

# MOLEX KK® Series Headers (.156")

## .156" PCB HEADERS

• Current: 7.0A

• Voltage: 250V

For quantities of 1000 and up, call for quote.

| MOUSER STOCK NO.   | Molex Part No. | Fig. | No. of Circuits | Dimensions: mm |       | Price Each |    |     |     |
|--|----------------|------|-----------------|----------------|-------|------------|----|-----|-----|
|  |                |      |                 | A              | B     | 1          | 10 | 100 | 500 |
| <b>Vertical Friction Lock, Tin Plating UL94V-0, Polyester</b>  |                |      |                 |                |       |            |    |     |     |
| 538-26-60-4020   | 26-60-4020     | A    | 2               | 7.77           | 3.96  |            |    |     |     |
| 538-26-60-4030   | 26-60-4030     | A    | 3               | 11.73          | 7.92  |            |    |     |     |
| 538-26-60-4040   | 26-60-4040     | A    | 4               | 15.70          | 11.89 |            |    |     |     |
| 538-26-60-4050   | 26-60-4050     | A    | 5               | 19.66          | 15.85 |            |    |     |     |
| 538-26-60-4060   | 26-60-4060     | A    | 6               | 23.62          | 19.81 |            |    |     |     |
| 538-26-60-4070   | 26-60-4070     | A    | 7               | 27.58          | 23.77 |            |    |     |     |
| 538-26-60-4080   | 26-60-4080     | A    | 8               | 31.55          | 27.74 |            |    |     |     |
| 538-26-60-4090   | 26-60-4090     | A    | 9               | 35.51          | 31.70 |            |    |     |     |
| 538-26-60-4100   | 26-60-4100     | A    | 10              | 39.47          | 35.66 |            |    |     |     |
| 538-26-60-4110   | 26-60-4110     | A    | 11              | 43.43          | 39.62 |            |    |     |     |
| 538-26-60-4120   | 26-60-4120     | A    | 12              | 47.40          | 43.59 |            |    |     |     |
| <b>Vertical Friction Lock, Gold Plating UL94V-0, Polyester</b> |                |      |                 |                |       |            |    |     |     |
| 538-26-61-4020   | 26-61-4020     | A    | 2               | 7.77           | 3.96  |            |    |     |     |
| 538-26-61-4030   | 26-61-4030     | A    | 3               | 11.73          | 7.92  |            |    |     |     |
| 538-26-61-4040   | 26-61-4040     | A    | 4               | 15.70          | 11.89 |            |    |     |     |
| 538-26-61-4050   | 26-61-4050     | A    | 5               | 19.66          | 15.85 |            |    |     |     |
| 538-26-61-4060   | 26-61-4060     | A    | 6               | 23.62          | 19.81 |            |    |     |     |
| 538-26-61-4070   | 26-61-4070     | A    | 7               | 27.58          | 23.77 |            |    |     |     |
| 538-26-61-4080   | 26-61-4080     | A    | 8               | 31.55          | 27.74 |            |    |     |     |
| 538-26-61-4090   | 26-61-4090     | A    | 9               | 35.51          | 31.70 |            |    |     |     |
| 538-26-61-4100   | 26-61-4100     | A    | 10              | 39.47          | 35.66 |            |    |     |     |
| 538-26-61-4120   | 26-61-4120     | A    | 12              | 47.40          | 43.59 |            |    |     |     |
| <b>Right Angle Friction Lock, Tin Plating</b>                  |                |      |                 |                |       |            |    |     |     |
| 538-26-60-5020   | 26-60-5020     | B    | 2               | 7.77           | 3.96  |            |    |     |     |
| 538-26-60-5030   | 26-60-5030     | B    | 3               | 11.73          | 7.92  |            |    |     |     |
| 538-26-60-5040   | 26-60-5040     | B    | 4               | 15.70          | 11.89 |            |    |     |     |
| 538-26-60-5050   | 26-60-5050     | B    | 5               | 19.66          | 15.85 |            |    |     |     |
| 538-26-60-5060   | 26-60-5060     | B    | 6               | 23.62          | 19.81 |            |    |     |     |
| 538-26-60-5070   | 26-60-5070     | B    | 7               | 27.58          | 23.77 |            |    |     |     |
| 538-26-60-5080   | 26-60-5080     | B    | 8               | 31.55          | 27.74 |            |    |     |     |
| 538-26-60-5090   | 26-60-5090     | B    | 9               | 35.51          | 31.70 |            |    |     |     |
| 538-26-60-5100   | 26-60-5100     | B    | 10              | 39.47          | 35.66 |            |    |     |     |
| 538-26-60-5110   | 26-60-5110     | B    | 11              | 43.43          | 39.62 |            |    |     |     |
| 538-26-60-5120   | 26-60-5120     | B    | 12              | 47.40          | 43.59 |            |    |     |     |
| <b>Vertical, Without Pegs, Tin Plating</b>                     |                |      |                 |                |       |            |    |     |     |
| 538-26-60-2020   | 26-60-2020     | C    | 2               | 7.77           | 3.96  |            |    |     |     |
| 538-26-60-2030   | 26-60-2030     | C    | 3               | 11.73          | 7.92  |            |    |     |     |
| 538-26-60-2040   | 26-60-2040     | C    | 4               | 15.70          | 11.89 |            |    |     |     |
| 538-26-60-2050   | 26-60-2050     | C    | 5               | 19.66          | 15.85 |            |    |     |     |
| 538-26-60-2100   | 26-60-2100     | C    | 10              | 39.47          | 35.66 |            |    |     |     |
| 538-26-60-2120   | 26-60-2120     | C    | 12              | 47.40          | 43.59 |            |    |     |     |

## .156" BREAKAWAY HEADERS - PCB

• Contact: Brass

• Square pins

• Voltage: 250VAC

• RoHS compliant per Molex documentation


RoHS Compliant

• Current: 7.0A max. (dependent on connection and PC Board)

For quantities of 1000 and up, call for quote.

| MOUSER STOCK NO.                                | Molex Part No. | Fig. | No. of Circuits | Dimensions: mm |       | Price Each |    |     |     |
|---|----------------|------|-----------------|----------------|-------|------------|----|-----|-----|
|   |                |      |                 | A              | B     | 1          | 10 | 100 | 500 |
| <b>Vertical, Tin Plating UL94V-0, Polyester</b> |                |      |                 |                |       |            |    |     |     |
| 538-26-48-1021                                  | 26-48-1021     | D    | 2               | 6.78           | 3.96  |            |    |     |     |
| 538-26-48-1031                                  | 26-48-1031     | D    | 3               | 10.74          | 7.92  |            |    |     |     |
| 538-26-48-1041                                  | 26-48-1041     | D    | 4               | 14.71          | 11.89 |            |    |     |     |
| 538-26-48-1051                                  | 26-48-1051     | D    | 5               | 18.67          | 15.85 |            |    |     |     |
| 538-26-48-1061                                  | 26-48-1061     | D    | 6               | 22.63          | 19.81 |            |    |     |     |
| 538-26-48-1071                                  | 26-48-1071     | D    | 7               | 26.59          | 23.77 |            |    |     |     |
| 538-26-48-1081                                  | 26-48-1081     | D    | 8               | 30.56          | 27.74 |            |    |     |     |
| 538-26-48-1091                                  | 26-48-1091     | D    | 9               | 34.52          | 31.70 |            |    |     |     |
| 538-26-48-1101                                  | 26-48-1101     | D    | 10              | 38.48          | 35.66 |            |    |     |     |
| 538-26-48-1111                                  | 26-48-1111     | D    | 11              | 42.44          | 39.62 |            |    |     |     |
| 538-26-48-1121                                  | 26-48-1121     | D    | 12              | 46.41          | 43.59 |            |    |     |     |
| 538-26-48-1241                                  | 26-48-1241     | D    | 24              | 93.85          | 91.14 |            |    |     |     |
| <b>Right Angle, Tin Plating</b>                 |                |      |                 |                |       |            |    |     |     |
| 538-26-48-1022                                  | 26-48-1022     | E    | 2               | 6.78           | 3.96  |            |    |     |     |
| 538-26-48-1032                                  | 26-48-1032     | E    | 3               | 10.74          | 7.92  |            |    |     |     |
| 538-26-48-1042                                  | 26-48-1042     | E    | 4               | 14.71          | 11.89 |            |    |     |     |
| 538-26-48-1052                                  | 26-48-1052     | E    | 5               | 18.67          | 15.85 |            |    |     |     |
| 538-26-48-1062                                  | 26-48-1062     | E    | 6               | 22.63          | 19.81 |            |    |     |     |
| 538-26-48-1082                                  | 26-48-1082     | E    | 8               | 30.56          | 27.74 |            |    |     |     |
| 538-26-48-1102                                  | 26-48-1102     | E    | 10              | 38.48          | 35.66 |            |    |     |     |
| 538-26-48-1122                                  | 26-48-1122     | E    | 12              | 46.41          | 43.59 |            |    |     |     |
| 538-26-48-1242                                  | 26-48-1242     | E    | 24              | 93.85          | 91.14 |            |    |     |     |
| <b>Vertical Friction Lock, Tin Plating</b>      |                |      |                 |                |       |            |    |     |     |
| 538-26-48-1025                                  | 26-48-1025     | F    | 2               | 6.78           | 3.96  |            |    |     |     |
| 538-26-48-1035                                  | 26-48-1035     | F    | 3               | 10.74          | 7.92  |            |    |     |     |
| 538-26-48-1045                                  | 26-48-1045     | F    | 4               | 14.71          | 11.89 |            |    |     |     |
| 538-26-48-1055                                  | 26-48-1055     | F    | 5               | 18.67          | 15.85 |            |    |     |     |
| 538-26-48-1065                                  | 26-48-1065     | F    | 6               | 22.63          | 19.81 |            |    |     |     |
| 538-26-48-1075                                  | 26-48-1075     | F    | 7               | 26.59          | 23.77 |            |    |     |     |
| 538-26-48-1085                                  | 26-48-1085     | F    | 8               | 30.56          | 27.74 |            |    |     |     |
| 538-26-48-1095                                  | 26-48-1095     | F    | 9               | 34.52          | 31.70 |            |    |     |     |
| 538-26-48-1105                                  | 26-48-1105     | F    | 10              | 38.48          | 35.66 |            |    |     |     |
| 538-26-48-1115                                  | 26-48-1115     | F    | 11              | 42.44          | 39.62 |            |    |     |     |
| 538-26-48-1125                                  | 26-48-1125     | F    | 12              | 46.41          | 43.59 |            |    |     |     |
| 538-26-48-1245                                  | 26-48-1245     | F    | 24              | 93.85          | 91.14 |            |    |     |     |
| <b>Right Angle Friction Lock, Tin Plating</b>   |                |      |                 |                |       |            |    |     |     |
| 538-26-48-1026                                  | 26-48-1026     | G    | 2               | 6.78           | 3.96  |            |    |     |     |
| 538-26-48-1036                                  | 26-48-1036     | G    | 3               | 10.74          | 7.92  |            |    |     |     |
| 538-26-48-1046                                  | 26-48-1046     | G    | 4               | 14.71          | 11.89 |            |    |     |     |
| 538-26-48-1066                                  | 26-48-1066     | G    | 6               | 22.63          | 19.81 |            |    |     |     |
| 538-26-48-1076                                  | 26-48-1076     | G    | 7               | 26.59          | 23.77 |            |    |     |     |
| 538-26-48-1086                                  | 26-48-1086     | G    | 8               | 30.56          | 27.74 |            |    |     |     |
| 538-26-48-1096                                  | 26-48-1096     | G    | 9               | 34.52          | 31.70 |            |    |     |     |
| 538-26-48-1106                                  | 26-48-1106     | G    | 10              | 38.48          | 35.66 |            |    |     |     |
| 538-26-48-1126                                  | 26-48-1126     | G    | 12              | 46.41          | 43.59 |            |    |     |     |
| 538-26-48-1246                                  | 26-48-1246     | G    | 24              | 93.85          | 91.14 |            |    |     |     |

## DIMENSIONS: mm (in.)

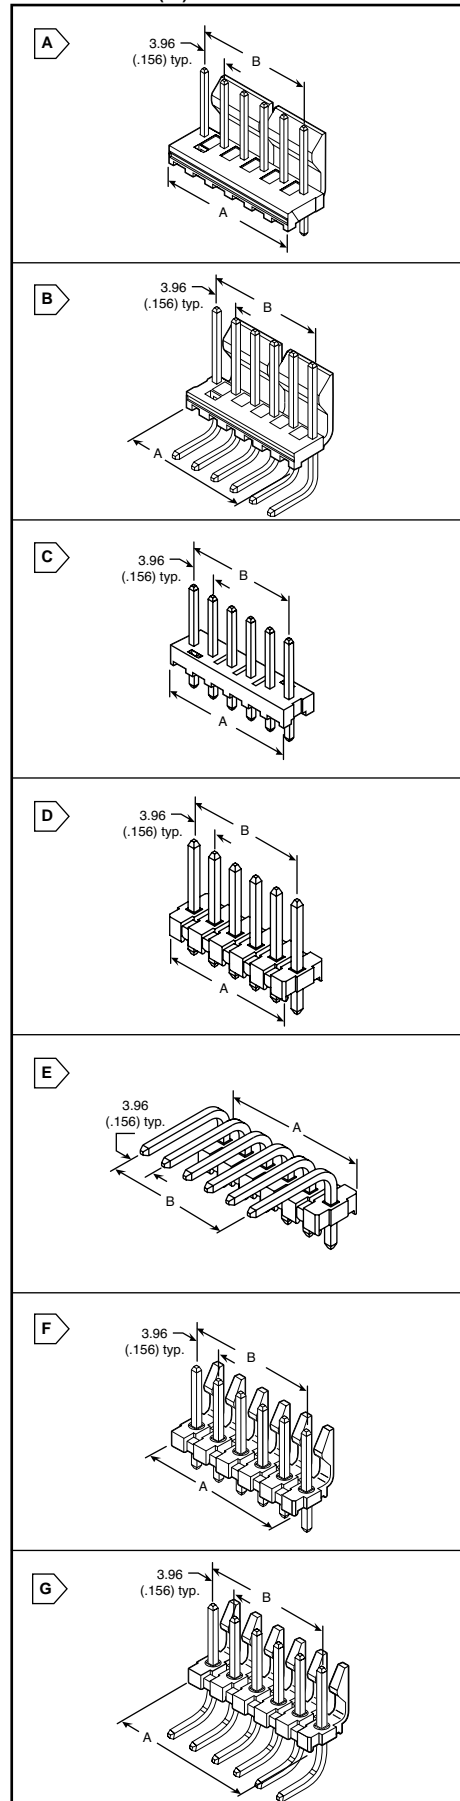

Rectangular Connectors Molex