

Features

- Noise Figure: 2.5 dB @ 24 GHz
- High Gain: 23 dB @ 24 GHz
- 50 Ω Match on Input & Output
- Single Voltage Bias: 3 V to 5 V range
- Integrated Active Bias Circuit
- Current adjustable from 1 mA - 80 mA
- Lead-Free 2 mm 8-lead PDFN Package
- RoHS* Compliant

Applications

- VSAT
- Point-to-Point
- 24 GHz ISM


Description

The MAAL-011129 is an easy-to-use three stage low noise amplifier with high gain and broadband 50 Ω match. It is designed for operation from 18 to 31.5 GHz and housed in a lead-free 2 mm 8-lead PDFN plastic package.

The MAAL-011129 has an integrated active bias circuit and bias tee to allow direct connection to V_{DD} without external chokes or DC blocks. The bias current is set by a simple external resistor, R_B , so the user can customize the power consumption. When $V_{BIAS} = 0$ V, the device is placed in power down mode.

The MAAL-011129 offers an easy-to-use surface mount, low noise amplifier solution that is well suited to diverse receiver applications such as VSAT, Point-to-Point and 24 GHz ISM.

Functional Schematic

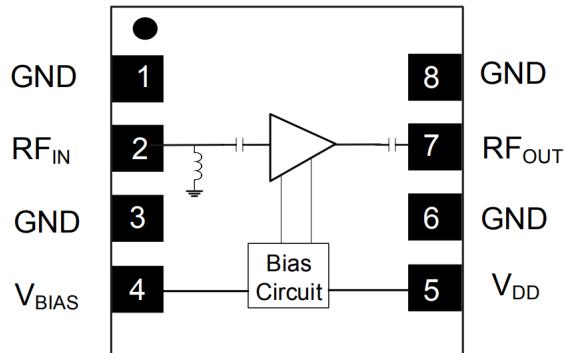

Pin Configuration³

Pin #	Pin Name	Description
1	GND	Ground
2	RF _{IN}	RF Input
3	GND	Ground
4	V _{BIAS}	Bias Control Voltage
5	V _{DD}	Drain Voltage
6	GND	Ground
7	RF _{OUT}	RF Output
8	GND	Ground
Backside	Paddle	RF & DC Ground

3. The exposed pad centered on the package bottom must be connected to RF, DC and thermal ground.

Ordering Information^{1,2}

Part Number	Package
MAAL-011129-TR3000	3000 piece reel
MAAL-011129-SMB	Sample Board

1. Reference Application Note M513 for reel size information.

2. All sample boards include 5 loose parts.

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Electrical Specifications: Freq. = 24 GHz, $T_A = 25^\circ\text{C}$, $V_{DD} = 5 \text{ V}$, $R_B = 1 \text{ k}\Omega$, $Z_0 = 50 \Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Noise Figure	—	dB	—	2.5	3.3
Gain	$P_{IN} = -20 \text{ dBm}$	dB	20	23	—
Input Return Loss	$P_{IN} = -20 \text{ dBm}$	dB	—	-13	—
Output Return Loss	$P_{IN} = -20 \text{ dBm}$	dB	—	-13	—
Output IP3	$P_{IN} = -22 \text{ dBm/tone}$ (10 MHz Tone Spacing)	dBm	—	25	—
Output P1dB	—	dBm	—	16	—
Isolation	$P_{IN} = -20 \text{ dBm}$	dB	—	45	—
Bias Current	—	mA	—	50	65

Absolute Maximum Ratings^{4,5}

Parameter	Absolute Maximum
Input Power	10 dBm
Operating Voltage	6 V
Junction Temperature ^{6,7}	+150°C
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

4. Exceeding any one or combination of these limits may cause permanent damage to this device.
5. MACOM does not recommend sustained operation near these survivability limits.
6. Operating at nominal conditions with $T_J \leq +150^\circ\text{C}$ will ensure $\text{MTTF} > 1 \times 10^6$ hours.
7. Junction Temperature (T_J) = $T_C + \Theta_{JC} * (V * I)$
Typical thermal resistance (Θ_{JC}) = 102°C/W.
 - a) $T_C = +25^\circ\text{C}$,
 $T_J = 51^\circ\text{C}$ @ 5 V, 50 mA
 - b) $T_C = +85^\circ\text{C}$,
 $T_J = 111^\circ\text{C}$ @ 5 V, 50 mA

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Low Noise Amplifier


18.0 - 31.5 GHz

MACOM®


MAAL-011129

Rev. V2

Sample PCB

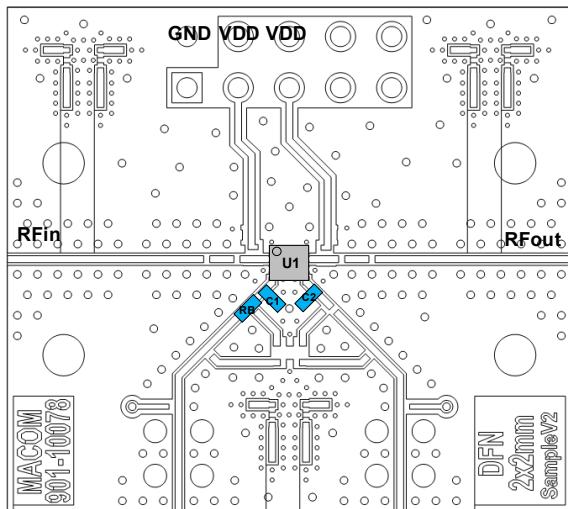

Sample PCB Layout

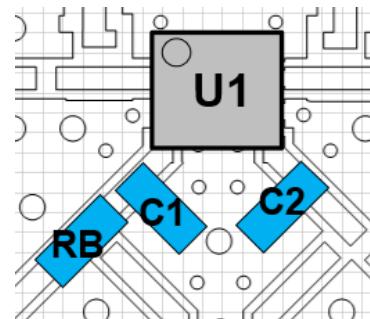

Application Information

The MAAL-011129 is designed to be easy to use yet provide high performance. The ultra small size, with no matching, and simple bias application allows easy placement on system boards.


Single Bias Operation

Connecting V_{DD} to V_{BIAS} using an external resistor R_B enables single bias operation of the amplifier, and the value of external resistor R_B sets the desired current I_{DD} . The following table shows drain current (I_{DD}) versus external resistor (R_B) values for V_{DD} voltages of 5 V and 3.3 V:

$V_{DD} = 3.3 \text{ V}$		$V_{DD} = 5 \text{ V}$	
$R_B (\Omega)$	$I_{DD} (\text{mA})$	$R_B (\Omega)$	$I_{DD} (\text{mA})$
Open	15	Open	25
200	50	200	80
400	40	400	70
1k	30	1k	50
2k	25	2k	40

With pin 4 (V_{BIAS}) left open the amplifier will default to low power mode. When pin 4 (V_{BIAS}) is set to 0 V through R_B , the device enters power down mode. In order to use power down mode a second supply is required that directly drives the R_B resistor.

Application Schematic

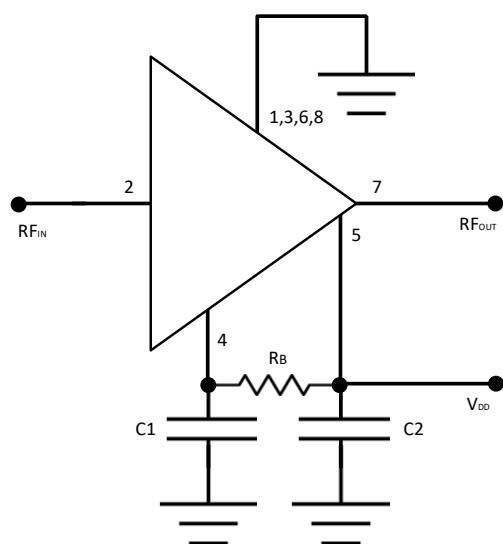


Grounding


It is recommended that the total ground (common mode) inductance not exceed 0.03 nH (30 pH). This is equivalent to placing at least four 8-mil (200- μm) diameter vias under the device, assuming an 8-mil (200- μm) thick RF layer to ground.

Typical Performance Curves: $V_{DD} = 5$ V, $R_B = 1$ k Ω


Gain

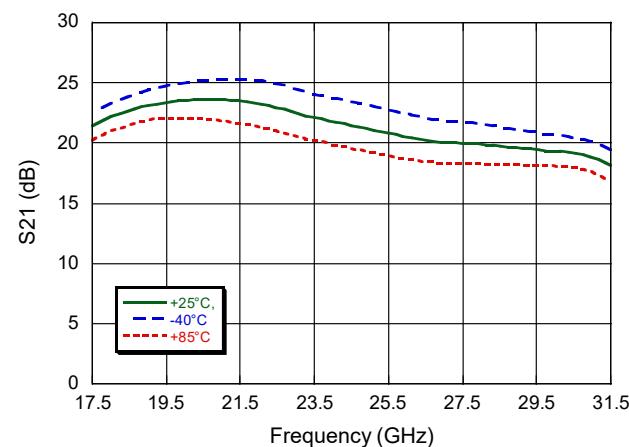


Noise Figure

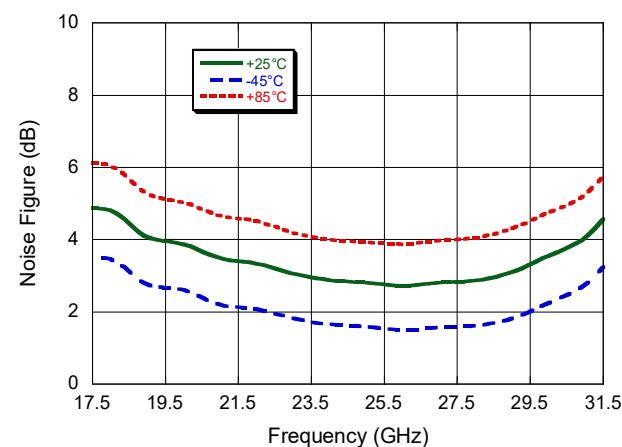


Input Return Loss

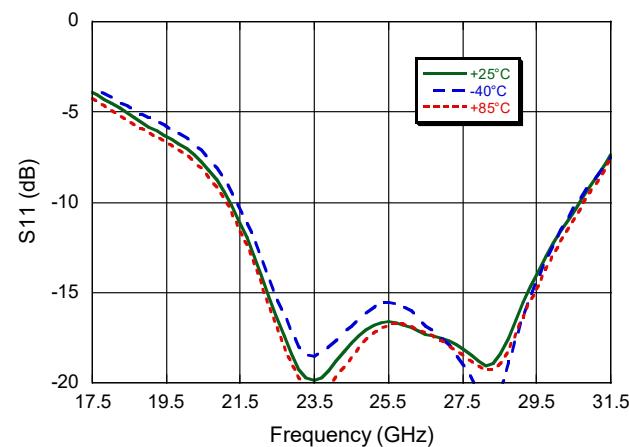


Output Return Loss

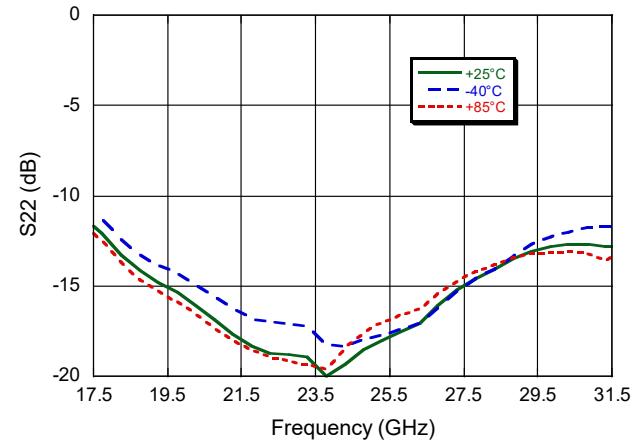

P1dB

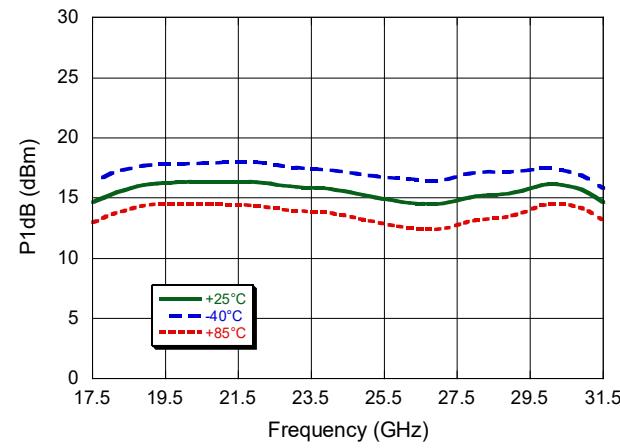


OIP3

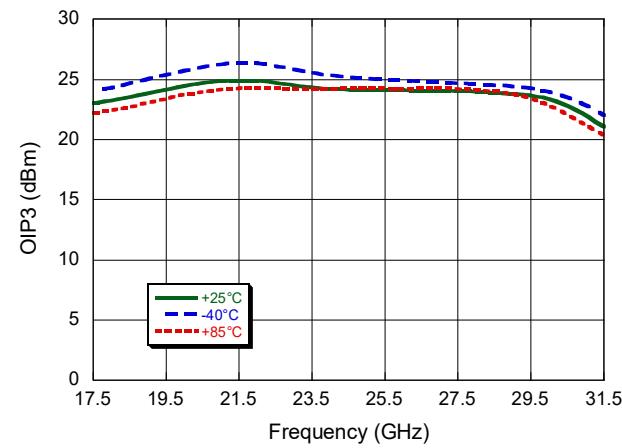


Typical Performance Curves: $V_{DD} = 3.3$ V & 5 V


Gain

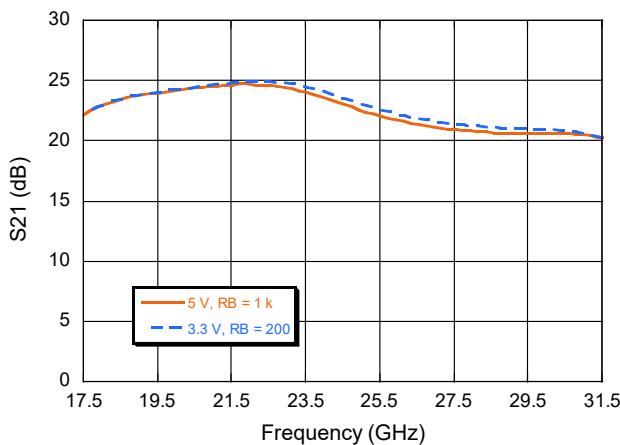


Noise Figure

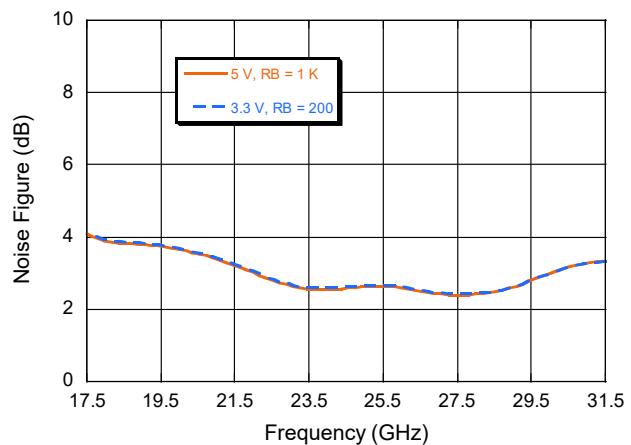


Input Return Loss

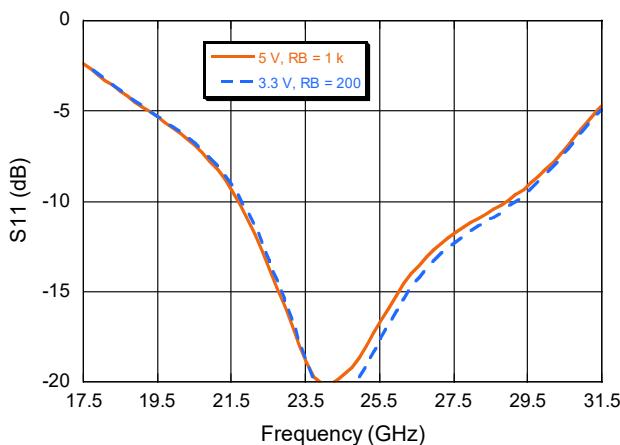


Output Return Loss

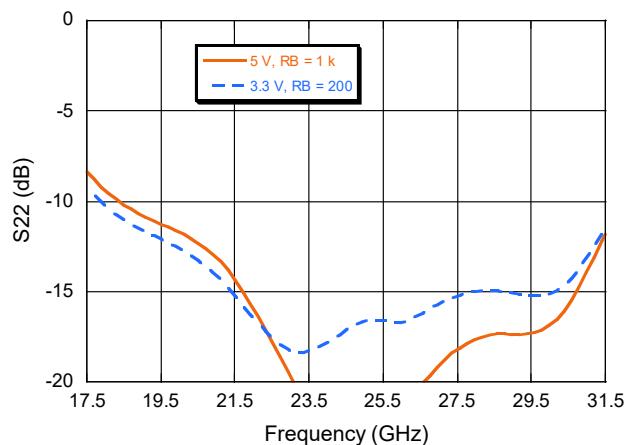

P1dB

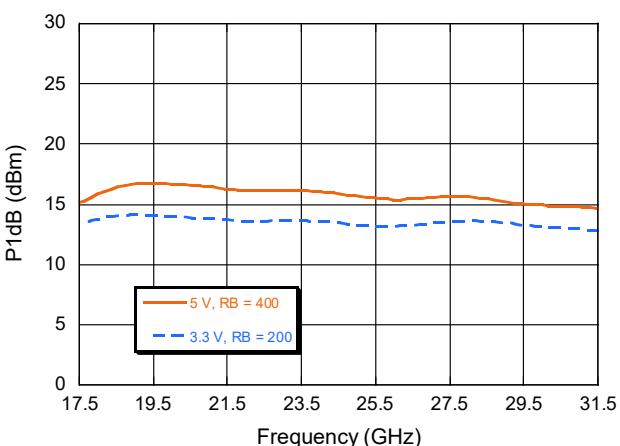

OIP3

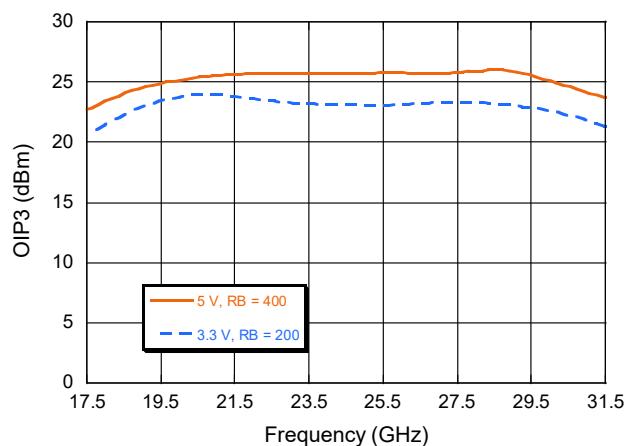

Low Noise Amplifier

18.0 - 31.5 GHz


MACOM®

MAAL-011129


Rev. V2

Typical Performance Curves: $V_{DD} = 5$ V, I_{DD} varied by R_B


Gain

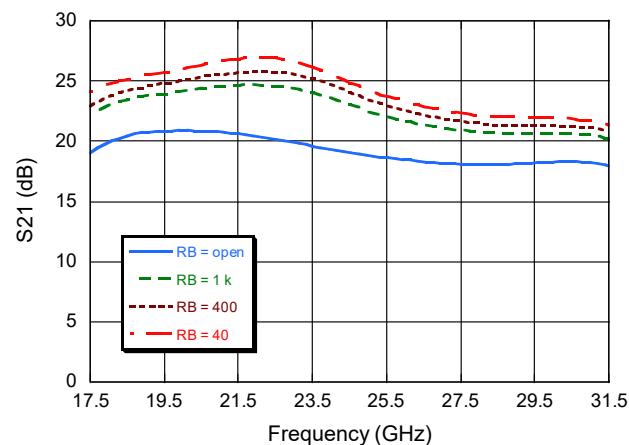


Noise Figure

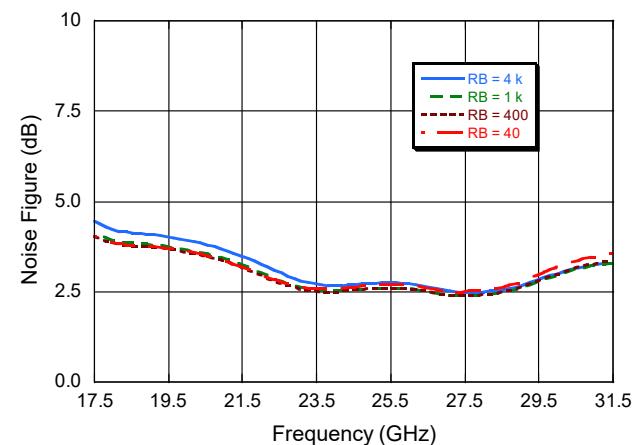


Input Return Loss

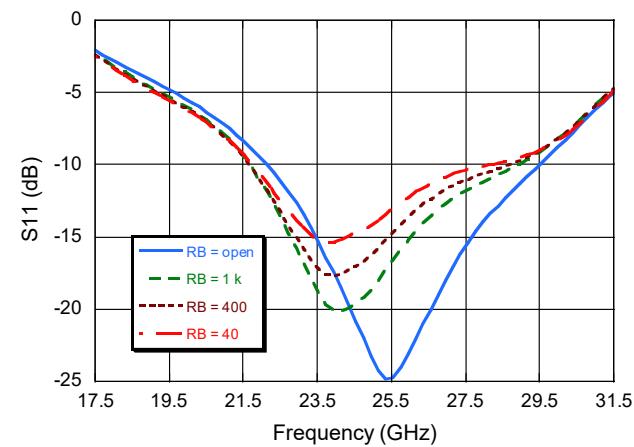


Output Return Loss

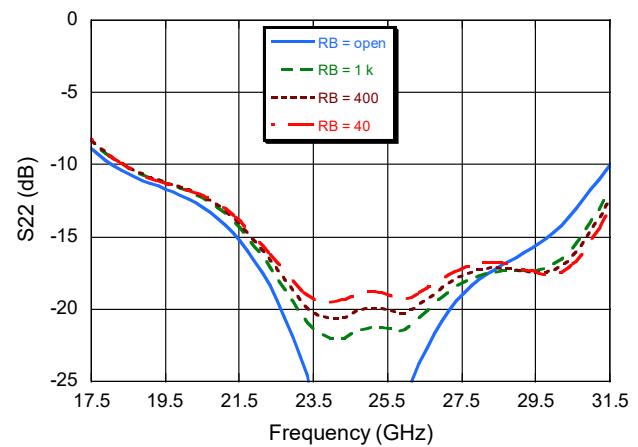


P1dB

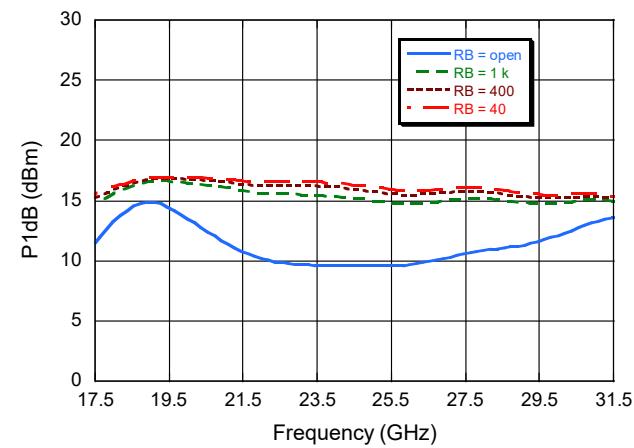

OIP3

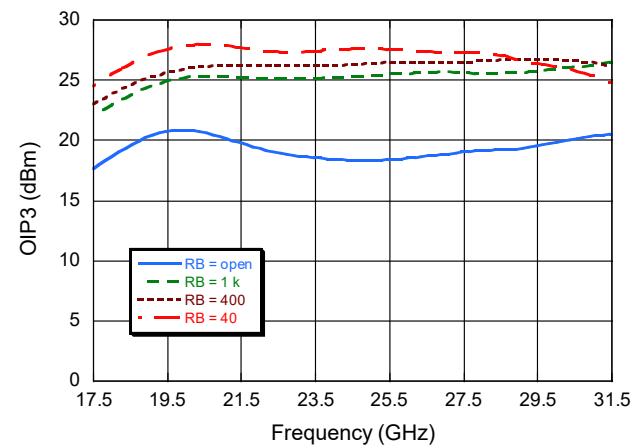

Lead Free 2 mm 8 Lead PDFN Package[†]

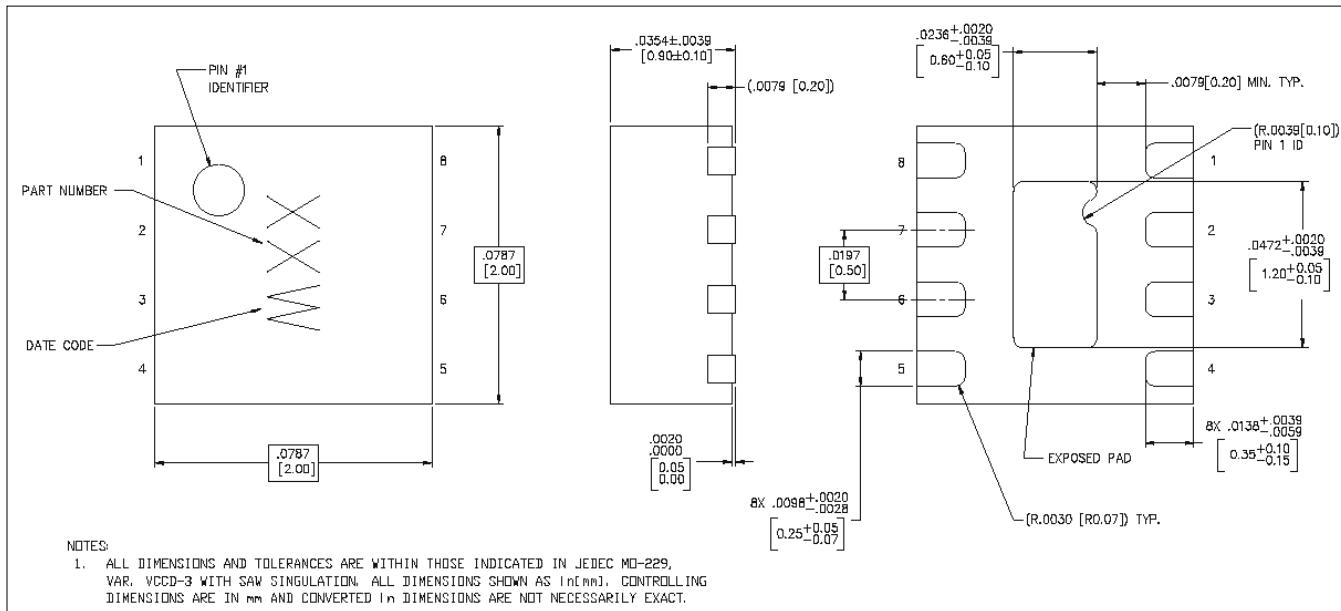

[†] Reference Application Note S2083 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level 1 requirements.
Plating is 100% Matte Tin over Copper

Revision History

Rev.	Date	Change Description
V1	Dec. 2017	Production release
V2	July 2025	Functional drawing corrected to have a shunt inductor, not a shunt resistor. Added a revision history table

**Low Noise Amplifier
18.0 - 31.5 GHz**

MACOM®

MAAL-011129

Rev. V2

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[MACOM:](#)

[MAAL-011129-TR1000](#) [MAAL-011129-TR3000](#)