

# PD-IM-7504B Marketing Board

## User Guide

**Preliminary**

**Revision 1.0**

**PRODUCTION DATA** – Information contained in this document is proprietary to Microsemi and is current as of publication date. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.

## Table of Contents

<b>1</b>	<b>ABOUT THIS GUIDE</b>	<b>3</b>
1.1	Audience	3
1.2	Organization	3
<b>2</b>	<b>INTRODUCTION</b>	<b>4</b>
2.1	Marketing Boards Ordering Information	4
2.2	Marketing Board Features	4
2.3	Marketing Board Interfaces and Connections	5
2.4	Physical Characteristics	5
2.5	Communication	5
<b>3</b>	<b>PHYSICAL DESCRIPTION</b>	<b>6</b>
3.1	Package Contents	6
3.2	Reset Button	6
3.3	Connectors	6
3.3.1	Connectors Table	6
3.4	V <sub>in</sub> DC jack connectors (J1)	7
3.5	LEDs Indication	8
<b>4</b>	<b>ELECTRICAL CHARACTERISTICS</b>	<b>9</b>
<b>5</b>	<b>INSTALLATION</b>	<b>10</b>
5.1	Preliminary Considerations and Safety Precautions	10
5.2	Default Configuration	10
<b>6</b>	<b>RELEVANT DOCUMENTS</b>	<b>11</b>

## 1 About this Guide

This user guide provides both a description and operation procedures for Microsemi's PD-IM-7504B Marketing Board, which is used to evaluate the performance of PD69104B PoE applications.

### 1.1 Audience

This user guide is intended for qualified personnel, meaning operators and technicians who have a background in electronics and are familiar with its basic concepts.

### 1.2 Organization

This guide is divided into several sections as follows:

- CHAPTER 1      **About this Guide:** Describes guide's objectives, audience, and organization.
- CHAPTER 2      **Introduction:** Describes PoE Marketing board overview, main functions, features, physical characteristics, and ordering information.
- CHAPTER 3      **Physical Description:** Provides explanation that relate to the physical description (switches, jumpers, connectors).
- CHAPTER 4      **Electrical Characteristics:** Provides electrical characteristics of the PoE Marketing board.
- CHAPTER 5      **Installation:** Describes installation process.
- CHAPTER 6      **Relevant Documents:** Details other documents relevant to the Marketing Board.

## 2 Introduction

Microsemi's PD-IM-7504B Marketing Board (see Figure 1) provides designers with the needed environment to evaluate the performance and implementation of PoE and PoE extended mode applications, based on PD69104B PoE Manager. Marketing board enables PoE designers to evaluate Microsemi's PoE solution with maximum flexibility and ease in configuration

All necessary steps and connection instructions required for installing and operating this board are provided within this document.

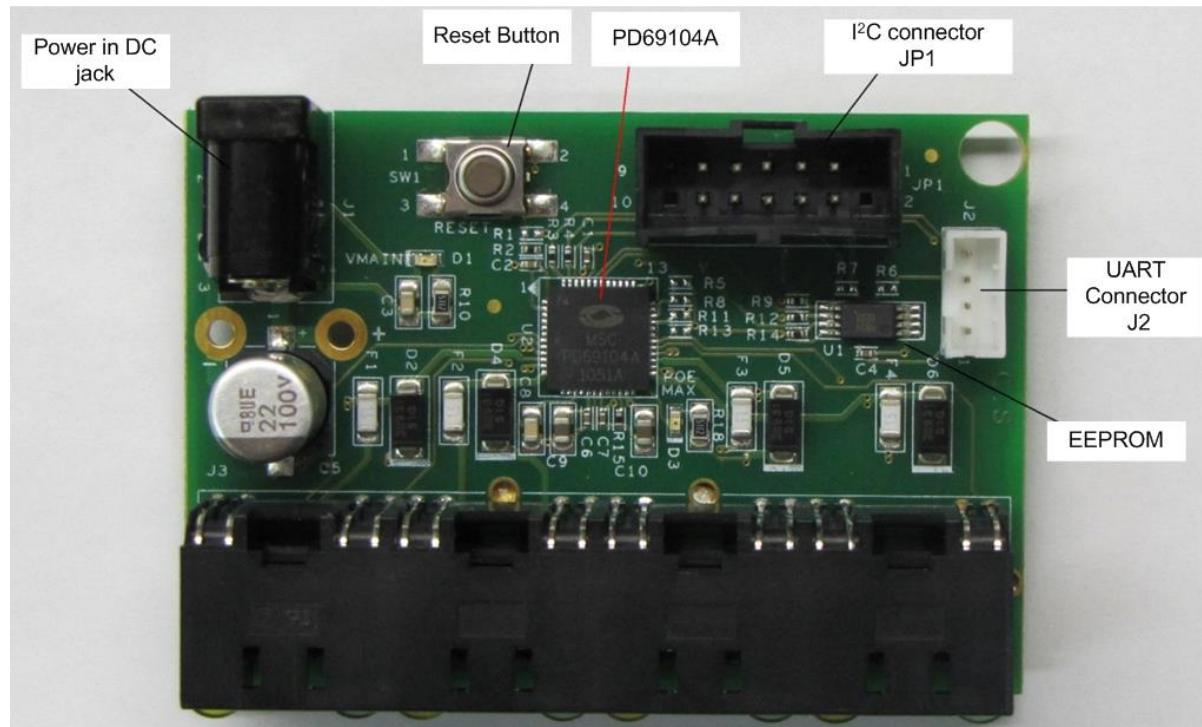


Figure 1: PD-IM-7504B Marketing Board – General View

### 2.1 Marketing Boards Ordering Information

Microsemi's supplies the following Marketing Boards as detailed below:

Ordering Number	Description
PD-IM-7504B	1 Marketing Board that simulates a 4 ports PoE.

### 2.2 Marketing Board Features

- Designed to support four RJ45 ports, PoE application, and PoE extended mode (2-pairs)
- V<sub>in</sub> connector – DC jack
- On-board LEDs indicators
- Reset button
- EEPROM support
- I<sup>2</sup>C and UART communication connectors.
- Marketing Board working temperature: 0°C to +50°C
- RoHS compliant

## 2.3 Marketing Board Interfaces and Connections

Board has several interfaces:

- **RJ45 interface:** Running from PD69104B to 4 PDs (powered devices)
- **V<sub>in</sub> connectors:** DC in (V<sub>main</sub>) connection (J1)
- **LEDs indication:** V<sub>main</sub> power OK, Power limit LEDs
- **UART connector:** for UART communication.
- **I<sup>2</sup>C connector:** for I<sup>2</sup>C communication or EEPROM configuration.

## 2.4 Physical Characteristics

The following table lists the Marketing Board's physical characteristics.

Physical Characteristics

Parameter	Value
Mechanical dimensions	66 x 45 x 16 mm (L x W x H)

## 2.5 Communication

- **I<sup>2</sup>C** –Marketing Board is set to work with I<sup>2</sup>C communication through connector JP1, with Aardvark ([http://www.totalphase.com/products/aardvark\\_i2cspi/](http://www.totalphase.com/products/aardvark_i2cspi/)) or any other I<sup>2</sup>C master.

Pin	JP1 Description
1	SCL
2	GND
3	SDA
4	
5	
6	
7	
8	
9	
10	WP **

\*\* When configuring EEPROM, connect this pin to GND.

- **UART**- connecting through J2 pins:

Pin	J2 Description
1	3.3V (out)
2	Tx
3	Rx
4	GND

- **E<sup>2</sup>PROM** – When no host controls the IC and configuration should be other then default, an EEPROM may be used for uploading new configurations. EEPROM can be burn by JP1.

## 3 Physical Description

### 3.1 Package Contents

Upon opening the Marketing Board package, verify all parts itemized in the packing list are included. If any part is missing or seems damaged; contact local representative or Microsemi's Headquarters. Package contents for standard shipments are as follows:

- PD-IM-7504B Marketing Board
- 55V power supply Adapter + AC cord

### 3.2 Reset Button

The dedicated Reset button SW1 (see Figure 1) is utilized to reset PD69104B PoE manager.

### 3.3 Connectors

The following sections provide both general and detailed information regarding unit connectors.

#### 3.3.1 Connectors Table

The following table lists Marketing Board's connectors.

Table 1: Connectors List

#	Connector	Name	Description
1	J1	V <sub>in</sub> DC jack	44V-57V DC input (V <sub>main</sub> ) connection used for powering the Marketing Board
2	J2	UART connector	UART communication connector. (3.3V compatible) Can use PD-0600 (Microsemi USB to UART converter) or any equivalent equipment
3	J3	RJ45 connectors	Four RJ45 ports for connecting to powered device
4	JP1	I <sup>2</sup> C connector	Connection to I <sup>2</sup> C communication through AARDVARK or any other equivalent equipment (3.3V compatible)

### 3.4 $V_{in}$ DC jack connectors (J1)

See Figure 2.

DC in ( $V_{main}$ ) connection, used to power Marketing Board,  $44V > V_{main} > 57V_{DC}$ .

**Table 2:  $V_{in}$  Connectors**

Pin No.	Signal Name	Description
1	$V_{main}$ ( $V_{in}$ +)	Positive main voltage (referenced to AGND)
Hole 1(right)	$V_{main}$ ( $V_{in}$ +)	Used for soldering wires to external power supply
Hole 2(left)	GND( $V_{in}$ -)	Used for soldering wires to external power supply



**Figure 2**

Since provided power supply can't support four ports PoE + full load ( $4*0.6A=2.4A$ ), a wired connection can be used for connecting laboratory power supply directly to PCB using the holes located near J1.

### 3.5 LEDs Indication

- **D1** –  $V_{MAIN}$  indication .
- **D3** – MAX power indication. (Indicates power budget is reaching its limit)
- **Port Status LED**– in front of each port in the RJ45 connector there is a green LED that indicates whether port is operating. See Figure 4

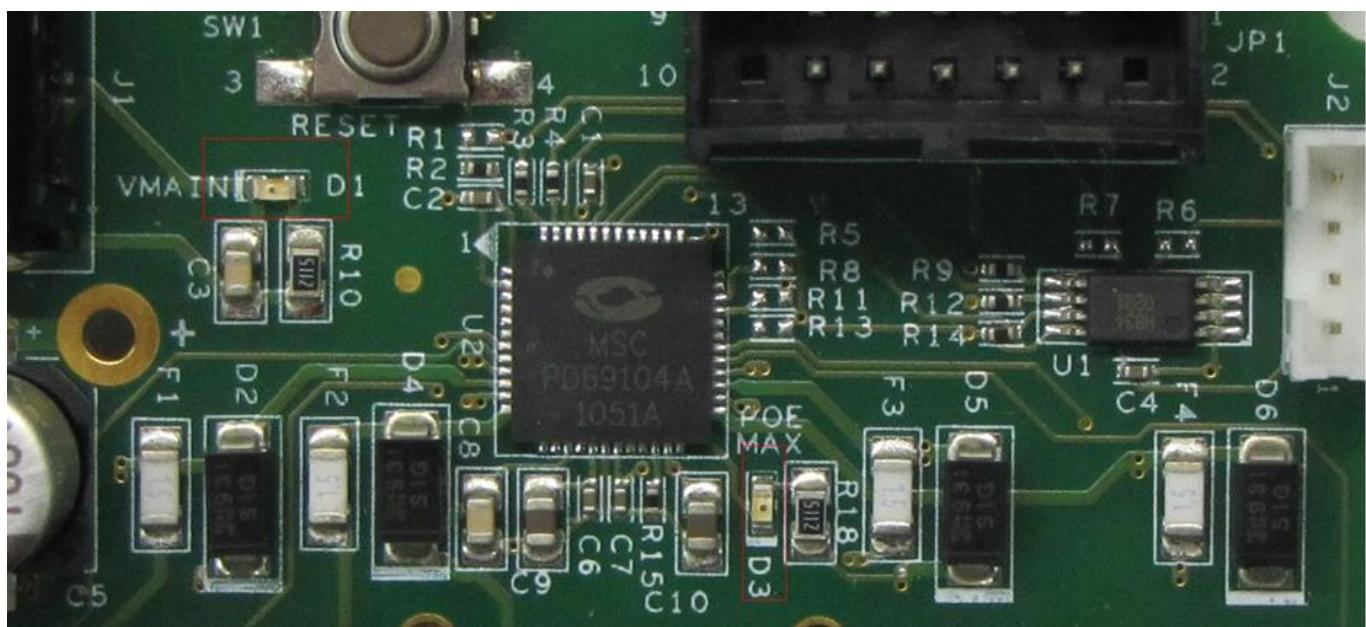


Figure 3: LEDs Indication

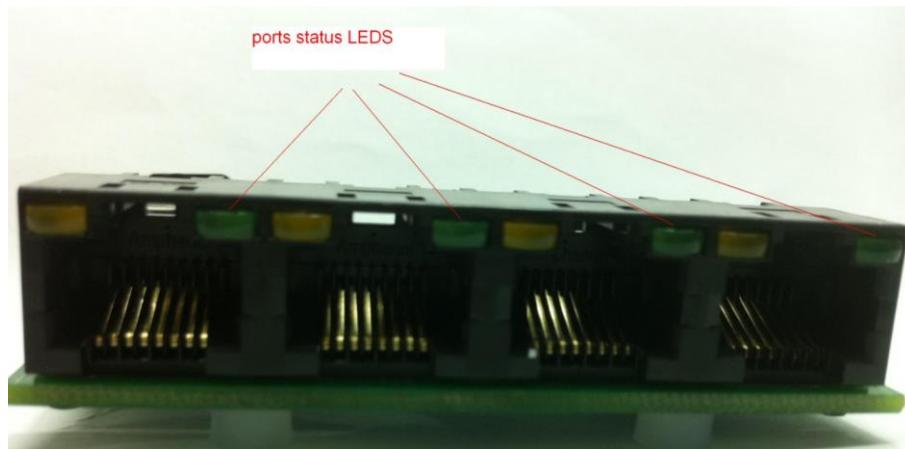


Figure 4: LEDs Indication

## 4 Electrical Characteristics

Marketing board's electrical characteristics are listed below:

**Table 3: Electrical Characteristics**

Parameter	Symbol	Min.	Max.	Units
Main DC supply $V_{\text{main}}$	$V_{\text{in}}$	44	57	V
Port current	$I_{\text{out}}$		0.6	A

## 5 Installation

This chapter describes the steps required for installing and operating the Marketing Board with any PoE application.

### 5.1 Preliminary Considerations and Safety Precautions

- Prior to powering the board, connect all required peripherals.
- Never hot swap peripherals units!
- Verify board is properly configured prior to turning on power supply.

### 5.2 Default Configuration

- Current set configured to AT mode (600mA).  
If "AF" current (350mA) has to be changed, load 0Ω to R11.
- Communication mode set to I<sup>2</sup>C (R5 is loaded with 0Ω).  
If UART is required, disconnect R5 and connect 0Ω to R8.
- PoE Automode.

All configurations can be set by communication or EEPROM.

## **6 Relevant Documents**

- PD69104B datasheet, catalogue number DS\_PD69104B
- Serial Communication Protocol user guide 06-0032-056
- PD69104B reg. map user guide, catalogue number 06-0480-056
- Marketing board schema PD-1358G201
- Layout 06-0134-080 Credit Card Auto mode PD69104B application note AN-198

The information contained in the document is PROPRIETARY AND CONFIDENTIAL information of Microsemi and cannot be copied, published, uploaded, posted, transmitted, distributed or disclosed or used without the express duly signed written consent of Microsemi. If the recipient of this document has entered into a disclosure agreement with Microsemi, then the terms of such Agreement will also apply. This document and the information contained herein may not be modified, by any person other than authorized personnel of Microsemi. No license under any patent, copyright, trade secret or other intellectual property right is granted to or conferred upon you by disclosure or delivery of the information, either expressly, by implication, inducement, estoppel or otherwise. Any license under such intellectual property rights must be approved by Microsemi in writing signed by an officer of Microsemi.

Microsemi reserves the right to change the configuration, functionality and performance of its products at anytime without any notice. This product has been subject to limited testing and should not be used in conjunction with life-support or other mission-critical equipment or applications. Microsemi assumes no liability whatsoever, and Microsemi disclaims any express or implied warranty, relating to sale and/or use of Microsemi products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. The product is subject to other terms and conditions which can be located on the web at <http://www.microsemi.com/legal/tnc.asp>

## Revision History

Revision Level / Date	Para. Affected/Page	Description
1.0 / 10-Feb-11		Initial revision

For support contact: [sales\\_AMSG@microsemi.com](mailto:sales_AMSG@microsemi.com)

Visit our web site at: [www.microsemi.com](http://www.microsemi.com)

Catalog Number: PD69104B\_UG\_EVB

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[PD-IM-7504B](#)