

SOT-23



Pin Definition:

1. Reference
2. Cathode
3. Anode

TO-92



Pin Definition:

1. Reference
2. Anode
3. Cathode

General Description

TS432 series is a three-terminal adjustable shunt regulator with specified thermal stability. The output voltage may be set to any value between V_{REF} (approximately 1.24V) and 18V with two external resistors. TS432 series has a typical output impedance of 0.05Ω . Active output circuitry provides a very sharp turn-on characteristic, making TS432 series excellent replacement for zener diode in many applications.

Features

- Precision Reference Voltage
TS432A – $1.24V \pm 1\%$
TS432B – $1.24V \pm 0.5\%$
- Minimum Cathode Current for Regulation: $20\mu A$ (typ.)
- Equivalent Full Range Temp. Coefficient: $50\text{ppm} / ^\circ\text{C}$
- Programmable Output Voltage up to 18V
- Fast Turn-On Response
- Sink Current Capability of $80\mu A$ to 100mA
- Low Dynamic Output Impedance: 0.05Ω
- Low Output Noise
- Halogen Free Available

Applications

- Voltage Monitor
- Delay Timer
- Constant –Current Source/Sink
- High-Current Shunt Regulator
- Crow Bar
- Over-Voltage / Under-Voltage Protection

Ordering Information


| Part No. | Package | Packing |
|--------------|---------|--------------------|
| TS432xCX RFG | SOT-23 | 3,000pcs / 7" Reel |
| TS432xCT B0G | TO-92 | 1,000pcs / Bulk |
| TS432xCT A3G | TO-92 | 2,000pcs / Ammo |

Note: Where **x** denotes voltage tolerance

A: $\pm 1\%$, **B**: $\pm 0.5\%$

G” denotes for Halogen free products

Block Diagram

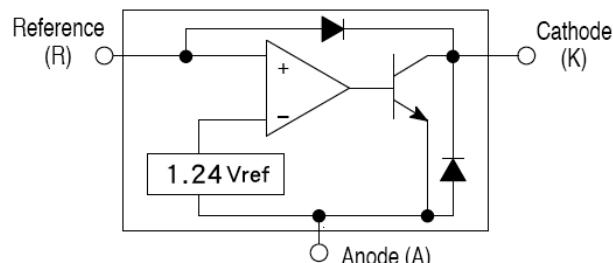

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Limit | Unit |
|----------------------------------|------------|------------|------------------|
| Cathode Voltage (Note 1) | V_{KA} | 18 | V |
| Continuous Cathode Current Range | I_K | 100 | mA |
| Reference Input Current Range | I_{REF} | 3 | mA |
| Power Dissipation | P_D | 0.35 | W |
| Junction Temperature | T_J | +150 | $^\circ\text{C}$ |
| Operation Temperature Range | T_{OPER} | 0 ~ +70 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -65 ~ +150 | $^\circ\text{C}$ |

Note 1: Voltage values are with respect to the anode terminal unless otherwise noted.

Recommended Operating Condition

| Parameter | Symbol | Limit | Unit |
|----------------------------------|----------|-------|------|
| Cathode Voltage (Note 1) | V_{KA} | 16 | V |
| Continuous Cathode Current Range | I_K | 100 | mA |

Electrical Characteristics ($T_A=25^\circ C$ unless otherwise noted)


| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|---|--------------------------------|--|-------|-------|-------|---------------|
| Reference voltage TS432A | V_{REF} | $V_{KA}=V_{REF}$, $I_K=10\text{mA}$ (Figure 1) | 1.227 | 1.240 | 1.252 | V |
| TS432B | | | 1.233 | | 1.246 | |
| Deviation of reference input voltage | ΔV_{REF} | $V_{KA}=V_{REF}$, $I_K=10\text{mA}$ $T_A=$ full range (Figure 1) | -- | 10 | 25 | mV |
| Ratio of change in V_{REF} to change in cathode Voltage | $\Delta V_{REF}/\Delta V_{KA}$ | $I_K=10\text{mA}$, $V_{KA} = 16\text{V}$ to V_{REF} (Figure 2) | -- | -1.0 | -2.7 | mV/V |
| Reference Input current | I_{REF} | $R1=10\text{K}\Omega$, $R2=\infty$, $I_{KA}=10\text{mA}$ $T_A=$ full range (Figure 2) | -- | 0.25 | 0.5 | μA |
| Deviation of reference input current, over temp. | ΔI_{REF} | $R1=10\text{K}\Omega$, $R2=\infty$, $I_{KA}=10\text{mA}$ $T_A=$ full range (Figure 2) | -- | 0.04 | 0.8 | μA |
| Off-state Cathode Current | I_{KA} (off) | $V_{REF}=0\text{V}$ (Figure 3), $V_{KA}=16\text{V}$ | -- | 0.125 | 0.5 | μA |
| Dynamic Output Impedance | $ Z_{KA} $ | $f<1\text{KHz}$, $V_{KA}=V_{REF}$ $I_{KA}=1\text{mA}$ to 100mA (Figure 1) | -- | 0.2 | 0.4 | Ω |
| Minimum Operating Cathode Current | $I_{KA(MIN)}$ | $V_{KA}=V_{REF}$ (Figure 1) | -- | 20 | 80 | μA |

* The deviation parameters ΔV_{REF} and ΔI_{REF} are defined as difference between the maximum value and minimum value

Obtained over the full operating ambient temperature range that applied.

* The average temperature coefficient of the reference input voltage, αV_{REF} is defined as:

$$\alpha V_{ref} \left(\frac{\text{ppm}}{\text{ }^\circ\text{C}} \right) = \frac{\left(\frac{(\Delta V_{ref})}{V_{ref} (T_A = 25^\circ C)} \times 10^6 \right)}{\Delta T_A}$$

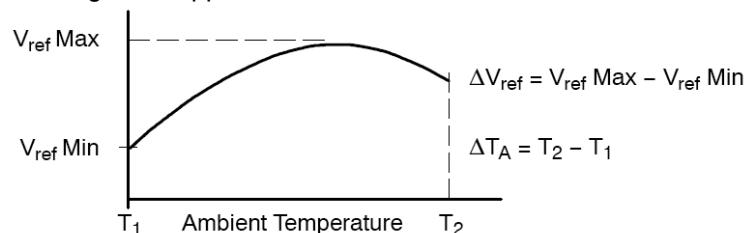

Where: T_2-T_1 = full temperature change.

αV_{REF} can be positive or negative depending on whether V_{REF} Min. or V_{REF} Max occurs at the lower ambient temperature. Example: $\Delta V_{REF}=7.2\text{mV}$ and the slope is positive, $V_{REF}=1.241\text{V}$ at $25^\circ C$, $\Delta T=125^\circ C$

$$\alpha V_{ref} \left(\frac{\text{ppm}}{\text{ }^\circ\text{C}} \right) = \frac{\frac{0.0072}{0.0125} \times 10^6}{125} = 46 \text{ ppm}/\text{ }^\circ\text{C}$$

* The dynamic impedance Z_{KA} is defined as:

$$|Z_{KA}| = \frac{\Delta V_{KA}}{\Delta I_K}$$

* When the device operating with two external resistors, R_1 and R_2 , (refer to Figure 2) the total dynamic impedance of the circuit is given by:

$$|Z_{KA}'| = |Z_{KA}| \times \left(1 + \frac{R_1}{R_2} \right)$$

Test Circuits

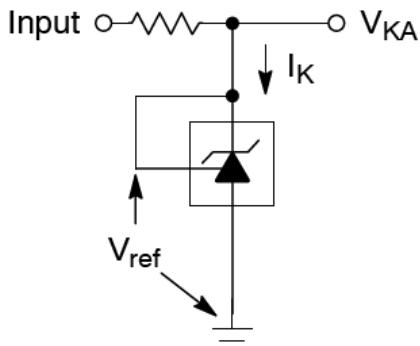


Figure 1: $V_{KA} = V_{REF}$

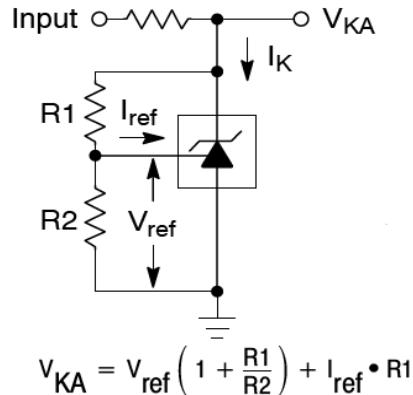


Figure 2: $V_{KA} > V_{REF}$

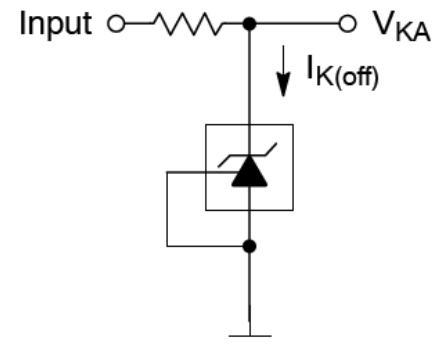


Figure 3: Off-State Current

Additional Information – Stability


When TS432 series is used as a shunt regulator, there are two options for selection of C_L , are recommended for optional stability:

- A) No load capacitance across the device, decouple at the load.
- B) Large capacitance across the device, optional decoupling at the load.

The reason for this is that TS432 series exhibits instability with capacitances in the range of 10nF to 1 μ F (approx.) at light cathode current up to 3mA(typ). The device is less stable the lower the cathode voltage has been set for. Therefore while the device will be perfectly stable operating at a cathode current of 10mA (approx.) with a 0.1 μ F capacitor across it, it will oscillate transiently during start up as the cathode current passes through the instability region. Select a very low capacitance, or alternatively a high capacitance (10 μ F) will avoid this issue altogether. Since the user will probably wish to have local decoupling at the load anyway, the most cost effective method is to use no capacitance at all directly across the device. PCB trace/via resistance and inductance prevent the local load decoupling from causing the oscillation during the transient start up phase.

Note: if the TS432 series is located right at the load, so the load decoupling capacitor is directly across it, then this capacitor will have to be $\leq 1\text{nF}$ or $\geq 10\mu\text{F}$.

Applications Examples

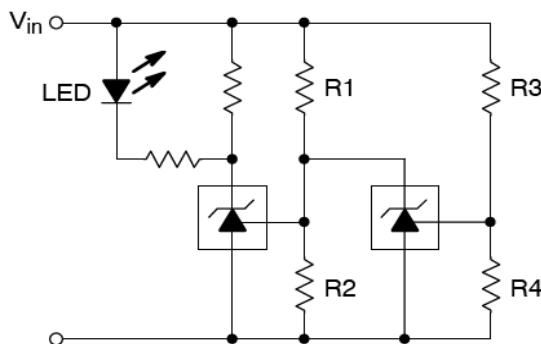


L.E.D. indicator is 'ON' when V_{in} is between the upper and lower limits,

$$\text{Lower limit} = \left(1 + \frac{R1}{R2}\right) V_{ref}$$

$$\text{Upper limit} = \left(1 + \frac{R3}{R4}\right) V_{ref}$$

Figure 4: Voltage Monitor

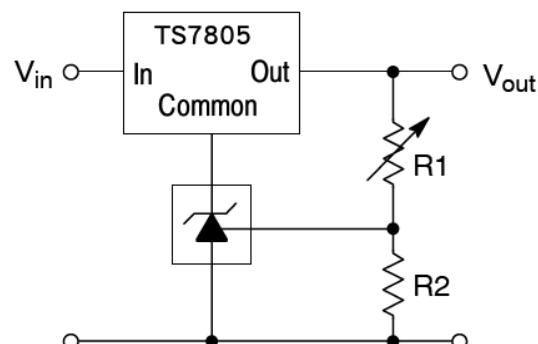

$$V_{out} = \left(1 + \frac{R1}{R2}\right) V_{ref}$$

$$V_{out(\min)} = V_{ref} + 5.0 \text{ V}$$

Figure 5: Output Control for Three Terminal Fixed Regulator

Applications Examples (Continue)

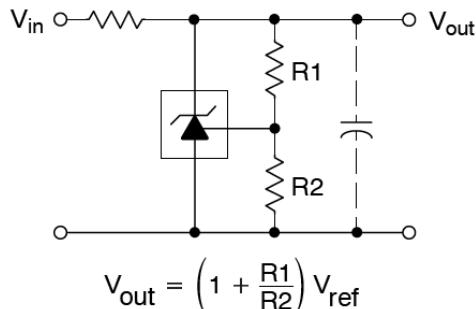


Figure 6: Shunt Regulator

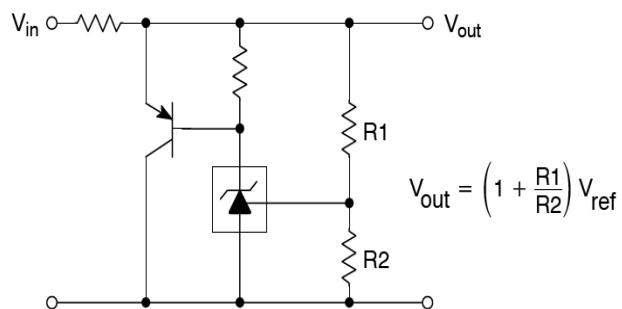


Figure 7: High Current Shunt Regulator

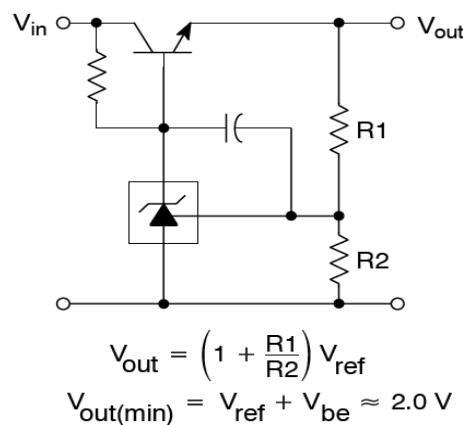


Figure 8: Series Pass Regulator

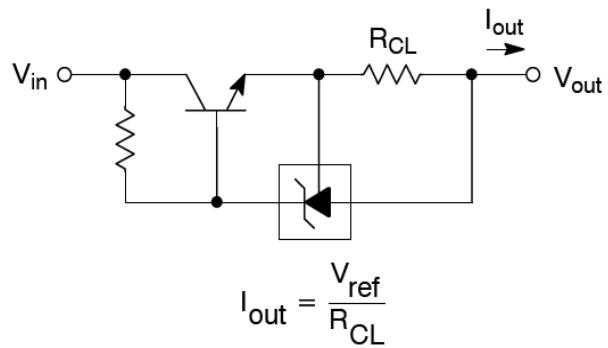


Figure 9: Constant Current Source

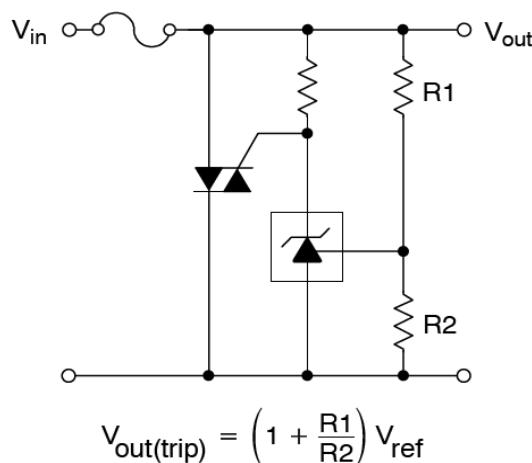


Figure 10: TRIAC Crowbar

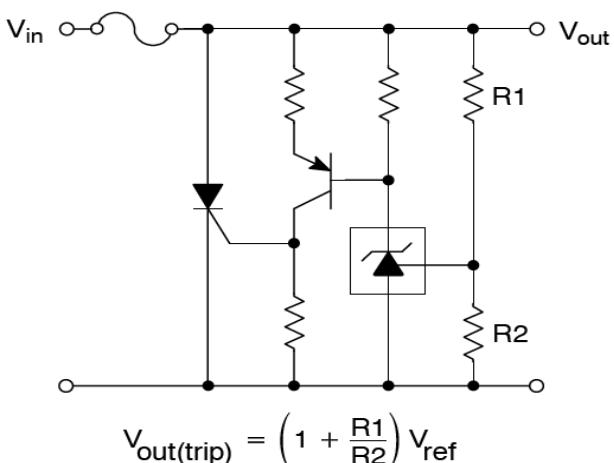


Figure 11: SCR Crowbar

Applications Examples (Continue)

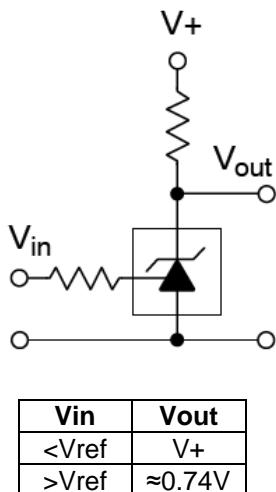


Figure 12: Single-Supply Comparator with Temperature-Compensated Threshold

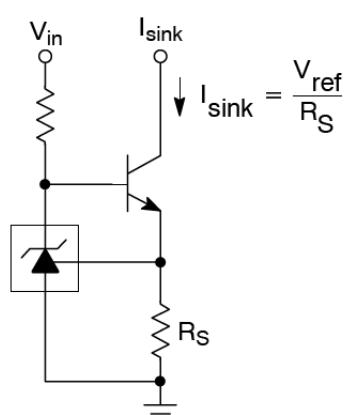


Figure 13: Constant Current Sink



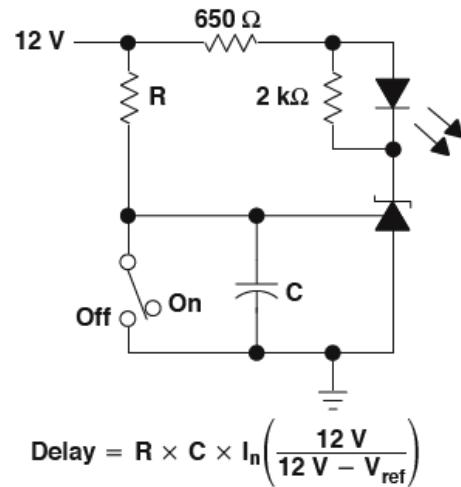




Figure 14: Delay Timer

Typical Performance Characteristics

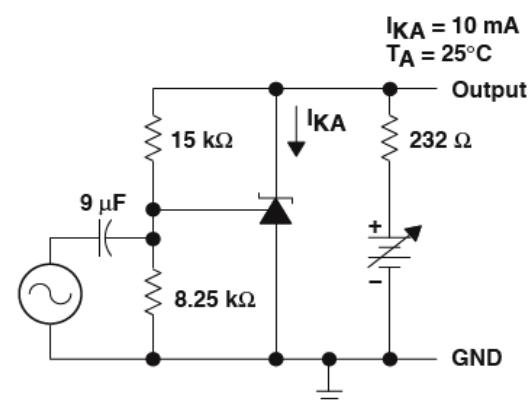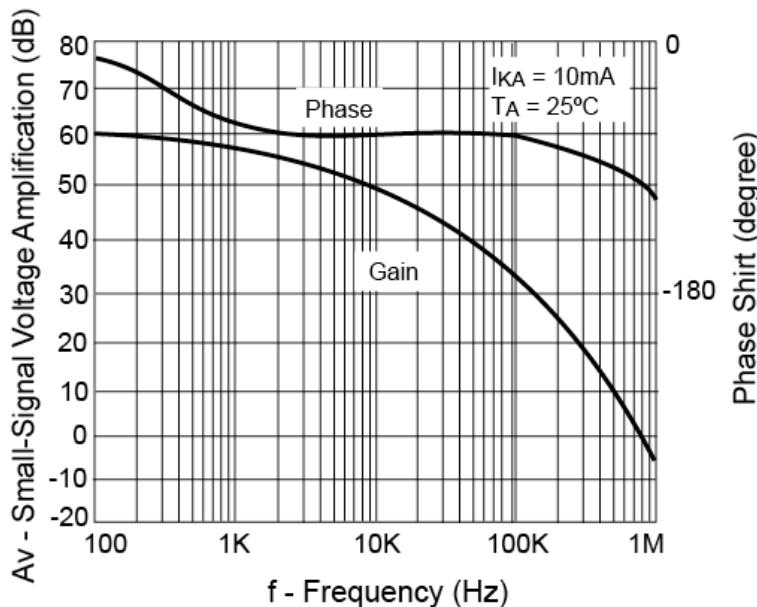

Test Circuit for Voltage Amplification


Figure 15: Small-Signal Voltage Gain and Phase Shift vs. Frequency

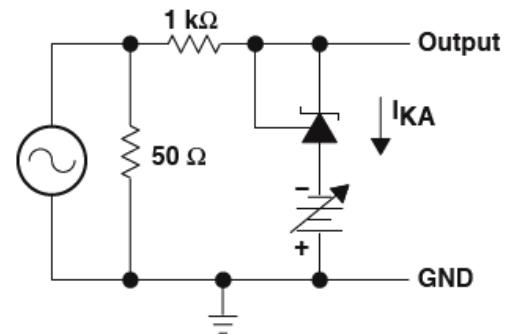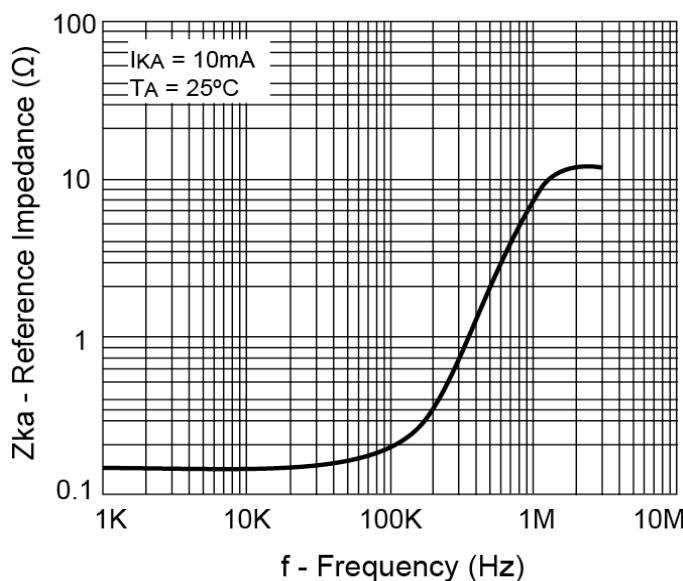

Test Circuit for Reference Impedance

Figure 16: Reference Impedance vs. Frequency

Typical Performance Characteristics

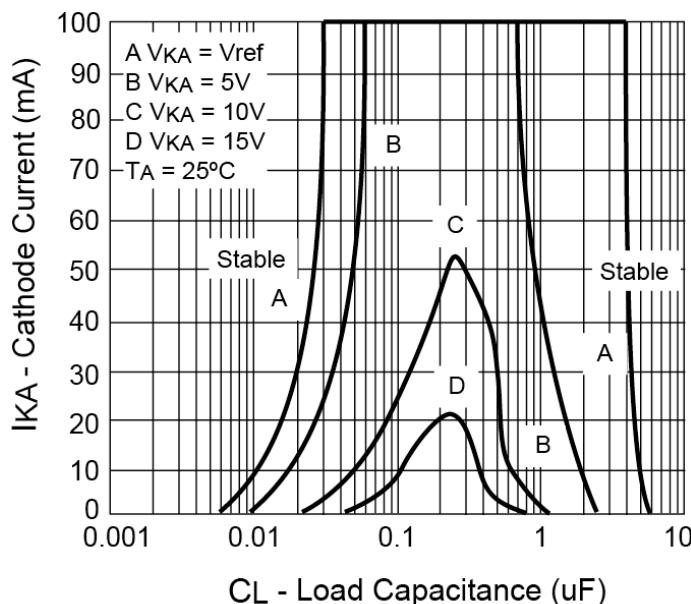

The areas under the curves represent conditions that may cause the device to oscillate. For curves B, C, and D, R_2 and V_+ were adjusted to establish the initial V_{KA} and I_{KA} conditions with $C_L=0$. V_{BATT} and C_L then were adjusted to determine the ranges of stability.

Figure 17: Stability Boundary Condition




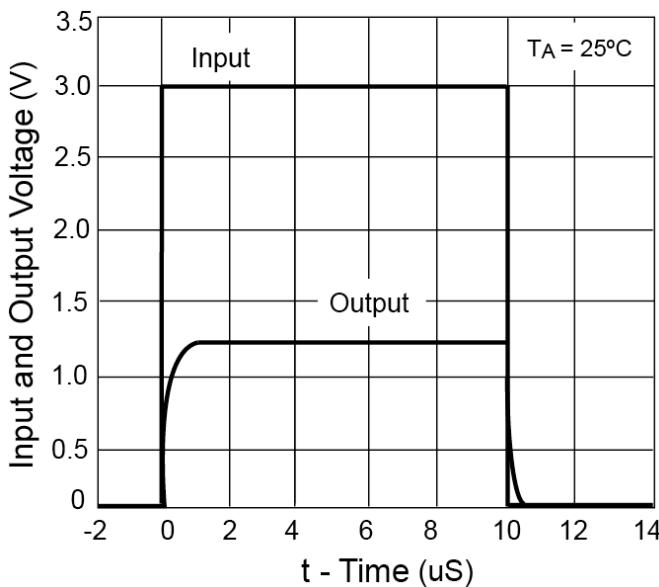


Figure 18: Pulse Response

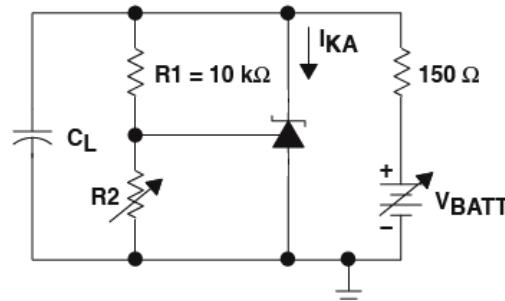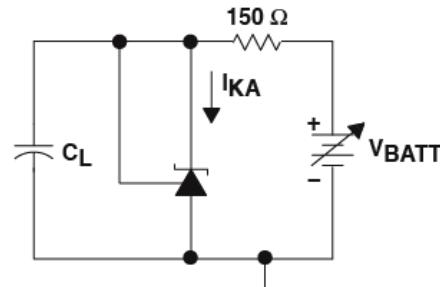

Test Circuit for Curve B, C and D

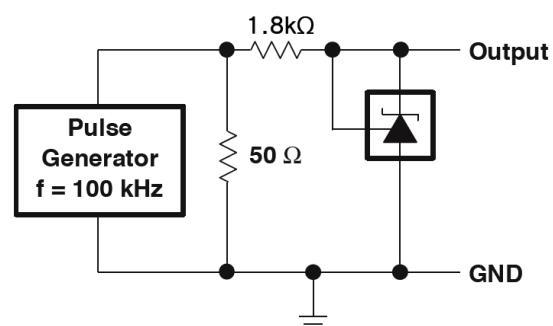

Test Circuit for Pulse Response, $I_k=1\text{mA}$

Electrical Characteristics

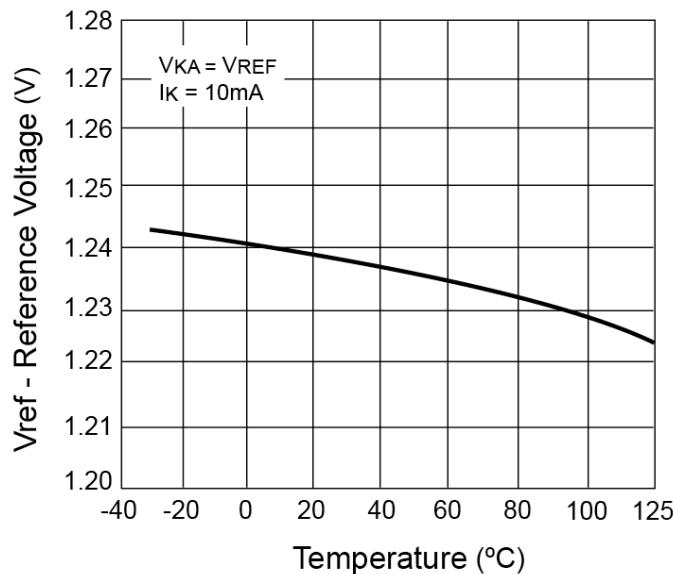


Figure 19: Reference Voltage vs. Temperature

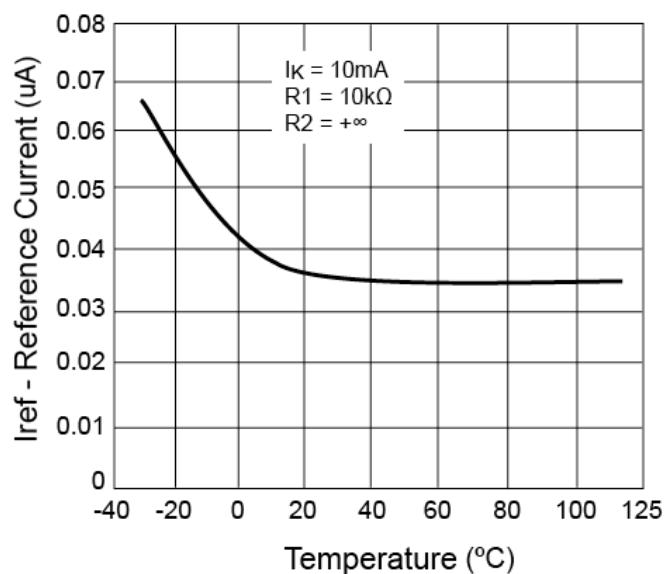


Figure 20: Reference Current vs. Temperature



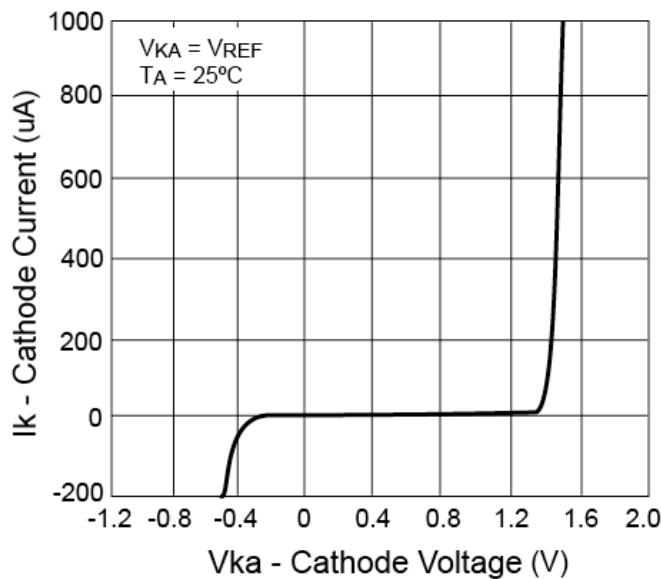



Figure 21: Cathode Current vs. Cathode Voltage

SOT-23 Mechanical Drawing

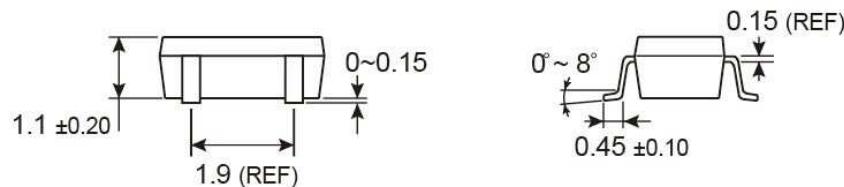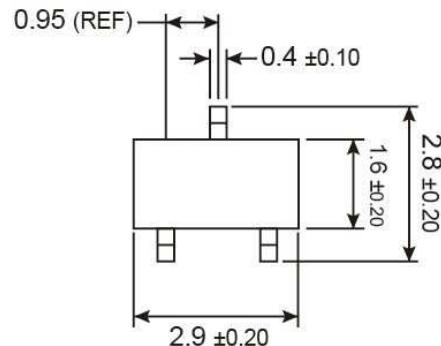


Unit: Millimeters

Marking Diagram




2 = Device Code
X = Tolerance Code
 $(A = \pm 1\%, B = \pm 0.5\%)$
Y = Year Code
M = Month Code for Halogen Free Product
 $O = \text{Jan}, P = \text{Feb}, Q = \text{Mar}, R = \text{Apr}$
 $S = \text{May}, T = \text{Jun}, U = \text{Jul}, V = \text{Aug}$
 $W = \text{Sep}, X = \text{Oct}, Y = \text{Nov}, Z = \text{Dec}$
L = Lot Code

TO-92 Mechanical Drawing

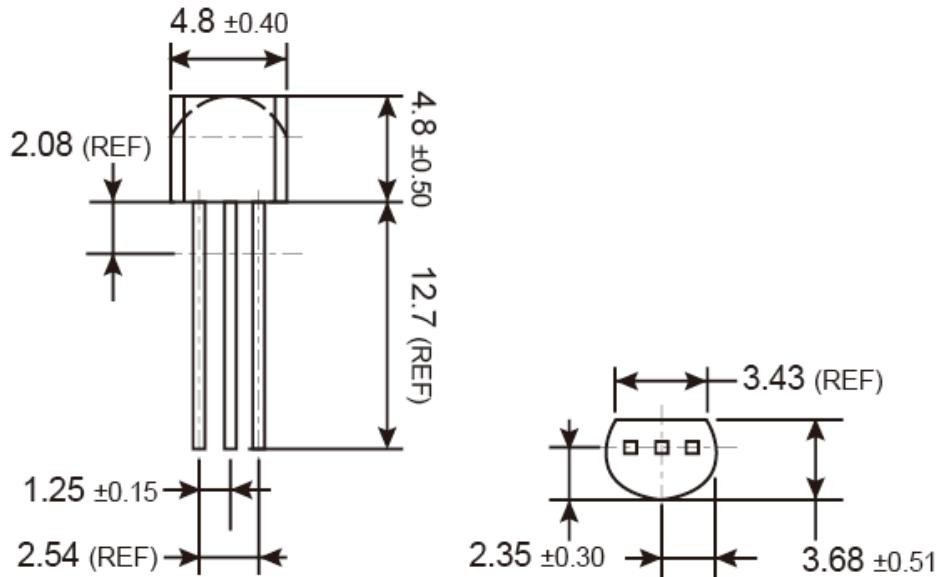

Unit: Millimeters

Marking Diagram




X = Tolerance Code
 (A = ±1%, B = ±0.5%)
Y = Year Code
M = Month Code for Halogen Free Product

| | | | | | | | |
|----------|------|----------|------|----------|------|----------|------|
| O | =Jan | P | =Feb | Q | =Mar | R | =Apr |
| S | =May | T | =Jun | U | =Jul | V | =Aug |
| W | =Sep | X | =Oct | Y | =Nov | Z | =Dec |

L = Lot Code

TO-92 Ammo Pack Mechanical Drawing

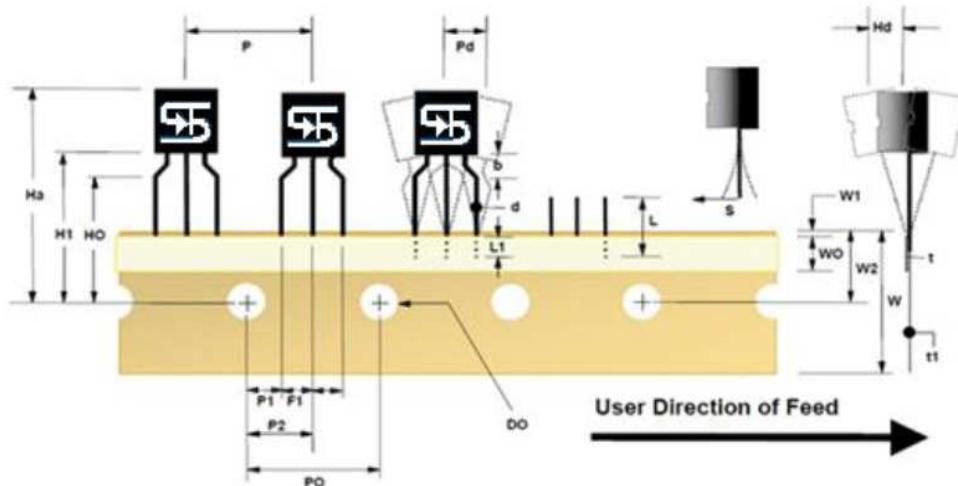

Tape Dimension

| ITEM DESCRIPTION | SYMBOL | DIMENSION(mm) |
|------------------------------------|--------|---------------------------|
| Base of Package to Lead Bend | b | 2.4892 (typ.) |
| Component Height | Ha | 23.5712 (+/- 0.635) |
| Lead Clinch Height | HO | 16.002 (+/- 0.508) |
| Component Base Height | H1 | 18.9992 (+/- 0.508) |
| Component Alignment (side / side) | Pd | 1.016 (max) |
| Component Alignment (front / back) | Hd | 0.7874 (max) |
| Component Pitch | P | 12.7 (+/- 0.508) |
| Feed Hole Pitch | PO | 12.7 (+/- 0.2032) |
| Hole Center to Component Center | P1 | 3.81 (+0.2286, -0.254) |
| Hole Center to Component Center | P2 | 6.2738 (+/- 0.1778) |
| Lead Spread | F1/F2 | 2.6416 (+/- 0.254) |
| Lead Thickness | d | 0.4572 (+0.0508, -0.0762) |
| Cut Lead Length | L | 10.8966 (max) |
| Taped Lead Length | L1 | 5.3086 (+1.2954, -1.3208) |
| Taped Lead Thickness | t | 0.8218 (+/- 0.1524) |
| Carrier Tape Thickness | t1 | 0.5334 (+/- 0.1524) |
| Carrier Tape Width | W | 17.9832 (+0.508, -0.4826) |
| Hold – down Tape Width | WO | 5.9944 (+/- 0.3048) |
| Hold – down Tape position | W1 | 0.889 (max) |
| Feed Hole Position | W2 | 9.144 (+/- 0.635) |
| Sprocket Hole Diameter | DO | 3.9878 (+0.2032, -0.1778) |
| Lead Spring Out | S | 0.1016 (max) |

Pb-Free

 **RoHS**
COMPLIANT

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[TS432ACT](#) [TS432ACX](#) [TS432BCT](#) [TS432BCX](#) [TS432ACT A3G](#) [TS432BCT A3G](#) [TS432ACX RFG](#) [TS432BCX RFG](#)