



PFA10-T-01-3-960-DC24V-40A

The primary switched-mode power supply of type PFA10-T is ideally suited for automation and mechanical engineering applications. Its compact design allows space-saving integration into control cabinets with limited installation space. The housing with 25° angled terminals enables tool-free installation and quick replacement. The three-phase AC input is also suitable for operation with DC voltage. With a 24 V DC output, up to 96.9 % efficiency, 960 W output power, and 150 % power reserve for up to 6 seconds, the power supply meets all the requirements of dynamic industrial applications.



TYPICAL FEATURES

- Slim Design (80 mm) with 25° Push-In connectors
- Fast tool-less mounting and demounting
- DC-Input Range 430 V to 815 V / 850 V 10 s
- Efficiency factor 96.9 %
- No derating at -40 °C to +60 °C, Boost Power 150 % for 6 s
- Thermal Power Bonus up to 110 % / 45 °C
- Highest Lifetime Expectancy 80.000 h / 40 °C

TYP. APPLICATIONS

Industrial & automation, building automation, energy, datacom & telecom, infrastructure

YOUR BENEFITS

- High power density
- Robustness suitable for industrial use
- Power boost for peak loads
- Quick, tool-free installation
- High efficiency and long service life

APPROVALS / CERTIFICATIONS



WEB LINKS

[Further information](#), [International approvals](#), [Technical basics](#), [REACH](#), [RoHS](#), [Contact](#)

COMPLIANCE



TECHNICAL DATA (TU = +25 °C, UB = 3AC 400 V UNDER FULL LOAD AND AFTER WARM-UP, UNLESS OTHERWISE SPECIFIED)

INPUT CIRCUIT	
Rated input voltage range U_e	AC 320...575 V (3 phase operation) AC 350...480 V (2 phase operation, max. P_{out} = 600 W) DC 450...815 V (DC input refer to „Connections for DC-operation“ continuous) Max. DC 850 V (DC input refer to „Connections for DC-operation“ max. 10 s)
Rated input voltage U_n	AC 400...480 V (at 50/60 Hz)
Input current	3 x 1.6 A typ. at U_b = AC 400 V 3 x 1.4 A typ. at U_b = AC 480 V 2.1 A typ. at U_b = DC 500 V
Mains frequency	47...63 Hz
Inrush current	with 3-phase AC 400 V: max. 10 A (cold start)
Turn-on Voltage	prevents switching on during 1 AC operation min. AC 300 V DC operation min. DC 424 V
Turn-off Voltage	AC operation min. AC 290 V DC operation min. DC 410 V
Power factor correction	Typ. 0.94 (AC 400 V, full load)
Input protection	Internal back-up fuse, 2x T5 A slow-blow
Recommended back-up fuse	3 pole MCB e.g. E-T-A's 4230; C16 protector
OUTPUT CIRCUIT	
Output power rating	960 W
Rated output voltage U_o	DC 24 V
Rated output current I_o	40 A
Overload limit in constant current mode	44 A
Output voltage accuracy	±1 %
Minimum load	0 %
Line Regulation	±0.1 % typ. (low line to high line, full load)
Load regulation	with load range 0 % to 100 % typ. ±0.3 %
Voltage setting range	DC 24...28 V When input voltage is below AC 350 V, the output voltage is limited to DC 24 V. Make sure that the maximum rated output power will not be exceeded when trimming up.
Power boost factor	150 % for 6 s 250 % for 20 ms (refer to „Boost Power“)
Residual ripple	1 % of the rated value V_{out} ; 20 MHz bandwidth
Capacitive load	Max. 40 mF
Transient Response	10-100% load: ±3.0% typ. recovery time: 100 ms typ.
Over Voltage Protection (OVP)	SELV output DC 35 V, latch off
Short circuit behaviour	Hiccup mode, auto recovery
Reverse voltage resistance	Max. DC 35 V (continuous) DC 38 V (< 5 min)
Operating conditions signalling	DC OK - green LED DC OK - LED off (abnormal mode, no operation or failure) standard operation, output voltage okay closed - Signal Contact (normal mode) open - Signal Contact (abnormal mode, no operation or failure)

Battery Charging Mode	typ. 100% $I_{out,lim}$ continuous DIP-Switch 2 "ON"; limited to T_{AMB} max. 60° C, to maintain reliability. Refer to „CC/CV Mode (Charging Mode)“
------------------------------	--

ELECTRICAL DATA	
Rated frequency	83 kHz
Rated insulation voltage	I/P to O/P: AC 3,5 kV / DC 5 kV I/P to PE: AC 1,6 kV / DC 2,5 kV O/P to PE: AC 500 V / DC 700 V (tested for 1 minute)
Efficiency	Typ. 96.9 %
Auxiliary circuit ratings	DC 30 V / 0.1 A (do not connect signaling contact to hazardous voltages)
Power consumption	Typ. 2.2 W (3-phase AC 400 V; max. 3 W) Typ. 2.5 W (3-phases AC 480 V; max. 3 W)
Power failure bridging time	23 ms
Switch-on delay t_{start}	2- and 3-phase operation, AC 400 V typ. 695 ms max. 810 ms
Rise time	typ. 5 ms max. 10 ms
Insulation resistance	Input to output (I/P → O/P) $\geq 4.5 M\Omega$

OPERATING MODE SETTING			
Description	DIP1	DIP2	Switch position
Single Mode (Factory set) Power Boost Mode available, refer to „Boost Power“	OFF	OFF	
Parallel Load Share Mode Angled output characteristic for load sharing. Voltage drop from 0 to nom. I_{OUT} : 1.2V	ON	OFF	
Charging Mode Current Limitation strictly at nominal current. Refer to „CC/CV Mode (Charging Mode)“ For battery charging, please get in contact with E-T-A.	OFF	ON	
Not allowed!	ON	ON	

MECHANICAL DATA	
Mounting dimensions (WxHxD)	80 x 135 x 155.7 mm
Mounting position	Wall mounting with input terminals pointing downwards (see dimensions)
Mass	Approx. 1,140 g
Material	Polycarbonate / Aluminum

MOUNTING VALUES - CAGE CLAMP			
Connection capacity Connection L1, L2, L3	Cable cross section [mm ²]	Cable cross section [AWG]	Stripping length [mm]
rigid	0.25...6	24...8	12...13
flexible	0.25...6	24...8	12...13
Connection capacity Connection PE	Cable cross section [mm ²]	Cable cross section [AWG]	Stripping length [mm]
rigid	0.25...6	24...8	12...13
flexible	0.25...6	24...8	12...13
Connection capacity Connection +1, +2 (V _{out})	Cable cross section [mm ²]	Cable cross section [AWG]	Stripping length [mm]
rigid	0.75...25	18...4	18...20
flexible	0.75...25	18...4	18...20
Connection capacity Connection -1, -2 (V _{out})	Cable cross section [mm ²]	Cable cross section [AWG]	Stripping length [mm]
rigid	0.75...25	18...4	18...20
flexible	0.75...25	18...4	18...20

Use flexible (stranded wire) or solid cables with above wire cross-section is recommended. Use copper conductors designed for an operating temperature of at least 90°C.

MOUNTING VALUES			
Signal connection capacity (13,14)	Cable cross section [mm ²]	Cable cross section [AWG]	Stripping length [mm]
flexible with ferrule	0.25...1.5	24...16	8...9

Do not connect signaling contact to hazardous voltages

AMBIENT CONDITIONS	
Ambient temperature	-40...+70 °C (with derating)
Storage temperature	-40...+85 °C
Damp heat	non-condensing, max. 95 % rel. humidity
Vibration	Test according to IEC 60068-2-6 out of operation, 3.5 mm deflection (5...8.4 Hz), 2 g (8.4...150 Hz), 10 cycles per axis (min-max-min), 1 octave/min
Shock	Test according to IEC 60068-2-27, test Ea 15 g (11 ms), 3 x (positive/negative) per side
IP code	I with PE connection
IP code (standard)	IP20
Insulation Grade	reinforced
Earth Leakage Current	AC 480 V / 60 Hz 3.5 mA max.
MTBF	Test according to EN/IEC 61709 (SN29500) 680 x 10 ³ h
Operating altitude	5000 m
	Recognized by safety agency for safe operation up to 5000 m. High altitude operation may impact the performance and lifetime

ORDERING NUMBER CODE

P	F	A	1	0	-	T	-	0	1	-	3	-	9	6	0	-	D	C	2	4	V	-	4	0	A
1						2		3			4		5				6				7				

1 TYPE NUMBER

PFA10 Switch mode power supply

2 MOUNTING

T	DIN rail mounting
---	-------------------

3 TERMINAL

01	Push-in terminals
----	-------------------

4 PHASE

3	Phase
---	-------

5 POWER IN WATTS

240	240 Watt
480	480 Watt
960	960 Watt

6 RATED VOLTAGE

DC24V	DC 24 V
DC48V	DC 48 V only 960W version

7 RATED CURRENT

10A	10 A
20A	20 A
40A	40 A

APPROVALS

Test standard	File Certificate No.	Types
UL 62368-1 CSA C22.2 No. 62368-1	E471781	PFA10-T-01-03-240-DC24V-10A PFA10-T-01-03-480-DC24V-20A PFA10-T-01-03-960-DC24V-40A PFA10-T-01-03-960-DC48V-20A
UL 61010-1 UL 61010-2-201 CSA C22.2 No. 107	E492388	PFA10-T-01-03-240-DC24V-10A PFA10-T-01-03-480-DC24V-20A PFA10-T-01-03-960-DC24V-40A PFA10-T-01-03-960-DC48V-20A
IEC/EN 61010-1 IEC/EN 61010-2-201 IEC/EN 62368-1		PFA10-T-01-03-240-DC24V-10A PFA10-T-01-03-480-DC24V-20A PFA10-T-01-03-960-DC24V-40A PFA10-T-01-03-960-DC48V-20A

APPROVALS



File #E224736



UL 61010 File# E492388



IEC/EN 61010-1, IEC/EN 61010-2-201, IEC/EN 62368-1


The products were submitted for safety files at AC- and DC-Input operation. (AC 350...575 V and DC 450...600 V).

If input voltage is > DC 500 V consider an external fuse according to applicable standards. 2-phase operation is not included in the safety approvals. Additional tests might be necessary when the complete application has to be approved according to UL 62368-1, 61010-1 and UL 61010-2-201


Output power derating for Line-input of less than 3AC 350 V (derate linearly from 100% at AC 350 V to 90% at 3AC 320 V)

TIME-/CURRENT CHARACTERISTICS

OPERATING MODE - U/I FACTORY SETTING (SINGLE MODE)

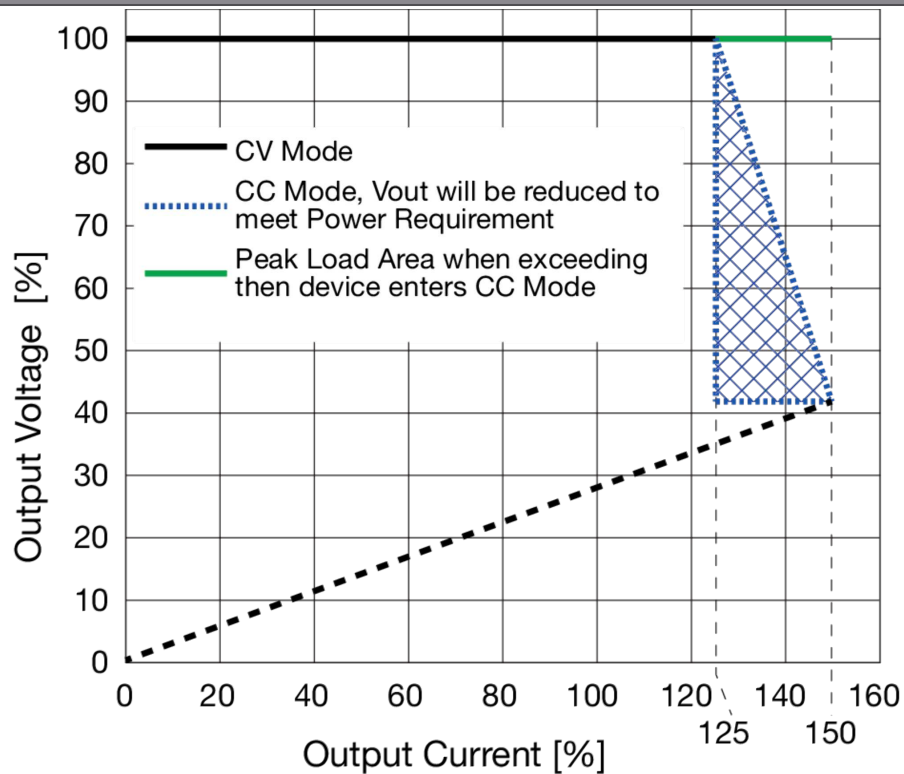


OPERATING MODE - CC/CV MODE (CHARGING MODE)

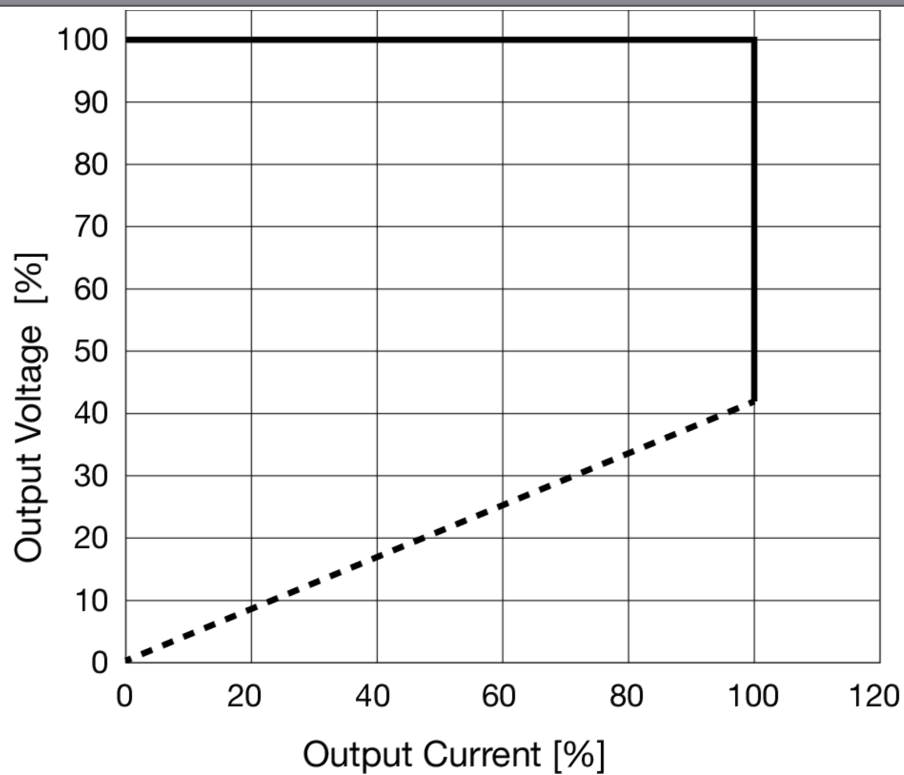


DERATING

DERATING CURVE

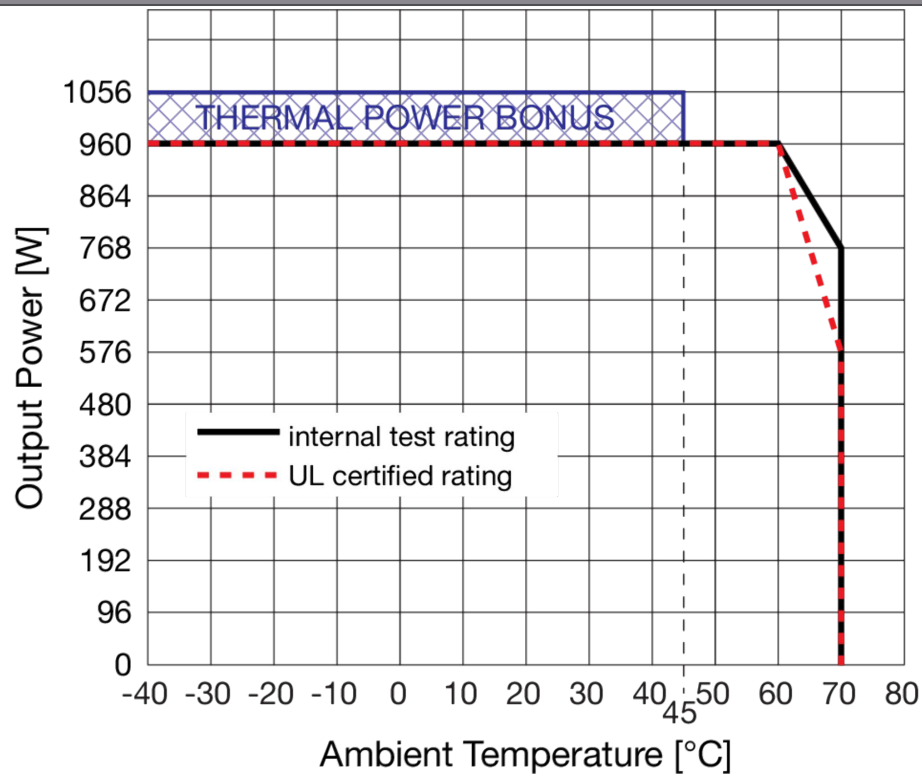


EFFICIENCY

EFFICIENCY VS LOAD 960 W DC 24 V

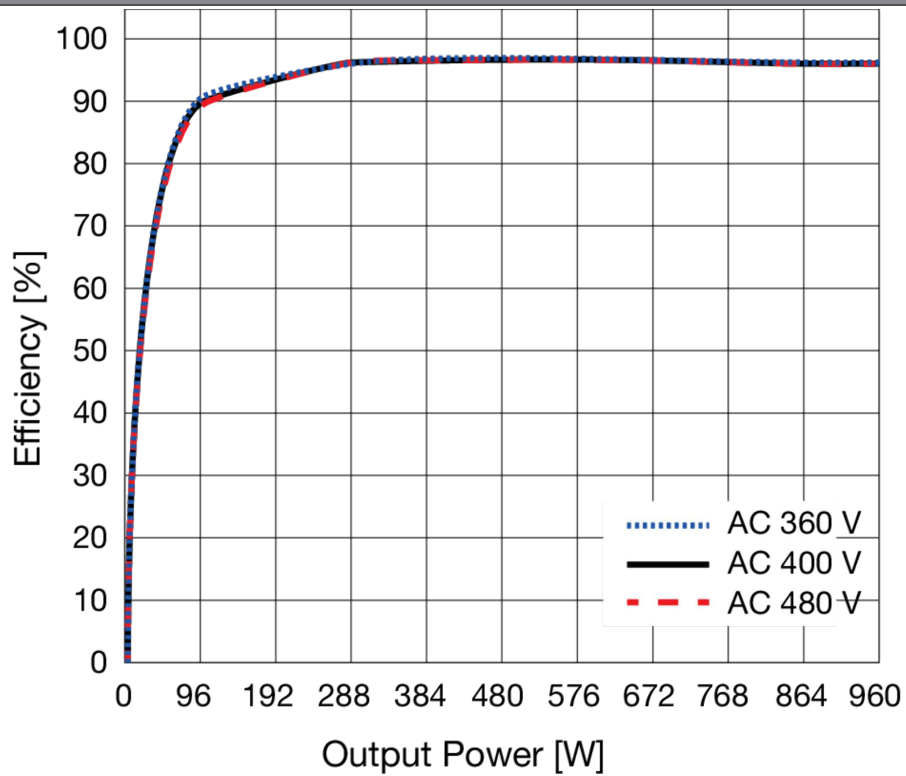


POWER DISSIPATION VS. LOAD 960 W DC 24 V

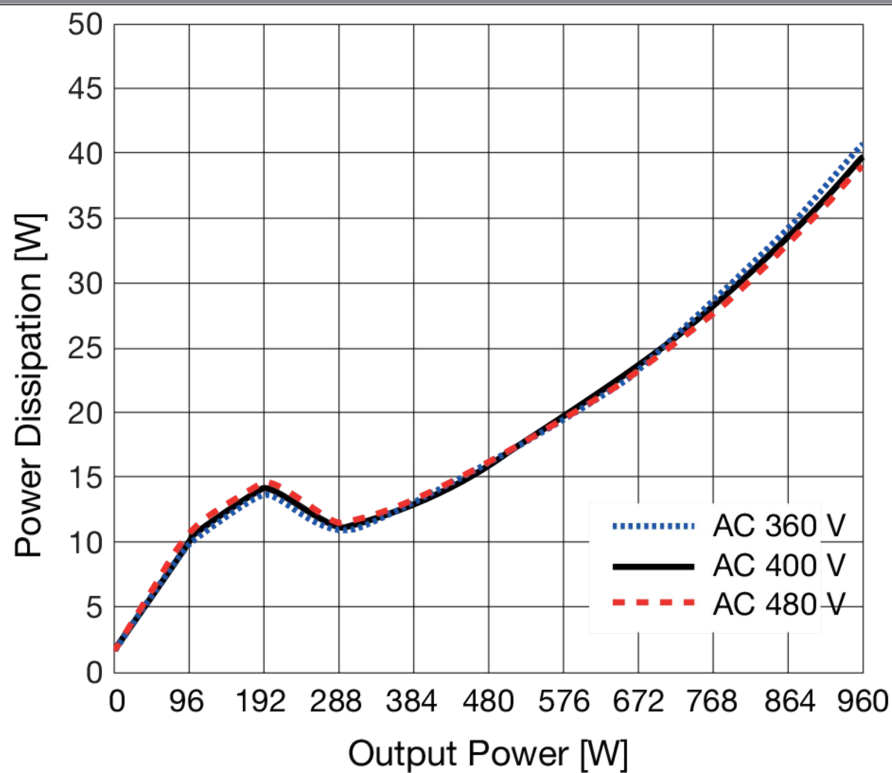


DIMENSIONS

DIMENSIONS

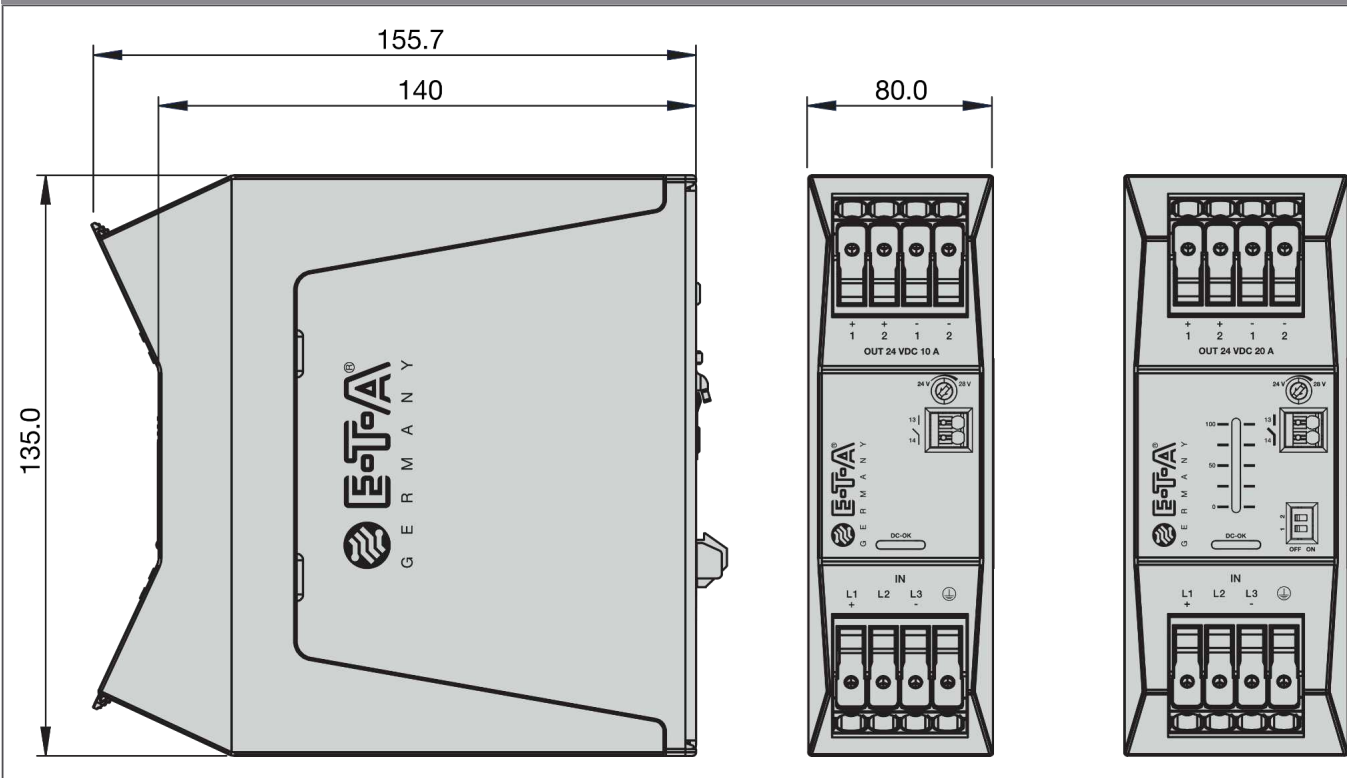


INSTALLATION INSTRUCTIONS

MOUNTING DIMENSIONS

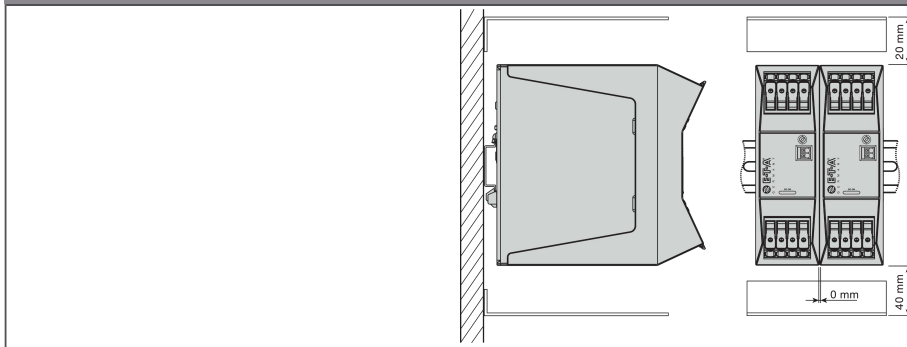


To guarantee sufficient convection cooling, keep a distance of 20 mm above and 40 mm below the device.
For vertical mounting the device should be installed with the input terminal on the bottom.
No space between supplies are required.

INSTALLATION INSTRUCTIONS MOUNTING

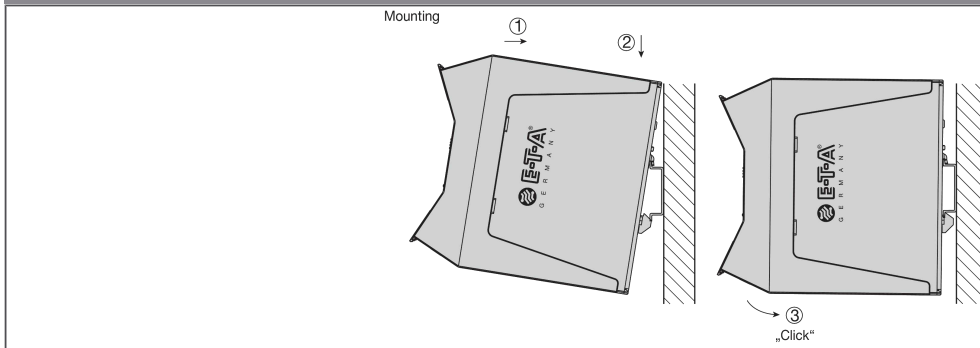


1. Place the device on the DIN rail with a slight upward tilt. Snap the device onto the DIN rail.
2. Now tilt the device downwards until it reaches the lower part of the DIN rail.
3. Press the lower part of the device firmly against the rail until the device clicks into place on the DIN rail.
4. Shake the device gently to ensure that it is securely engaged.

INSTALLATION INSTRUCTIONS DISMANTLING

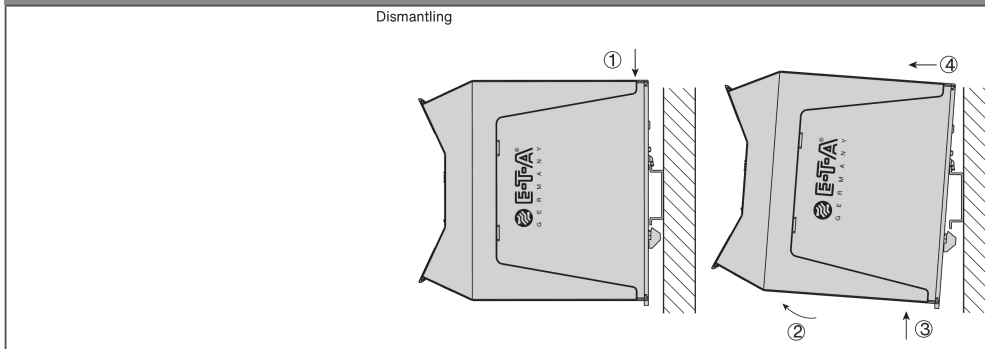

1. Press the unlock button on the top of the device to release the latch from the rail.
2. While pushing the button, slightly tilt the device forward.
3. Pull the device away from the DIN rail by pushing it up.
4. Remove the power supply completely from the rail.


INSTALLATION INSTRUCTIONS DISMANTLING

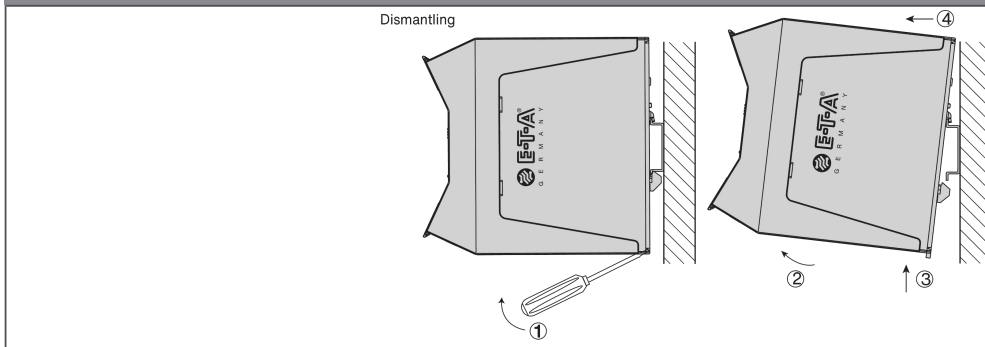


1. Pull the DIN rail latch by using a screwdriver OUT of the device and HOLD it.
2. Tilt the bottom of the device OUT.
3. Pull the device away from the DIN rail by pushing it up.
4. Remove the power supply completely from the rail.

SCHEMATIC DIAGRAMS


SCHEMATIC DIAGRAM

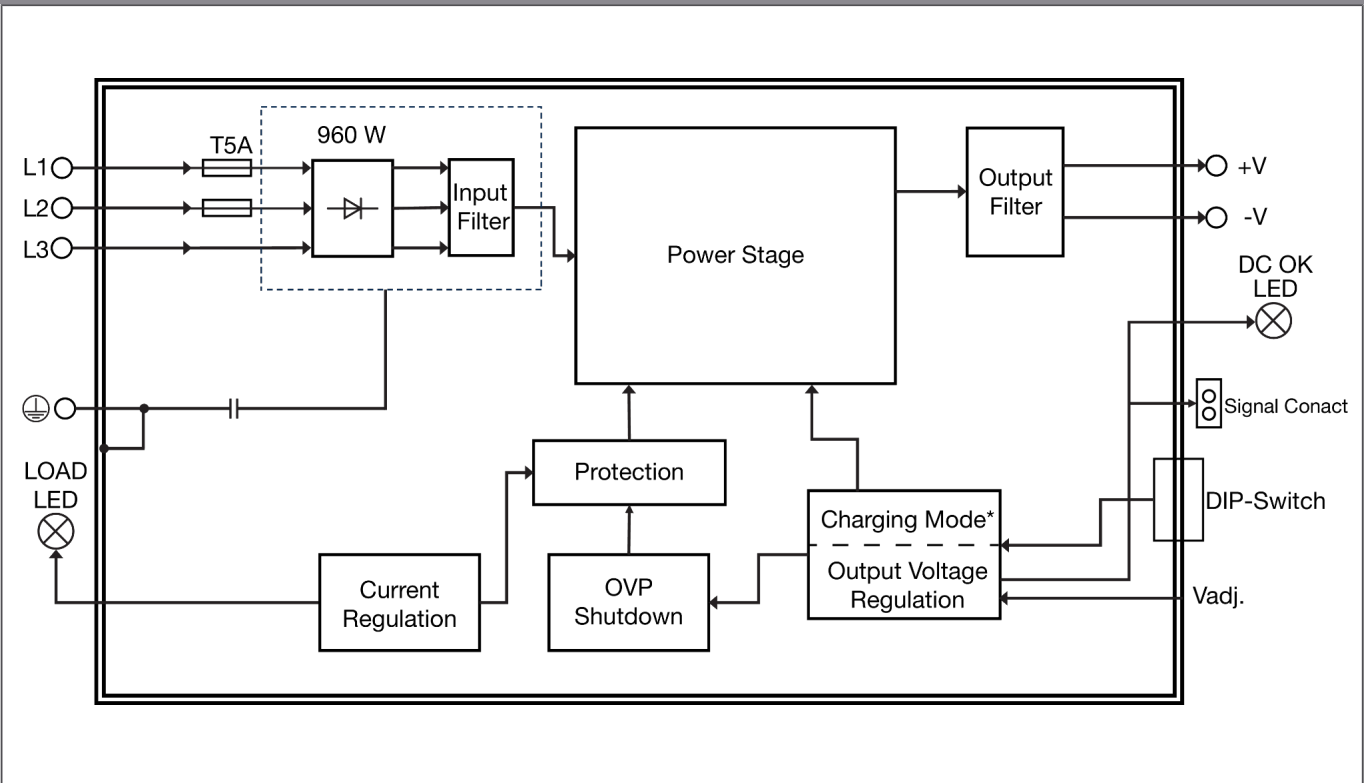

CONNECTIONS FOR DC-OPERATION

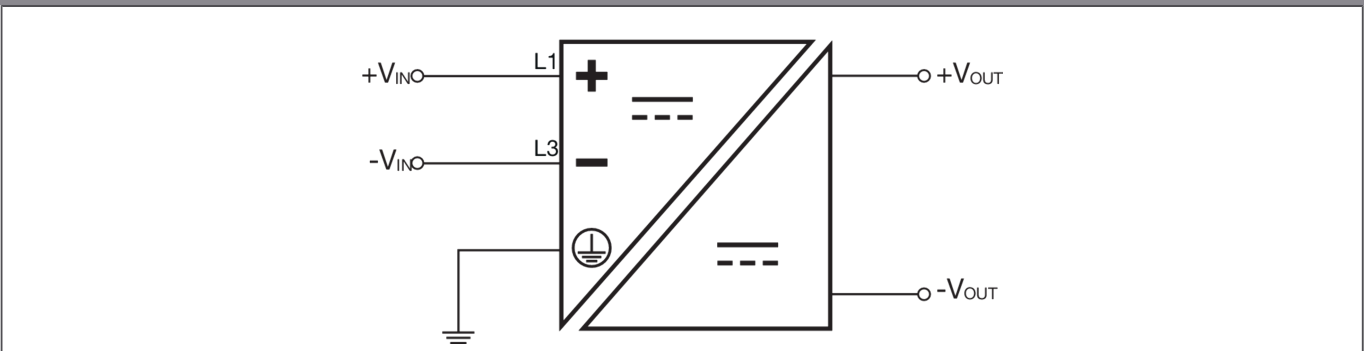


PHASE REDUNDANCY

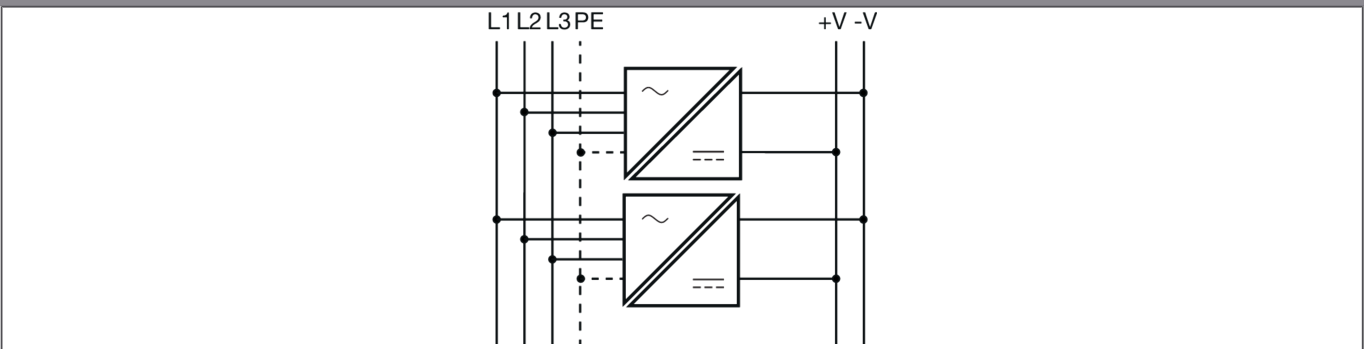

1) If one phase fails, operation is still guaranteed. (2-phase operation)


PARALLEL OPERATION

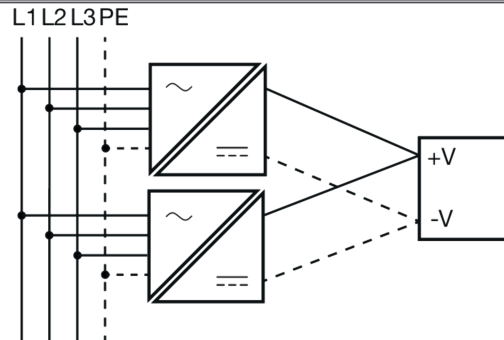

- 1) Set DIP switch 1 to "ON" to enable parallel operation.
- 2) Adjust all power supplies to exactly the same output voltage under identical load and cooling conditions.
- 2) Use identical cable lengths and cross-sections (star configuration). Switch on all units simultaneously to prevent triggering overload protection.
- 3) Only use parallel operation in the standard mounting position (input terminals at the bottom). Do not connect in parallel under conditions that require output current reduction (e.g., above 60 °C ambient temperature,...).
- 4) Leakage current, EMI, inrush current, and harmonics increase when using multiple power supplies in parallel.


FUNCTIONAL DIAGRAMS

BOOST POWER (AC 400V...480 V OR DC 500 V; -40°C TO +60°C MAX.)

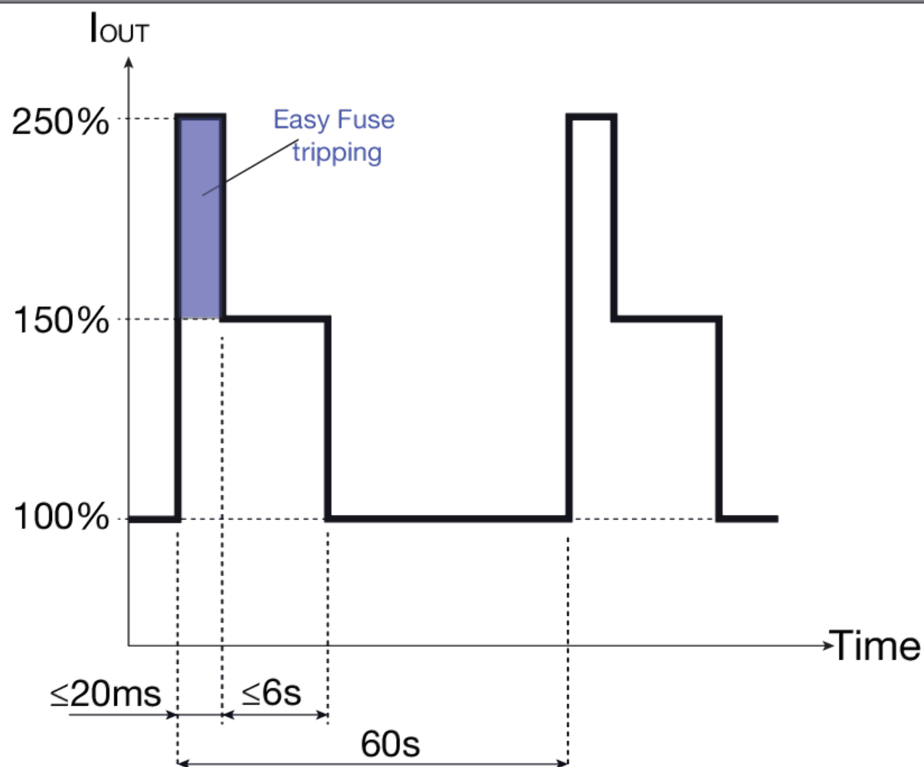

STATUS INDICATION

LOAD INDICATION LED

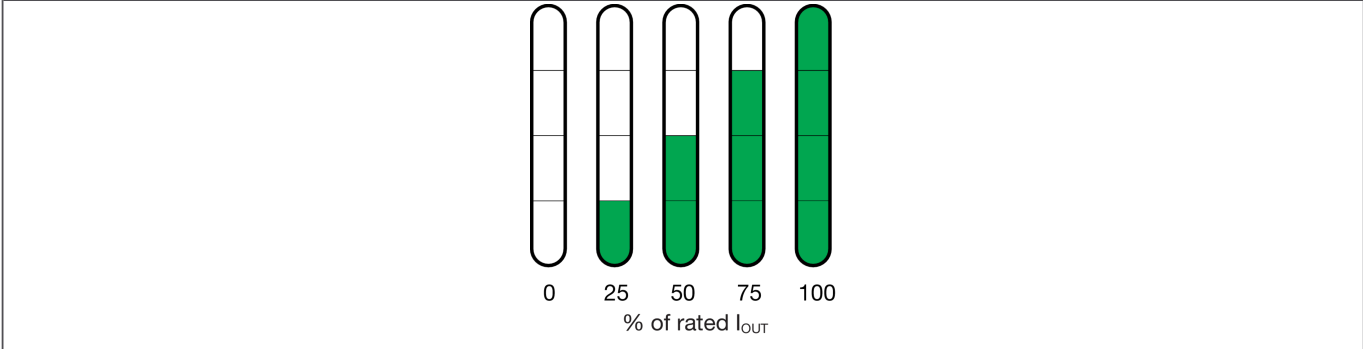

Note: green LED (normal mode); LED off (abnormal mode, no operation or error)

All information and data given on our products are accurate and reliable to the best of our knowledge, but E-T-A does not accept any responsibility for the use in applications which are not in accordance with the present specification. E-T-A reserves the right to change specifications at any time in the interest of technical improvement. Dimensions are subject to change without notice. Please enquire for the latest dimensional drawing with tolerances if required. All dimensions, data, pictures and descriptions are for information only and are not binding. Amendments, errors and omissions excepted. Ordering part numbers may differ from the device marking.