

# Product data sheet

Specifications



multifunction relay, Harmony Timer  
Relays, 8A, 1 CO, 0.05sâ€‘300h,  
symmetrical flashing, 24...240V AC  
DC

RE22R1MYMR

## Main

Range of product	Harmony Timer Relays
Discrete output type	Relay
Product or component type	Modular timing relay
Device short name	RE22
nominal output current	8 A

## Complementary

Contacts type and composition	1 C/O timed contact, cadmium free
Time delay type	Power on-delay Off-delay On-delay and off-delay Symmetrical flashing Interval
Time delay range	30...300 s 10...100 s 3...30 s 30...300 min 3...30 min 0.3...3 s 0.05...1 s 30...300 h 1...10 s 3...30 h
Control type	Rotary knob Diagnostic button Potentiometer external
[Us] rated supply voltage	24...240 V AC/DC 50/60 Hz
Release input voltage	<= 2.4 V
Voltage range	0.85...1.1 Us
Supply frequency	50...60 Hz +/- 5 %
Connections - terminals	Screw terminals, 1 x 0.5...1 x 3.3 mm <sup>2</sup> (AWG 20...AWG 12) solid without cable end Screw terminals, 2 x 0.5...2 x 2.5 mm <sup>2</sup> (AWG 20...AWG 14) solid without cable end Screw terminals, 1 x 0.2...1 x 2.5 mm <sup>2</sup> (AWG 24...AWG 14) flexible with cable end Screw terminals, 2 x 0.2...2 x 1.5 mm <sup>2</sup> (AWG 24...AWG 16) flexible with cable end
Tightening torque	0.6...1 N.m conforming to IEC 60947-1
Housing material	Self-extinguishing
Repeat accuracy	+/- 0.5 % conforming to IEC 61812-1
Temperature drift	+/- 0.05 %/°C
Voltage drift	+/- 0.2 %/V
Setting accuracy of time delay	+/- 10 % of full scale at 25 °C conforming to IEC 61812-1

<b>Time delay type</b>	Power on-delay - A- Power on-delay relay On-delay and off-delay - Ac- On-delay and off-delay relay w/ control signal Power on-delay - At- Power on-delay relay w/ pause/summation (X1) Power on-delay - Aw- Power on-delay relay w/ retrigger/restart On-delay and off-delay - Act- On-delay and off-delay relay w/ control signal and pause/summation Off-delay - C- Off-delay relay w/ control signal Off-delay - Ct- Off-delay relay w/ control signal and pause/summation Symmetrical flashing - D- Symmetrical flashing relay (starting pulse-off) Symmetrical flashing - Dt- Symmetrical flashing relay (starting pulse-off) w/ pause/summation (X1) Symmetrical flashing - Dw- Symmetrical flashing relay (starting pulse-off) w/ retrigger/restart Symmetrical flashing - Di- Symmetrical flashing relay (starting pulse-on) Symmetrical flashing - Dit- Symmetrical flashing relay (starting pulse-on) w/ pause/summation (X1) Symmetrical flashing - Diw- Symmetrical flashing relay (starting pulse-on) w/ retrigger/restart Interval - H- Interval relay Interval - Ht- Interval relay w/ pause/summation (X1) Interval - Hw- Interval relay w/ retrigger/restart Interval - W- Interval relay w/ control signal off Interval - Wt- Interval relay w/ control signal off and pause/summation
<b>Control signal pulse width</b>	100 ms with load in parallel 30 ms
<b>Insulation resistance</b>	100 MOhm at 500 V DC conforming to IEC 60664-1
<b>Recovery time</b>	120 ms on de-energisation
<b>Immunity to microbreaks</b>	10 ms
<b>Power consumption in VA</b>	3 VA at 240 V AC
<b>Power consumption in W</b>	1.5 W at 240 V DC
<b>Switching capacity in VA</b>	2000 VA
<b>Minimum switching current</b>	10 mA at 5 V DC
<b>Maximum switching current</b>	8 A
<b>Maximum switching voltage</b>	250 V AC
<b>Electrical durability</b>	100000 cycles, 8 A at 250 V, AC-1 100000 cycles, 2 A at 24 V, DC-1
<b>Mechanical durability</b>	10000000 cycles
<b>Rated impulse withstand voltage</b>	5 kV for 1.2...50 µs conforming to IEC 60664-1
<b>Power on delay</b>	100 ms
<b>Creepage distance</b>	4 kV/3 conforming to IEC 60664-1
<b>Overvoltage category</b>	III conforming to IEC 60664-1
<b>Safety reliability data</b>	MTTFd = 205.4 years B10d = 190000
<b>Mounting position</b>	Any position
<b>Mounting support</b>	35 mm DIN rail conforming to IEC 60715
<b>Status LED</b>	LED backlight green (steady) for dial pointer indication LED yellow (steady) for output relay energised LED yellow (fast flashing) for timing in progress and output relay de-energised LED yellow (slow flashing) for timing in progress and output relay energised

<b>Function available</b>	A- Power on-delay relay-1 C/O Ac- On-delay and off-delay relay w/ control signal-1 C/O At- Power on-delay relay w/ pause/summation (X1)-1 C/O Aw- Power on-delay relay w/ retrigger/restart-1 C/O Act- On-delay and off-delay relay w/ control signal and pause/summation-1 C/O C- Off-delay relay w/ control signal-1 C/O Ct- Off-delay relay w/ control signal and pause/summation-1 C/O D- Symmetrical flashing relay (starting pulse-off)-1 C/O Dt- Symmetrical flashing relay (starting pulse-off) w/ pause/summation (X1)-1 C/O Dw- Symmetrical flashing relay (starting pulse-off) w/ retrigger/restart-1 C/O Di- Symmetrical flashing relay (starting pulse-on)-1 C/O Dit- Symmetrical flashing relay (starting pulse-on) w/ pause/summation (X1)-1 C/O Diw- Symmetrical flashing relay (starting pulse-on) w/ retrigger/restart-1 C/O H- Interval relay-1 C/O Ht- Interval relay w/ pause/summation (X1)-1 C/O Hw- Interval relay w/ retrigger/restart-1 C/O W- Interval relay w/ control signal off-1 C/O Wt- Interval relay w/ control signal off and pause/summation-1 C/O
<b>Width</b>	22.5 mm
<b>Product weight</b>	0.1 kg
<b>Control type</b>	With test button
<b>Number of functions</b>	18

## Environment

<b>Dielectric strength</b>	2.5 kV for 1 mA/1 minute at 50 Hz between relay output and power supply with basic insulation conforming to IEC 61812-1
<b>Standards</b>	IEC 61812-1 UL 508
<b>Directives</b>	2004/108/EC - electromagnetic compatibility 2006/95/EC - low voltage directive
<b>Product certifications</b>	RCM GL EAC CE CSA CCC UL
<b>Ambient air temperature for operation</b>	-20...60 °C
<b>Ambient air temperature for storage</b>	-40...70 °C
<b>IP degree of protection</b>	IP40 housing: conforming to IEC 60529 IP50 front face: conforming to IEC 60529 IP20 terminals: conforming to IEC 60529
<b>Pollution degree</b>	3 conforming to IEC 60664-1
<b>Vibration resistance</b>	20 m/s <sup>2</sup> (f= 10...150 Hz) conforming to IEC 60068-2-6
<b>Shock resistance</b>	15 gn not operating for 11 ms conforming to IEC 60068-2-27 5 gn in operation for 11 ms conforming to IEC 60068-2-27
<b>Relative humidity</b>	95 % at 25...55 °C

<b>Electromagnetic compatibility</b>	Fast transients immunity test - test level: 1 kV level 3 (capacitive connecting clip) conforming to IEC 61000-4-4 Surge immunity test - test level: 1 kV level 3 (differential mode) conforming to IEC 61000-4-5 Surge immunity test - test level: 2 kV level 3 (common mode) conforming to IEC 61000-4-5 Electrostatic discharge - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2 Electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test - test level: 10 V/m level 3 (80 MHz...1 GHz) conforming to IEC 61000-4-3 Conducted RF disturbances - test level: 10 V level 3 (0.15...80 MHz) conforming to IEC 61000-4-6 Fast transient bursts - test level: 2 kV level 3 (direct contact) conforming to IEC 61000-4-4 Immunity to microbreaks and voltage drops - test level: 30 % (500 ms) conforming to IEC 61000-4-11 Immunity to microbreaks and voltage drops - test level: 100 % (20 ms) conforming to IEC 61000-4-11
--------------------------------------	--

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	2.900 cm
<b>Package 1 Width</b>	8.600 cm
<b>Package 1 Length</b>	10.000 cm
<b>Package 1 Weight</b>	101.000 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	40
<b>Package 2 Height</b>	15.000 cm
<b>Package 2 Width</b>	30.000 cm
<b>Package 2 Length</b>	40.000 cm
<b>Package 2 Weight</b>	4.500 kg



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint	53
----------------------------------	----

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	7bdc2711-0ad2-427c-8ece-532c5e9f09d7
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a>

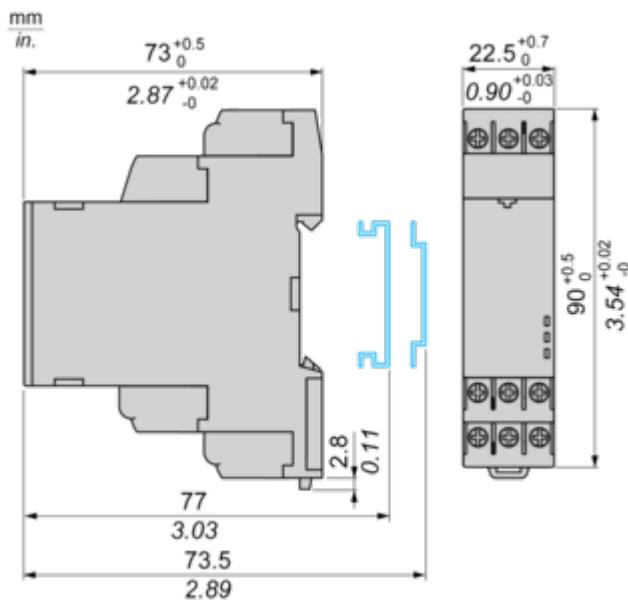
## Use Again

### Repack and remanufacture

Take-back	No
-----------	----

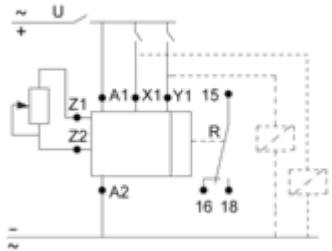
## Dimensions Drawings

## Dimensions



## Connections and Schema

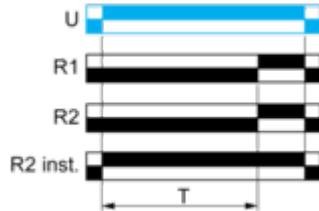
## Wiring Diagram



## Technical Description

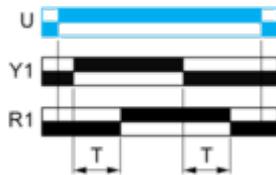
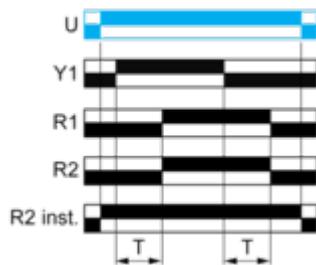
Function A: Power On-Delay**Description**

On energisation of power supply, the timing period T starts. After timing, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output****Function: 2 Outputs**

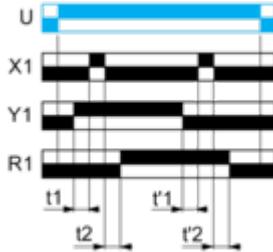
Function Ac: On-Delay & Off-Delay with Control Signal**Description**

After energisation of power supply and energization of Y1 causes the timing period T to start.  
At the end of this timing period, the output(s) R close(s).  
When deenergization of Y1, the timing T starts.  
At the end of this timing period T, the output(s) R revert(s) to its/their initial position.  
The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output****Function: 2 Outputs**

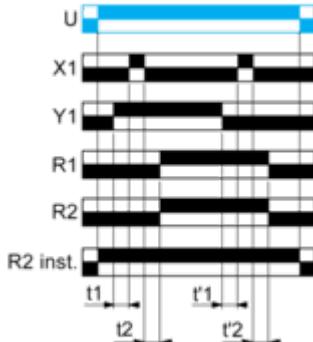
Function Act: On-Delay & Off-Delay with Control Signal & With Pause / Summation Control**Description**

After energisation of power supply and energization of Y1 causes the timing period T to start and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R close(s). When deenergization of Y1, the timing T starts and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial position. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output**

$$T = t1 + t2 + \dots$$

$$T = t'1 + t'2 + \dots$$

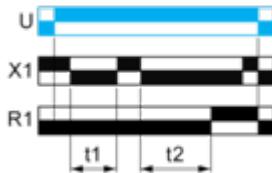
**Function: 2 Outputs**

$$T = t1 + t2 + \dots$$

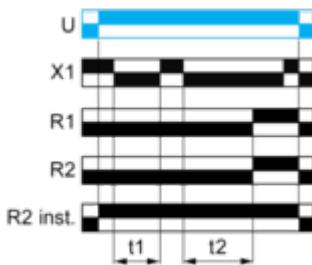
$$T = t'1 + t'2 + \dots$$

**Function At: Power On-Delay with Pause / Summation Control****Description**

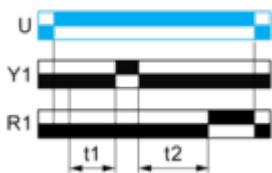
On energisation of power supply, the timing period T starts. Timing can be interrupted / paused each time X1 energizes. Except for RE17\*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, timing can be interrupted / paused each time Y1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output with Pause / Summation Control**

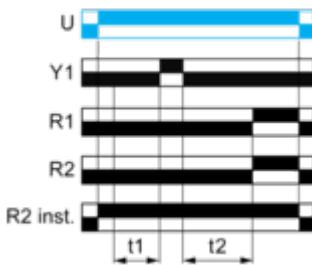
$$T = t1 + t2 + \dots$$

**Function: 2 Outputs with Pause / Summation Control**

$$T = t1 + t2 + \dots$$

**Function: 1 Output with Retrigger / Restart Control**

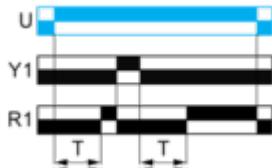
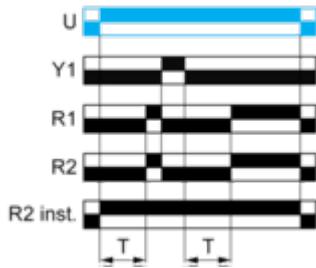
$$T = t1 + t2 + \dots$$

**Function: 2 Outputs with Retrigger / Restart Control**

$$T = t1 + t2 + \dots$$

Function Aw : Power On-Delay With Retrigger / Restart Control**Description**

On energisation of power supply, the timing period T starts. At the end of the timing period T, the output(s) R close(s). Energization of Y1 makes the output(s) R open(s). Deenergization of Y1 restarts timing period T. At the end of timing period T, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST")

**Function: 1 Output****Function: 2 Outputs**

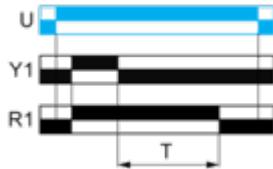
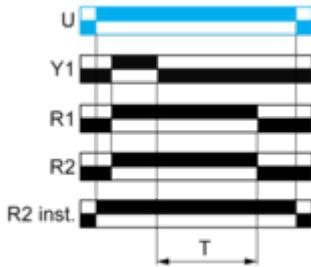
---

**Function C: Off-Delay Relay with Control Signal**

---

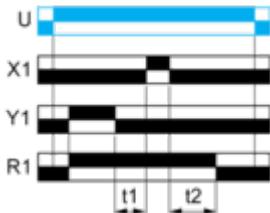
**Description**

After energisation of power supply and energization of Y1 causes output(s) R close(s). When Y1 deenergizes, timing T starts. At the end of this timing period T, the output(s) R revert(s) to its/their initial position. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

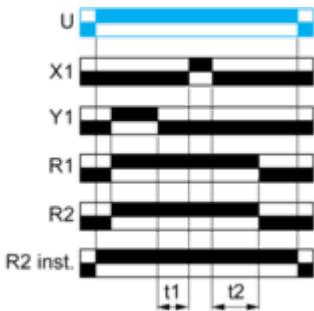
**Function: 1 Output****Function: 2 Outputs**

**Function Ct: Off-Delay Relay with Control Signal & With Pause / Summation Control****Description**

After energisation of power supply and energization of Y1 cause output(s) R close(s). When Y1 deenergizes, timing starts and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output**

$$T = t1 + t2 + \dots$$

**Function: 2 Outputs**

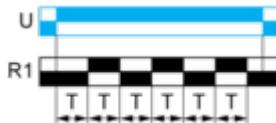
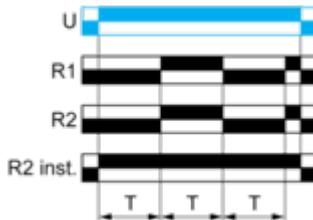
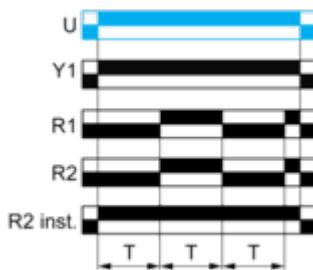
$$T = t1 + t2 + \dots$$

**Function D: Symmetrical Flashing Relay (Starting Pulse Off)**

---

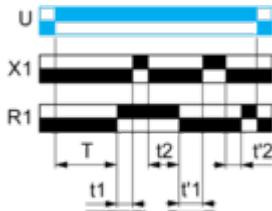
**Description**

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T. This cycle is repeated indefinitely until power supply removal. Specially for RE17\*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, this D function can only be initiated by energizing Y1 permanently. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output****Function: 2 Outputs****Function: 1 Output with Retrigger / Restart Control****Function: 2 Output with Retrigger / Restart Control**

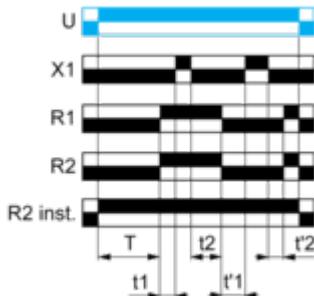
**Function Dt: Symmetrical Flashing Relay (Starting Pulse Off) & With Pause / Summation Control****Description**

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, then changes to output(s) R close(s). The output(s) R close state will remain for the same timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output**

$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

**Function: 2 Outputs**

$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

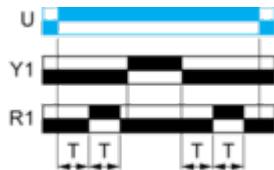
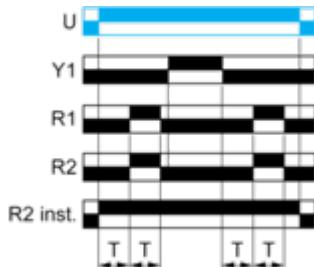
---

**Function DW: Symmetrical Flashing Relay (Starting Pulse Off) & With Retrigger / Restart Control**

---

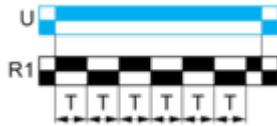
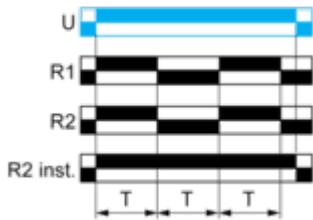
**Description**

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T. This cycle is repeated indefinitely until power supply removal. Specially for RE17\*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, this D function can only be initiated by energizing Y1 permanently. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output****Function: 2 Outputs**

Function Di: Symmetrical Flashing Relay (Starting Pulse On)**Description**

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T then revert(s) to its/their initial state for the same timing duration T. This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output****Function: 2 Outputs**

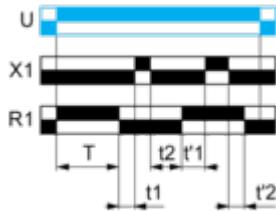
---

**Function D1: Symmetrical Flashing Relay (Starting Pulse On) & With Pause / Summation Control**


---

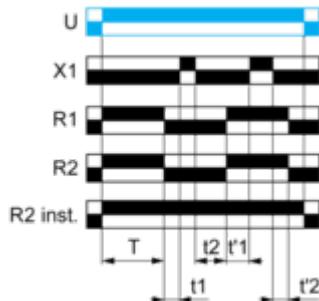
**Description**

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, then revert(s) to its/their initial state. The output(s) R at initial state will remain for the same timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R change(s) to close state. This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output**


$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

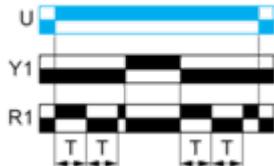
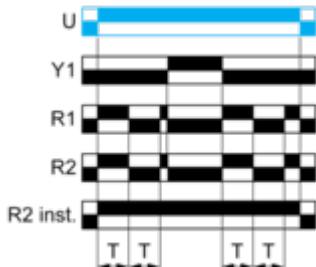
**Function: 2 Outputs**


$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

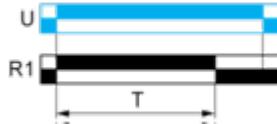
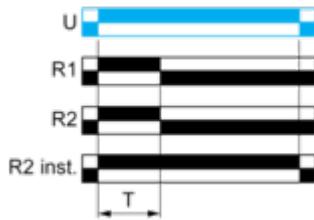
**Function Diw: Symmetrical Flashing Relay (Starting Pulse On) & With Retrigger / Restart Control****Description**

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T then revert(s) to its/their initial state for the same timing duration T. This cycle is repeated indefinitely until power supply removal. At any state of the output(s) R when Y1 energizes, the output(s) R will revert to its/their initial state and followed by Y1 deenergizes then restarts the same operation as described at the beginning. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output****Function: 2 Outputs**


Function H: Interval Relay**Description**

On energisation of power supply, output(s) R close(s) and timing period T starts. At the end of the timing period T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

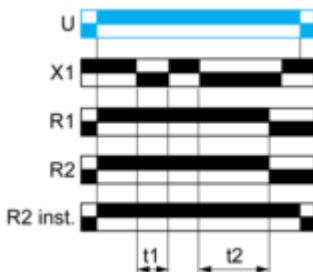
**Function: 1 Output****Function: 2 Outputs**

**Function Ht: Interval Relay & With Pause / Summation Control****Description**


On energisation of power supply, output(s) R close(s) and timing period T starts. The timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning. Except for RE17\*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes. The second output (R2) can be either timed (when set to "TIMED" or instantaneous (when set to "INST").

**Function: 1 Output**

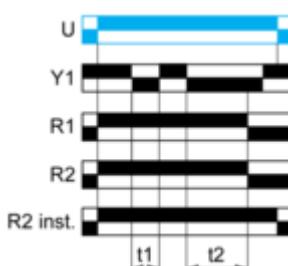
$$T = t1 + t2 + \dots$$

**Function: 2 Outputs**

$$T = t1 + t2 + \dots$$

**Function: 1 Output with Retrigger / Restart Control**

$$T = t1 + t2 + \dots$$

**Function: 2 Outputs with Retrigger / Restart Control**

$$T = t1 + t2 + \dots$$

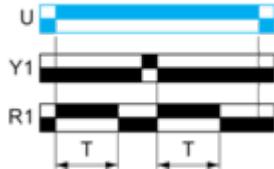
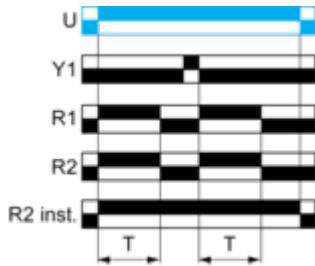
---

**Function Hw: Interval Relay & with Retrigger / Restart Control**

---

**Description**

On energisation of power supply, output(s) R close(s) and timing period T starts. At the end of the timing period T, the output(s) R revert(s) to its/their initial state. At any state of the output(s) R when Y1 energizes followed by deenergizes, the output(s) R close(s) then restarts the same operation as described at the beginning. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

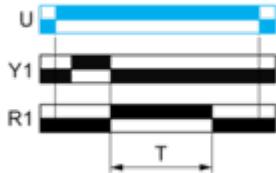
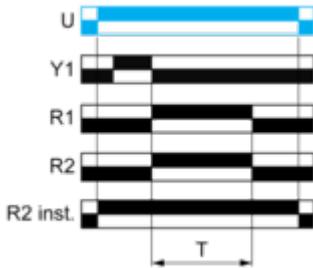
**Function: 1 Output****Function: 2 Outputs**

**Function W: Interval Relay with Control Signal Off**

---

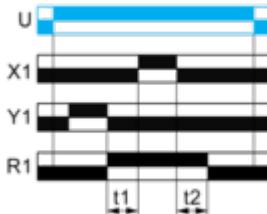
**Description**

After energisation of power supply and on energization of Y1 following by deenergization of Y1, the output(s) R close(s) and starts the timing T. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

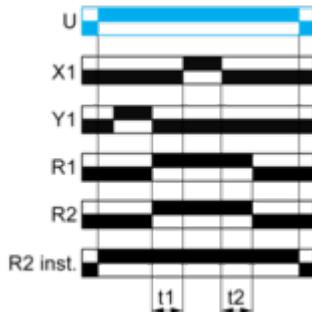
**Function: 1 Output****Function: 2 Outputs**

**Function Wt: Interval Relay with Control Signal Off & with Pause / Summation Control****Description**

After energisation of power supply and on energization of Y1 following by de-energization of Y1, the output(s) R close(s) and starts the timing T. Timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

**Function: 1 Output**

$$T = t1 + t2 + \dots$$

**Function: 2 Outputs**

$$T = t1 + t2 + \dots$$

**Legend**

- Relay de-energised
- Relay energised
- Output open
- Output closed

U -	Supply
R1/R2 -	2 timed outputs
X1 -	Pause / Summation control
Y1 -	Retrigger / Restart control
R2 inst. -	The second output is instantaneous if the right position is selected
T -	Timing period

## Technical Illustration

## Dimensions

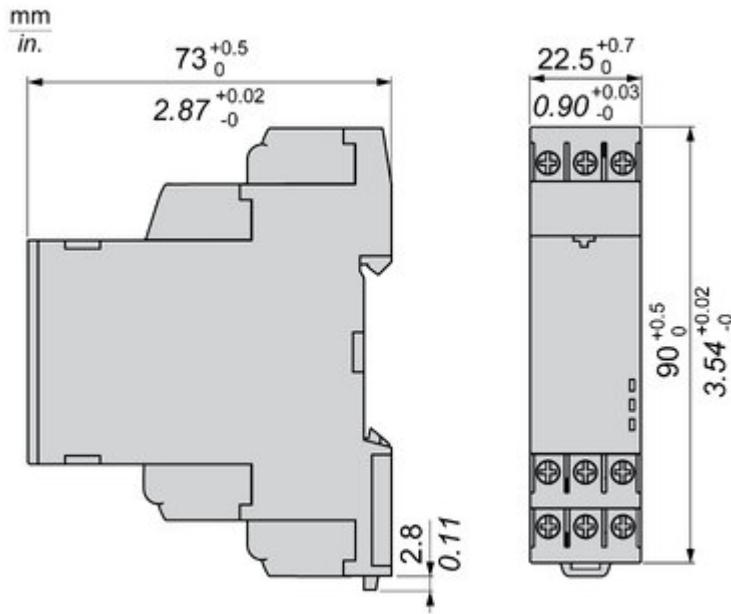


Image of product / Alternate images

Alternative

---

