



Mini-Circuits

SURFACE MOUNT 

RF Transformer

TCM3-452X+

50Ω

20 to 4500 MHz

FEATURES

- Wide bandwidth 20 to 4500 MHz
- Balanced transmission line
- Good return loss
- Aqueous washable

APPLICATIONS

- PCS
- Wideband push-pull amplifiers
- Cellular



Generic photo used for illustration purposes only

CASE STYLE: DB1627


+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio (secondary/primary)			3		Ohm
Frequency Range		20		4500	MHz
Insertion Loss	20 - 4500	—	1.5	3.0	dB
Amplitude Unbalance	20 - 4500	—	0.5	—	dB
Phase Unbalance	20 - 4500	—	4	—	Degree

ELECTRICAL SCHEMATIC

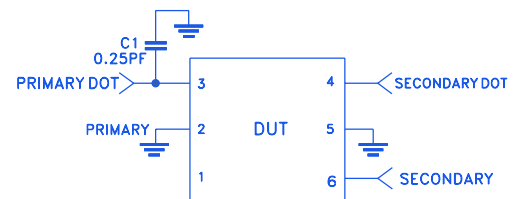


MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.4 W
DC Current	30 mA

Permanent damage may occur if any of these limits are exceeded.


CONFIGURATION H

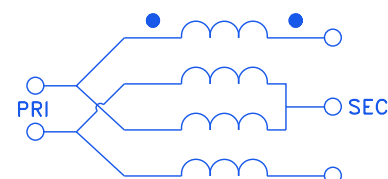 Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
ECO-025163
TCM3-452X+
MCL NY
250408

PAGE 1 OF 3



Mini-Circuits®

SURFACE MOUNT RF Transformer



TCM3-452X+

50Ω


20 to 4500 MHz

PIN CONNECTIONS

PRIMARY DOT	3
PRIMARY	2
SECONDARY DOT	4
SECONDARY	6
GND	2,5
NOT USED	1

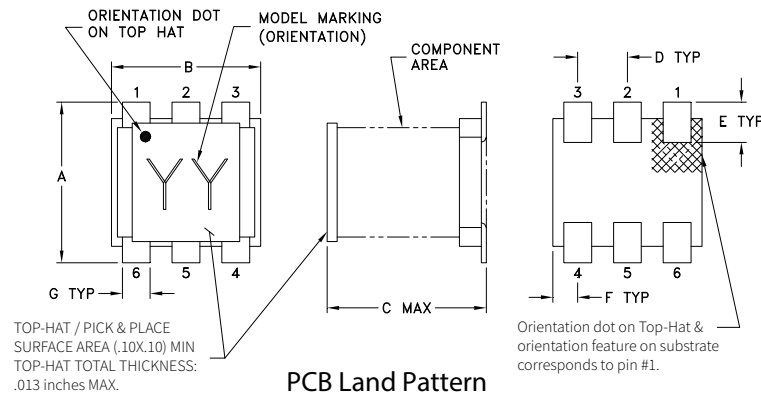OUTLINE DRAWING**PCB Land Pattern**

SUGGESTED LAYOUT
TOLERANCE TO BE WITHIN ± 0.002

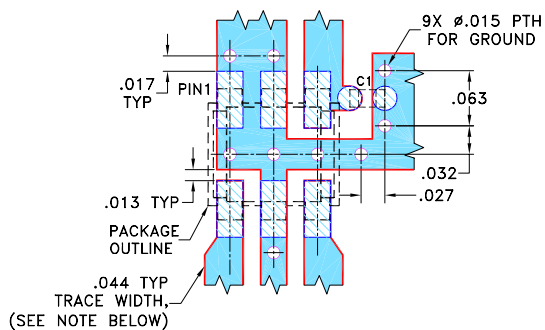DEMOBOARD MCL P/N: TB-TCM3-452X+
SUGGESTED PCB LAYOUT (PL-381)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.020" \pm 0.0015"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. 0402 SIZE CHIP COMPONENT FOOTPRINT IS SHOWN FOR REFERENCE. FOR COMPONENT VALUE REFER TO TB-697+.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DIMENSIONS (Inches)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

TAPE & REEL INFORMATION: F47



top hat[®]
SURFACE MOUNT
RF Transformer

TCM3-452X+




50Ω

20 to 4500 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
10	1.58	11.11	0.01	0.07
500	1.39	12.51	0.03	3.37
1000	1.32	12.58	0.09	5.92
1500	1.31	12.44	0.14	7.91
2000	1.30	13.27	0.17	9.03
2500	1.30	15.62	0.18	8.53
3000	1.32	17.66	0.21	8.24
3500	1.38	17.99	0.46	6.49
4000	1.56	17.66	0.67	3.78
4500	1.67	18.98	0.76	4.17

Note: 0.25 PF capacitor is suggested to be added at primary to ground to improve return loss.

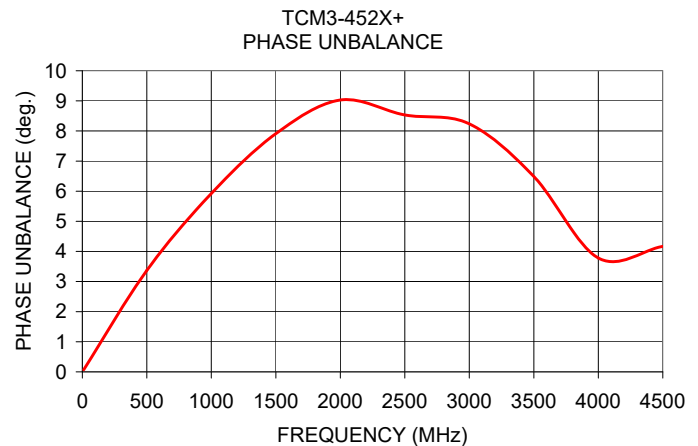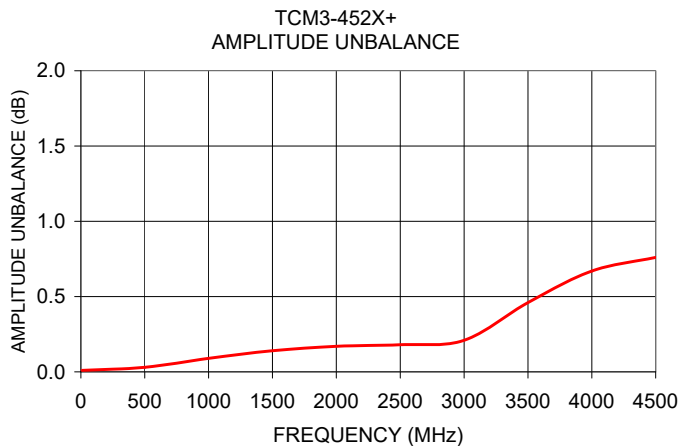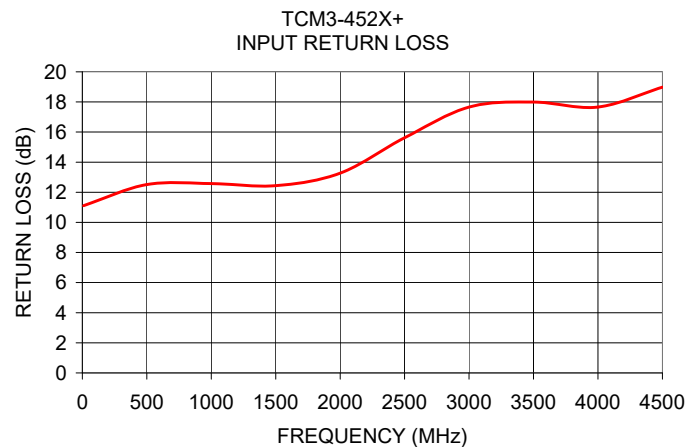

- NOTES
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html