


USB Type-C™ Power Delivery Sink expansion board based on TCPP01-M12 for STM32 Nucleo

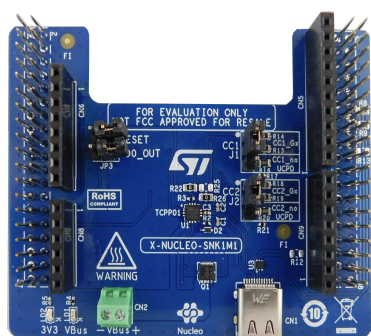

Features

- On-board **TCPP01-M12** protection for USB Type-C and PD Sink applications
- Compliant with the latest specification of USB Type-C and Power delivery, including the Programmable Power Supply (PPS) feature
- USB-IF certified (Test ID certification: 5205)
- 100 W-rated solution
- 6 V overvoltage protection (OVP) on CC lines against short-to- V_{BUS} when the connector is unplugged
- Up to 22 V adjustable overvoltage protection (OVP) on V_{BUS} line against charger failure
- Surge protection (8/20 μ s) and system-level ESD protection on V_{BUS}
- Common mode filter and ESD protection on USB 2.0 High Speed data lines
- System level ESD protection on CC lines as per IEC61000-4-2 level 4 (± 8 kV contact discharge)
- Low power mode for battery operation allowing zero current consumption when no cable is attached
- Integrated dead battery management when the device battery is fully depleted
- Overtemperature protection (OTP)
- RoHS compliant

Description

The **X-NUCLEO-SNK1M1** expansion board allows evaluating **TCPP01-M12** features for USB Type-C overvoltage protection for V_{BUS} and CC lines related to Sink applications.

The expansion board is designed to be stack on top of **NUCLEO-G071RB** or **NUCLEO-G474RE** or **NUCLEO-L412RB-P** development board, exploiting the characteristics of the USB Type-C and Power Delivery peripheral embedded in their microcontrollers, and any STM32 Nucleo-64 board to demonstrate the Type-C mechanism basic operations (attach, detach and power supply options).

The **X-NUCLEO-SNK1M1** expansion board provides an effective demonstration of the dead battery operation, thanks to the integrated **ST715PU33R** LDO linear regulator that supplies the connected **STM32 Nucleo development board** when a source is attached via USB Type-C connector.

The **X-NUCLEO-SNK1M1** is compliant with the latest USB Type-C and Power Delivery specifications and is also USB-IF certified as a 100 W solution supporting Programmable Power Supply (PPS) function.

Product summary	
USB Type-C™ Power Delivery Sink expansion board based on TCPP01-M12 for STM32 Nucleo	X-NUCLEO-SNK1M1
USB Type-C software expansion for STM32Cube	X-CUBE-TCPP
USB type-C port protection	TCPP01-M12
STM32 Nucleo-64 development boards with STM32G071RB/ STM32G474RE/ STM32L412RB MCUs	NUCLEO-G071RB/ NUCLEO-G474RE/ NUCLEO-L412RB-P
Applications	USB Type-C and Power Delivery

Schematic diagrams

Figure 1. X-NUCLEO-SNK1M1 circuit schematic (1 of 2)


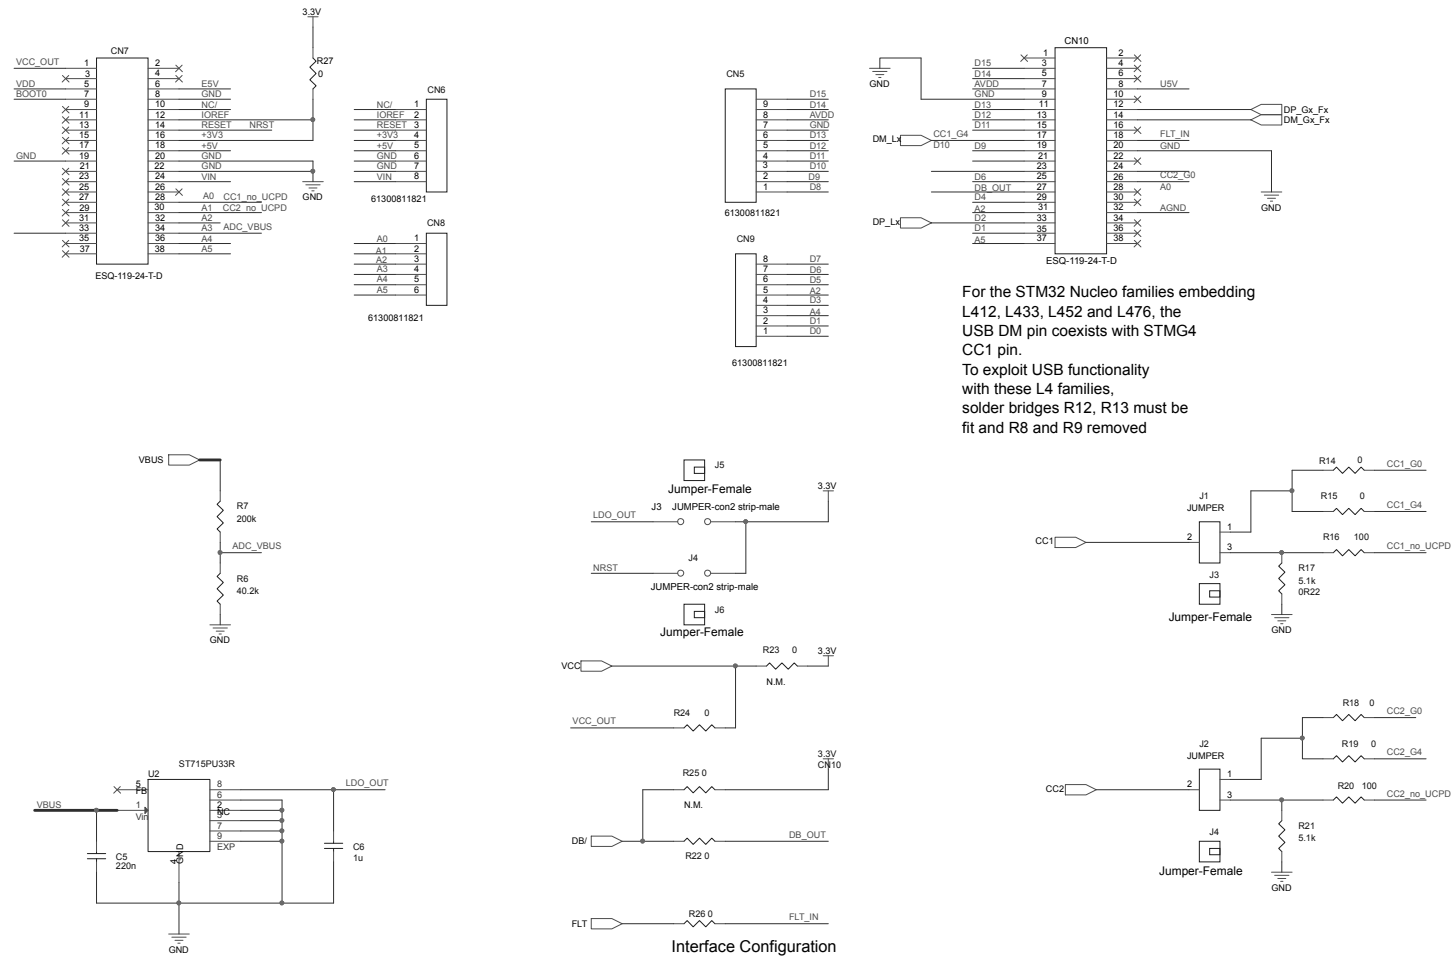


Figure 2. X-NUCLEO-SNK1M1 circuit schematic (2 of 2)

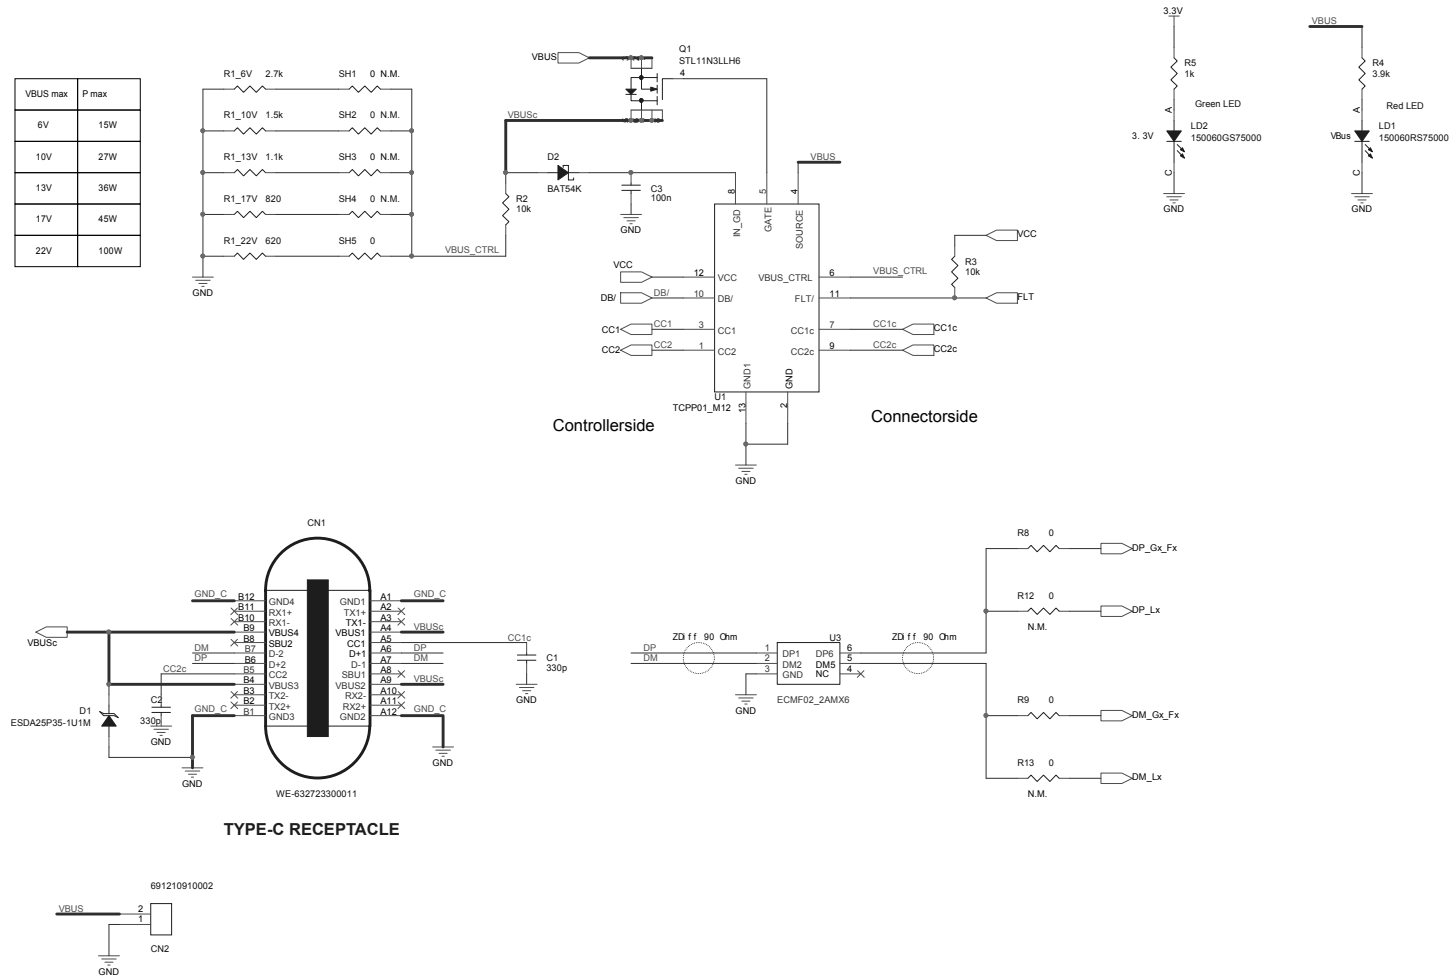

Revision history

Table 1. Document revision history

Date	Version	Changes
02-Mar-2021	1	Initial release.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved