

Bi-Directional Coupler

SYDC-20-31HP+

50Ω 20 dB Coupling 1.5 to 30 MHz 50 Watt



Generic photo used for illustration purposes only

CASE STYLE: AH1596

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature -40°C to 65°C Case*
 Storage Temperature -55°C to 100°C
 * Case temperature is defined as temperature on ground leads.
 Permanent damage may occur if any of these limits are exceeded.

Pad Connections

INPUT	8
OUTPUT	1
COUPLED (FORWARD)	5
COUPLED (REVERSE)	4
GROUND	2,3,6,7


Outline Drawing

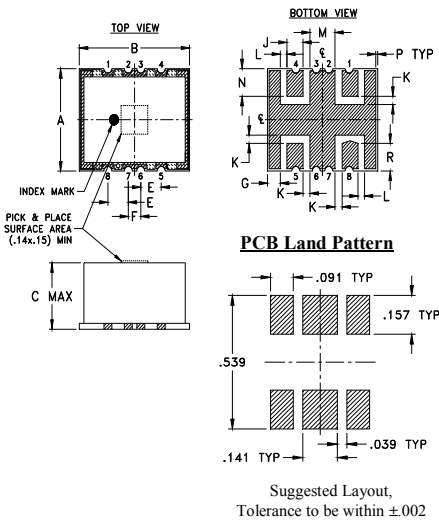

Outline Dimensions (inch/mm)

A	B	C	E	F	G	H	J
.50	.62	.36	.115	.070	.073	--	.090
12.70	15.75	9.14	2.92	1.78	1.85	--	2.29
K	L	M	N	P	Q	R	wt
.040	.037	.140	.135	.010	--	.135	grams
1.02	0.94	3.56	3.43	0.25	--	3.43	3.00

Demo Board MCL P/N: TB-608+ Suggested PCB Layout (PL-339)

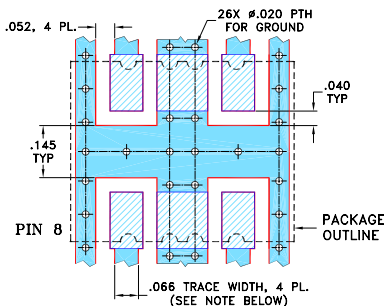

- NOTES:**
- TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- high power, 50W max. with output load VSWR 2.0 max
- high power, 20W max. with output open or short
- low mainline loss, 0.1 dB typ.
- high directivity, 33 dB typ.
- excellent flatness, 0.1 dB typ.

Applications


- military mobile
- signal monitoring

Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		1.5	—	30	MHz
Mainline Loss (above theoretical 0.044 dB)	1.5-30	—	0.06	0.25	dB
Coupling	1.5-30	19.5	20.5	21.5	dB
Coupling Flatness(±)	1.5-30	—	0.05	0.2	dB
Directivity	1.5-30	22	33	—	dB
Return Loss (Input)	1.5-30	20	25	—	dB
Return Loss (Output)	1.5-30	20	25	—	dB
Return Loss (Coupling)	1.5-30	18	24	—	dB
Input Power ¹	1.5-30	—	—	50	W

1. The user must provide adequate means of heat removal to limit the temperature of ground connections 2,3,6,7, to 65°C, in order to ensure proper performance. At 25°C ambient temperature this requires thermal resistance of the user's PC board heat sink to be 10°C/W.

Electrical Schematic

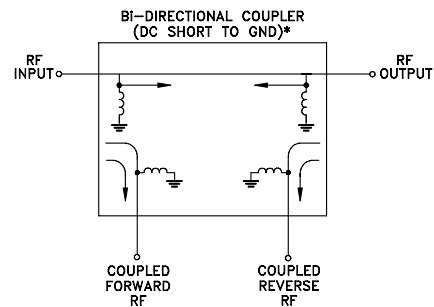

* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.




Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Directivity (dB)		Return Loss (dB)			
	In-Out	In-Cpl Fwd	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
1.50	0.07	20.49	20.49	20.45	51.77	45.19	40.50	42.13	41.68	42.07
3.00	0.07	20.50	20.50	20.46	50.18	45.85	39.51	40.84	40.64	41.51
5.00	0.07	20.51	20.51	20.47	47.78	44.28	38.07	38.87	39.00	38.71
8.00	0.07	20.51	20.51	20.47	45.16	42.62	36.18	36.50	36.83	36.19
10.00	0.07	20.52	20.52	20.48	43.40	41.50	35.11	35.11	35.40	34.81
13.00	0.07	20.52	20.52	20.48	41.29	39.87	33.42	33.40	33.51	33.09
15.00	0.07	20.53	20.53	20.49	40.17	39.01	32.39	32.36	32.41	32.07
20.00	0.08	20.54	20.54	20.50	37.62	36.63	30.07	29.90	29.91	29.65
25.00	0.09	20.55	20.55	20.52	35.50	34.74	28.31	28.12	27.98	27.80
30.00	0.09	20.57	20.57	20.54	33.64	33.09	26.88	26.72	26.52	26.31

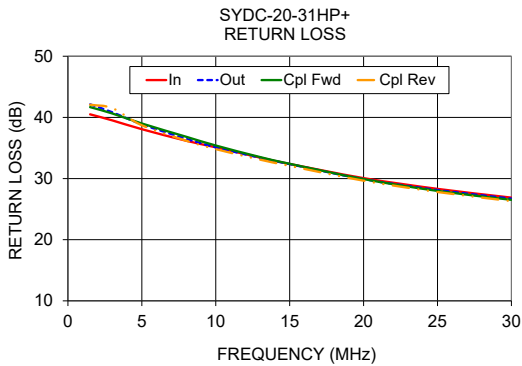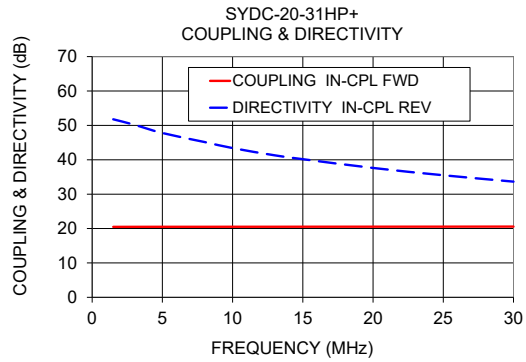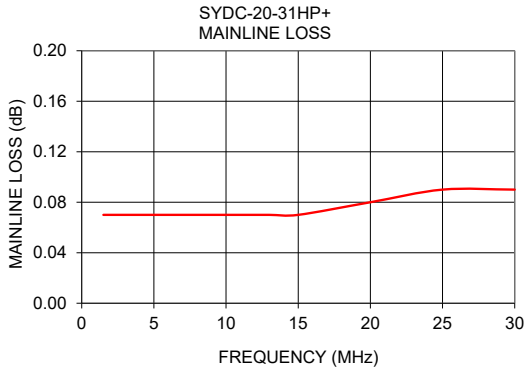

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SYDC-20-31HP+](#)