

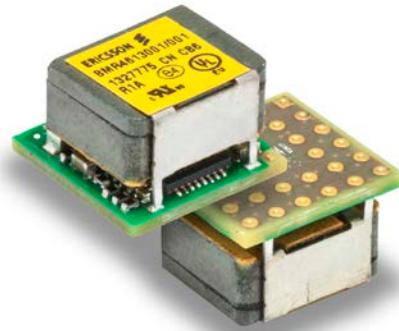
|                                          |
|------------------------------------------|
| <b>BMR461 series PoL Regulators</b>      |
| Input 4.5-14 V, Output up to 18 A / 60 W |

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

**Key Features**

- Small package  
12.2 x 12.2 x 8.0 mm (0.48 x 0.48 x 0.315 in)
- 0.6 V - 5.0 V output voltage range
- High efficiency, typ. 96 % at 12Vin, 5Vout and 80% load
- Configuration Control and Monitoring via PMBus
- Adaptive compensation of PWM control loop & fast loop transient response
- Synchronization input & phase spreading/interleaving
- Voltage Tracking & Voltage margining
- MTBF 24 Mh

**General Characteristics**

- For narrow board pitch applications (15 mm/0.6 in)
- Pre-bias start-up and shut down
- Monotonic & Soft start Power up
- Input under voltage shutdown
- OTP, output OVP, OCP
- Remote control & Power Good
- Differential sense pins
- Voltage setting via pin-strap or PMBus
- Advanced Configurable via Graphical User Interface
- ISO 9001/14001 certified supplier
- Highly automated manufacturing ensures quality

**Safety Approvals****Design for Environment**

Meets requirements in high-temperature lead-free soldering processes.

**Contents**

|                                     |                   |    |
|-------------------------------------|-------------------|----|
| Ordering Information                | .....             | 2  |
| General Information                 | .....             | 2  |
| Safety Specification                | .....             | 3  |
| Absolute Maximum Ratings            | .....             | 4  |
| Electrical Specification            |                   |    |
| 6A/ 0.6 – 5.0Vout                   | BMR 461 2001..... | 5  |
| 12A/ 0.6 – 5.0Vout                  | BMR 461 3001..... | 15 |
| 18A/ 0.6 – 1.8Vout                  | BMR 461 4001..... | 25 |
| EMC Specification                   | .....             | 33 |
| Operating Information               | .....             | 34 |
| Thermal Consideration               | .....             | 44 |
| Typical Application Circuit         | .....             | 46 |
| Layout Consideration                | .....             | 46 |
| Mechanical Information              | .....             | 52 |
| Soldering Information               | .....             | 53 |
| Delivery Package Information        | .....             | 54 |
| Product Qualification Specification | .....             | 55 |

|                                          |  |
|------------------------------------------|--|
| <b>BMR461 series PoL Regulators</b>      |  |
| Input 4.5-14 V, Output up to 18 A / 60 W |  |

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

**Ordering Information**

| Product program | Output                |
|-----------------|-----------------------|
| BMR 461 2001    | 0.6-5.0 V, 6 A/ 30 W  |
| BMR 461 3001    | 0.6-5.0 V, 12 A/ 60 W |
| BMR 461 4001    | 0.6-1.8 V, 18 A/ 36W  |

**Product number and Packaging**

| BMR 461 n <sub>1</sub> n <sub>2</sub> n <sub>3</sub> n <sub>4</sub> /n <sub>5</sub> n <sub>6</sub> n <sub>7</sub> n <sub>8</sub> |                |   |   |   |   |   |   |   |   |
|----------------------------------------------------------------------------------------------------------------------------------|----------------|---|---|---|---|---|---|---|---|
| Options                                                                                                                          | n <sub>1</sub> | n | n | n | / | n | n | n | n |
| Output Current                                                                                                                   | o              |   |   |   | / |   |   |   |   |
| Mechanical                                                                                                                       |                | o |   |   | / |   |   |   |   |
| Variants info                                                                                                                    |                |   | o | o | / |   |   |   |   |
| Configuration file                                                                                                               |                |   |   |   | / | o | o | o |   |
| Packaging                                                                                                                        |                |   |   |   | / |   |   |   | o |

| Options                                      | Description |                                                                                                                          |
|----------------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------|
| n <sub>1</sub>                               | 2           | 6A                                                                                                                       |
|                                              | 3           | 12A                                                                                                                      |
|                                              | 4           | 18A                                                                                                                      |
| n <sub>2</sub>                               | 0           | LGA                                                                                                                      |
| n <sub>3</sub> n <sub>4</sub>                | 01          | Standard variants                                                                                                        |
| n <sub>5</sub> n <sub>6</sub> n <sub>7</sub> | 001         | Standard configuration                                                                                                   |
| n <sub>8</sub>                               | C           | Antistatic tape & reel of 280 products<br>(1 full reel/box =280 products. Sample delivery available in lower quantities) |

Example: Product number BMR 461 3001/001C equals a 12A, LGA, PMBus and analog pin strap, standard configuration variant.

**General Information****Reliability**

The failure rate ( $\lambda$ ) and mean time between failures (MTBF =  $1/\lambda$ ) is calculated at max output power and an operating ambient temperature ( $T_A$ ) of +40°C. Ericsson Power Modules uses Telcordia SR-332 Issue 2 Method 1 to calculate the mean steady-state failure rate and standard deviation ( $\sigma$ ).

Telcordia SR-332 Issue 2 also provides techniques to estimate the upper confidence levels of failure rates based on the mean and standard deviation.

| Mean steady-state failure rate, $\lambda$                                                                                             | Std. deviation, $\sigma$ |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| 40 nFailures/h                                                                                                                        | 8.2 nFailures/h          |
| MTBF (mean value) for the BMR 461 series = 24.98 Mh.<br>MTBF at 90% confidence level = 19.77 Mh<br>(calculation based on BMR461 3001) |                          |

**Compatibility with RoHS requirements**

The products are compatible with the relevant clauses and requirements of the RoHS directive 2002/95/EC and have a maximum concentration value of 0.1% by weight in homogeneous materials for lead, mercury, hexavalent chromium, PBB and PBDE and of 0.01% by weight in homogeneous materials for cadmium.

Exemptions in the RoHS directive utilized in Ericsson Power Modules products are found in the Statement of Compliance document.

Ericsson Power Modules fulfills and will continuously fulfill all its obligations under regulation (EC) No 1907/2006 concerning the registration, evaluation, authorization and restriction of chemicals (REACH) as they enter into force and is through product materials declarations preparing for the obligations to communicate information on substances in the products.

**Quality Statement**

The products are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000, Six Sigma, and SPC are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out and they are subjected to an ATE-based final test. Conservative design rules, design reviews and product qualifications, plus the high competence of an engaged work force, contribute to the high quality of the products.

**Warranty**

Warranty period and conditions are defined in Ericsson Power Modules General Terms and Conditions of Sale.

**Limitation of Liability**

Ericsson Power Modules does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

**© Ericsson AB 2014**

The information and specifications in this technical specification is believed to be correct at the time of publication. However, no liability is accepted for inaccuracies, printing errors or for any consequences thereof. Ericsson AB reserves the right to change the contents of this technical specification at any time without prior notice.

|                                                                                 |                                                    |
|---------------------------------------------------------------------------------|----------------------------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W |                                                    |
|                                                                                 | 1/287 01 - BMR 461 Uen C Feb 2014<br>© Ericsson AB |

## Safety Specification

### General information

Ericsson Power Modules DC/DC converters and DC/DC regulators are designed in accordance with safety standards IEC/EN/UL 60950-1 *Safety of Information Technology Equipment*.

IEC/EN/UL 60950-1 contains requirements to prevent injury or damage due to the following hazards:

- Electrical shock
- Energy hazards
- Fire
- Mechanical and heat hazards
- Radiation hazards
- Chemical hazards

On-board DC/DC converters and DC/DC regulators are defined as component power supplies. As components they cannot fully comply with the provisions of any safety requirements without "Conditions of Acceptability". Clearance between conductors and between conductive parts of the component power supply and conductors on the board in the final product must meet the applicable safety requirements. Certain conditions of acceptability apply for component power supplies with limited stand-off (see Mechanical Information for further information). It is the responsibility of the installer to ensure that the final product housing these components complies with the requirements of all applicable safety standards and regulations for the final product.

Component power supplies for general use should comply with the requirements in IEC 60950-1, EN 60950-1 and UL 60950-1 *Safety of Information Technology Equipment*. There are other more product related standards, e.g. IEEE 802.3 CSMA/CD (*Ethernet*) Access Method, and ETS-300132-2 *Power supply interface at the input to telecommunications equipment, operated by direct current (dc)*, but all of these standards are based on IEC/EN/UL 60950-1 with regards to safety.

Ericsson Power Modules DC/DC converters and DC/DC regulators are UL 60950-1 recognized and certified in accordance with EN 60950-1.

The flammability rating for all construction parts of the products meet requirements for V-0 class material according to IEC 60695-11-10, *Fire hazard testing, test flames* – 50 W horizontal and vertical flame test methods.

The products should be installed in the end-use equipment, in accordance with the requirements of the ultimate application. Normally the output of the DC/DC converter is considered as SELV (Safety Extra Low Voltage) and the input source must be isolated by minimum Double or Reinforced Insulation from the primary circuit (AC mains) in accordance with IEC/EN/UL 60950-1.

### Isolated DC/DC converters

It is recommended that a slow blow fuse is to be used at the input of each DC/DC converter. If an input filter is used in the circuit the fuse should be placed in front of the input filter.

In the rare event of a component problem that imposes a short circuit on the input source, this fuse will provide the following functions:

- Isolate the fault from the input power source so as not to affect the operation of other parts of the system.
- Protect the distribution wiring from excessive current and power loss thus preventing hazardous overheating.

The galvanic isolation is verified in an electric strength test. The test voltage ( $V_{iso}$ ) between input and output is 1500 Vdc or 2250 Vdc (refer to product specification).

### 24 V DC systems

The input voltage to the DC/DC converter is SELV (Safety Extra Low Voltage) and the output remains SELV under normal and abnormal operating conditions.

### 48 and 60 V DC systems

If the input voltage to the DC/DC converter is 75 Vdc or less, then the output remains SELV (Safety Extra Low Voltage) under normal and abnormal operating conditions.

Single fault testing in the input power supply circuit should be performed with the DC/DC converter connected to demonstrate that the input voltage does not exceed 75 Vdc.

If the input power source circuit is a DC power system, the source may be treated as a TNV-2 circuit and testing has demonstrated compliance with SELV limits in accordance with IEC/EN/UL60950-1.

### Non-isolated DC/DC regulators

The input voltage to the DC/DC regulator is SELV (Safety Extra Low Voltage) and the output remains SELV under normal and abnormal operating conditions.

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

## Absolute Maximum Ratings

| Characteristics             |                                                                                          | min  | typ | max | Unit |
|-----------------------------|------------------------------------------------------------------------------------------|------|-----|-----|------|
| $T_{P1}$                    | Operating temperature (see Thermal Consideration section)                                | -40  | 120 | 120 | °C   |
| $T_S$                       | Storage temperature                                                                      | -40  | 125 | 125 | °C   |
| $V_I$                       | Input voltage (See Operating Information Section for input and output voltage relations) | -0.3 | 18  | 18  | V    |
| Logic I/O voltage           | CTRL, SA0, SA1, SALERT, SCL, SDA, VSET, SYNC, PG, CS_VTRK                                | -0.3 | 4   | 4   | V    |
| Ground voltage differential | -S, PREF, GND                                                                            | -0.3 | 0.3 | 0.3 | V    |
| Analog pin voltage          | $V_o$ , +S                                                                               | -0.3 | 5.5 | 5.5 | V    |

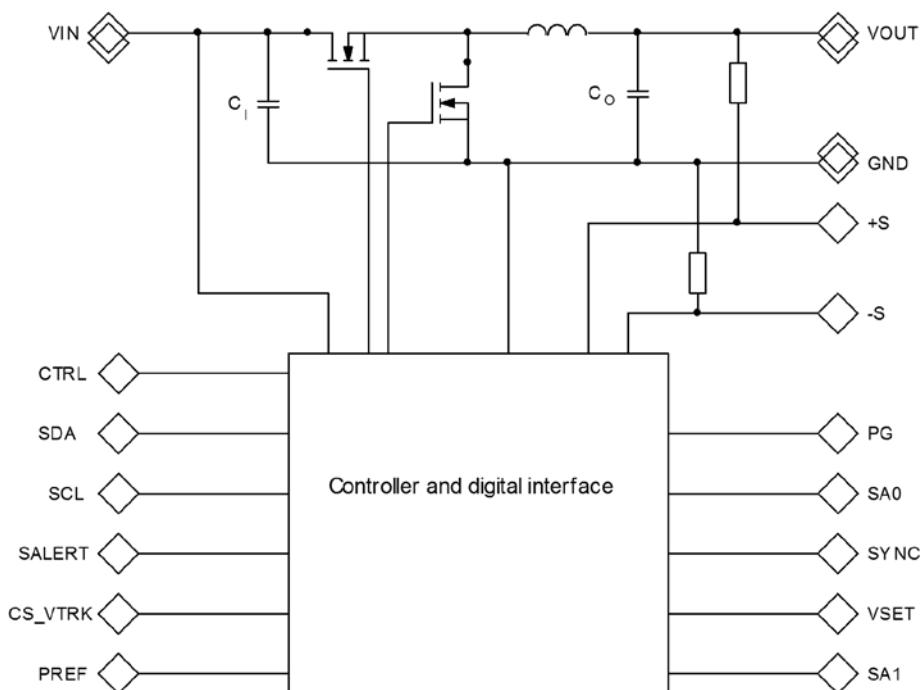
Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as no destruction limits, are normally tested with one parameter at a time exceeding the limits in the Electrical Specification. If exposed to stress above these limits, function and performance may degrade in an unspecified manner.

## Configuration File

This product is designed with a digital control circuit. The control circuit uses a configuration file which determines the functionality and performance of the product. The Electrical Specification table shows parameter values of functionality and performance with the default configuration file, unless otherwise specified. The default configuration file is designed to fit most application needs with focus on high efficiency. If different characteristics are required it is possible to change the configuration file to optimize certain performance characteristics.

In this Technical specification examples are included to show the possibilities with digital control. See Operating Information section for information about trade offs when optimizing certain key performance characteristics.

## Fundamental Circuit Diagram



|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Electrical Specification****BMR 461 2001** $T_{P1} = -30$  to  $+95^\circ\text{C}$ ,  $V_I = 4.5$  to  $14\text{ V}$ ,  $V_I > V_O + 1.0\text{ V}$ Typical values given at:  $T_{P1} = +25^\circ\text{C}$ ,  $V_I = 12.0\text{ V}$ , max  $I_O$ , unless otherwise specified under Conditions.Default configuration file, 190 10-CDA 102 0518/001.  $V_O$  defined by pin strap.External  $C_{IN} = 47\text{ }\mu\text{F}$  ceramic +  $270\text{ }\mu\text{F}/10\text{ m}\Omega$  electrolytic,  $C_{OUT} = 3 \times 100\text{ }\mu\text{F} + 0.1\text{ }\mu\text{F}$  ceramic.

See Operating Information section for selection of capacitor types. Sense pins are connected to the output pins.

| Characteristics |                                                     | Conditions                 | min                                                                                                                  | typ                        | max  | Unit          |
|-----------------|-----------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------|------|---------------|
| $V_I$           | Input voltage                                       |                            | 4.5                                                                                                                  |                            | 14   | V             |
| $V_O$           | Output voltage without pin strap                    |                            |                                                                                                                      | 0                          |      | V             |
|                 | Output voltage adjustment range                     |                            | 0.60                                                                                                                 |                            | 5.0  | V             |
|                 | Output voltage adjustment including PMBus margining |                            | 0.50                                                                                                                 |                            | 5.25 | V             |
|                 | Output voltage set-point resolution                 |                            |                                                                                                                      | 1.2                        |      | mV            |
|                 | Output voltage accuracy                             | Including line, load, temp | -1                                                                                                                   |                            | 1    | % $V_O$       |
|                 | Internal resistance +S/-S to $V_{OUT}/GND$          |                            |                                                                                                                      | 47                         |      | $\Omega$      |
|                 | +S bias current                                     |                            |                                                                                                                      | 50                         |      | $\mu\text{A}$ |
|                 | -S bias current                                     |                            |                                                                                                                      | -35                        |      | $\mu\text{A}$ |
|                 | Line regulation                                     | $I_O = \text{max } I_O$    | $V_O = 0.6\text{ V}$<br>$V_O = 1.2\text{ V}$<br>$V_O = 1.8\text{ V}$<br>$V_O = 3.3\text{ V}$<br>$V_O = 5.0\text{ V}$ | 1<br>2<br>3<br>4<br>7      |      | mV            |
|                 | Load regulation                                     | $I_O = 0 - 100\%$          | $V_O = 0.6\text{ V}$<br>$V_O = 1.2\text{ V}$<br>$V_O = 1.8\text{ V}$<br>$V_O = 3.3\text{ V}$<br>$V_O = 5.0\text{ V}$ | 1<br>1<br>1<br>2<br>2      |      | mV            |
| $V_{Oac}$       | Output ripple & noise (up to 20 MHz)                |                            | $V_O = 0.6\text{ V}$<br>$V_O = 1.2\text{ V}$<br>$V_O = 1.8\text{ V}$<br>$V_O = 3.3\text{ V}$<br>$V_O = 5.0\text{ V}$ | 10<br>10<br>11<br>19<br>25 |      | mVp-p         |

| $I_O$     | Output current                    |                                                                                                                      | 0 | 6                                    | A |   |
|-----------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------|---|--------------------------------------|---|---|
| $I_S$     | Static input current at max $I_O$ | $V_O = 0.6\text{ V}$<br>$V_O = 1.2\text{ V}$<br>$V_O = 1.8\text{ V}$<br>$V_O = 3.3\text{ V}$<br>$V_O = 5.0\text{ V}$ |   | 0.38<br>0.70<br>1.00<br>1.75<br>2.63 |   | A |
| $I_{lim}$ | Current limit threshold           |                                                                                                                      |   | 9<br>11                              | A |   |
| $I_{sc}$  | Short circuit current             | RMS, hiccup mode,<br>$V_O = 3.3\text{ V}$ , 4 m $\Omega$ short                                                       |   | 3                                    | A |   |

|        |                                |                         |                                                                                                                      |                                      |   |
|--------|--------------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|--------------------------------------|---|
| $\eta$ | Efficiency                     | 50% of max $I_O$        | $V_O = 0.6\text{ V}$                                                                                                 | 70.1                                 | % |
|        |                                |                         | $V_O = 1.2\text{ V}$                                                                                                 | 81.8                                 |   |
|        |                                |                         | $V_O = 1.8\text{ V}$                                                                                                 | 86.4                                 |   |
|        |                                |                         | $V_O = 3.3\text{ V}$                                                                                                 | 91.0                                 |   |
|        |                                |                         | $V_O = 5.0\text{ V}$                                                                                                 | 93.3                                 |   |
|        |                                | $I_O = \text{max } I_O$ | $V_O = 0.6\text{ V}$<br>$V_O = 1.2\text{ V}$<br>$V_O = 1.8\text{ V}$<br>$V_O = 3.3\text{ V}$<br>$V_O = 5.0\text{ V}$ | 78.5<br>87.3<br>90.7<br>94.0<br>95.6 | % |
| $d$    | Power dissipation at max $I_O$ |                         | $V_O = 0.6\text{ V}$<br>$V_O = 1.2\text{ V}$<br>$V_O = 1.8\text{ V}$<br>$V_O = 3.3\text{ V}$<br>$V_O = 5.0\text{ V}$ | 0.99<br>1.01<br>1.12<br>1.28<br>1.40 | W |

|                                          |  |
|------------------------------------------|--|
| <b>BMR461 series PoL Regulators</b>      |  |
| Input 4.5-14 V, Output up to 18 A / 60 W |  |

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

**BMR 461 2001**

| Characteristics |                             | Conditions | min                                                                               | typ                                  | max | Unit    |
|-----------------|-----------------------------|------------|-----------------------------------------------------------------------------------|--------------------------------------|-----|---------|
| $P_{li}$        | Input idling power          | $I_O = 0$  | $V_O = 0.6 V$<br>$V_O = 1.2 V$<br>$V_O = 1.8 V$<br>$V_O = 3.3 V$<br>$V_O = 5.0 V$ | 0.70<br>0.70<br>0.71<br>0.80<br>0.92 |     | W       |
| $P_{CTRL}$      | Input standby power         |            | Turned off with CTRL-pin                                                          | 0.25                                 |     | W       |
| $C_I$           | Internal input capacitance  |            | $V_I = 0 V$                                                                       | 47                                   |     | $\mu F$ |
| $C_O$           | Internal output capacitance |            | $V_O = 0 V$<br>$V_O = 3.3 V$<br>$V_O = 5.0 V$                                     | 47<br>24<br>15                       |     | $\mu F$ |
| $C_{OUT}$       | Total output capacitance    |            | Effective capacitance<br>Note 1                                                   | 55                                   |     | $\mu F$ |

|           |                                       |                                                                                                               |    |  |         |
|-----------|---------------------------------------|---------------------------------------------------------------------------------------------------------------|----|--|---------|
| $V_{tr1}$ | Load transient peak voltage deviation | Load step 25-75-25% of<br>max $I_O$ , $dI/dt = 1.5 A/\mu s$<br>$C_O=3x100 \mu F + 270 \mu F$<br>$V_O = 3.3 V$ | 50 |  | mV      |
| $t_{tr1}$ | Load transient recovery time          |                                                                                                               | 13 |  | $\mu s$ |

|          |                                        |                                                  |          |         |     |   |
|----------|----------------------------------------|--------------------------------------------------|----------|---------|-----|---|
| $F_{sw}$ | Switching frequency                    |                                                  | 600      |         | kHz |   |
|          | Switching frequency range              | PMBus configurable<br>FREQUENCY_SWITCH<br>Note 2 | 300-1000 |         | kHz |   |
|          | Switching frequency set-point accuracy |                                                  | -10      | $\pm 5$ | 10  | % |
|          | External Sync Duty Cycle               |                                                  | 40       | 60      |     | % |
|          | Input Clock Frequency Drift Tolerance  | External clock source                            | -10      | 10      |     | % |

|                                                       |                       |                                                  |                                                                         |         |     |         |
|-------------------------------------------------------|-----------------------|--------------------------------------------------|-------------------------------------------------------------------------|---------|-----|---------|
| Input Under Voltage Lockout (hardware controlled)     | Threshold, $V_{UVLO}$ | Rising edge                                      | 3.8                                                                     | 4.1     | 4.4 | V       |
|                                                       | Hysteresis            |                                                  |                                                                         | 0.24    |     | V       |
| Input Over Voltage Lockout (hardware controlled)      | Threshold, $V_{OVLO}$ | Input rising                                     | 14.3                                                                    | 15.2    | 16  | V       |
|                                                       | Threshold             |                                                  |                                                                         | 4.35    |     | V       |
| Input Turn-On Voltage                                 | Threshold range       | PMBus configurable<br>VIN_ON                     |                                                                         | 0-14.7  |     | V       |
|                                                       | Threshold             |                                                  |                                                                         | 3.8     |     | V       |
| Input Turn-Off Voltage                                | Threshold range       | PMBus configurable<br>VIN_OFF                    |                                                                         | 0-14.7  |     | V       |
|                                                       | IUPV threshold        |                                                  |                                                                         | 4.1     |     | V       |
| Input Under/Over Voltage Protection, IUPV/ IOVP       | IUPV threshold range  | PMBus configurable<br>VIN_UV_FAULT_LIMIT         |                                                                         | 0-14.7  |     | V       |
|                                                       | IOVP threshold        |                                                  |                                                                         | 14.4    |     | V       |
|                                                       | IOVP threshold range  | PMBus configurable<br>VIN_OV_FAULT_LIMIT         |                                                                         | 0-14.7  |     | V       |
|                                                       | Set point accuracy    |                                                  | -150                                                                    | 150     |     | mV      |
|                                                       | Fault response        | VIN_UV_FAULT_RESPONSE<br>VIN_OV_FAULT_RESPONSE   | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3. |         |     |         |
| Output voltage Over/Under Voltage Protection, OVP/UVP | UVP threshold         |                                                  |                                                                         | 85      |     | % $V_O$ |
|                                                       | UVP threshold range   | PMBus configurable<br>VOUT_UV_FAULT_LIMIT        |                                                                         | 0-100   |     | % $V_O$ |
|                                                       | OVP threshold         |                                                  |                                                                         | 115     |     | % $V_O$ |
|                                                       | OVP threshold range   | PMBus configurable<br>VOUT_OV_FAULT_LIMIT        |                                                                         | 100-115 |     | % $V_O$ |
|                                                       | Fault response        | VOUT_UV_FAULT_RESPONSE<br>VOUT_OV_FAULT_RESPONSE | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3. |         |     |         |

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

**BMR 461 2001**

| Characteristics                                 | Conditions          | min                                    | typ                                                                     | max | Unit |
|-------------------------------------------------|---------------------|----------------------------------------|-------------------------------------------------------------------------|-----|------|
| Over Current Protection, OCP                    | OCP threshold       | Set value                              | 10                                                                      |     | A    |
|                                                 | OCP threshold range | PMBus configurable IOUT_OC_FAULT_LIMIT | 0-10                                                                    |     | A    |
|                                                 | Fault response      | IOUT_OC_FAULT_RESPONSE                 | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3. |     |      |
| Over Temperature Protection, OTP                | OTP threshold       | Note 4                                 | 120                                                                     |     | °C   |
|                                                 | OTP threshold range | PMBus configurable OT_FAULT_LIMIT      | -40...+120                                                              |     | °C   |
|                                                 | OTP hysteresis      | PMBus configurable                     | 15                                                                      |     | °C   |
|                                                 | Fault response      | OT_FAULT_RESPONSE                      | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3. |     |      |
| Over Temperature Shutdown (hardware controlled) | Threshold           | Note 4                                 | 150                                                                     |     | °C   |
|                                                 | Hysteresis          |                                        | 20                                                                      |     | °C   |
|                                                 | Accuracy            |                                        | ±20                                                                     |     | °C   |

|                |                                                     |                                                     |     |     |
|----------------|-----------------------------------------------------|-----------------------------------------------------|-----|-----|
| $V_{OL}$       | Logic output low signal level                       | SCL, SDA, SYNC, SALERT, PG                          | 0.4 | V   |
| $V_{OH}$       | Logic output high signal level                      | Sink/source current = 4 mA                          | 2.8 | V   |
| $I_{OL}$       | Logic output low sink current                       |                                                     | 4   | mA  |
| $I_{OH}$       | Logic output high source current                    |                                                     | 4   | mA  |
| $V_{IL}$       | Logic input low threshold                           | SCL, SDA, CTRL, SYNC                                | 0.8 | V   |
| $V_{IH}$       | Logic input high threshold                          |                                                     | 2   | V   |
| $I_{IL\_CTRL}$ | Logic input low sink current                        | CTRL                                                | 0.5 | mA  |
| $I_{I\_LEAK}$  | Logic leakage current                               | SCL, SDA, SYNC, SALERT, PG                          | 10  | uA  |
| $f_{SMB}$      | SMBus Operating frequency                           |                                                     | 400 | kHz |
| $T_{BUF}$      | SMBus Bus free time                                 | STOP bit to START bit<br>See section SMBus – Timing | 1.3 | μs  |
| $t_{set}$      | SMBus SDA setup time from SCL                       |                                                     | 100 | ns  |
| $t_{hold}$     | SMBus SDA hold time from SCL                        |                                                     | 300 | ns  |
|                | SMBus START/STOP condition setup/hold time from SCL |                                                     | 600 | ns  |
| $T_{low}$      | SCL low period                                      |                                                     | 1.3 | μs  |
| $T_{high}$     | SCL high period                                     |                                                     | 0.6 | μs  |

|                                                |                                              |                                                                               |                            |    |
|------------------------------------------------|----------------------------------------------|-------------------------------------------------------------------------------|----------------------------|----|
| Initialization time                            | From $V_I > V_{UVLO}$ to ready to be enabled | 23                                                                            | ms                         |    |
| Soft-start On Delay Time Note 5                | Delay duration                               | 10                                                                            | ms                         |    |
|                                                | Delay duration range                         | 1-145                                                                         | ms                         |    |
|                                                | Delay set resolution                         | 0.6                                                                           | ms                         |    |
|                                                | Delay set accuracy                           | ±0.5 x Delay set resolution                                                   | ms                         |    |
|                                                | Delay accuracy                               | ±0.8                                                                          | ms                         |    |
| Soft-start Rise Time (0-100% of $V_O$ ) Note 5 | Ramp duration                                | 10                                                                            | ms                         |    |
|                                                | Ramp duration range                          | 1 - (255 x Ramp set resolution)                                               | ms                         |    |
|                                                | Ramp set resolution                          | Varies with $V_O$                                                             | 0.4 1 ms                   |    |
|                                                | Ramp set accuracy                            | TON_RISE value sent versus read-back                                          | ±0.5 x Ramp set resolution | ms |
|                                                | Ramp time accuracy                           | Actual ramp duration versus TON_RISE read-back                                | ±10                        | μs |
| Compensation Calibration                       | Signal duration                              | 5                                                                             | ms                         |    |
|                                                | Signal level                                 | $V_O = 0.6 \text{ V}$<br>$V_O = 1.2 - 3.3 \text{ V}$<br>$V_O = 5.0 \text{ V}$ | 3.5 2.5 2 % $V_O$          |    |

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

**BMR 461 2001**

| Characteristics | Conditions                                    | min                                                                 | typ | max | Unit             |
|-----------------|-----------------------------------------------|---------------------------------------------------------------------|-----|-----|------------------|
| Power Good , PG | Rising                                        |                                                                     | 90  |     | % V <sub>o</sub> |
|                 | Falling                                       |                                                                     | 85  |     | % V <sub>o</sub> |
|                 | Tracking mode<br>See section Voltage Tracking |                                                                     | 450 |     | mV               |
|                 | PG thresholds range<br>(Non-tracking only)    | PMBus configurable<br>POWER_GOOD_ON<br>POWER_GOOD_OFF               | 0   | 100 | % V <sub>o</sub> |
|                 | PG delay                                      | From V <sub>o</sub> reaching target to<br>PG assertion              |     | 11  | ms               |
|                 | Enabled compensation<br>calibration (default) | Tracking mode<br>See section Voltage Tracking                       |     | 20  | ms               |
|                 | PG delay                                      | From V <sub>o</sub> reaching PG rising<br>threshold to PG assertion |     | 0   | ms               |
|                 | Disabled compensation<br>calibration          | Tracking mode<br>See section Voltage Tracking                       |     | 20  | ms               |

|                              |                       |      |     |    |
|------------------------------|-----------------------|------|-----|----|
| Tracking Input Voltage Range | CS_VTRK pin<br>Note 6 | 0    | 1.2 | V  |
| Tracking Accuracy            |                       | -100 | 100 | mV |

|                     |                                       |                                                                              |      |                  |
|---------------------|---------------------------------------|------------------------------------------------------------------------------|------|------------------|
| Monitoring accuracy | Input voltage<br>READ_VIN             |                                                                              | ±3   | % V <sub>l</sub> |
|                     | Output voltage<br>READ_VOUT           |                                                                              | ±1   | % V <sub>o</sub> |
|                     | Output current<br>READ_IOUT<br>Note 7 | TP <sub>1</sub> = 0-95°C, V <sub>l</sub> = 4.5-14 V,<br>I <sub>o</sub> > 5 A | ±8.5 | % I <sub>o</sub> |
|                     |                                       | TP <sub>1</sub> = 0-95°C, V <sub>l</sub> = 4.5-14 V,<br>I <sub>o</sub> < 5 A | ±0.4 | A                |
|                     | Temperature<br>READ_TEMPERATURE_1     | Note 4                                                                       | -5   | 5 °C             |
|                     | Duty cycle<br>READ_DUTY_CYCLE         | Duty cycle < 10%                                                             | -3   | 3 %              |
|                     |                                       | Duty cycle > 10%                                                             | -1   | ±0.5 1 %         |

Note 1. Value refers to total (internal + external) effective output capacitance. Capacitance derating with V<sub>o</sub> typical for ceramic capacitors (bias characteristics) and temperature variations must be considered for the external capacitor(s). See section External Output Capacitors.

Note 2. A switching frequency close to 475 kHz should not be used since this frequency represents a boundary of two operational modes of the product. There are configuration changes to consider when changing the switching frequency, see section Switching Frequency.

Note 3. The restart interval is configurable between 100ms and 700ms in 100ms steps. Severe overcurrent faults occurring with V<sub>o</sub> > 2.5V may result in a restart interval of 1200 ms instead of the configured value. See operating conditions for other fault response alternatives.

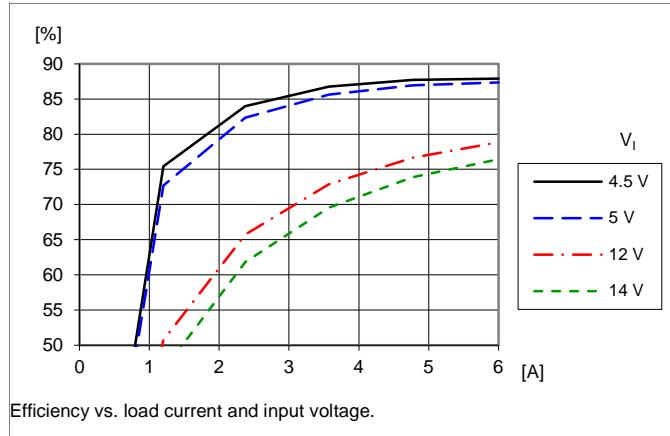
Note 4. Temperature measured internally at temperature position P3. See section Over Temperature Protection.

Note 5. Same specification applies for soft-stop and TOFF\_DELAY/TOFF\_FALL if enabled. The internal ramp and delay generators can only achieve certain discrete timing values. A written TON/OFF\_DELAY or TON/OFF\_RISE value will be rounded to the closest achievable value, thus a command read-back provides the actual set value. See section Soft-Start and Soft-Stop.

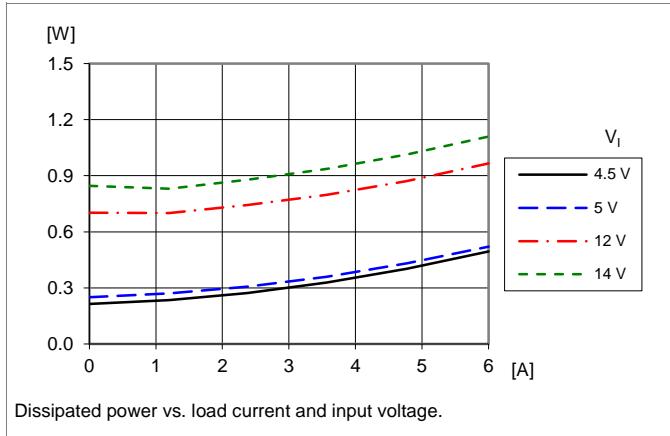
Note 6. Larger tracking input range is provided by external resistor divider, see section Voltage Tracking.

Note 7. At V<sub>o</sub> > 3.5V and V<sub>o</sub> / V<sub>l</sub> in the approximate range 55-70% there may be an additional current monitoring inaccuracy on the negative side up to -1 A.

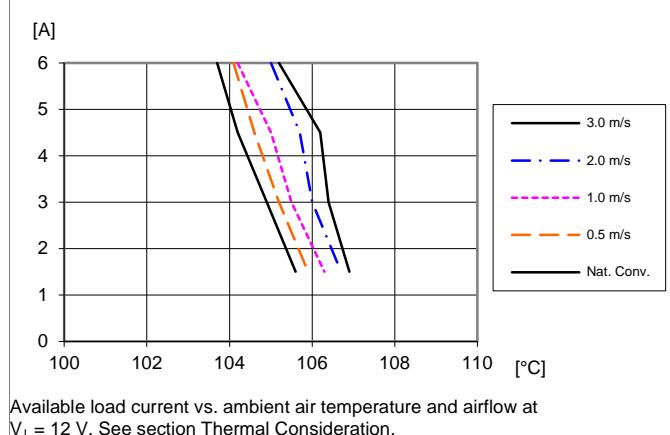
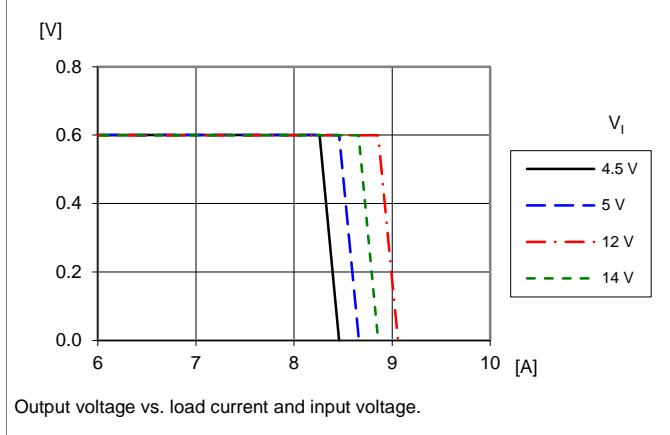
|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 0.6$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 2001****Efficiency**

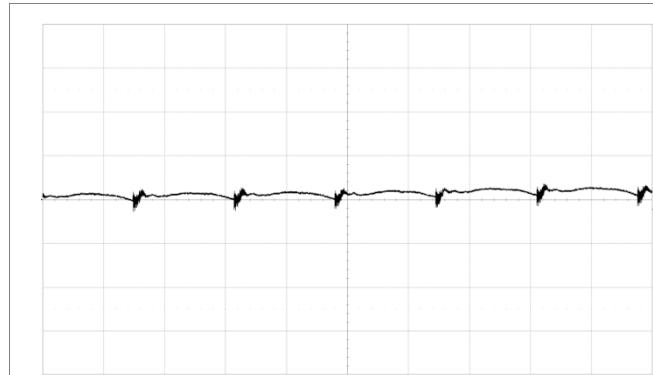
Efficiency vs. load current and input voltage.

**Power Dissipation**

Dissipated power vs. load current and input voltage.

**Output Current Derating**Available load current vs. ambient air temperature and airflow at  $V_I = 12$  V. See section Thermal Consideration.**Current Limit Characteristics**

Output voltage vs. load current and input voltage.

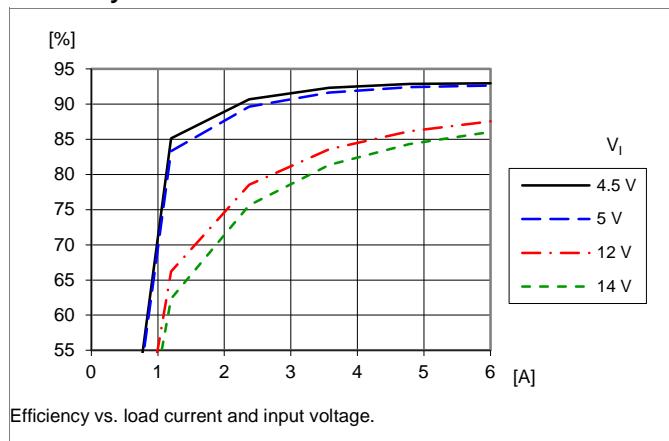
**Output Ripple and Noise**

Fundamental output voltage ripple at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F}$ ,  $I_O = 6$  A.  
 Scale: 5 mV/div, 1  $\mu\text{s}$ /div, 20 MHz bandwidth.  
 See section Output Ripple and Noise.

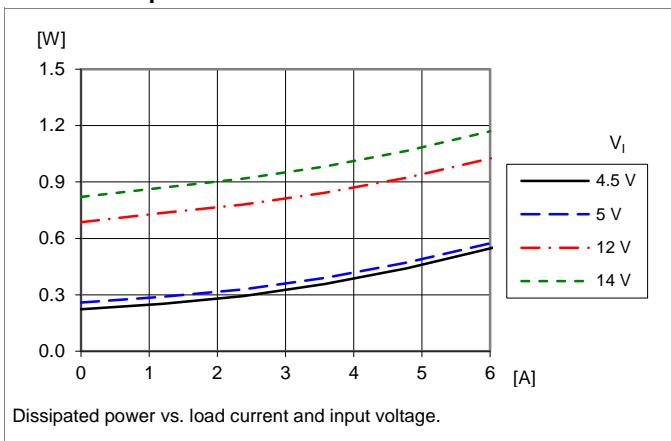
**Transient Response**

Output voltage response to load current step change (1.5–4.5–1.5 A) at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F} + 270 \mu\text{F}/10\text{m}\Omega$ . Default compensation settings.  
 Scale: 20 mV/div, 5 A/div, 100  $\mu\text{s}$ /div.

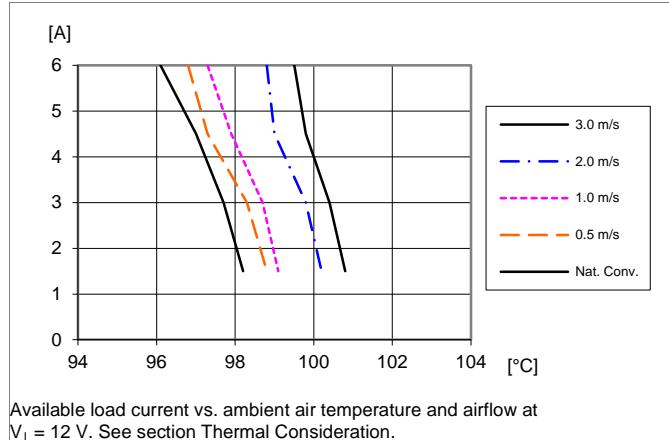
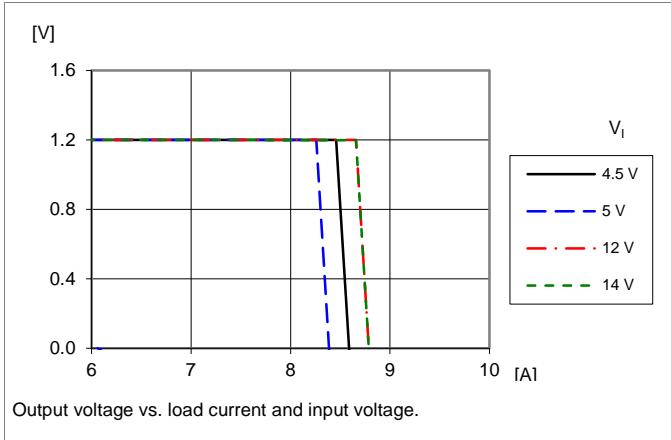
|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 1.2$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 2001****Efficiency**

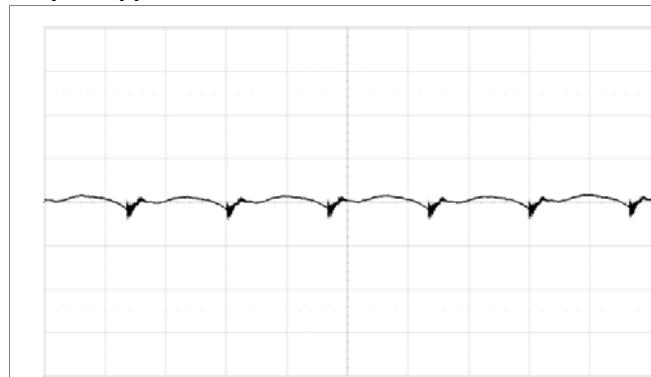
Efficiency vs. load current and input voltage.

**Power Dissipation**

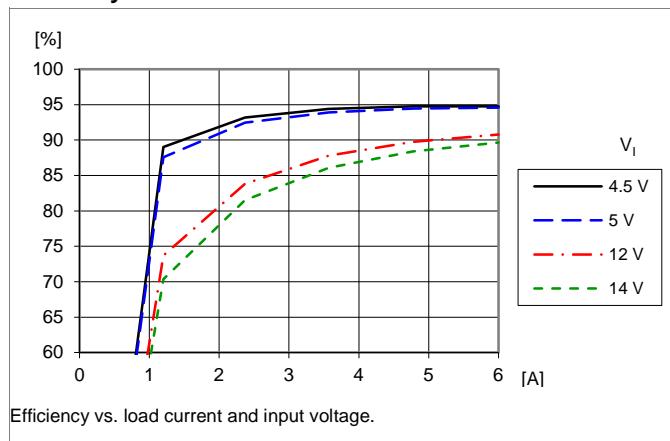
Dissipated power vs. load current and input voltage.

**Output Current Derating**Available load current vs. ambient air temperature and airflow at  $V_I = 12$  V. See section Thermal Consideration.**Current Limit Characteristics**

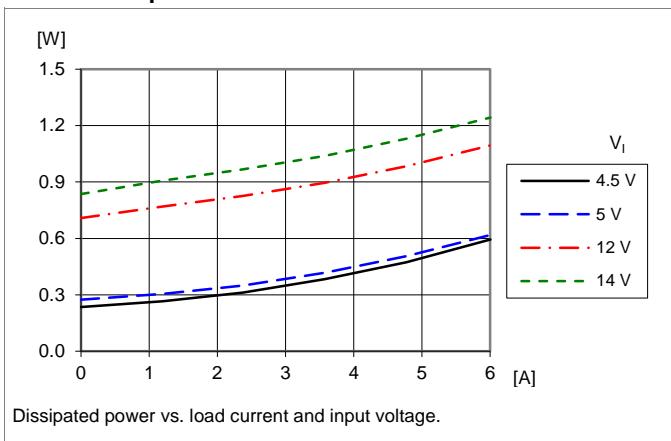
Output voltage vs. load current and input voltage.

**Output Ripple and Noise**Fundamental output voltage ripple at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F}$ ,  $I_O = 6$  A.  
Scale: 5 mV/div, 1 μs/div, 20 MHz bandwidth.  
See section Output Ripple and Noise.**Transient Response**Output voltage response to load current step change (1.5–4.5–1.5 A) at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F} + 270 \mu\text{F}/10\text{m}\Omega$ . Default compensation settings.  
Scale: 20 mV/div, 5 A/div, 100 μs/div.

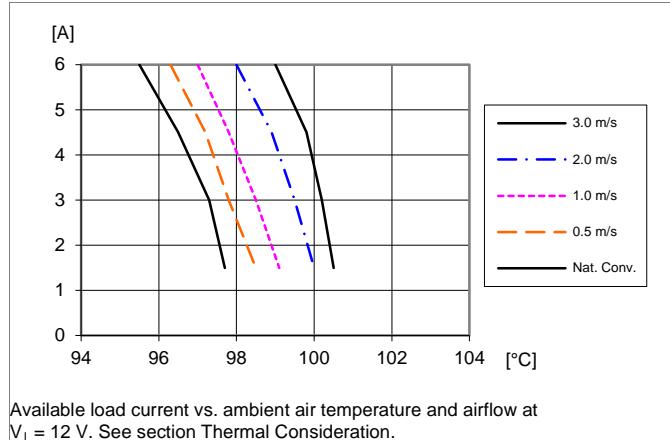
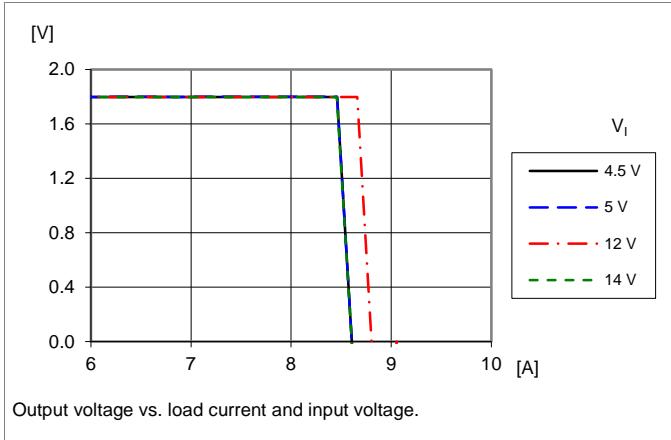
|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 1.8$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 2001****Efficiency**

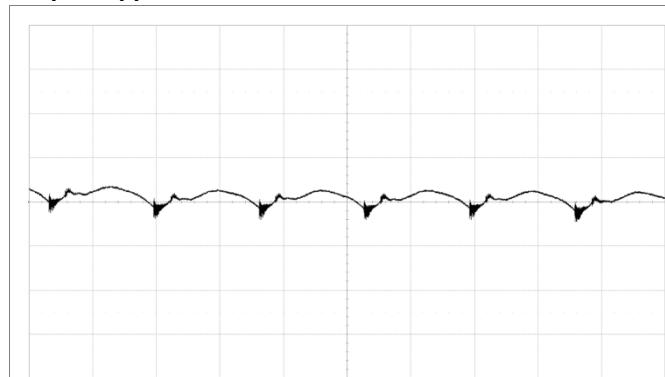
Efficiency vs. load current and input voltage.

**Power Dissipation**

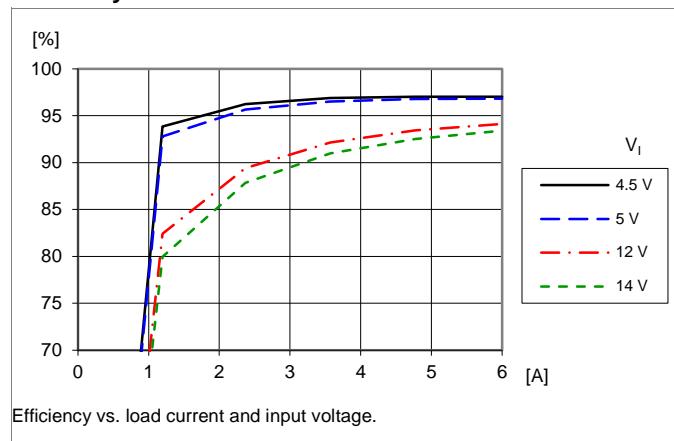
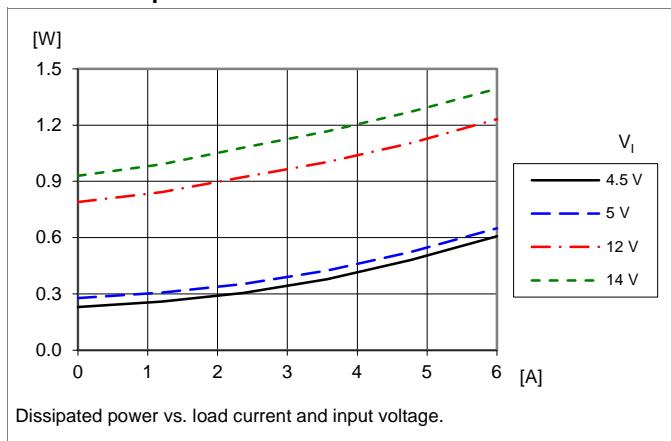
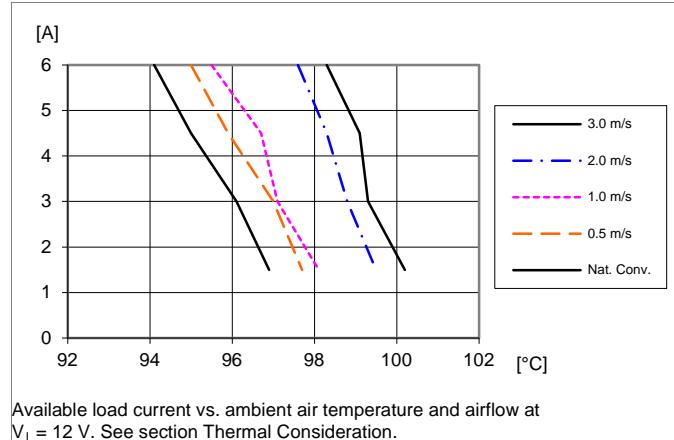
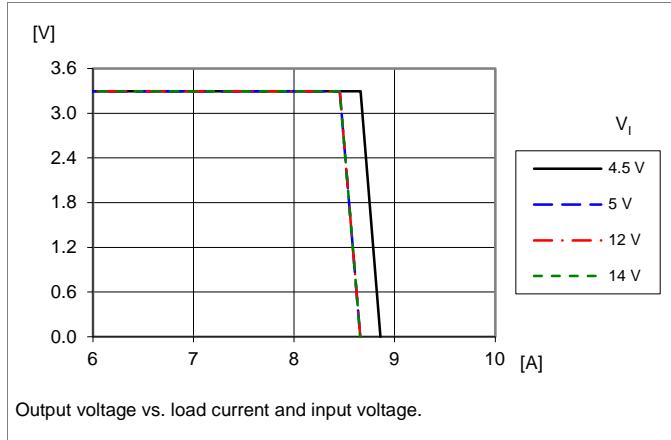
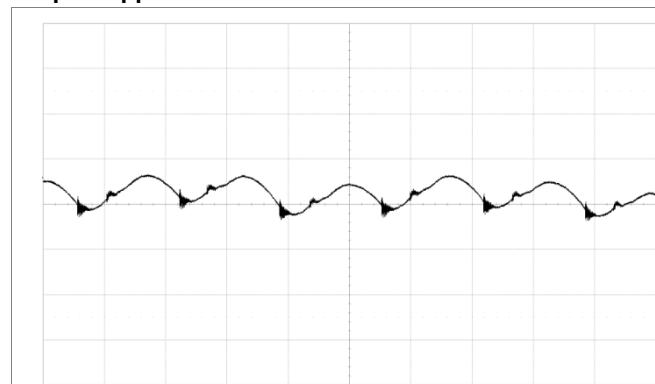
Dissipated power vs. load current and input voltage.

**Output Current Derating**Available load current vs. ambient air temperature and airflow at  $V_I = 12$  V. See section Thermal Consideration.**Current Limit Characteristics**

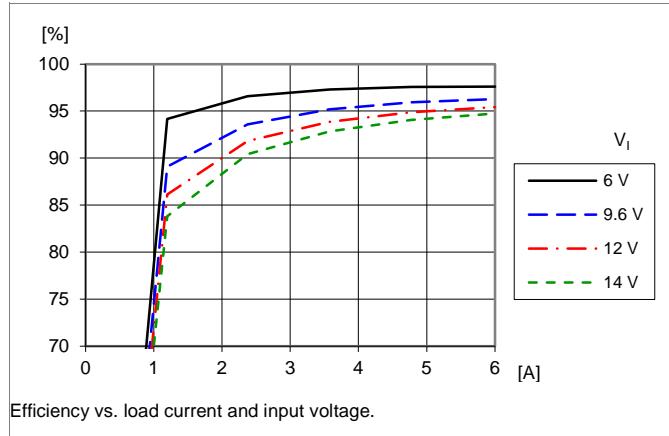
Output voltage vs. load current and input voltage.

**Output Ripple and Noise**Fundamental output voltage ripple at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F}$ ,  $I_O = 6$  A.  
Scale: 5 mV/div, 1 μs/div, 20 MHz bandwidth.  
See section Output Ripple and Noise.**Transient Response**Output voltage response to load current step change (1.5–4.5–1.5 A) at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F} + 270 \mu\text{F}/10\text{m}\Omega$ . Default compensation settings.  
Scale: 20 mV/div, 5 A/div, 100 μs/div.

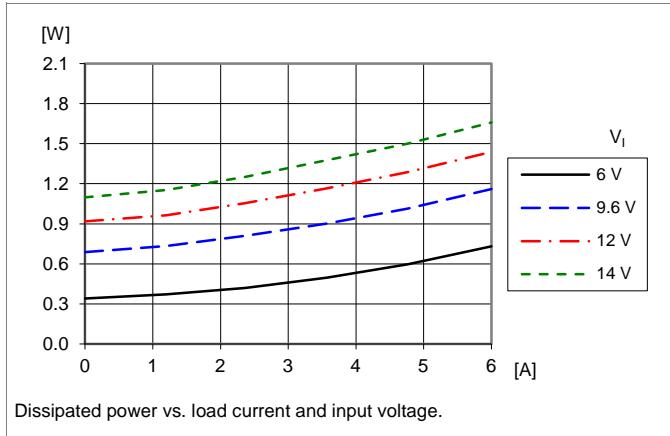
|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 3.3$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 2001****Efficiency****Power Dissipation****Output Current Derating****Current Limit Characteristics****Output Ripple and Noise****Transient Response**

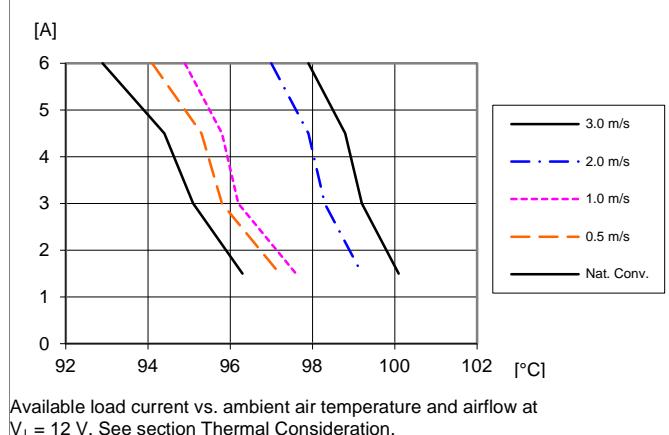
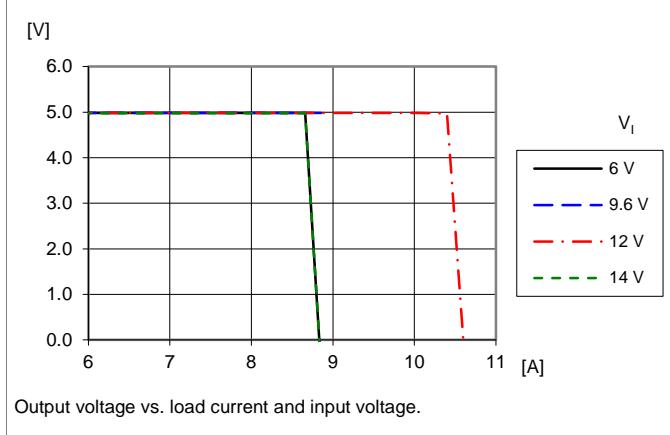
|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 5.0$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 2001****Efficiency**

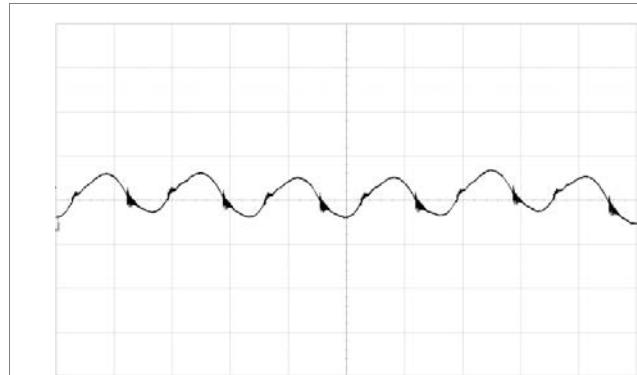
Efficiency vs. load current and input voltage.

**Power Dissipation**

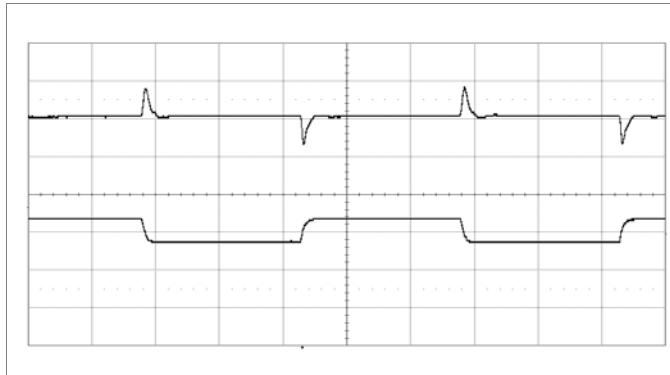
Dissipated power vs. load current and input voltage.

**Output Current Derating**Available load current vs. ambient air temperature and airflow at  $V_I = 12$  V. See section Thermal Consideration.**Current Limit Characteristics**

Output voltage vs. load current and input voltage.

**Output Ripple and Noise**

Fundamental output voltage ripple at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F}$ ,  $I_O = 6\text{A}$ .  
 Scale: 5 mV/div, 1  $\mu\text{s}/\text{div}$ , 20 MHz bandwidth.  
 See section Output Ripple and Noise.

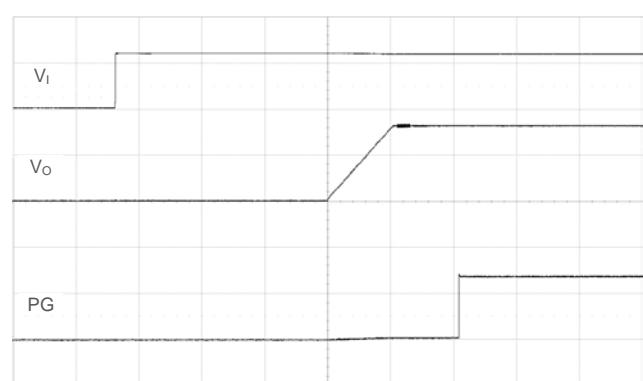
**Transient Response**

Output voltage response to load current step change (1.5–4.5–1.5 A) at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F} + 270 \mu\text{F}/10\text{m}\Omega$ . Default compensation settings.  
 Scale: 50 mV/div, 5 A/div, 100  $\mu\text{s}/\text{div}$ .

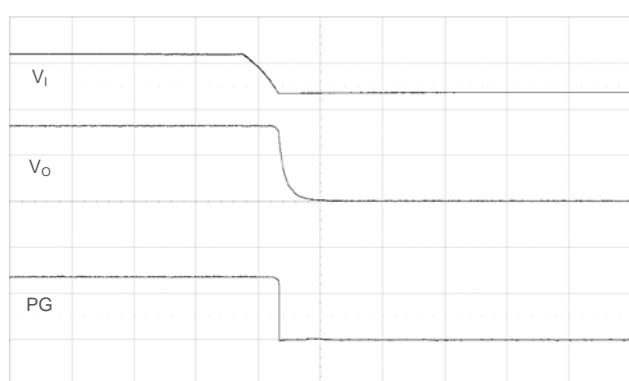
|                                          |
|------------------------------------------|
| <b>BMR461 series PoL Regulators</b>      |
| Input 4.5-14 V, Output up to 18 A / 60 W |

1/287 01 - BMR 461 Uen C Feb 2014

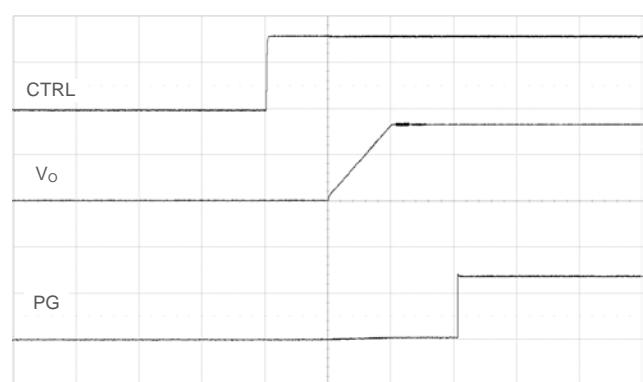
© Ericsson AB

**Typical Characteristics**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ ,  $V_O = 3.3\text{ V}$ **BMR 461 2001****Start-up by input source**

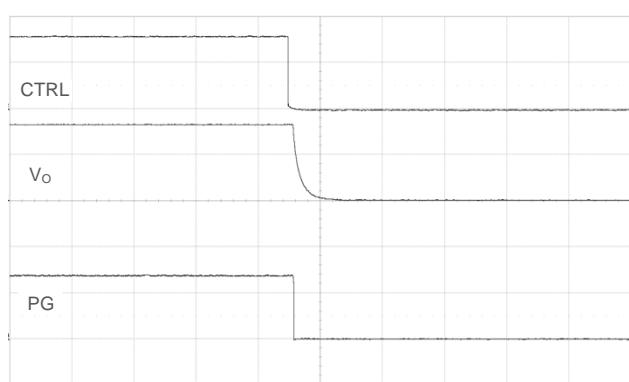
Start-up enabled by applying  $V_I$ .  $\text{TON\_DELAY} = \text{TON\_RISE} = 10\text{ ms}$  (default).  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ , PG pulled up to  $V_O$ .  
Scale: 10 or 2 V/div, 10 ms/div.

**Shut-down by input source**

Shut-down by removing  $V_I$ .  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ , PG pulled up to  $V_O$ .  
Scale: 10 or 2 V/div, 1 ms/div.

**Start-up by CTRL signal**

Start-up enabled by CTRL signal.  $\text{TON\_DELAY} = \text{TON\_RISE} = 10\text{ ms}$  (default).  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ , PG pulled up to  $V_O$ .  
Scale: 2 V/div, 10 ms/div.

**Shutdown by CTRL signal**

Shut-down by CTRL signal.  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ , PG pulled up to  $V_O$ .  
Scale: 2 V/div, 1 ms/div.

|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Electrical Specification****BMR 461 3001** $T_{P1} = -30$  to  $+95^\circ\text{C}$ ,  $V_I = 4.5$  to  $14$  V,  $V_I > V_O + 1.0$  VTypical values given at:  $T_{P1} = +25^\circ\text{C}$ ,  $V_I = 12.0$  V, max  $I_O$ , unless otherwise specified under Conditions.Default configuration file, 190 10-CDA 102 0370/001.  $V_O$  defined by pin strap.External  $C_{IN} = 47 \mu\text{F}$  ceramic +  $270 \mu\text{F}/10 \text{ m}\Omega$  electrolytic,  $C_{OUT} = 3 \times 100 \mu\text{F} + 0.1 \mu\text{F}$  ceramic.

See Operating Information section for selection of capacitor types. Sense pins are connected to the output pins.

| Characteristics |                                                     | Conditions                 | min                                                                               | typ                        | max  | Unit          |
|-----------------|-----------------------------------------------------|----------------------------|-----------------------------------------------------------------------------------|----------------------------|------|---------------|
| $V_I$           | Input voltage                                       |                            | 4.5                                                                               |                            | 14   | V             |
| $V_O$           | Output voltage without pin strap                    |                            |                                                                                   | 0                          |      | V             |
|                 | Output voltage adjustment range                     |                            | 0.60                                                                              |                            | 5.0  | V             |
|                 | Output voltage adjustment including PMBus margining |                            | 0.50                                                                              |                            | 5.25 | V             |
|                 | Output voltage set-point resolution                 |                            |                                                                                   | 1.2                        |      | mV            |
|                 | Output voltage accuracy                             | Including line, load, temp | -1                                                                                |                            | 1    | % $V_O$       |
|                 | Internal resistance +S/-S to $V_{OUT}/GND$          |                            | 47                                                                                |                            |      | $\Omega$      |
|                 | +S bias current                                     |                            | 50                                                                                |                            |      | $\mu\text{A}$ |
|                 | -S bias current                                     |                            | -35                                                                               |                            |      | $\mu\text{A}$ |
|                 | Line regulation                                     | $I_O = \text{max } I_O$    | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V<br>$V_O = 3.3$ V<br>$V_O = 5.0$ V | 1<br>2<br>3<br>4<br>7      |      | mV            |
|                 | Load regulation                                     | $I_O = 0 - 100\%$          | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V<br>$V_O = 3.3$ V<br>$V_O = 5.0$ V | 1<br>1<br>1<br>2<br>2      |      | mV            |
| $V_{Oac}$       | Output ripple & noise (up to 20 MHz)                |                            | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V<br>$V_O = 3.3$ V<br>$V_O = 5.0$ V | 10<br>10<br>11<br>19<br>25 |      | mVp-p         |

| $I_O$     | Output current                    |                                                                                   | 0 | 12                              | A |   |
|-----------|-----------------------------------|-----------------------------------------------------------------------------------|---|---------------------------------|---|---|
| $I_S$     | Static input current at max $I_O$ | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V<br>$V_O = 3.3$ V<br>$V_O = 5.0$ V |   | 0.7<br>1.3<br>2.0<br>3.5<br>5.2 |   | A |
| $I_{lim}$ | Current limit threshold           |                                                                                   |   | 15<br>17                        |   | A |
| $I_{sc}$  | Short circuit current             | RMS, hiccup mode,<br>$V_O = 3.3$ V, 4 m $\Omega$ short                            |   | 3                               |   | A |

|        |                                |                         |                                                                                   |                                      |   |
|--------|--------------------------------|-------------------------|-----------------------------------------------------------------------------------|--------------------------------------|---|
| $\eta$ | Efficiency                     | 50% of max $I_O$        | $V_O = 0.6$ V                                                                     | 78.8                                 | % |
|        |                                |                         | $V_O = 1.2$ V                                                                     | 87.5                                 |   |
|        |                                |                         | $V_O = 1.8$ V                                                                     | 90.8                                 |   |
|        |                                |                         | $V_O = 3.3$ V                                                                     | 94.1                                 |   |
|        |                                |                         | $V_O = 5.0$ V                                                                     | 95.4                                 |   |
|        |                                | $I_O = \text{max } I_O$ | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V<br>$V_O = 3.3$ V<br>$V_O = 5.0$ V | 81.3<br>89.0<br>91.8<br>94.6<br>95.8 | % |
| $P_d$  | Power dissipation at max $I_O$ |                         | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V<br>$V_O = 3.3$ V<br>$V_O = 5.0$ V | 1.66<br>1.78<br>1.93<br>2.24<br>2.63 | W |

|                                          |  |
|------------------------------------------|--|
| <b>BMR461 series PoL Regulators</b>      |  |
| Input 4.5-14 V, Output up to 18 A / 60 W |  |

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

**BMR 461 3001**

| Characteristics |                             | Conditions | min                                                                                                                       | typ                                  | max | Unit          |
|-----------------|-----------------------------|------------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-----|---------------|
| $P_{ii}$        | Input idling power          | $I_o = 0$  | $V_o = 0.6 \text{ V}$<br>$V_o = 1.2 \text{ V}$<br>$V_o = 1.8 \text{ V}$<br>$V_o = 3.3 \text{ V}$<br>$V_o = 5.0 \text{ V}$ | 0.70<br>0.70<br>0.71<br>0.80<br>0.92 |     | W             |
| $P_{CTRL}$      | Input standby power         |            | Turned off with CTRL-pin                                                                                                  | 0.25                                 |     | W             |
| $C_i$           | Internal input capacitance  |            | $V_i = 0 \text{ V}$                                                                                                       | 47                                   |     | $\mu\text{F}$ |
| $C_o$           | Internal output capacitance |            | $V_o = 0 \text{ V}$<br>$V_o = 3.3 \text{ V}$<br>$V_o = 5.0 \text{ V}$                                                     | 47<br>24<br>15                       |     | $\mu\text{F}$ |
| $C_{OUT}$       | Total output capacitance    |            | Effective capacitance<br>Note 1                                                                                           | 55                                   |     | $\mu\text{F}$ |

|           |                                       |                                                                                                                                                          |    |  |               |
|-----------|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----|--|---------------|
| $V_{tr1}$ | Load transient peak voltage deviation | Load step 25-75-25% of<br>max $I_o$ , $di/dt = 1.5 \text{ A}/\mu\text{s}$<br>$C_o = 3 \times 100 \mu\text{F} + 270 \mu\text{F}$<br>$V_o = 3.3 \text{ V}$ | 60 |  | mV            |
| $t_{tr1}$ | Load transient recovery time          |                                                                                                                                                          | 25 |  | $\mu\text{s}$ |

|          |                                        |                                                  |          |         |     |   |
|----------|----------------------------------------|--------------------------------------------------|----------|---------|-----|---|
| $F_{sw}$ | Switching frequency                    |                                                  | 600      |         | kHz |   |
|          | Switching frequency range              | PMBus configurable<br>FREQUENCY_SWITCH<br>Note 2 | 300-1000 |         | kHz |   |
|          | Switching frequency set-point accuracy |                                                  | -10      | $\pm 5$ | 10  | % |
|          | External Sync Duty Cycle               |                                                  | 40       | 60      |     | % |
|          | Input Clock Frequency Drift Tolerance  | External clock source                            | -10      | 10      |     | % |

|                                                       |                       |                                                                  |                                                                        |         |     |          |
|-------------------------------------------------------|-----------------------|------------------------------------------------------------------|------------------------------------------------------------------------|---------|-----|----------|
| Input Under Voltage Lockout (hardware controlled)     | Threshold, $V_{UVLO}$ | Rising edge                                                      | 3.8                                                                    | 4.1     | 4.4 | V        |
|                                                       | Hysteresis            |                                                                  |                                                                        | 0.24    |     | V        |
| Input Over Voltage Lockout (hardware controlled)      | Threshold, $V_{OVLO}$ | Input rising                                                     | 14.3                                                                   | 15.2    | 16  | V        |
|                                                       | Threshold             |                                                                  |                                                                        | 4.35    |     | V        |
| Input Turn-On Voltage                                 | Threshold range       | PMBus configurable<br>$V_{IN\_ON}$                               |                                                                        | 0-14.7  |     | V        |
|                                                       | Threshold             |                                                                  |                                                                        | 3.8     |     | V        |
| Input Turn-Off Voltage                                | Threshold range       | PMBus configurable<br>$V_{IN\_OFF}$                              |                                                                        | 0-14.7  |     | V        |
|                                                       | IUPV threshold        |                                                                  |                                                                        | 4.1     |     | V        |
| Input Under/Over Voltage Protection, IUPV/ IOVP       | IUPV threshold range  | PMBus configurable<br>$V_{IN\_UV\_FAULT\_LIMIT}$                 |                                                                        | 0-14.7  |     | V        |
|                                                       | IOVP threshold        |                                                                  |                                                                        | 14.4    |     | V        |
|                                                       | IOVP threshold range  | PMBus configurable<br>$V_{IN\_OV\_FAULT\_LIMIT}$                 |                                                                        | 0-14.7  |     | V        |
|                                                       | Set point accuracy    |                                                                  | -150                                                                   | 150     |     | mV       |
|                                                       | Fault response        | $V_{IN\_UV\_FAULT\_RESPONSE}$<br>$V_{IN\_OV\_FAULT\_RESPONSE}$   | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3 |         |     |          |
|                                                       | UV threshold          |                                                                  |                                                                        | 85      |     | $\% V_o$ |
|                                                       | UV threshold range    | PMBus configurable<br>$V_{OUT\_UV\_FAULT\_LIMIT}$                |                                                                        | 0-100   |     | $\% V_o$ |
| Output voltage Over/Under Voltage Protection, OVP/UVP | OVP threshold         |                                                                  |                                                                        | 115     |     | $\% V_o$ |
|                                                       | OVP threshold range   | PMBus configurable<br>$V_{OUT\_OV\_FAULT\_LIMIT}$                |                                                                        | 100-115 |     | $\% V_o$ |
|                                                       | Fault response        | $V_{OUT\_UV\_FAULT\_RESPONSE}$<br>$V_{OUT\_OV\_FAULT\_RESPONSE}$ | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3 |         |     |          |

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

**BMR 461 3001**

| Characteristics                                 | Conditions          | min                                       | typ                                                                     | max | Unit |
|-------------------------------------------------|---------------------|-------------------------------------------|-------------------------------------------------------------------------|-----|------|
| Over Current Protection, OCP                    | OCP threshold       | Set value                                 | 16                                                                      |     | A    |
|                                                 | OCP threshold range | PMBus configurable<br>IOUT_OC_FAULT_LIMIT | 0-18                                                                    |     | A    |
|                                                 | Fault response      | IOUT_OC_FAULT_RESPONSE                    | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3. |     |      |
| Over Temperature Protection, OTP                | OTP threshold       | Note 4                                    | 120                                                                     |     | °C   |
|                                                 | OTP threshold range | PMBus configurable<br>OT_FAULT_LIMIT      | -40...+120                                                              |     | °C   |
|                                                 | OTP hysteresis      | PMBus configurable                        | 15                                                                      |     | °C   |
|                                                 | Fault response      | OT_FAULT_RESPONSE                         | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3  |     |      |
| Over Temperature Shutdown (hardware controlled) | Threshold           | Note 4                                    | 150                                                                     |     | °C   |
|                                                 | Hysteresis          |                                           | 20                                                                      |     | °C   |
|                                                 | Accuracy            |                                           | ±20                                                                     |     | °C   |

|                |                                                     |                                                          |     |     |
|----------------|-----------------------------------------------------|----------------------------------------------------------|-----|-----|
| $V_{OL}$       | Logic output low signal level                       | SCL, SDA, SYNC, SALERT, PG<br>Sink/source current = 4 mA | 0.4 | V   |
| $V_{OH}$       | Logic output high signal level                      |                                                          | 2.8 | V   |
| $I_{OL}$       | Logic output low sink current                       |                                                          | 4   | mA  |
| $I_{OH}$       | Logic output high source current                    |                                                          | 4   | mA  |
| $V_{IL}$       | Logic input low threshold                           | SCL, SDA, CTRL, SYNC                                     | 0.8 | V   |
| $V_{IH}$       | Logic input high threshold                          |                                                          | 2   | V   |
| $I_{IL\_CTRL}$ | Logic input low sink current                        | CTRL                                                     | 0.5 | mA  |
| $I_{IL\_LEAK}$ | Logic leakage current                               | SCL, SDA, SYNC, SALERT, PG                               | 10  | uA  |
| $f_{SMB}$      | SMBus Operating frequency                           |                                                          | 400 | kHz |
| $T_{BUF}$      | SMBus Bus free time                                 | STOP bit to START bit<br>See section SMBus – Timing      | 1.3 | μs  |
| $t_{set}$      | SMBus SDA setup time from SCL                       |                                                          | 100 | ns  |
| $t_{hold}$     | SMBus SDA hold time from SCL                        |                                                          | 300 | ns  |
|                | SMBus START/STOP condition setup/hold time from SCL |                                                          | 600 | ns  |
| $T_{low}$      | SCL low period                                      |                                                          | 1.3 | μs  |
| $T_{high}$     | SCL high period                                     |                                                          | 0.6 | μs  |

|                                                |                                              |                                                       |                            |
|------------------------------------------------|----------------------------------------------|-------------------------------------------------------|----------------------------|
| Initialization time                            | From $V_I > V_{UVLO}$ to ready to be enabled | 23                                                    | ms                         |
| Soft-start On Delay Time Note 5                | Delay duration                               | 10                                                    | ms                         |
|                                                | Delay duration range                         | 1-145                                                 | ms                         |
|                                                | Delay set resolution                         | 0.6                                                   | ms                         |
|                                                | Delay set accuracy                           | ±0.5 x Delay set resolution                           | ms                         |
|                                                | Delay accuracy                               | ±0.8                                                  | ms                         |
| Soft-start Rise Time (0-100% of $V_O$ ) Note 5 | Ramp duration                                | 10                                                    | ms                         |
|                                                | Ramp duration range                          | 1 - (255 x Ramp set resolution)                       | ms                         |
|                                                | Ramp set resolution                          | Varies with $V_O$                                     | 0.4 1 ms                   |
|                                                | Ramp set accuracy                            | TON_RISE value sent versus read-back                  | ±0.5 x Ramp set resolution |
|                                                | Ramp time accuracy                           | Actual ramp duration versus TON_RISE read-back        | ±10 μs                     |
| Compensation Calibration                       | Signal duration                              | 5                                                     | ms                         |
|                                                | Signal level                                 | $V_O = 0.6 V$<br>$V_O = 1.2 - 3.3 V$<br>$V_O = 5.0 V$ | 3.5 2.5 2 % $V_O$          |

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

**BMR 461 3001**

| Characteristics | Conditions                                    | min                                                                 | typ | max | Unit             |
|-----------------|-----------------------------------------------|---------------------------------------------------------------------|-----|-----|------------------|
| Power Good , PG | Rising                                        |                                                                     | 90  |     | % V <sub>o</sub> |
|                 | Falling                                       |                                                                     | 85  |     | % V <sub>o</sub> |
|                 | Tracking mode<br>See section Voltage Tracking |                                                                     | 450 |     | mV               |
|                 | PG thresholds range<br>(Non-tracking only)    | PMBus configurable<br>POWER_GOOD_ON<br>POWER_GOOD_OFF               | 0   | 100 | % V <sub>o</sub> |
|                 | PG delay                                      | From V <sub>o</sub> reaching target to<br>PG assertion              |     | 11  | ms               |
|                 | Enabled compensation<br>calibration (default) | Tracking mode<br>See section Voltage Tracking                       |     | 20  | ms               |
|                 | PG delay                                      | From V <sub>o</sub> reaching PG rising<br>threshold to PG assertion |     | 0   | ms               |
|                 | Disabled compensation<br>calibration          | Tracking mode<br>See section Voltage Tracking                       |     | 20  | ms               |

|                              |                       |      |     |    |
|------------------------------|-----------------------|------|-----|----|
| Tracking Input Voltage Range | CS_VTRK pin<br>Note 6 | 0    | 1.2 | V  |
| Tracking Accuracy            |                       | -100 | 100 | mV |

|                     |                                       |                                                                              |      |                  |
|---------------------|---------------------------------------|------------------------------------------------------------------------------|------|------------------|
| Monitoring accuracy | Input voltage<br>READ_VIN             |                                                                              | ±3   | % V <sub>1</sub> |
|                     | Output voltage<br>READ_VOUT           |                                                                              | ±1   | % V <sub>o</sub> |
|                     | Output current<br>READ_IOUT<br>Note 7 | TP <sub>1</sub> = 0-95°C, V <sub>1</sub> = 4.5-14 V,<br>I <sub>o</sub> > 5 A | ±8.5 | % I <sub>o</sub> |
|                     |                                       | TP <sub>1</sub> = 0-95°C, V <sub>1</sub> = 4.5-14 V,<br>I <sub>o</sub> < 5 A | ±0.4 | A                |
|                     | Temperature<br>READ_TEMPERATURE_1     | Note 4                                                                       | -5   | 5 °C             |
|                     | Duty cycle<br>READ_DUTY_CYCLE         | Duty cycle < 10%                                                             | -3   | 3 %              |
|                     |                                       | Duty cycle > 10%                                                             | -1   | ±0.5 1 %         |

Note 1. Value refers to total (internal + external) effective output capacitance. Capacitance derating with V<sub>o</sub> typical for ceramic capacitors (bias characteristics) and temperature variations must be considered for the external capacitor(s). See section External Output Capacitors.

Note 2. A switching frequency close to 475 kHz should not be used since this frequency represents a boundary of two operational modes of the product. There are configuration changes to consider when changing the switching frequency, see section Switching Frequency.

Note 3. The restart interval is configurable between 100ms and 700ms in 100ms steps. Severe overcurrent faults occurring with V<sub>o</sub> > 2.5V may result in a restart interval of 1200 ms instead of the configured value. See operating conditions for other fault response alternatives.

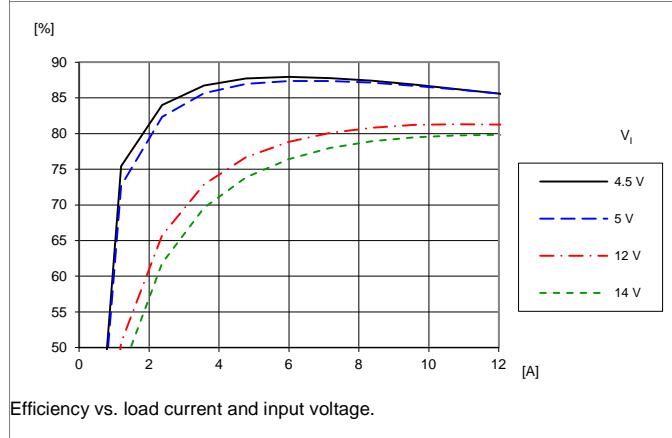
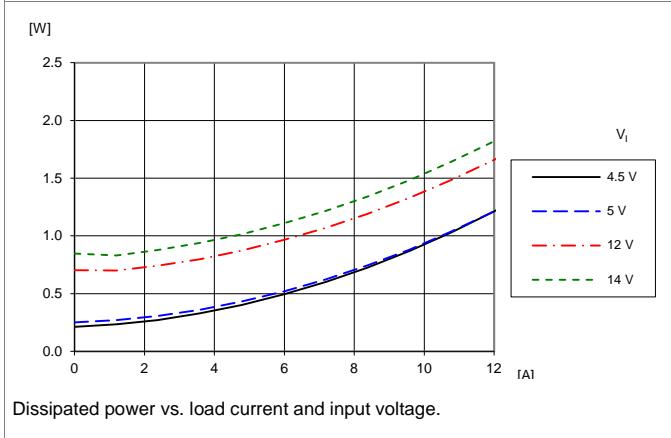
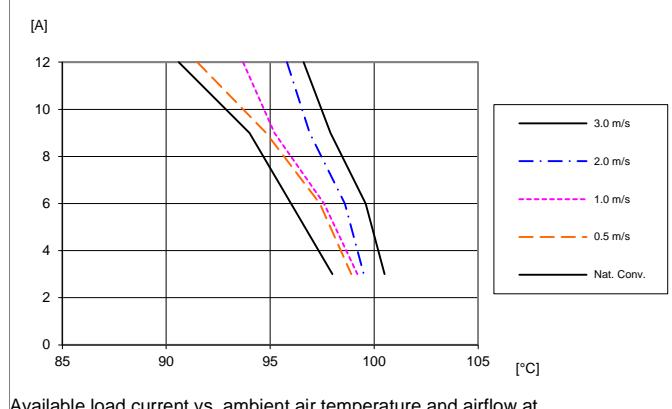
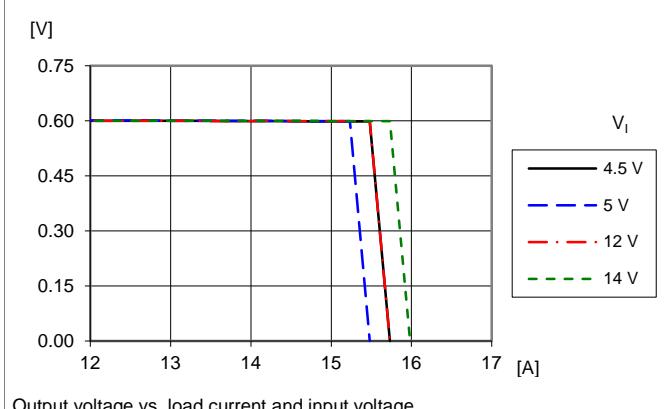
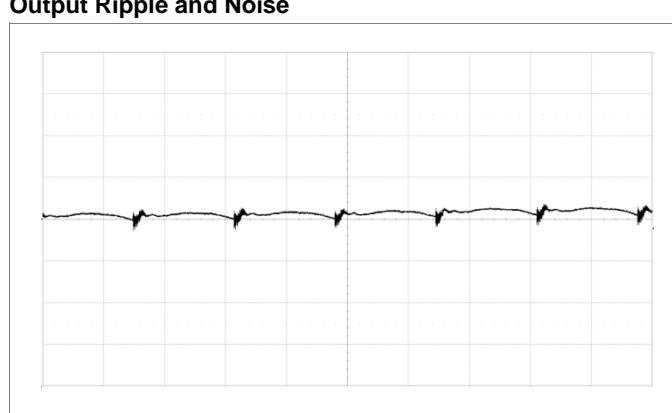
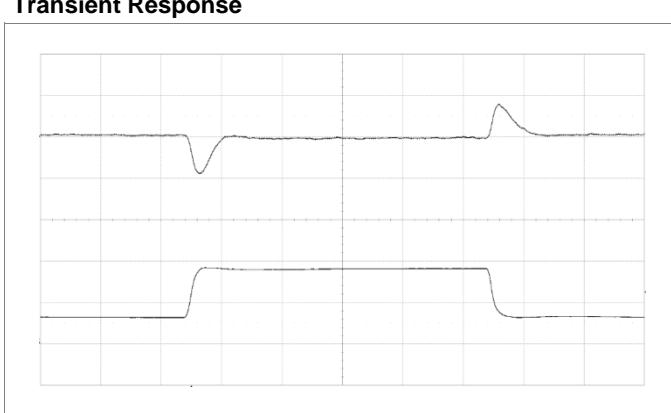
Note 4. Temperature measured internally at temperature position P3. See section Over Temperature Protection.

Note 5. Same specification applies for soft-stop and TOFF\_DELAY/TOFF\_FALL if enabled. The internal ramp and delay generators can only achieve certain discrete timing values. A written TON/OFF\_DELAY or TON/OFF\_RISE value will be rounded to the closest achievable value, thus a command read-back provides the actual set value. See section Soft-Start and Soft-Stop.

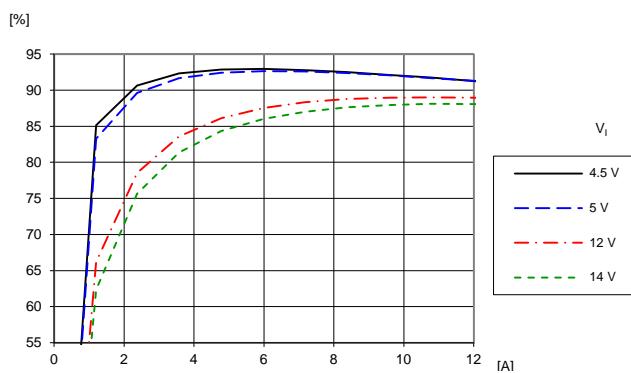
Note 6. Larger tracking input range is provided by external resistor divider, see section Voltage Tracking.

Note 7. At V<sub>o</sub> > 3.5V and V<sub>o</sub> / V<sub>1</sub> in the approximate range 55-70% there may be an additional current monitoring inaccuracy on the negative side up to -1 A.

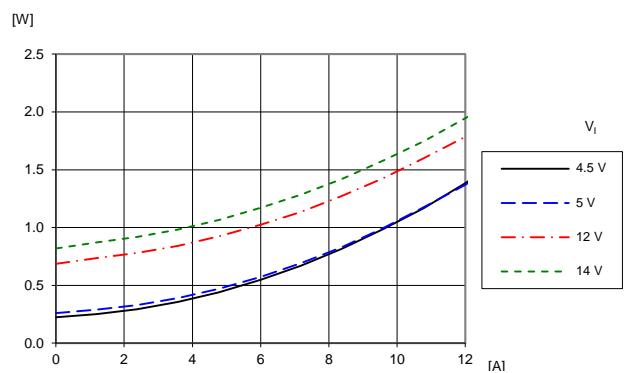
|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 0.6$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 3001****Efficiency****Power Dissipation****Output Current Derating****Current Limit Characteristics****Output Ripple and Noise****Transient Response**

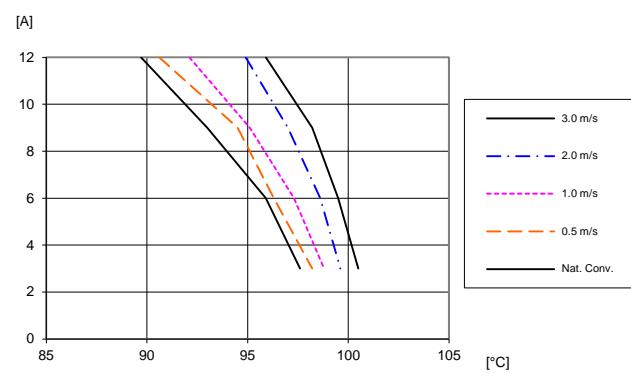
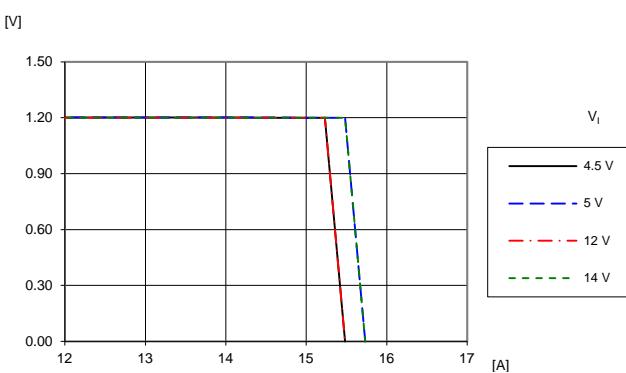
|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 1.2$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 3001****Efficiency**

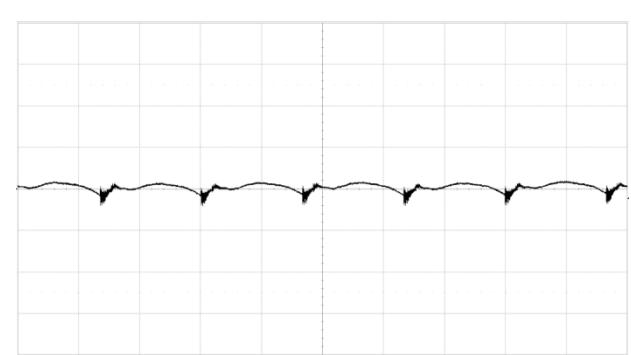
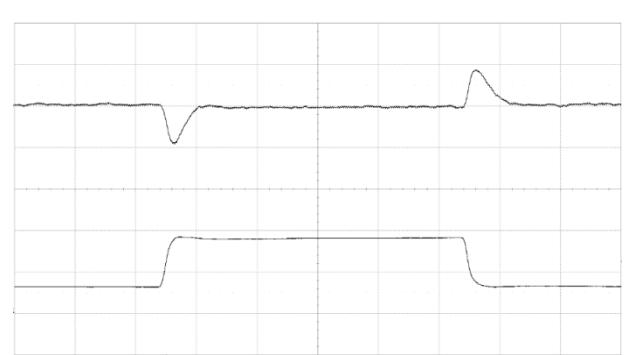
Efficiency vs. load current and input voltage.

**Power Dissipation**

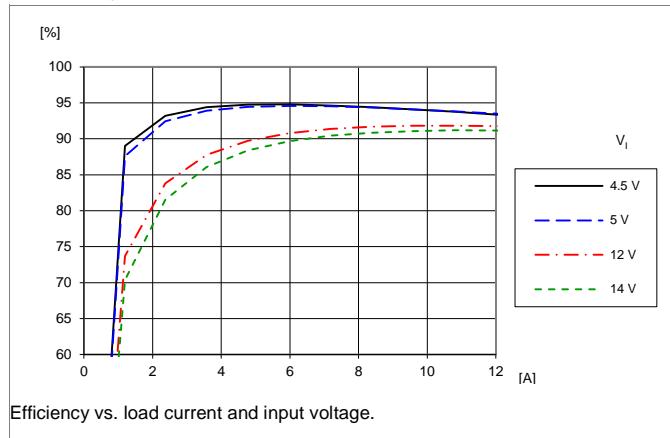
Dissipated power vs. load current and input voltage.

**Output Current Derating**Available load current vs. ambient air temperature and airflow at  $V_I = 12$  V. See section Thermal Consideration.**Current Limit Characteristics**

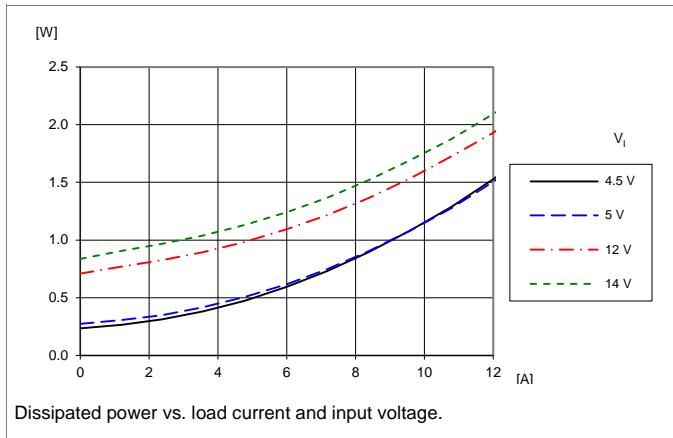
Output voltage vs. load current and input voltage.

**Output Ripple and Noise**Fundamental output voltage ripple at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F}$ ,  $I_O = 12$  A.  
Scale: 5 mV/div, 1 μs/div, 20 MHz bandwidth.  
See section Output Ripple and Noise.**Transient Response**Output voltage response to load current step change (3–9–3 A) at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F} + 270 \mu\text{F}/10\text{m}\Omega$ . Default compensation settings.  
Scale: 50 mV/div, 5 A/div, 50 μs/div.

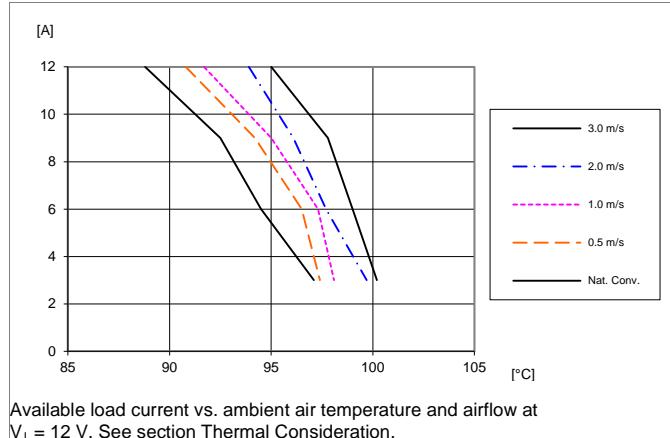
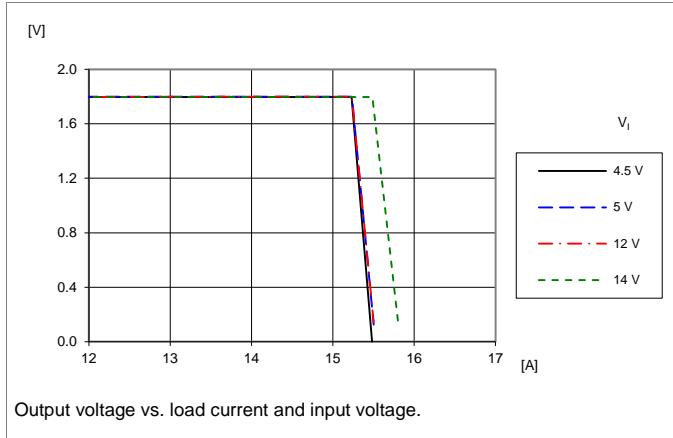
|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 1.8$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 3001****Efficiency**

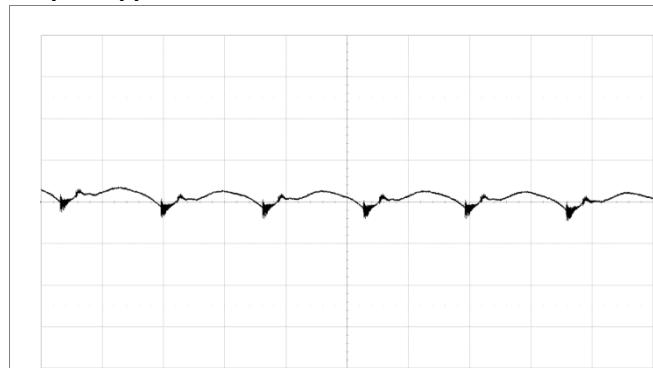
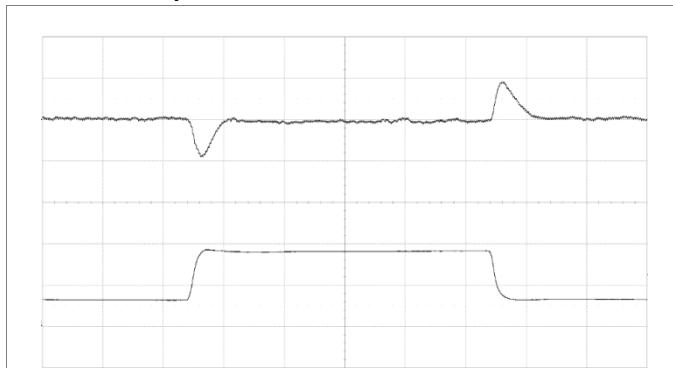
Efficiency vs. load current and input voltage.

**Power Dissipation**

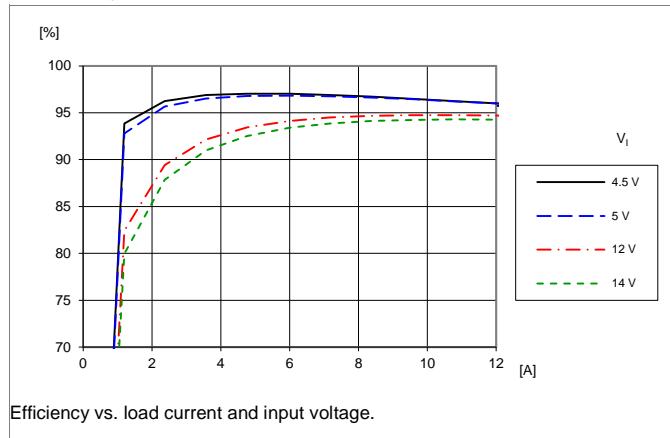
Dissipated power vs. load current and input voltage.

**Output Current Derating**Available load current vs. ambient air temperature and airflow at  $V_O = 12$  V. See section Thermal Consideration.**Current Limit Characteristics**

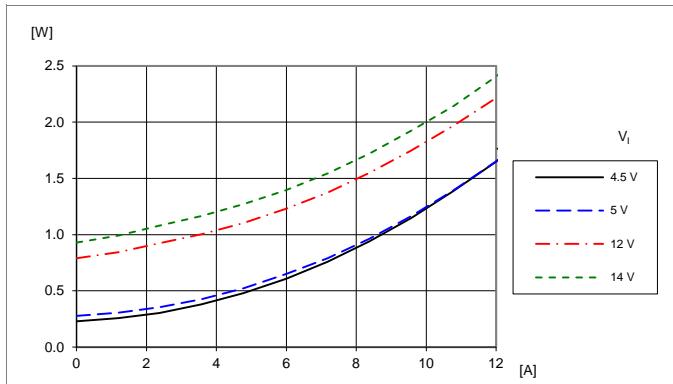
Output voltage vs. load current and input voltage.

**Output Ripple and Noise**Fundamental output voltage ripple at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F}$ ,  $I_O = 12$  A.  
Scale: 5 mV/div, 1 μs/div, 20 MHz bandwidth.  
See section Output Ripple and Noise.**Transient Response**Output voltage response to load current step change (3–9–3 A) at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F} + 270 \mu\text{F}/10\text{m}\Omega$ . Default compensation settings.  
Scale: 50 mV/div, 5 A/div, 50 μs/div.

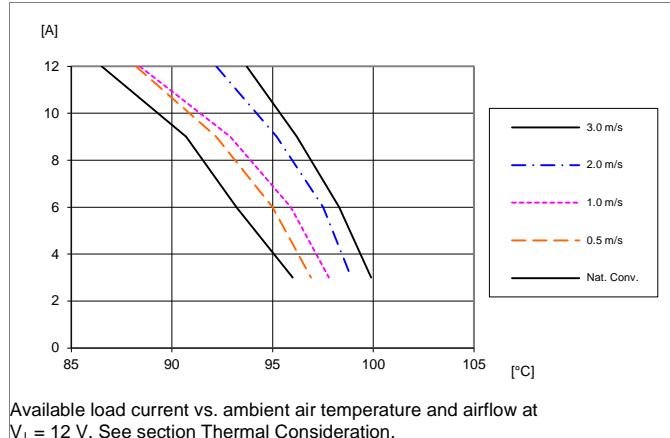
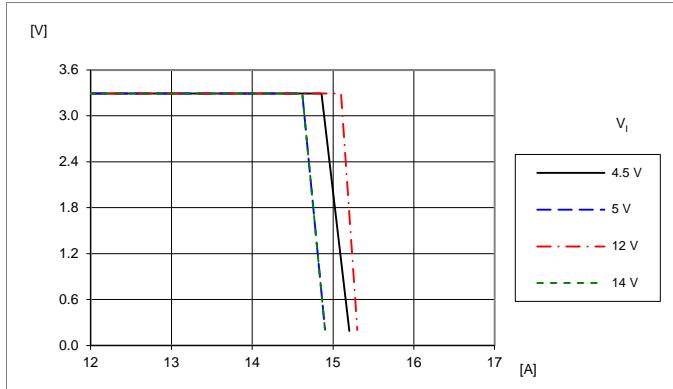
|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 3.3$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 3001****Efficiency**

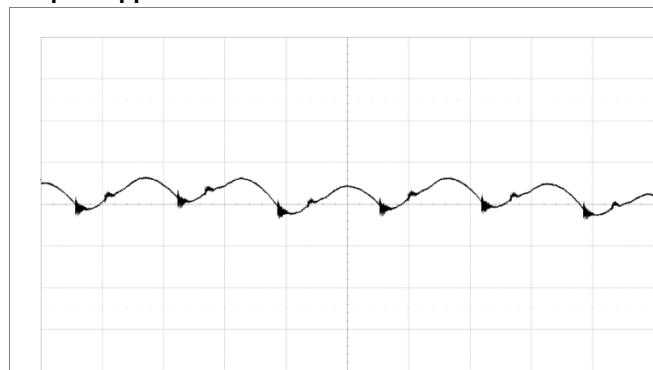
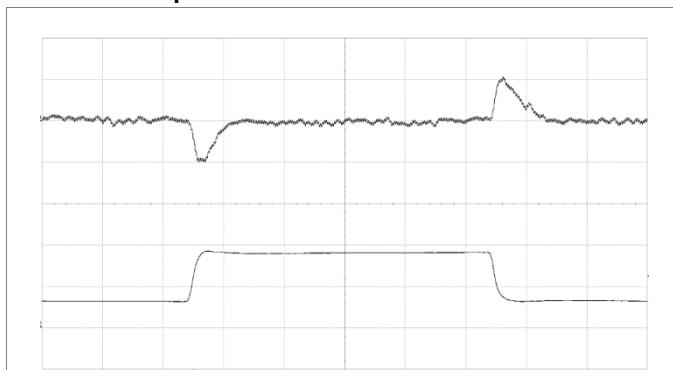
Efficiency vs. load current and input voltage.

**Power Dissipation**

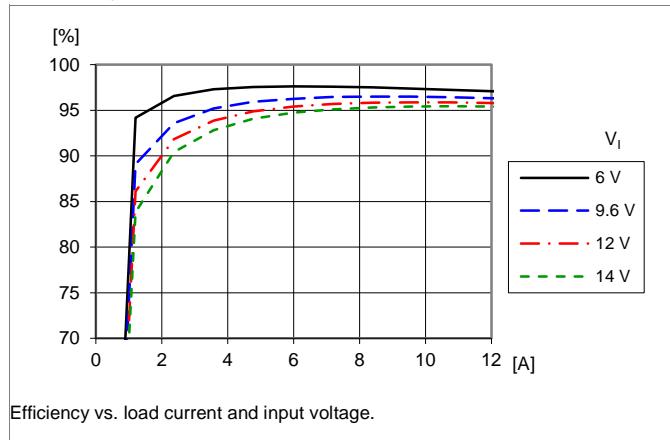
Dissipated power vs. load current and input voltage.

**Output Current Derating**Available load current vs. ambient air temperature and airflow at  $V_O = 12$  V. See section Thermal Consideration.**Current Limit Characteristics**

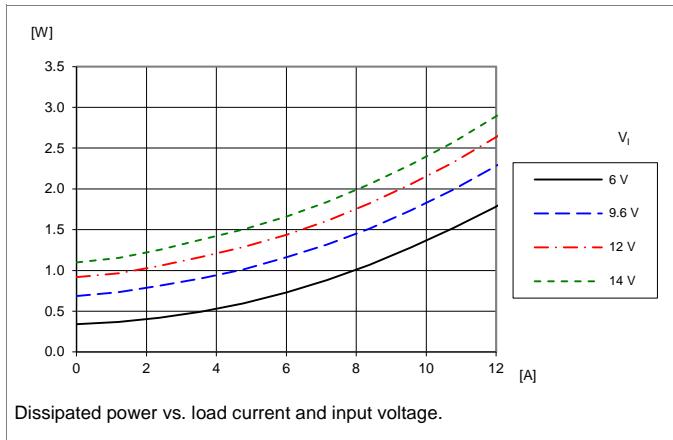
Output voltage vs. load current and input voltage.

**Output Ripple and Noise**Fundamental output voltage ripple at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F}$ ,  $I_O = 12$  A.  
Scale: 5 mV/div, 1 μs/div, 20 MHz bandwidth.  
See section Output Ripple and Noise.**Transient Response**Output voltage response to load current step change (3–9–3 A) at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F} + 270 \mu\text{F}/10\text{m}\Omega$ . Default compensation settings.  
Scale: 50 mV/div, 5 A/div, 50 μs/div.

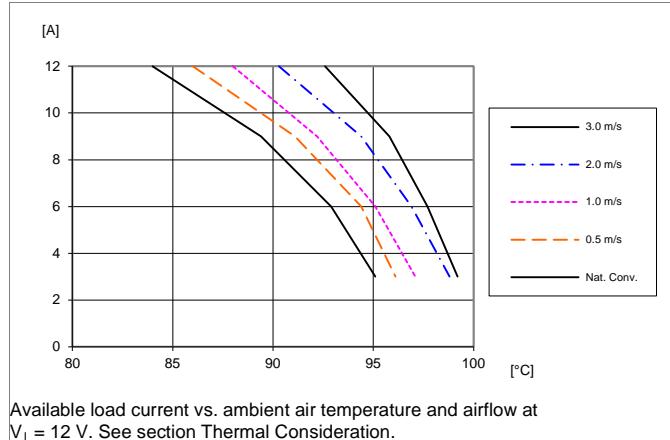
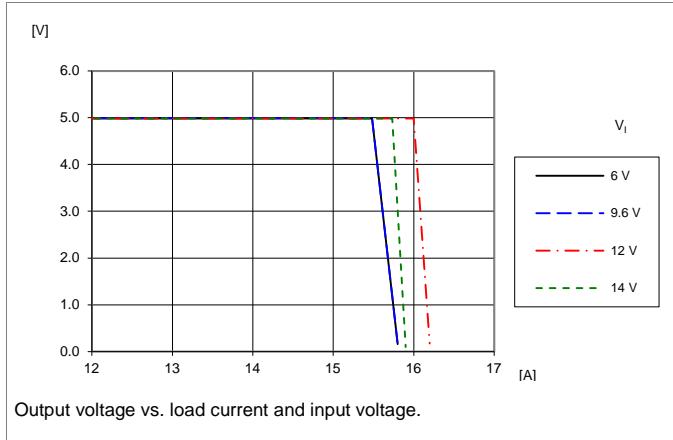
|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 5.0$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 3001****Efficiency**

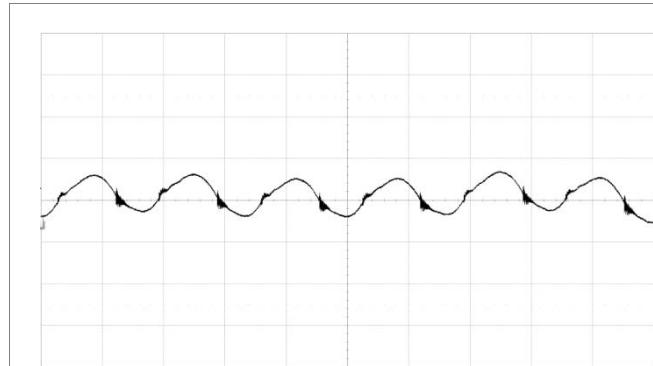
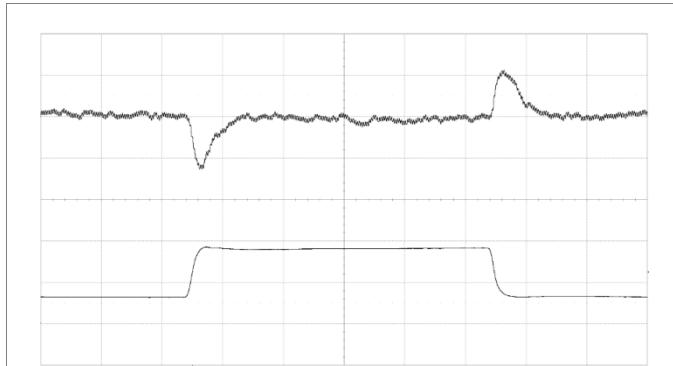
Efficiency vs. load current and input voltage.

**Power Dissipation**

Dissipated power vs. load current and input voltage.

**Output Current Derating**Available load current vs. ambient air temperature and airflow at  $V_O = 12$  V. See section Thermal Consideration.**Current Limit Characteristics**

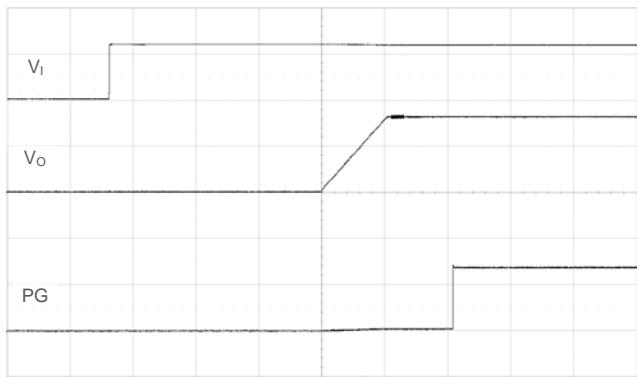
Output voltage vs. load current and input voltage.

**Output Ripple and Noise**Fundamental output voltage ripple at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F}$ ,  $I_O = 12$  A.  
Scale: 5 mV/div, 1 μs/div, 20 MHz bandwidth.  
See section Output Ripple and Noise.**Transient Response**Output voltage response to load current step change (3-9-3 A) at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F} + 270 \mu\text{F}/10\text{m}\Omega$ . Default compensation settings.  
Scale: 50 mV/div, 5 A/div, 50 μs/div.

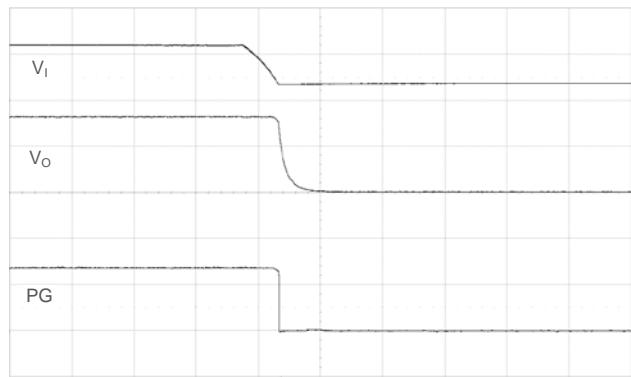
|                                          |
|------------------------------------------|
| <b>BMR461 series PoL Regulators</b>      |
| Input 4.5-14 V, Output up to 18 A / 60 W |

1/287 01 - BMR 461 Uen C Feb 2014

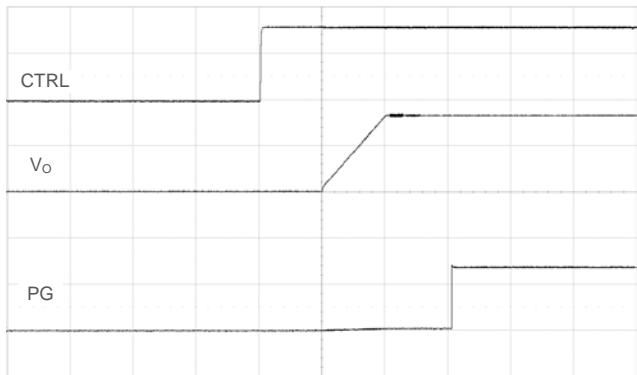
© Ericsson AB

**Typical Characteristics**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ ,  $V_O = 3.3\text{ V}$ **BMR 461 3001****Start-up by input source**

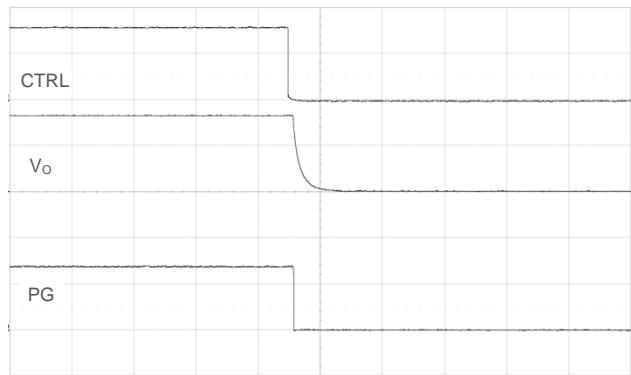
Start-up enabled by applying  $V_I$ .  $\text{TON\_DELAY} = \text{TON\_RISE} = 10\text{ ms}$  (default).  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ , PG pulled up to  $V_O$ .  
Scale: 10 or 2 V/div, 10 ms/div.

**Shut-down by input source**

Shut-down by removing  $V_I$ .  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ , PG pulled up to  $V_O$ .  
Scale: 10 or 2 V/div, 1 ms/div.

**Start-up by CTRL signal**

Start-up enabled by CTRL signal.  $\text{TON\_DELAY} = \text{TON\_RISE} = 10\text{ ms}$  (default).  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ , PG pulled up to  $V_O$ .  
Scale: 2 V/div, 10 ms/div.

**Shutdown by CTRL signal**

Shut-down by CTRL signal.  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ , PG pulled up to  $V_O$ .  
Scale: 2 V/div, 1 ms/div.

|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Electrical Specification****BMR 461 4001** $T_{P1} = -30$  to  $+95^\circ\text{C}$ ,  $V_I = 4.5$  to  $14$  V,  $V_I > V_O + 1.0$  VTypical values given at:  $T_{P1} = +25^\circ\text{C}$ ,  $V_I = 12.0$  V, max  $I_O$ , unless otherwise specified under Conditions.Default configuration file, 190 10-CDA 102 0519/001.  $V_O$  defined by pin strap.External  $C_{IN} = 47$   $\mu\text{F}$  ceramic + 270  $\mu\text{F}$ /10 m $\Omega$  electrolytic,  $C_{OUT} = 3 \times 100$   $\mu\text{F}$  + 0.1  $\mu\text{F}$  ceramic.

See Operating Information section for selection of capacitor types. Sense pins are connected to the output pins.

| Characteristics |                                                     | Conditions                                      | min                                             | typ            | max | Unit          |
|-----------------|-----------------------------------------------------|-------------------------------------------------|-------------------------------------------------|----------------|-----|---------------|
| $V_I$           | Input voltage                                       |                                                 | 4.5                                             |                | 14  | V             |
| $V_O$           | Output voltage without pin strap                    |                                                 |                                                 | 0              |     | V             |
|                 | Output voltage adjustment range                     |                                                 | 0.60                                            |                | 1.8 | V             |
|                 | Output voltage adjustment including PMBus margining |                                                 | 0.50                                            |                | 2.0 | V             |
|                 | Output voltage set-point resolution                 |                                                 |                                                 | 1.2            |     | mV            |
|                 | Output voltage accuracy                             | Including line, load, temp                      | -1                                              | 1              |     | % $V_O$       |
|                 | Internal resistance +S-/S to $V_{OUT}/GND$          |                                                 | 47                                              |                |     | $\Omega$      |
|                 | +S bias current                                     |                                                 | 50                                              |                |     | $\mu\text{A}$ |
|                 | -S bias current                                     |                                                 | -35                                             |                |     | $\mu\text{A}$ |
|                 | Line regulation                                     | $I_O = \text{max } I_O$                         | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V | 3<br>3<br>5    |     | mV            |
|                 | Load regulation                                     | $I_O = 0 - 100\%$                               | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V | 2<br>2<br>1    |     | mV            |
| $V_{Oac}$       | Output ripple & noise (up to 20 MHz)                | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V |                                                 | 10<br>10<br>11 |     | mVp-p         |

|           |                                   |                                                        |   |                      |   |
|-----------|-----------------------------------|--------------------------------------------------------|---|----------------------|---|
| $I_O$     | Output current                    |                                                        | 0 | 18                   | A |
| $I_S$     | Static input current at max $I_O$ | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V        |   | 0.38<br>0.70<br>1.00 | A |
| $I_{lim}$ | Current limit threshold           |                                                        |   | 22<br>23             | A |
| $I_{sc}$  | Short circuit current             | RMS, hiccup mode,<br>$V_O = 3.3$ V, 4 m $\Omega$ short |   | 3                    | A |

|        |                               |                         |                                                 |                      |   |
|--------|-------------------------------|-------------------------|-------------------------------------------------|----------------------|---|
| $\eta$ | Efficiency                    | 50% of max $I_O$        | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V | 81.0<br>88.7<br>91.6 | % |
|        |                               | $I_O = \text{max } I_O$ | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V | 79.3<br>87.5<br>90.5 | % |
| $d$    | Power disipation at max $I_O$ |                         | $V_O = 0.6$ V<br>$V_O = 1.2$ V<br>$V_O = 1.8$ V | 2.80<br>3.10<br>3.40 | W |

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

**BMR 461 4001**

| Characteristics |                             | Conditions | min                                             | typ                  | max | Unit    |
|-----------------|-----------------------------|------------|-------------------------------------------------|----------------------|-----|---------|
| $P_{li}$        | Input idling power          | $I_o = 0$  | $V_o = 0.6 V$<br>$V_o = 1.2 V$<br>$V_o = 1.8 V$ | 0.70<br>0.70<br>0.71 |     | W       |
| $P_{CTRL}$      | Input standby power         |            | Turned off with CTRL-pin                        | 0.25                 |     | W       |
| $C_i$           | Internal input capacitance  |            | $V_i = 0 V$                                     | 47                   |     | $\mu F$ |
| $C_o$           | Internal output capacitance |            | $V_o = 0 V$<br>$V_o = 1.2 V$<br>$V_o = 1.8 V$   | 47<br>39<br>35       |     | $\mu F$ |
| $C_{OUT}$       | Total output capacitance    |            | Effective capacitance<br>Note 1                 | 55                   |     | $\mu F$ |

|           |                                       |                                                                                                               |    |         |
|-----------|---------------------------------------|---------------------------------------------------------------------------------------------------------------|----|---------|
| $V_{tr1}$ | Load transient peak voltage deviation | Load step 25-75-25% of<br>max $I_o$ , $di/dt = 1.5 A/\mu s$<br>$C_o=3x100 \mu F + 270 \mu F$<br>$V_o = 1.8 V$ | 70 | mV      |
| $t_{tr1}$ | Load transient recovery time          |                                                                                                               | 22 | $\mu s$ |

|          |                                        |                                                  |          |              |
|----------|----------------------------------------|--------------------------------------------------|----------|--------------|
| $F_{sw}$ | Switching frequency                    |                                                  | 600      | kHz          |
|          | Switching frequency range              | PMBus configurable<br>FREQUENCY_SWITCH<br>Note 2 | 300-1000 | kHz          |
|          | Switching frequency set-point accuracy |                                                  | -10      | $\pm 5$ 10 % |
|          | External Sync Duty Cycle               |                                                  | 40       | 60 %         |
|          | Input Clock Frequency Drift Tolerance  | External clock source                            | -10      | 10 %         |

|                                                       |                       |                                                  |                                                                        |         |     |         |
|-------------------------------------------------------|-----------------------|--------------------------------------------------|------------------------------------------------------------------------|---------|-----|---------|
| Input Under Voltage Lockout (hardware controlled)     | Threshold, $V_{UVLO}$ | Rising edge                                      | 3.8                                                                    | 4.1     | 4.4 | V       |
|                                                       | Hysteresis            |                                                  |                                                                        | 0.24    |     | V       |
| Input Over Voltage Lockout (hardware controlled)      | Threshold, $V_{OVLO}$ | Input rising                                     | 14.3                                                                   | 15.2    | 16  | V       |
|                                                       | Threshold             |                                                  |                                                                        | 4.35    |     | V       |
| Input Turn-On Voltage                                 | Threshold range       | PMBus configurable<br>VIN_ON                     |                                                                        | 0-14.7  |     | V       |
|                                                       | Threshold             |                                                  |                                                                        | 3.8     |     | V       |
| Input Turn-Off Voltage                                | Threshold range       | PMBus configurable<br>VIN_OFF                    |                                                                        | 0-14.7  |     | V       |
|                                                       | IUPV threshold        |                                                  |                                                                        | 4.1     |     | V       |
| Input Under/Over Voltage Protection, IUPV/ IOVP       | IUPV threshold range  | PMBus configurable<br>VIN_UV_FAULT_LIMIT         |                                                                        | 0-14.7  |     | V       |
|                                                       | IOVP threshold        |                                                  |                                                                        | 14.4    |     | V       |
|                                                       | IOVP threshold range  | PMBus configurable<br>VIN_OV_FAULT_LIMIT         |                                                                        | 0-14.7  |     | V       |
|                                                       | Set point accuracy    |                                                  | -150                                                                   | 150     |     | mV      |
|                                                       | Fault response        | VIN_UV_FAULT_RESPONSE<br>VIN_OV_FAULT_RESPONSE   | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3 |         |     |         |
|                                                       | UVP threshold         |                                                  |                                                                        | 85      |     | % $V_o$ |
| Output voltage Over/Under Voltage Protection, OVP/UVP | UVP threshold range   | PMBus configurable<br>VOUT_UV_FAULT_LIMIT        |                                                                        | 0-100   |     | % $V_o$ |
|                                                       | OVP threshold         |                                                  |                                                                        | 115     |     | % $V_o$ |
|                                                       | OVP threshold range   | PMBus configurable<br>VOUT_OV_FAULT_LIMIT        |                                                                        | 100-115 |     | % $V_o$ |
|                                                       | Fault response        | VOUT_UV_FAULT_RESPONSE<br>VOUT_OV_FAULT_RESPONSE | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3 |         |     |         |

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

**BMR 461 4001**

| Characteristics                                 |                     | Conditions                             | min                                                                     | typ        | max | Unit |
|-------------------------------------------------|---------------------|----------------------------------------|-------------------------------------------------------------------------|------------|-----|------|
| Over Current Protection, OCP                    | OCP threshold       | Set value                              |                                                                         | 24         |     | A    |
|                                                 | OCP threshold range | PMBus configurable IOUT_OC_FAULT_LIMIT |                                                                         | 0-24       |     | A    |
|                                                 | Fault response      | IOUT_OC_FAULT_RESPONSE                 | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3. |            |     |      |
| Over Temperature Protection, OTP                | OTP threshold       | Note 4                                 |                                                                         | 120        |     | °C   |
|                                                 | OTP threshold range | PMBus configurable OT_FAULT_LIMIT      |                                                                         | -40...+120 |     | °C   |
|                                                 | OTP hysteresis      | PMBus configurable                     |                                                                         | 15         |     | °C   |
|                                                 | Fault response      | OT_FAULT_RESPONSE                      | Shutdown, make continuous restarts at 700 ms interval (hiccup). Note 3  |            |     |      |
| Over Temperature Shutdown (hardware controlled) | Threshold           | Note 4                                 |                                                                         | 150        |     | °C   |
|                                                 | Hysteresis          |                                        |                                                                         | 20         |     | °C   |
|                                                 | Accuracy            |                                        |                                                                         | ±20        |     | °C   |

|                |                                                     |                                                          |     |     |
|----------------|-----------------------------------------------------|----------------------------------------------------------|-----|-----|
| $V_{OL}$       | Logic output low signal level                       | SCL, SDA, SYNC, SALERT, PG<br>Sink/source current = 4 mA | 0.4 | V   |
| $V_{OH}$       | Logic output high signal level                      |                                                          | 2.8 | V   |
| $I_{OL}$       | Logic output low sink current                       |                                                          | 4   | mA  |
| $I_{OH}$       | Logic output high source current                    |                                                          | 4   | mA  |
| $V_{IL}$       | Logic input low threshold                           | SCL, SDA, CTRL, SYNC                                     | 0.8 | V   |
| $V_{IH}$       | Logic input high threshold                          |                                                          | 2   | V   |
| $I_{IL\_CTRL}$ | Logic input low sink current                        | CTRL                                                     | 0.5 | mA  |
| $I_{I\_LEAK}$  | Logic leakage current                               | SCL, SDA, SYNC, SALERT, PG                               | 10  | uA  |
| $f_{SMB}$      | SMBus Operating frequency                           |                                                          | 400 | kHz |
| $T_{BUF}$      | SMBus Bus free time                                 | STOP bit to START bit<br>See section SMBus – Timing      | 1.3 | μs  |
| $t_{set}$      | SMBus SDA setup time from SCL                       |                                                          | 100 | ns  |
| $t_{hold}$     | SMBus SDA hold time from SCL                        |                                                          | 300 | ns  |
|                | SMBus START/STOP condition setup/hold time from SCL |                                                          | 600 | ns  |
| $T_{low}$      | SCL low period                                      |                                                          | 1.3 | μs  |
| $T_{high}$     | SCL high period                                     |                                                          | 0.6 | μs  |

|                                                |                      |                                                  |                                 |         |
|------------------------------------------------|----------------------|--------------------------------------------------|---------------------------------|---------|
| Initialization time                            |                      | From $V_I > V_{UVLO}$ to ready to be enabled     | 23                              | ms      |
| Soft-start On Delay Time Note 5                | Delay duration       |                                                  | 10                              | ms      |
|                                                | Delay duration range | PMBus configurable TON_DELAY                     | 1-145                           | ms      |
|                                                | Delay set resolution |                                                  | 0.6                             | ms      |
|                                                | Delay set accuracy   | TON_DELAY value sent versus read-back            | ±0.5 x Delay set resolution     | ms      |
|                                                | Delay accuracy       | Actual delay duration versus TON_DELAY read-back | ±0.8                            | ms      |
| Soft-start Rise Time (0-100% of $V_O$ ) Note 5 | Ramp duration        |                                                  | 10                              | ms      |
|                                                | Ramp duration range  | PMBus configurable TON_RISE                      | 1 - (255 x Ramp set resolution) | ms      |
|                                                | Ramp set resolution  | Varies with $V_O$                                | 0.4                             | 1       |
|                                                | Ramp set accuracy    | TON_RISE value sent versus read-back             | ±0.5 x Ramp set resolution      | ms      |
|                                                | Ramp time accuracy   | Actual ramp duration versus TON_RISE read-back   | ±10                             | μs      |
| Compensation Calibration                       | Signal duration      |                                                  | 5                               | ms      |
|                                                | Signal level         | $V_O = 0.6$ V<br>$V_O = 1.2 - 1.8$ V             | 3.5<br>2.5                      | % $V_O$ |

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

**BMR 461 4001**

| Characteristics | Conditions                                    | min                                                                 | typ | max | Unit             |
|-----------------|-----------------------------------------------|---------------------------------------------------------------------|-----|-----|------------------|
| Power Good , PG | Rising                                        |                                                                     | 90  |     | % V <sub>o</sub> |
|                 | Falling                                       |                                                                     | 85  |     | % V <sub>o</sub> |
|                 | Tracking mode<br>See section Voltage Tracking |                                                                     | 450 |     | mV               |
|                 | PG thresholds range<br>(Non-tracking only)    | PMBus configurable<br>POWER_GOOD_ON<br>POWER_GOOD_OFF               | 0   | 100 | % V <sub>o</sub> |
|                 | PG delay                                      | From V <sub>o</sub> reaching target to<br>PG assertion              |     | 11  | ms               |
|                 |                                               | Tracking mode<br>See section Voltage Tracking                       |     | 20  | ms               |
|                 | PG delay                                      | From V <sub>o</sub> reaching PG rising<br>threshold to PG assertion |     | 0   | ms               |
|                 |                                               | Tracking mode<br>See section Voltage Tracking                       |     | 20  | ms               |

|                              |                       |      |     |    |
|------------------------------|-----------------------|------|-----|----|
| Tracking Input Voltage Range | CS_VTRK pin<br>Note 6 | 0    | 1.2 | V  |
| Tracking Accuracy            |                       | -100 | 100 | mV |

|                     |                                       |                                                                              |      |                  |    |
|---------------------|---------------------------------------|------------------------------------------------------------------------------|------|------------------|----|
| Monitoring accuracy | Input voltage<br>READ_VIN             |                                                                              | ±3   | % V <sub>1</sub> |    |
|                     | Output voltage<br>READ_VOUT           |                                                                              | ±1   | % V <sub>o</sub> |    |
|                     | Output current<br>READ_IOUT<br>Note 7 | TP <sub>1</sub> = 0-95°C, V <sub>1</sub> = 4.5-14 V,<br>I <sub>o</sub> > 5 A | ±8.5 | % I <sub>o</sub> |    |
|                     |                                       | TP <sub>1</sub> = 0-95°C, V <sub>1</sub> = 4.5-14 V,<br>I <sub>o</sub> < 5 A | ±0.4 | A                |    |
|                     | Temperature<br>READ_TEMPERATURE_1     | Note 4                                                                       | -5   | 5                | °C |
|                     | Duty cycle<br>READ_DUTY_CYCLE         | Duty cycle < 10%                                                             | -3   | 3                | %  |
|                     |                                       | Duty cycle > 10%                                                             | -1   | ±0.5             | 1  |

Note 1. Value refers to total (internal + external) effective output capacitance. Capacitance derating with V<sub>o</sub> typical for ceramic capacitors (bias characteristics) and temperature variations must be considered for the external capacitor(s). See section External Output Capacitors.

Note 2. A switching frequency close to 475 kHz should not be used since this frequency represents a boundary of two operational modes of the product. There are configuration changes to consider when changing the switching frequency, see section Switching Frequency.

Note 3. The restart interval is configurable between 100ms and 700ms in 100ms steps. Severe overcurrent faults occurring with V<sub>o</sub> > 2.5V may result in a restart interval of 1200 ms instead of the configured value. See operating conditions for other fault response alternatives.

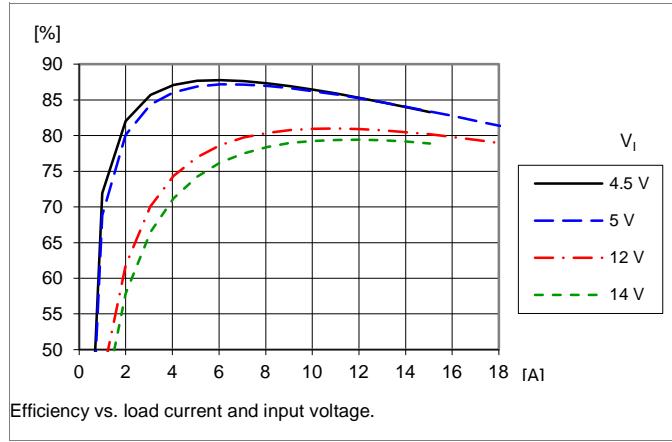
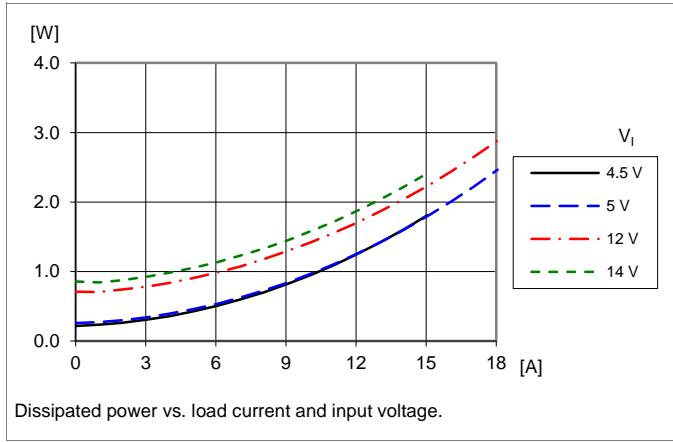
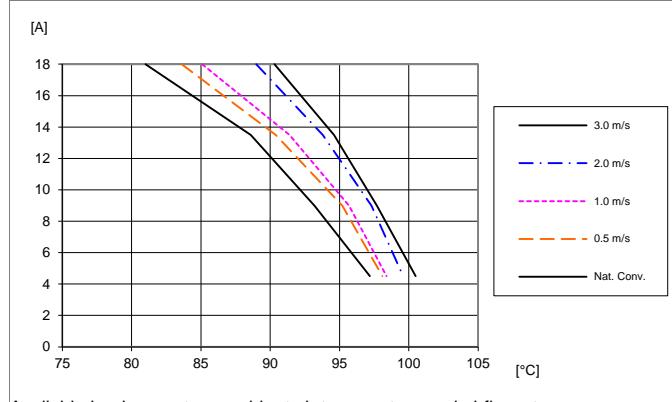
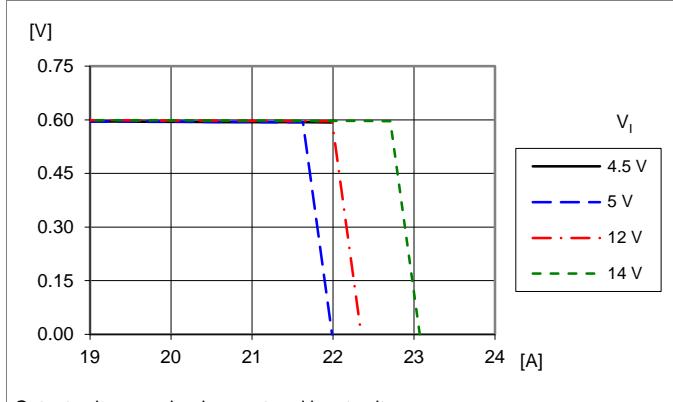
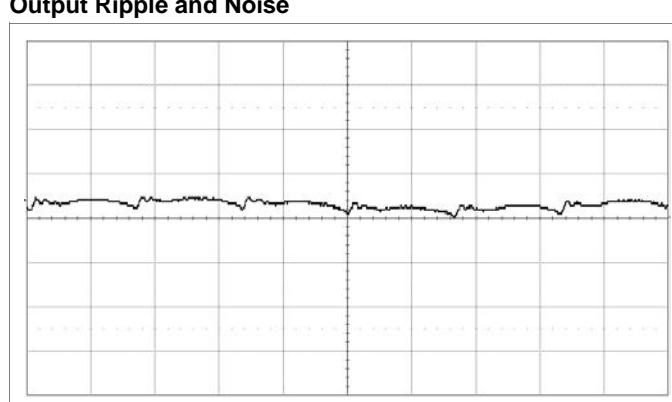
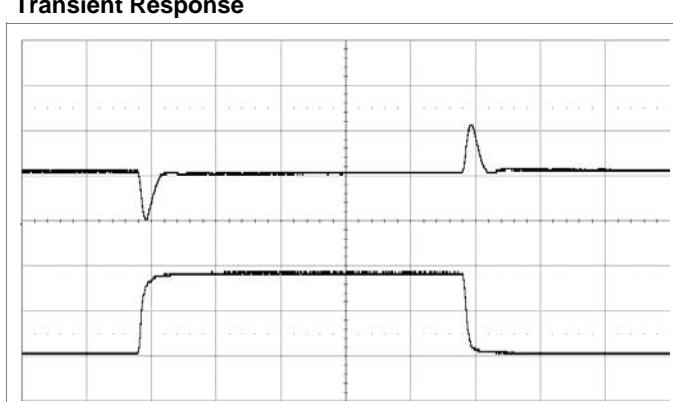
Note 4. Temperature measured internally at temperature position P3. See section Over Temperature Protection.

Note 5. Same specification applies for soft-stop and TOFF\_DELAY/TOFF\_FALL if enabled. The internal ramp and delay generators can only achieve certain discrete timing values. A written TON/OFF\_DELAY or TON/OFF\_RISE value will be rounded to the closest achievable value, thus a command read-back provides the actual set value. See section Soft-Start and Soft-Stop.

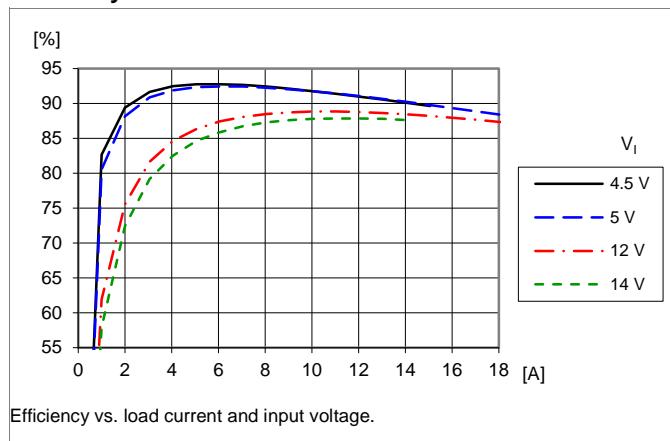
Note 6. Larger tracking input range is provided by external resistor divider, see section Voltage Tracking.

Note 7. At V<sub>o</sub> > 3.5V and V<sub>o</sub> / V<sub>1</sub> in the approximate range 55-70% there may be an additional current monitoring inaccuracy on the negative side up to -1 A.

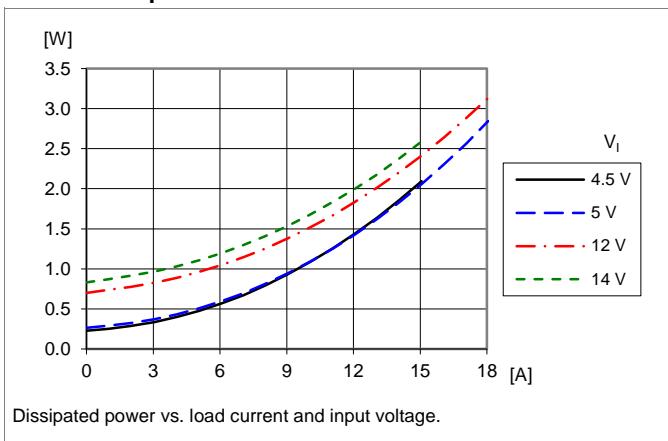
|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 0.6$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 4001****Efficiency****Power Dissipation****Output Current Derating****Current Limit Characteristics****Output Ripple and Noise****Transient Response**

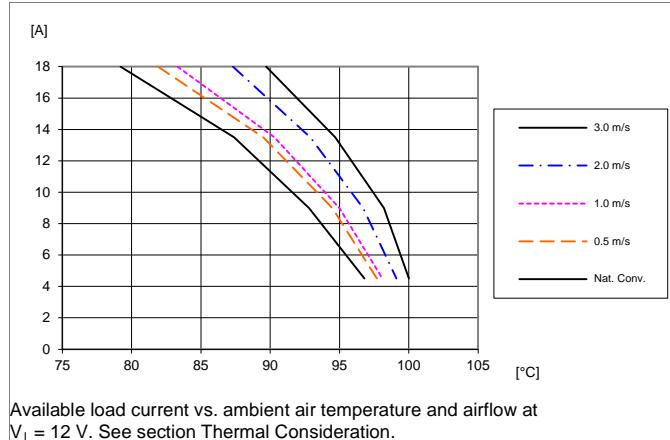
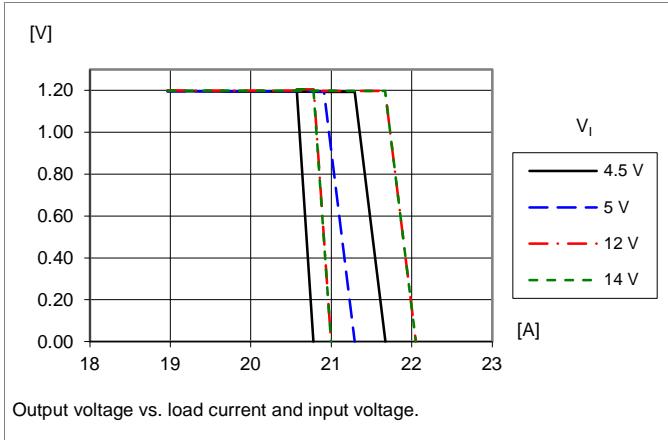
|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 1.2$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 4001****Efficiency**

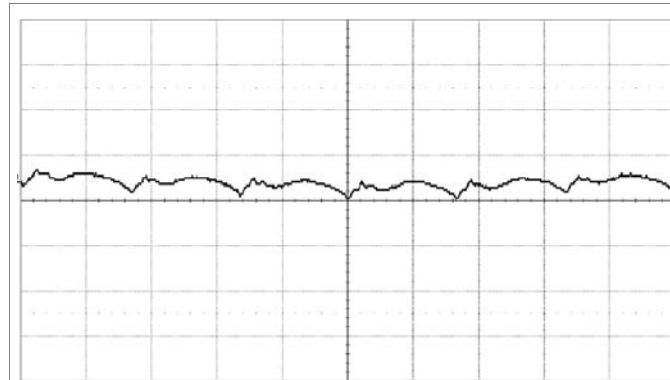
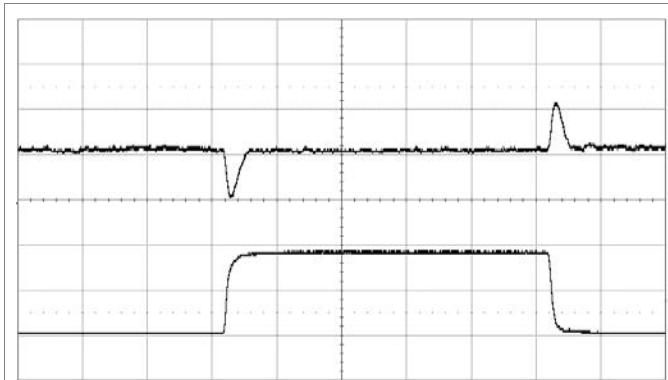
Efficiency vs. load current and input voltage.

**Power Dissipation**

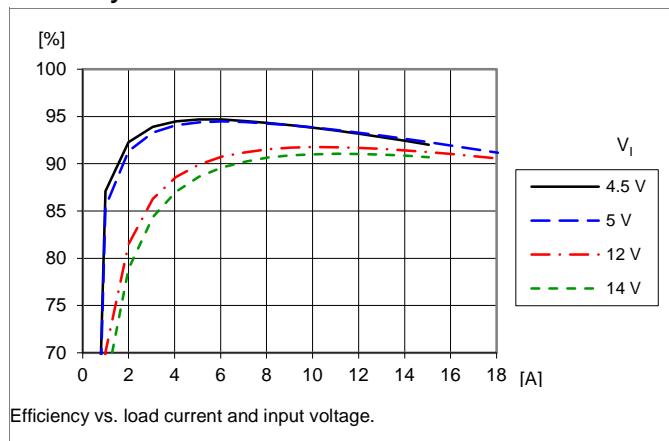
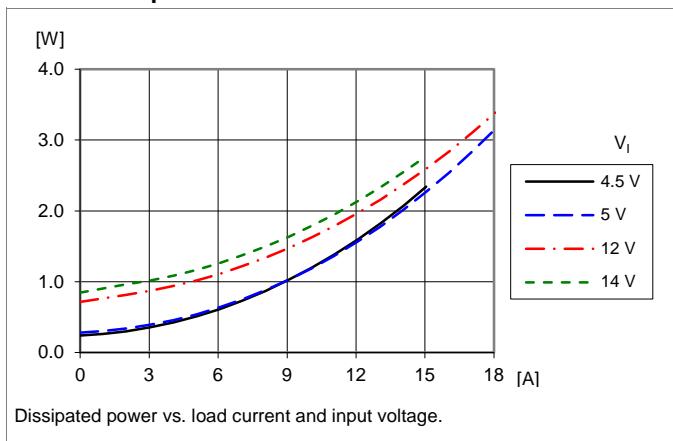
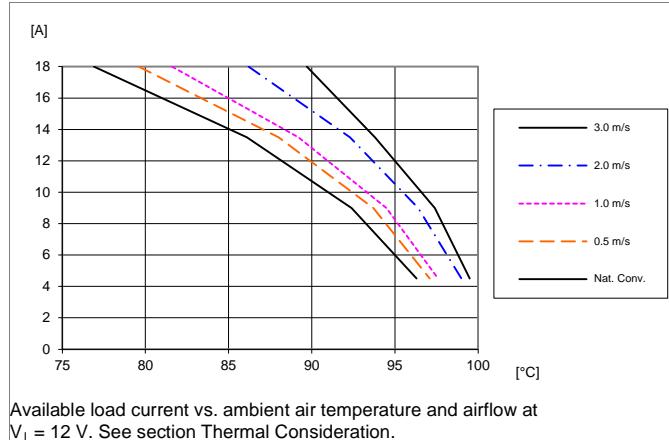
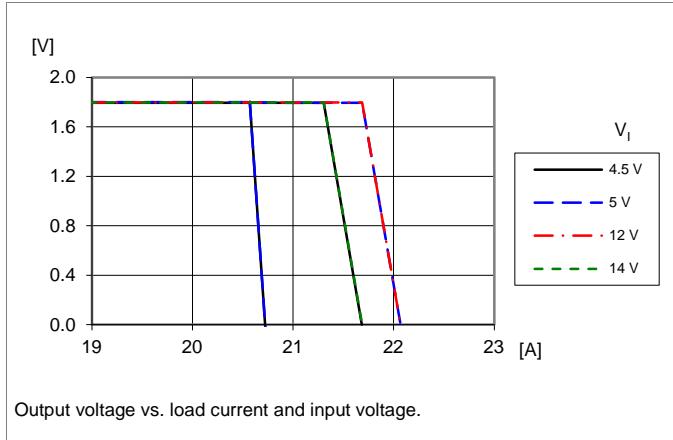
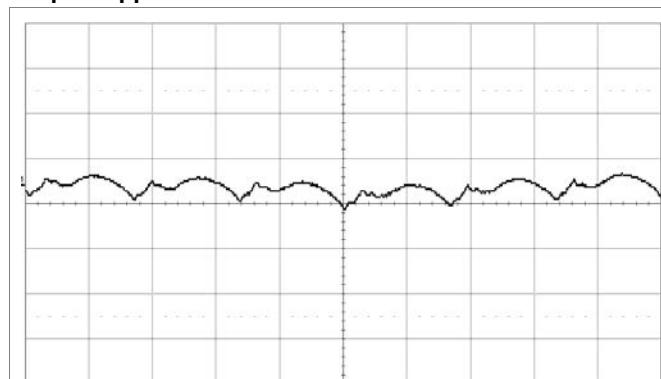
Dissipated power vs. load current and input voltage.

**Output Current Derating**Available load current vs. ambient air temperature and airflow at  $V_I = 12$  V. See section Thermal Consideration.**Current Limit Characteristics**

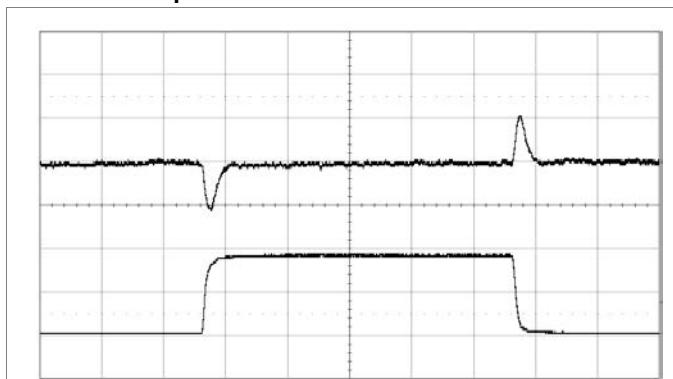
Output voltage vs. load current and input voltage.

**Output Ripple and Noise**Fundamental output voltage ripple at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F}$ ,  $I_O = 18$  A.  
Scale: 5 mV/div, 1  $\mu\text{s}/\text{div}$ , 20 MHz bandwidth.  
See section Output Ripple and Noise.**Transient Response**Output voltage response to load current step change (4.5–13.5–4.5 A) at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F} + 270 \mu\text{F}/10\text{m}\Omega$ . Default compensation settings.  
Scale: 50 mV/div, 5 A/div, 100  $\mu\text{s}/\text{div}$ .

|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Typical Characteristics,  $V_O = 1.8$  V**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ **BMR 461 4001****Efficiency****Power Dissipation****Output Current Derating****Current Limit Characteristics****Output Ripple and Noise**

Fundamental output voltage ripple at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F}$ ,  $I_O = 18$  A.  
Scale: 5 mV/div, 1 μs/div, 20 MHz bandwidth.  
See section Output Ripple and Noise.

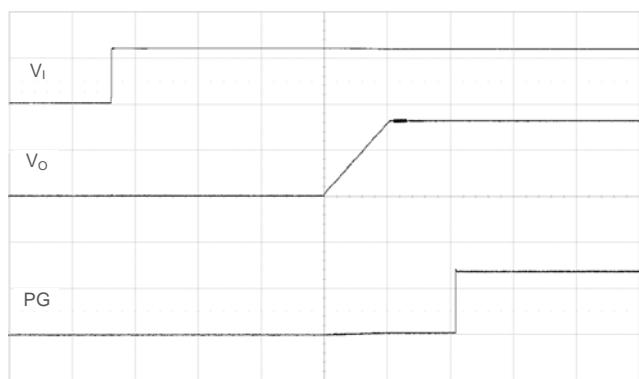
**Transient Response**

Output voltage response to load current step change (4.5–13.5–4.5 A) at  $V_I = 12$  V,  $C_O = 3 \times 100 \mu\text{F} + 270 \mu\text{F}/10\text{m}\Omega$ . Default compensation settings.  
Scale: 50 mV/div, 5 A/div, 100 μs/div.

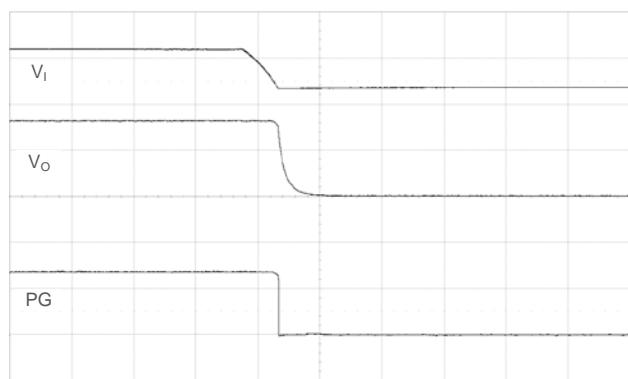
|                                          |
|------------------------------------------|
| <b>BMR461 series PoL Regulators</b>      |
| Input 4.5-14 V, Output up to 18 A / 60 W |

1/287 01 - BMR 461 Uen C Feb 2014

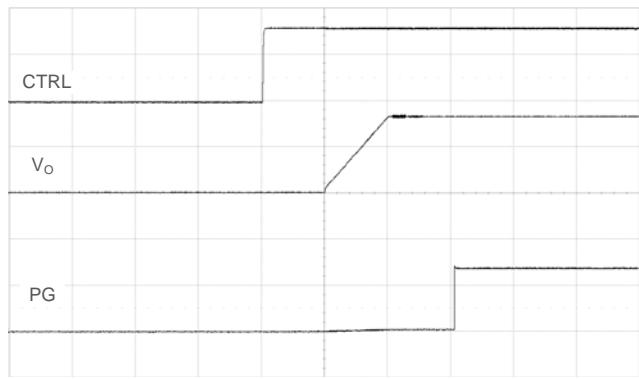
© Ericsson AB

**Typical Characteristics**Default Configuration,  $T_{P1} = +25^\circ\text{C}$ ,  $V_O = 1.8\text{ V}$ **BMR 461 4001****Start-up by input source**

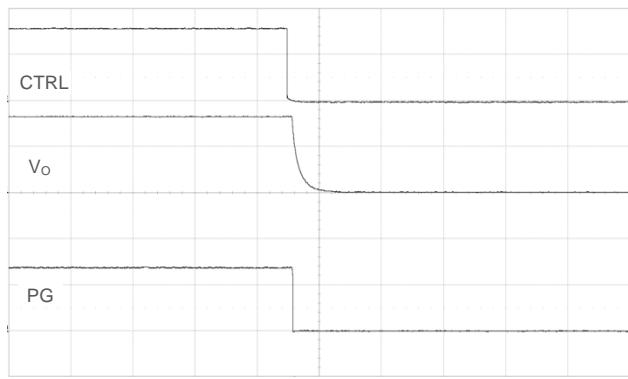
Start-up enabled by applying  $V_I$ .  $TON\_DELAY = TON\_RISE = 10\text{ ms}$  (default).  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ ,  $PG$  pulled up to  $V_O$ .  
Scale: 10 or 1 V/div, 10 ms/div.

**Shut-down by input source**

Shut-down by removing  $V_I$ .  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ ,  $PG$  pulled up to  $V_O$ .  
Scale: 10 or 1 V/div, 1 ms/div.

**Start-up by CTRL signal**

Start-up enabled by CTRL signal.  $TON\_DELAY = TON\_RISE = 10\text{ ms}$  (default).  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ ,  $PG$  pulled up to  $V_O$ .  
Scale: 2 or 1 V/div, 10 ms/div.

**Shutdown by CTRL signal**

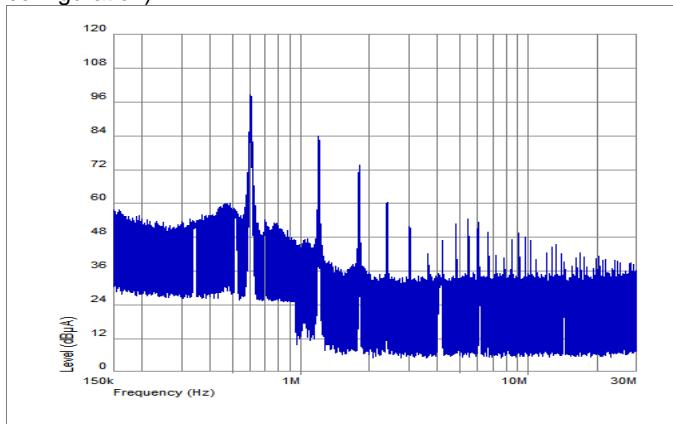
Shut-down by CTRL signal.  
 $V_I = 12\text{ V}$ ,  $I_O = \text{max } I_O$ ,  $PG$  pulled up to  $V_O$ .  
Scale: 2 or 1 V/div, 1 ms/div.

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

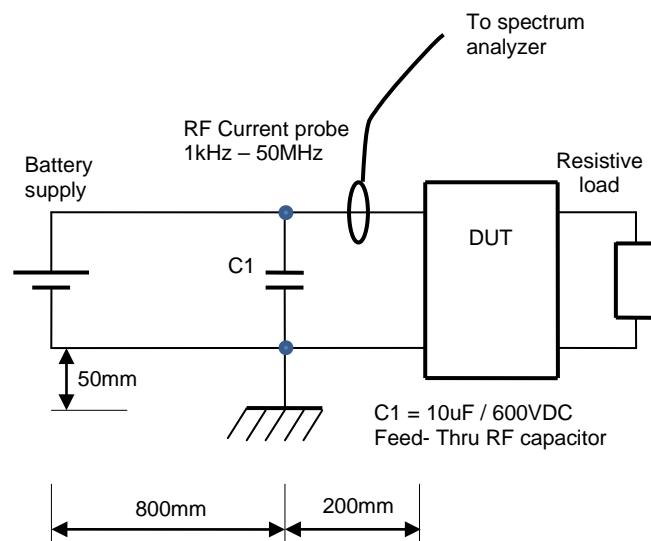
### EMC Specification

Conducted EMI is measured according to the test set-up below. The fundamental switching frequency is 600 kHz.  $V_I = 12$  V,  $V_O = 1.8$  V,  $I_O = 18$  A.

**Conducted EMI** Input terminal value (typical for default configuration).



EMI without filter.



Test set-up conducted emission, power lead

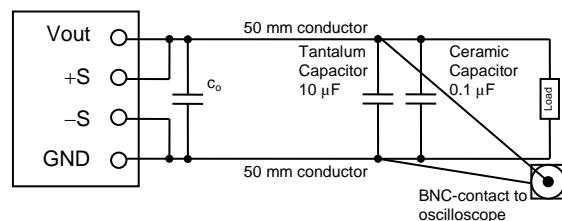
### Layout Recommendations

The radiated EMI performance of the product will depend on the PWB layout and ground layer design. It is also important to consider the stand-off of the product. If a ground layer is used, it should be connected to the output of the product and the equipment ground or chassis.

A ground layer will increase the stray capacitance in the PWB and improve the high frequency EMC performance.

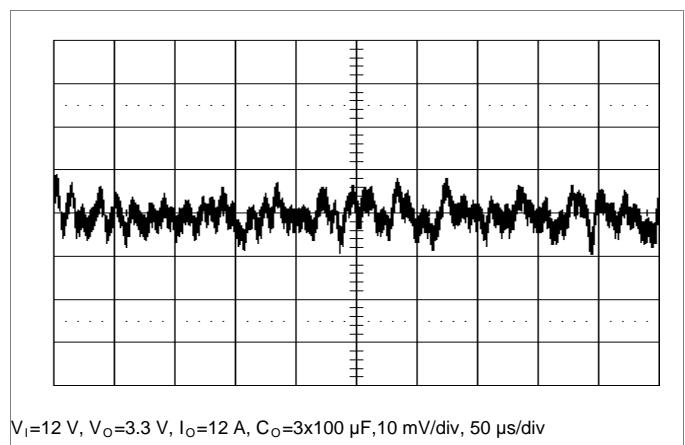
### Output Ripple and Noise

Output ripple and noise is measured according to figure below. A 50 mm conductor works as a small inductor forming together with the two capacitances a damped filter.



Output ripple and noise test set-up.

The digital compensation of the product is designed to automatically provide stability, accurate line and load regulation and good transient performance for a wide range of operating conditions (switching frequency, input voltage, output voltage, output capacitance). Inherent from the implementation and normal to the product there will be some low-frequency noise or wander at the output, in addition to the fundamental switching frequency output ripple. The total output ripple and noise is maintained at a low level.



Example of low frequency noise at the output.

|                                                                                 |                                                    |
|---------------------------------------------------------------------------------|----------------------------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W |                                                    |
|                                                                                 | 1/287 01 - BMR 461 Uen C Feb 2014<br>© Ericsson AB |

## Operating Information

### Power Management Overview

This product is equipped with a PMBus interface. The product incorporates a wide range of readable and configurable power management features that are simple to implement with a minimum of external components. Additionally, the product includes protection features that continuously safeguard the load from damage due to unexpected system faults. A fault is also shown as an alert on the SALERT pin. The product is delivered with a default configuration suitable for a wide range of operation in terms of input voltage, output voltage, and load. The configuration is stored in an internal Non-Volatile Memory (NVM). All power management functions can be reconfigured using the PMBus interface. Please contact your local Ericsson Power Modules representative for design support of custom configurations or appropriate SW tools for design and download of your own configurations.

### Input Under Voltage Lockout, UVLO

The product provides a non-configurable under voltage lockout (UVLO) circuit that monitors the internal supply of the converter. Below a certain input voltage level the internal supply will be too low for proper operation and the product will be in under voltage lockout, not switching or responding to the CTRL pin or to PMBus commands.

### Input Over Voltage Lockout, OVLO

The product provides a non-configurable over voltage lockout (OVLO) circuit that will shut down the product when the input voltage rises above a certain level. The product will not switch, respond to the CTRL pin or to PMBus commands when being in over voltage lockout.

### Input Turn-On and Turn-Off Voltage

The product monitors the input voltage and will turn-on and turn-off the output at configured levels (assuming the product is enabled by CTRL pin or PMBus). The default turn-on input voltage level is 4.35 V whereas the corresponding turn-off input voltage level is 3.8 V. The turn-on and turn-off levels may be reconfigured using the PMBus commands VIN\_ON and VIN\_OFF.

### Input Under Voltage Protection (IUVP)

The product monitors the input voltage continuously and will respond as configured when the input voltage falls below the configured threshold level. The product can respond in a number of ways as follows:

1. Continue operating without interruption.
2. Continue operating for a given delay period, followed by an output voltage shutdown if the fault still exists.
3. Immediate and definite shutdown of output voltage until the fault is cleared by PMBus or the output voltage is re-enabled.
4. Immediate shutdown of output voltage while the fault is

present. Operation resumes and the output is enabled when the fault condition no longer exists.

The default response is 4. The IUVF function can be reconfigured using the PMBus commands VIN\_UV\_FAULT\_LIMIT and VIN\_UV\_FAULT\_RESPONSE.

### Input Over Voltage Protection (IOVP)

The product monitors the input voltage continuously and will respond as configured when the input voltage rises above the configured threshold level. Refer to section "Input Under Voltage Protection" for response configuration options and default setting.

### Input and Output Impedance

The impedance of both the input source and the load will interact with the impedance of the product. It is important that the input source has low characteristic impedance. If the input voltage source contains significant inductance, the addition of a capacitor with low ESR at the input of the product will ensure stable operation.

### External Input Capacitors

The input ripple RMS current in a buck converter can be estimated to

$$\text{Eq. 1. } I_{\text{inputRMS}} = I_{\text{load}} \sqrt{D(1-D)},$$

where  $I_{\text{load}}$  is the output load current and  $D$  is the duty cycle.

The maximum load ripple current becomes  $I_{\text{load}}/2$ . The ripple current is divided into three parts, i.e., currents in the input source, external input capacitor, and internal input capacitor. How the current is divided depends on the impedance of the input source, ESR and capacitance values in the capacitors.

For most applications non-tantalum capacitors are preferred due to the robustness of such capacitors to accommodate high inrush currents of systems being powered from very low impedance sources. It is recommended to use a combination of ceramic capacitors and low-ESR electrolytic/polymer bulk capacitors. The low ESR of ceramic capacitors effectively limits the input ripple voltage level, while the bulk capacitance minimizes deviations in the input voltage at large load transients.

It is recommended to use at least 47 uF of ceramic input capacitance. At duty cycles between 25% and 75% where the input ripple current increases (see Eq. 1), additional ceramic capacitance will help to keep the input ripple voltage low. The required bulk capacitance depends on the impedance of the input source and the load transient levels at the output. In general a low-ESR bulk capacitor of at least 100 uF is recommended. The larger the duty cycle is, the larger impact an output load step will have on the input side, thus the larger bulk capacitance is required to limit the input voltage deviation.

If several products are connected in a phase spreading setup the amount of input capacitance per product can be reduced.

**BMR461 series PoL Regulators**  
Input 4.5-14 V, Output up to 18 A / 60 W

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

Input Capacitors must be placed closely and with low impedance connections to the VIN and GND pins in order to be effective.

### External Output Capacitors

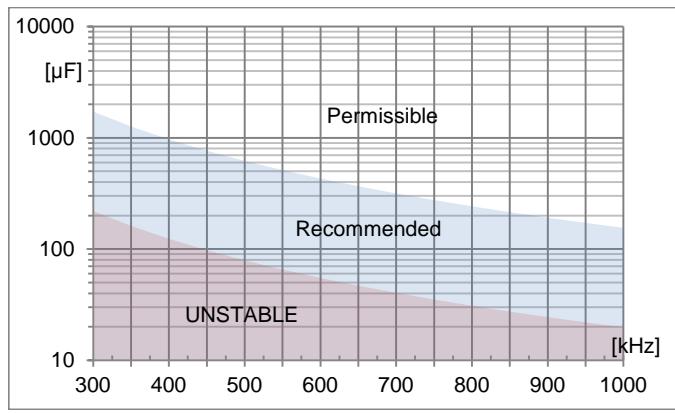
The output capacitor requirement depends on two considerations; output ripple voltage and load transient response. To achieve low ripple voltage, the output capacitor bank must have a low ESR value, which is achieved with ceramic output capacitors. A small output voltage deviation during load transients is achieved by using a larger amount of capacitance. Designs with smaller load transients can use fewer capacitors and designs with more dynamic load content will require more load capacitors to achieve a small output deviation. Improved transient response can also be achieved by adjusting the settings of the control loop of the product (see section Compensation Implementation).

It is recommended to locate low ESR ceramic and low ESR electrolytic/polymer capacitors as close to the load as possible, using several capacitors in parallel to lower the effective ESR. It is important to use low resistance and low inductance PCB layouts and cabling in order for capacitance to be effective.

The control loop of the product is optimized to operate with low-ESR output capacitors and is capable of achieving a fast loop transient response with a reduced amount of capacitance. The effective output capacitance is recommended to be in the range  $[C_{OUT\_low}, C_{OUT\_high}]$  according to equations Eq. 2 and Eq. 3 below, where  $F_{SW}$  is the switching frequency. The compensation implementation of the product is optimized for this range.

$$Eq. 2. \quad C_{OUT\_low} = \frac{2.6 \cdot 10^7}{(F_{SW})^2}$$

$$Eq. 3. \quad C_{OUT\_high} = \frac{16 \cdot 10^7}{(F_{SW})^2}$$



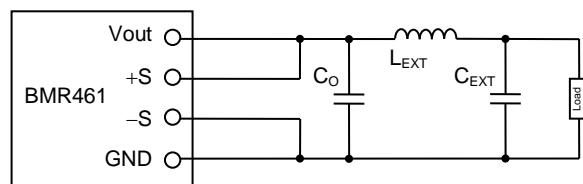
The product permits a large range of output capacitance, thus

capacitance above  $C_{OUT\_high}$  is acceptable. This capability is important in applications where the output capacitance may be unknown or not well controlled or in applications where a large amount of output capacitance is required. The limit of  $C_{OUT\_low}$  must be followed in order to guarantee stability.

Note that Eq. 2 and Eq. 3 and the chart above refer to the total capacitance at the output, thus including both the capacitance internal to the product and the external capacitance applied in the application. The internal output capacitance is listed in the Electrical Characteristics table.

Note also that Eq. 2 and Eq. 3 and the chart refers to the effective capacitance, not taking into account the capacitance derating that applies for ceramic capacitors with increased voltage or temperature variations.

In cases where the external output filter includes an inductor (forming a pi filter) according to the picture below, the following must be considered.



External output filter with inductor (pi filter).

In order for the compensation calibration (see next sections) to give a reliable result, the following condition should be fulfilled:

$$F_{LC\_EXT} = \frac{1}{2\pi\sqrt{L_{EXT}C_{EXT}}} > \frac{F_{SW}}{10}$$

where  $F_{LC\_EXT}$  is the resonance frequency of the external filter and  $F_{SW}$  is the switching frequency. If there are multiple pi filters in parallel on the output, giving a more complex transfer function with several resonance peaks, each of the peaks should be above  $F_{SW}/10$ .

If this condition is not fulfilled it is recommended to disable compensation calibration and set  $F_{LC}$  manually in COMP\_MODEL (see next sections). Please contact your Ericsson sales representative for further support.

For the BMR461 products, it is recommended that the remote sense connections are made at a point before the external inductor, as illustrated in the picture above.

**BMR461 series PoL Regulators**  
 Input 4.5-14 V, Output up to 18 A / 60 W

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

**Dynamic Loop Compensation (DLC)**

The typical design of regulated power converters includes a control function with a feedback loop that can be closed using either analog or digital circuits. The feedback loop is required to provide a stable output voltage, but should be optimized for the output filter to maintain output voltage regulation during transient conditions such as sudden changes in output current and/or input voltage. Digitally controlled converters allow one to optimize loop parameters without the need to change components on the board, however, optimization can still be challenging because the key parameters of the output filter include parasitic impedances in the PCB and the often distributed filter components themselves.

Dynamic Loop Compensation has been developed to solve the problem of compensation for a converter with a difficult to define output filter. This task is achieved by utilization of algorithms that can characterize an arbitrary output filter based on behavior of the output voltage in response to a disturbance initiated by the algorithm, or occurring due to the changes in operating conditions, and automatically adjust feedback loop parameters to match the output filter.

Details of the algorithm that is used to characterize an output filter and the different operational modes can be found in the following sections.

**Compensation Implementation**

Unlike PID-based digital power regulators the product uses a state-space model based algorithm that is valid for both the small- and large-signal response and accounts for duty-cycle saturation effects. This eliminates the need for users to determine and set thresholds for transitioning from linear to nonlinear modes. These capabilities result in fast loop transient response and the possibility of reducing the number of output capacitors.

Compensation calibration is when the resonance frequency  $F_{LC}$  of the output stage is measured. The  $F_{LC}$  value is used to automatically control the compensation. During ramp-up of the output voltage, robust and low bandwidth default compensation settings are used based on the default  $F_{LC}$  value assigned by bits 15:0 in PMBus command COMP\_MODEL. If the switching frequency is changed the default  $F_{LC}$  should be adjusted according to Eq. 4 to maintain robust settings.

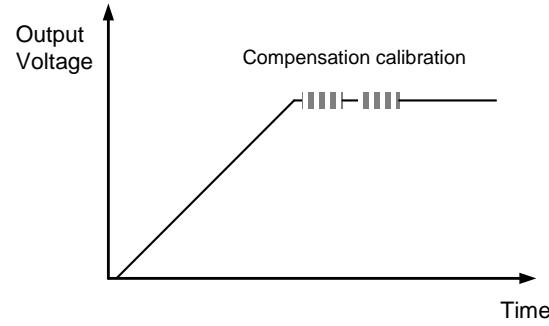
$$\text{Eq. 4. } F_{LC\_DEFAULT} = \frac{F_{SW}}{32}$$

It is possible for the user to write any  $F_{LC}$  value in COMP\_MODEL to be used during ramp-up. This is useful in cases where improved dynamic performance is needed during ramp-up. User assignment of  $F_{LC}$  in COMP\_MODEL is also needed when calibration is disabled, since in such case the  $F_{LC}$  value used during ramp-up will continue to be used when ramp-up has finished.

When calibration is enabled (default), an AC low amplitude measurement signal is applied on the output immediately after ramp-up has finished. See Electrical Characteristics table for a specification of this measurement signal. During calibration the resonant frequency  $F_{LC}$  of the power stage is measured. From the result an internal non-linear model is constructed to optimize the bandwidth and transient response of the product. Pole locations of the closed system are automatically selected based on switching frequency, measured  $F_{LC}$  and the output voltage level.

After each performed calibration, bits 15:0 in COMP\_MODEL are updated with measured  $F_{LC}$ , thus this value can be read out by the user. Note however, as soon as the output voltage is disabled, the  $F_{LC}$  value in COMP\_MODEL will revert back to the corresponding value stored in User NVM. Therefore, user values of COMP\_MODEL should be written to NVM, or, if written to RAM only, be written before each time the output voltage is enabled. COMP\_MODEL should only be changed in RAM while the output voltage is disabled.

By setting bit 2 in ADAPTIVE\_MODE a STORE\_USER\_ALL command will automatically be performed after the next calibration, effectively storing the measured  $F_{LC}$  value in COMP\_MODEL 15:0 in NVM as the  $F_{LC}$  value for subsequent ramp-ups.



Below table shows an example of improvement in transient response due to the compensation calibration, compared to using the  $F_{LC\_DEFAULT}$  value.

|                   | Non-calibrated compensation | Calibrated compensation |
|-------------------|-----------------------------|-------------------------|
| Voltage deviation | 53 mV                       | 34 mV                   |
| Recovery time     | 50 $\mu$ s                  | 30 $\mu$ s              |

*Load transient performance non-calibrated compensation with  $F_{LC\_DEFAULT}$  vs. calibrated compensation.  $V_i=12$  V,  $V_o=1.2$  V,  $C_o = 3 \times 100 \mu F + 270 \mu F/10m\Omega$ , load step 3-9-3 A, 1 A/us.*

**BMR461 series PoL Regulators**  
Input 4.5-14 V, Output up to 18 A / 60 W

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

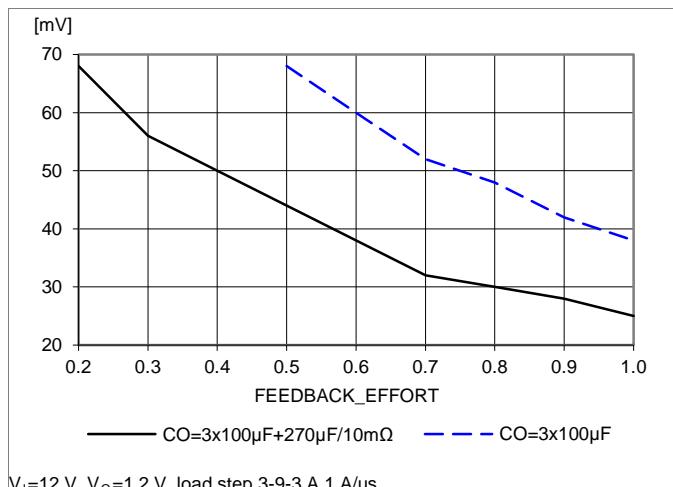
The PMBus command ADAPTIVE\_MODE provides the user different options for compensation calibration:

1. Calibration is performed once after each ramp-up (default). (ADAPTIVE\_MODE = 0x024B).
2. Calibration is performed once after first ramp-up after input voltage is applied (ADAPTIVE\_MODE = 0x124B).
3. Calibration is performed continuously after ramp-up at ~800 ms interval (ADAPTIVE\_MODE = 0x034B).
4. Calibration is disabled (ADAPTIVE\_MODE = 0x004B). The  $F_{LC}$  value stored in bits 15:0 in COMP\_MODEL will be applied.
5. Calibration is performed continuously in response to a PMBus command. Controlled by setting/clearing bit 8 in ADAPTIVE\_MODE during operation.

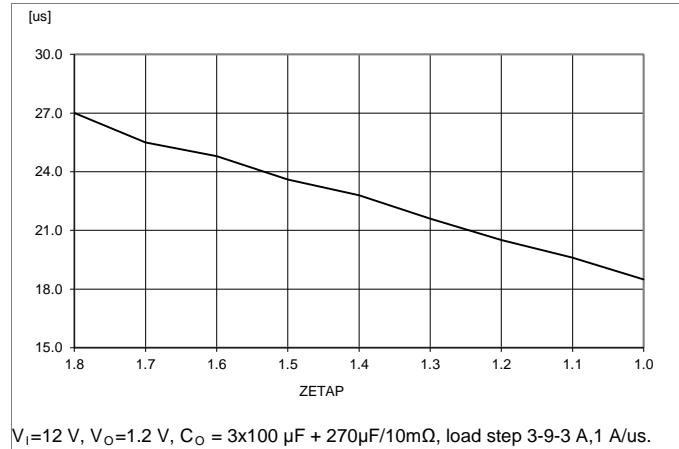
Compensation may be set more or less aggressive by adjusting the feedback gain factor, controlled by the PMBus command FEEDBACK\_EFFORT. This parameter is proportional to the open loop gain of the system. Increasing the gain, i.e the control effort, will reduce the voltage deviation at load transients, at the expense of somewhat increased jitter and noise on the output. Users also have access to the PMBus command ZETAP, which corresponds to the damping ratio of the closed loop system. By default the product uses 0.5 as the feedback gain factor and 1.5 for damping ratio, to target a system bandwidth of 10% of the switching frequency.

In some operating conditions at low output voltages, it is possible to enhance the recovery time at load release by enabling Negative Duty Cycle by PMBus command LOOP\_CONFIG.

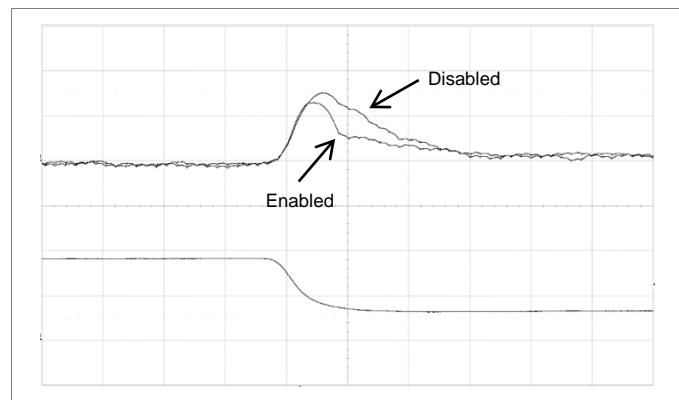
Below graphs exemplify the impact on load transient performance when adjusting the feedback gain factor, the damping ratio and the Negative Duty Cycle feature.



Voltage deviation vs. FEEDBACK\_EFFORT setting.



Recovery time to within 1% of  $V_O$  vs. ZETAP setting.



Load release response at enabled/disabled Negative Duty Cycle at low output voltage.

**Remote Sense**

The product has remote sense that can be used to compensate for voltage drops between the output and the point of load. The sense traces should be located close to the PWB ground layer to reduce noise susceptibility. Due to derating of internal output capacitance the voltage drop should be kept below  $V_{DROPMAX} = (5.25 - V_{OUT}) / 2$ . A large voltage drop will impact the electrical performance of the regulator. If the remote sense is not needed +S must be connected to VOUT and -S must be connected to GND.

**BMR461 series PoL Regulators**  
 Input 4.5-14 V, Output up to 18 A / 60 W


1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

**Output Voltage Control**

To control the output voltage the product features both a remote control input through the CTRL pin and a PMBus enable function by the command OPERATION. It is also possible to configure the output to be always on.

By default the output is controlled by the CTRL pin only. The output voltage control can be reconfigured using the PMBus command ON\_OFF\_CONFIG.

**Remote Control**


The product is equipped with a remote control function, i.e., the CTRL pin. The remote control can be connected to either the primary negative input connection (GND) or an external voltage (Vext). See Absolute Maximum Rating for maximum voltage level allowed at the CTRL pin.

The CTRL function allows the product to be turned on/off by an external device like a semiconductor or mechanical switch.

The CTRL pin has an internal 6.8 k $\Omega$  pull-up resistor to 3.3 V. The external device must provide a minimum required sink current to guarantee a voltage not higher than the logic low threshold level (see Electrical Characteristics). When the CTRL pin is left open, the voltage generated on the CTRL pin is 3.3 V.

By default the product provides "positive logic" RC and will turn on when the CTRL pin is left open and turn off when the CTRL pin is applied to GND. It is possible to configure "negative logic" instead by using the PMBus command ON\_OFF\_CONFIG.

If the device is to be synchronized to an external clock source, the clock frequency must be stable prior to asserting the CTRL pin.

**Output Voltage Adjust using Pin-strap Resistor**

Using an external Pin-strap resistor,  $R_{SET}$ , the output voltage can be set in the range 0.6 V to 5.0 V at 16 different levels shown in the table below. The resistor should be applied between the VSET pin and the PREF pin.

$R_{SET}$  also sets the maximum output voltage; see section "Output Voltage Range Limitation". The resistor is sensed only at the application of input voltage. Changing the resistor value during normal operation will not change the output voltage. The input voltage must be at least 1 V larger than the output voltage in order to deliver the correct output voltage. See Ordering Information for output voltage range.

The following table shows recommended resistor values for  $R_{SET}$ . Maximum 1% tolerance resistors are required.

| $V_{OUT}$ [V] | $R_{SET}$ [k $\Omega$ ] | $V_{OUT}$ [V] | $R_{SET}$ [k $\Omega$ ] |
|---------------|-------------------------|---------------|-------------------------|
| 0.60          | 5.11                    | 1.05          | 17.8                    |
| 0.70          | 6.19                    | 1.10          | 21.5                    |
| 0.75          | 7.15                    | 1.20          | 26.1                    |
| 0.80          | 8.25                    | 1.50          | 31.6                    |
| 0.85          | 9.53                    | 1.80          | 38.3                    |
| 0.90          | 11.0                    | 2.50          | 44.2                    |
| 0.95          | 12.7                    | 3.30          | 51.1                    |
| 1.00          | 14.7                    | 5.00          | 59.0                    |

Leaving  $V_{SET}$  open will produce an output voltage of 0 V. Using an  $R_{SET} \leq 4.22$  k $\Omega$  will put the product in track mode, see section Voltage Tracking.

**Output Voltage Adjust using PMBus**

The output voltage set by pin-strap can be overridden using the PMBus command VOUT\_COMMAND. See Electrical Specification for adjustment range.

**Voltage Margining Up/Down**

Using the PMBus interface it is possible to adjust the output higher or lower than its nominal voltage setting in order to determine whether the load device is capable of operating over its specified supply voltage range. This provides a convenient method for dynamically testing the operation of the load circuit over its supply margin or range. It can also be used to verify the function of supply voltage supervisors. Margin limits of the nominal output voltage  $\pm 5\%$  are default, but the margin limits can be reconfigured using the PMBus commands VOUT\_MARGIN\_LOW, VOUT\_MARGIN\_HIGH. Margining is activated by the command OPERATION.

**Output Voltage Trim**

The actual output voltage can be trimmed to optimize performance of a specific load by setting a non-zero value for PMBus command VOUT\_TRIM. The value of VOUT\_TRIM is summed with VOUT\_COMMAND, allowing for multiple products to be commanded to a common nominal value, but with slight adjustments per load.

**Output Voltage Range Limitation**

The output voltage is by default limited to the least of 5.5 V or 110% of the nominal output voltage, where the nominal output voltage is defined by pin-strap or by VOUT\_COMMAND in Non-Volatile Memory (see section Initialization Procedure). This protects the load from an over voltage due to an accidentally written wrong VOUT\_COMMAND. The limitation applies to the regulated output voltage, rather than the internal value of VOUT\_COMMAND. The output voltage limit can be reconfigured using the PMBus command VOUT\_MAX.

|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W |                                   |
|                                                                                 | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

### Output Over Voltage Protection (OVP)

The product includes over voltage limiting circuitry for protection of the load. The default OVP limit is 15% above the nominal output voltage. The product can be configured to respond in different ways to the output voltage exceeding the OVP limit:

1. Continue operating without interruption.
2. Continue operating for a given delay period, followed by an output voltage shutdown if the fault still exists.
3. Immediate and definite shutdown of output voltage until the fault is cleared by PMBus or the output voltage is re-enabled.
4. Immediate shutdown of output voltage while the fault is present. Operation resumes and the output is enabled when the fault condition no longer exists.

The default response is 4. The OVP limit and fault response can be reconfigured using the PMBus commands VOUT\_OV\_FAULT\_LIMIT and VOUT\_OV\_FAULT\_RESPONSE.

### Output Under Voltage Protection (UVP)

The product includes output under voltage limiting circuitry for protection of the load. The default UVP limit is 15% below the nominal output voltage. Refer to section "Output Over Voltage Protection" for response configuration options and default setting.

### Power Good

PG (Power Good) is an active high open drain output used to indicate when the product is ready to provide regulated output voltage to the load. During startup and during a fault condition, PG is held low.

By default, PG is asserted high after the output has ramped to a voltage above 90% of the nominal voltage and a successful compensation calibration has completed.

By default, PG is deasserted if the output voltage falls below 85% of the nominal voltage. These limits may be changed using the PMBus commands POWER\_GOOD\_ON and POWER\_GOOD\_OFF.

The PG output is not defined during ramp up of the input voltage due to the initialization of the product.

### Over Current Protection (OCP)

The product includes robust current limiting circuitry for protection at continuous overload. After ramp-up is complete the product can detect an output overload/short condition. The following OCP response options are available:

1. Continue operating without interruption (this could result in permanent damage to the product).
2. Immediate and definite shutdown of output voltage until the fault is cleared by PMBus or the output voltage is re-enabled.
3. Immediate shutdown of output voltage followed by continuous restart attempts of the output voltage with a preset interval ("hiccup" mode).

The default response from an over current fault is 3. Note that delayed shutdown is not supported. The load distribution should be designed for the maximum output short circuit current specified. The OCP limit and response can be reconfigured using the PMBus commands IOUT\_OC\_FAULT\_LIMIT and IOUT\_OC\_FAULT\_RESPONSE.

If option 2 above is to be used, the TON\_MAX\_FAULT\_RESPONSE setting should match the setting of IOUT\_OC\_FAULT\_RESPONSE in order to make sure that no restart attempts occur.

### Switching Frequency

The default switching frequency yields optimal performance. The switching frequency can be re-configured in a certain range using the PMBus command FREQUENCY\_SWITCH. Refer to Electrical Specification for default switching frequency and range.

If changing the switching frequency more than +/-10% from the default value, the following should be considered to maintain reliable operation:

- The default  $F_{LC}$  value in COMP\_MODEL should be adjusted, see section Compensation Implementation.
- Adjustment of the fixedDTR and fixedDTF values in DEADTIME\_GCTRL may be required, for higher switching frequencies in particular.

Changing the switching frequency will affect efficiency/power dissipation, load transient response and output ripple.

### Synchronization

The product may be synchronized with an external clock to eliminate beat noise on the input and output voltage lines by connecting the clock source to the SYNC pin. Synchronization can also be utilized for phase spreading, described in section Phase Spreading.

The clock frequency of the external clock source must be stable prior to enabling the output voltage. Further, the PMBus command FREQUENCY\_SWITCH must be set to a value close to the frequency of the external clock prior to enabling the output voltage, in order to set the internal controller in proper operational mode.

The product automatically checks for a clock signal on the SYNC pin when input power is applied and when the output is enabled. If no incoming clock signal is present, the product will use the internal oscillator at the configured switching frequency. In the event of a loss of the external clock signal during normal operation, the product will automatically switch to the internal oscillator and switch at a frequency close to the original SYNC input frequency.

### Phase Spreading

When multiple products share a common DC input supply, spreading of the switching clock phase between the products

**BMR461 series PoL Regulators**  
 Input 4.5-14 V, Output up to 18 A / 60 W

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

can be utilized. This dramatically reduces input capacitance requirements and efficiency losses, since the peak current drawn from the input supply is effectively spread out over the whole switch period. This requires that the products are synchronized.

The phase offset is measured from the rising edge of the applied external clock to the center of the PWM pulse as illustrated below.

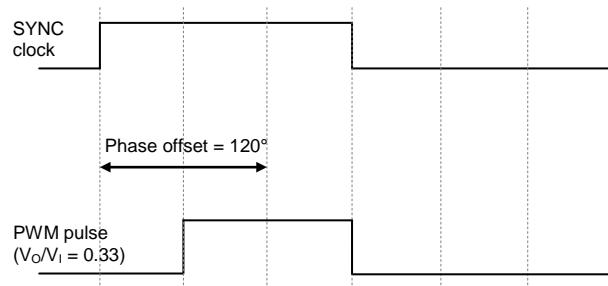


Illustration of phase offset.

By default the phase offset is controlled by the defined PMBus address (see section PMBus Interface) according to the table below. This provides a way to configure phase spreading with up to eight different phase positions without using a PMBus command.

| Set PMBus address | Phase offset |
|-------------------|--------------|
| xxxx000b          | 0°           |
| xxxx001b          | 60°          |
| xxxx010b          | 120°         |
| xxxx011b          | 180°         |
| xxxx100b          | 240°         |
| xxxx101b          | 300°         |
| xxxx110b          | 90°          |
| xxxx111b          | 270°         |

The default phase offset can be overridden by using the standard PMBus command INTERLEAVE. The phase offset can then be defined as

$$\text{Phase\_offset}^{\circ} = 360^{\circ} \times \frac{\text{Interleave\_order}}{\text{Number\_in\_group}}$$

*Interleave\_order* is in the range 0-15. *Number\_in\_group* is in the range 0-15 where a value of 0 means 16. The set resolution for the phase offset is  $360^{\circ} / 128 \approx 2.8^{\circ}$ .

Giving the PMBus command INTERLEAVE a value of 0x0000 will revert back to the default address controlled phase offset.

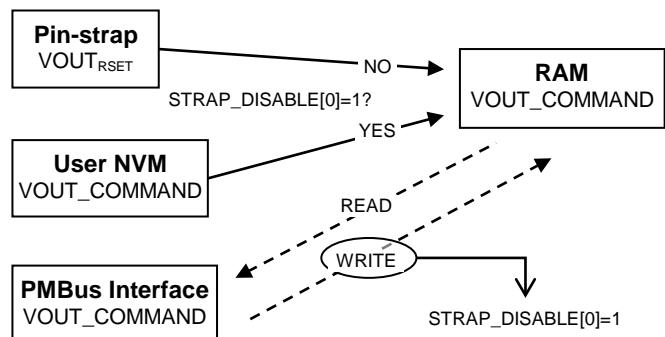
Ericsson provides software tools for convenient configuration of optimized phase spreading, allowing the amount of input capacitance to be significantly reduced.

**Initialization Procedure**

The product follows an internal initialization procedure after power is applied to the VIN pin (refer to figure below):

1. Self test and memory check.
2. The address pin-strap resistors are measured and the associated PMBus address is defined.
3. The output voltage pin-strap resistor is measured. The associated output voltage level will be loaded into operational RAM memory, unless an overriding PMBus command VOUT\_COMMAND has been explicitly written and stored in the User Non-Volatile Memory (indicated by bit 0 in command STRAP\_DISABLE).
4. Values stored in the User Non-Volatile Memory (NVM) are loaded into operational RAM memory. For PMBus commands listed in the table below, loaded values will be based on the output voltage level loaded in step 3 above, unless the commands have been explicitly written and stored in the User NVM.
5. Check for external clock signal at the SYNC pin and wait for lock if used.

Once this procedure is completed and the initialization time has passed (see Electrical Specification), the output voltage is ready to be enabled and the PMBus interface can be used.



Loading of nominal output voltage level.

Note the following implications of the initialization procedure:

- If the RSET pin-strap resistance is changed, input voltage will have to be cycled before the output voltage level is affected.
- If VOUT\_COMMAND is changed and stored to User NVM, input voltage will have to be cycled before the output voltage related commands in the table below are re-scaled according to the new output voltage level.

See section PMBus Interface for more information about the Non-Volatile Memories (NVM) of the product.

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

|                            |                                                              |
|----------------------------|--------------------------------------------------------------|
| Vout related PMBus command | Loaded value unless explicitly written + stored to User NVM. |
| POWER_GOOD_ON              | 0.90 x loaded Vout level                                     |
| POWER_GOOD_OFF             | 0.85 x loaded Vout level                                     |
| VOUT_MAX                   | 1.10 x loaded Vout level                                     |
| VOUT_MARGIN_HIGH           | 1.05 x loaded Vout level                                     |
| VOUT_MARGIN_LOW            | 0.95 x loaded Vout level                                     |
| VOUT_OV_FAULT_LIMIT        | 1.15 x loaded Vout level                                     |
| VOUT_UV_FAULT_LIMIT        | 0.85 x loaded Vout level                                     |

### Soft-start and Soft-stop

The soft-start and soft-stop control functionality allows the output voltage to ramp-up and ramp-down with defined timing with respect to the control of the output. This can be used to control inrush current and manage supply sequencing of multiple controllers.

The rise time is the time taken for the output to ramp to its target voltage while the fall time is the time taken for the output to ramp down from its regulation voltage to less than 10% of that value. The on delay time sets a delay from when the output is enabled until the output voltage starts to ramp up. The off delay time sets a delay from when the output is disabled until the output voltage starts to ramp down.

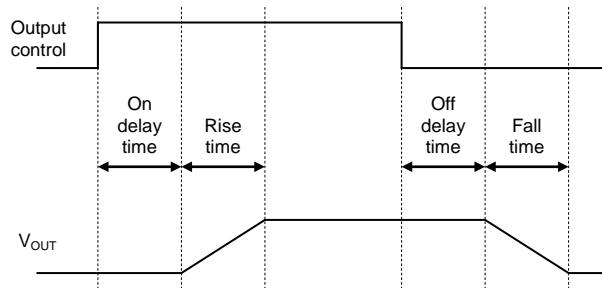


Illustration of Soft-Start and Soft-Stop

Soft-stop is disabled by default but may be enabled through the PMBus command ON\_OFF\_CONFIG. The delay and ramp times can be reconfigured using the PMBus commands TON\_DELAY, TON\_RISE, TOFF\_DELAY and TOFF\_FALL.

The internal delay generator can only achieve certain discrete timing values. A written TON\_DELAY/TOFF\_DELAY value will be rounded to the closest achievable value, thus a TON\_DELAY/OFF\_DELAY read will provide the actual set value.

The internal ramp generator can only achieve certain discrete timing values for a given combination of switch frequency, output voltage level, set ramp time and trim data. These values are close, but not exactly the same, when any of the relevant parameters are altered. A written TON\_RISE/TOFF\_FALL value will be rounded to the closest achievable value, thus a TON\_RISE/TOFF\_FALL read will provide the actual set value.

Refer to Electrical Specification for default on delay time and rise time and the configurability ranges and resolutions. The specification provided for soft-start applies also for soft-stop, if enabled.

### Output Voltage Sequencing

A group of products may be configured to power up in a predetermined sequence. This feature is especially useful when powering advanced processors, FPGAs, and ASICs that require one supply to reach its operating voltage prior to another. Multi-product sequencing can be achieved by configuring the start delay and rise time of each device through the PMBus interface and by connecting the CTRL pin of each product to a common enable signal.

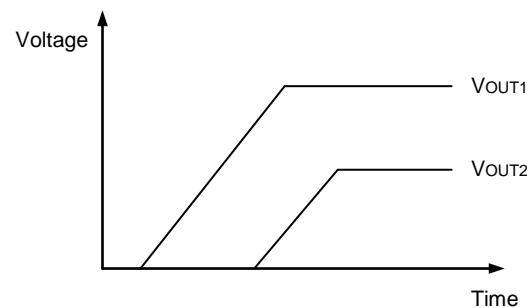


Illustration of Output Voltage Sequencing.

### Pre-Bias Startup Capability

Pre-bias startup often occurs in complex digital systems when current from another power source is fed back through a dual-supply logic component, such as FPGAs or ASICs. The product incorporates synchronous rectifiers, but will not sink current during startup, or turn off, or whenever a fault shuts down the product in a pre-bias condition.

When the output is enabled the product checks the output for the presence of pre-bias voltage. If the pre-bias voltage is above the output overvoltage threshold the product will not attempt soft-start. If the pre-bias voltage is less than 200 mV the soft-start is performed assuming no pre-bias. If the pre-bias voltage is above 200 mV but below target output voltage, the product ramps up the output voltage from the pre-bias voltage to the target regulation as shown in the figure below.

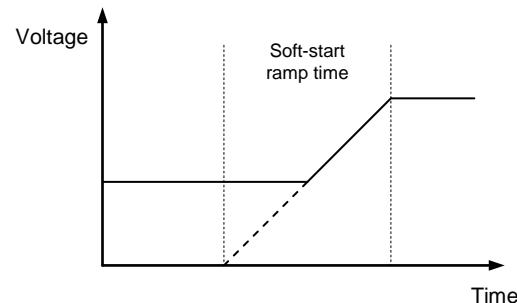


Illustration of Pre-Bias Startup

**BMR461 series PoL Regulators**  
Input 4.5-14 V, Output up to 18 A / 60 W

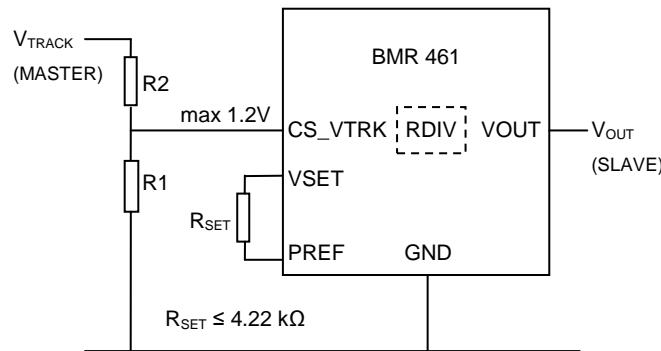
1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

**Voltage Tracking**

The product supports tracking of the output from a master voltage applied to the CS\_VTRK pin. To select the tracking mode, a resistance  $\leq 4.22 \text{ k}\Omega$  must be connected between the VSET and PREF pins.

The tracking ratio used is controlled by an internal feedback divider RDIV and an external resistive voltage divider (R1, R2) which is placed from the supply being tracked to GND pins.

**Tracking Mode Configuration**

In tracking mode the output voltage is regulated to the lower of:

$$\text{Eq. 5} \quad V_{OUT} = \frac{V_{TRACK}}{RDIV} \times \frac{R1}{R1 + R2}$$

or the output voltage defined by the PMBus command VOUT\_COMMAND.

RDIV is automatically selected based on the value of VOUT\_COMMAND as shown in the table below. If VOUT\_COMMAND is not defined by the user, it will default to 5.25 V with RDIV= 0.20272.

| VOUT_COMMAND [V]                      | RDIV    |
|---------------------------------------|---------|
| < 0.99                                | 0.99547 |
| 0.99 to < 1.12                        | 0.88222 |
| 1.12 to < 1.28                        | 0.76897 |
| 1.28 to < 1.50                        | 0.65572 |
| 1.50 to < 1.82                        | 0.54247 |
| 1.82 to < 2.29                        | 0.42922 |
| 2.29 to < 3.12                        | 0.31597 |
| 3.12 to < 5.25                        | 0.20272 |
| VOUT_COMMAND not user defined => 5.25 | 0.20272 |

For best tracking accuracy it is recommended that once the product is powered up, the VOUT\_COMMAND should not be changed so as to cause a change to the operational RDIV. If such a change in VOUT\_COMMAND is required, the user

should save the new value to User Non-Volatile Memory (using STORE\_USER\_ALL command) and recycle the input voltage to set a new RDIV operational value.

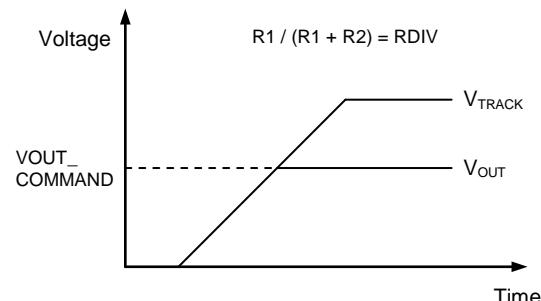
To simplify resistor selection it is recommended to fix R1 at 10 kΩ and use the following equation to determine R2:

$$\text{Eq. 6} \quad R2(k\Omega) = R1 \times \left( \frac{V_{TRACK}}{RDIV \times V_{OUT}} - 1 \right)$$

R2 must be chosen so that the CS\_VTRK input does not exceed 1.2 V.

As seen in Eq. 5, if the resistor-divider ratio from R1//R2 is chosen such that it is equal to the operational RDIV, the output voltage follows the tracking voltage coincidentally. For all other cases, the output voltage follows a ratiometric tracking. These two modes of tracking are further described below.

1. **Coincident tracking.** Output voltage is ramped at the same rate as the VTRACK voltage. To achieve coincident tracking the desired output voltage should be set by the PMBus command VOUT\_COMMAND. R2 should be set so that  $R2 = R1 / RDIV - R1$ . The output will stop ramping when the VOUT\_COMMAND level is reached. Since the voltage at the CS\_VTRK pin must be below 1.2 V, coincident tracking will not be possible in all cases. A higher R2 value may be required, giving a ratiometric tracking instead.

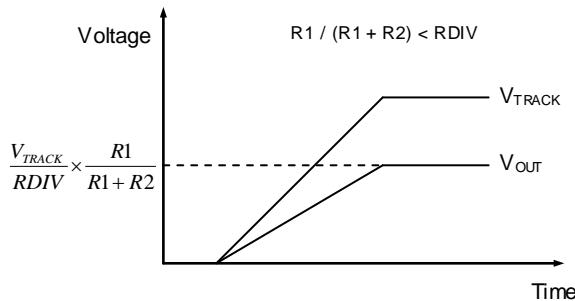
**Coincident Voltage Tracking**

**Example:**  
External  $V_{TRACK} = 3.3 \text{ V}$   
Target  $V_{OUT} = 2.5 \text{ V}$   
 $R1 = 10 \text{ k}\Omega$   
 $VOUT\_COMMAND = 2.5 \text{ V} \Rightarrow RDIV = 0.31597$   
 $R2 = 10 / 0.31597 - 10 = 21.6 \text{ k}\Omega$

2. **Ratiometric tracking.** Output voltage is ramped at a rate that is a percentage of the VTRACK voltage. To achieve ratiometric tracking, R2 should be set according to Eq. 6 with VOUT being the desired output voltage. The PMBus command VOUT\_COMMAND should be set equal to or higher than the output voltage given by Eq. 5, or not being set at all giving the default VOUT\_COMMAND value 5.25 V. Since the target voltage level is decided by the R1//R2

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

divider there will be a small regulation inaccuracy due to the tolerance of the resistors. Note also that  $V_{OUT}$  will be higher than  $V_{TRACK}$  if  $R1 / (R1 + R2) > RDIV$ .



*Ratiometric Voltage Tracking*

Example:

External  $V_{TRACK} = 3.3$  V

Target  $V_{OUT} = 1.3$  V

$VOUT\_COMMAND$  not set =>  $RDIV = 0.20272$

$R1 = 10$  k $\Omega$

$$\text{Eq. 6} \Rightarrow R2 = 10 \times \left( \frac{3.3}{0.20272 \times 1.3} - 1 \right) = 115k\Omega$$

During voltage tracking compensation calibration is triggered when the output voltage is above 450 mV and stable within a 100 mV window for two consecutive measurements at 10 ms intervals. When calibration is complete, the power good (PG) output is asserted. The PG output remains asserted until the output voltage falls below 450 mV, as verified at 10 ms intervals. For this reason, the PG output may remain high for as much as 10 ms after the output voltage has fallen below 450 mV.

When voltage tracking is enabled the output over voltage protection limit is set 12% above  $VOUT\_COMMAND$  as default. This limit may be reconfigured using the PMBus command  $VOUT\_OV\_FAULT\_LIMIT$ . Output under voltage protection is not functional in tracking mode.

Soft-start parameters  $TON\_DELAY$  and  $TON\_RISE$  are not functional in tracking mode and will be set to their minimum values to prevent interference with tracking.  $TOFF\_DELAY$  and  $TOFF\_FALL$  can be used if soft-stop is enabled. In such case the output voltage will follow the least of the output levels given by the soft-stop parameters and the tracking equations.

|                                          |
|------------------------------------------|
| <b>BMR461 series PoL Regulators</b>      |
| Input 4.5-14 V, Output up to 18 A / 60 W |

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

## Thermal Consideration

### General

The product is designed to operate in different thermal environments and sufficient cooling must be provided to ensure reliable operation. Cooling is achieved mainly by conduction, from the pins to the host board, and convection, which is dependent on the airflow across the product. Increased airflow enhances the cooling of the product.

The Output Current Derating graph found in the Output section for each model provides the available output current vs. ambient air temperature and air velocity at specified  $V_i$ .

The product is tested on a 254 x 254 mm, 35  $\mu\text{m}$  (1 oz), test board mounted vertically in a wind tunnel with a cross-section of 608 x 203 mm. The test board has 8 layers.

Proper cooling of the product can be verified by measuring the temperature at positions P1, P2 and P3. The temperature at these positions should not exceed the max values provided in the table below. Note that the max value is the absolute maximum rating (non destruction) and that the electrical Output data is guaranteed up to  $T_{P1} +95^\circ\text{C}$ .

See Design Note 019 for further information.

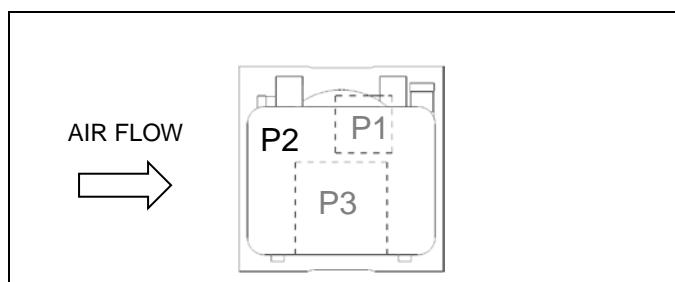
### Definition of Product Operating Temperature

The product operating temperature is used to monitor the temperature of the product. Proper thermal conditions can be verified by measuring the temperature at positions P1, P2 and P3. The temperature at these position ( $T_{P1}, T_{P2}, T_{P3}$ ) should not exceed the maximum temperatures in the table below. The number of measurement points may vary with different thermal design and topology.

| Position | Description             | Max Temperature    |
|----------|-------------------------|--------------------|
| P1       | T3, FET Reference point | 125°C *            |
| P2       | L1, Inductor            | 125°C * (115°C **) |
| P3       | N1, Control circuit     | 115°C *            |

\* A guard band of 5 °C is applied to the maximum recorded component temperatures when calculating output current derating curves.

\*\* See section Alternative thermal verification.



Temperature positions and air flow direction. Top view.

### Definition of Reference Temperature $T_{P1}$

The reference temperature is used to monitor the temperature limits of the product. Temperature above maximum  $T_{P1}$ , measured at the reference point P1 is not allowed and may cause degradation or permanent damage to the product.  $T_{P1}$  is also used to define the temperature range for normal operating conditions.  $T_{P1}$  is defined by the design and used to guarantee safety margins, proper operation and high reliability of the product.

### Alternative Thermal Verification

Since it is difficult to access positions P1 and P3 of the product, measuring the temperature at only position P2 is an alternative method to verify proper thermal conditions. If measuring only  $T_{P2}$  the maximum temperature of P2 must be lowered since in some operating conditions  $T_{P1}$  will be higher than  $T_{P2}$ . Using a temperature limit of 115°C for  $T_{P2}$  will make sure that the temperatures at all points P1, P2 and P3 stay below their maximum limits.

### Over Temperature Protection (OTP)

The internal temperature of the product is continuously monitored at position P3. When the internal temperature rises above the configured threshold level the product will respond as configured. The product can respond in a number of ways as follows:

1. Continue operating without interruption (this could result in permanent damage to the product).
2. Continue operating for a given delay period, followed by an output voltage shutdown if the fault still exists.
3. Immediate and definite shutdown of output voltage until the fault is cleared by PMBus or the output voltage is re-enabled.
4. Immediate shutdown of output voltage while the fault is present. Operation resumes and the output is enabled when the fault condition no longer exists.

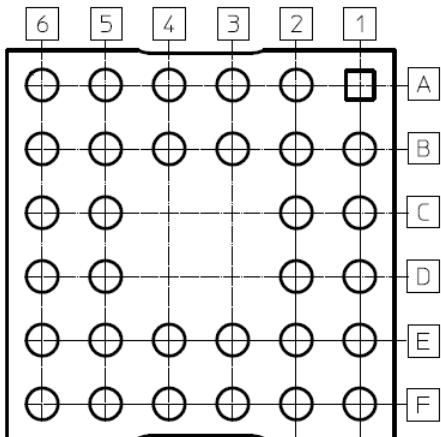
Default response is 4. The OTP protection uses hysteresis so that the fault exists until the temperature has fallen to a certain level (OT\_WARN\_LIMIT) below the fault threshold. The default OTP threshold and hysteresis are specified in Electrical Characteristics.

The OTP limit, hysteresis and response can be reconfigured using the PMBus commands OT\_FAULT\_LIMIT, OT\_WARN\_LIMIT and OT\_FAULT\_RESPONSE.

The product also incorporates a non-configurable hard-coded thermal shutdown associated with the temperature monitored at position P3 to ensure long-term flash-memory integrity. See Electrical Characteristics.

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

## Connections



Pin layout, bottom view.

Below table gives a brief description of the functionality of each pin. A more detailed description can be found in the different sub sections of the Operating Information section.

| Pin                          | Designation | Function                                                                                                                                        |
|------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| 1A, 1B<br>2A, 2B, 2C,<br>2D  | VOUT        | Output Voltage                                                                                                                                  |
| 3A, 3B, 4A,<br>4B,<br>5A, 5B | GND         | Power Ground                                                                                                                                    |
| 5C, 6A, 6B,<br>6C            | VIN         | Input Voltage                                                                                                                                   |
| 1C                           | +S          | Positive sense. Connect to output voltage close to the load                                                                                     |
| 1D                           | -S          | Negative sense. Connect to power ground close to the load.                                                                                      |
| 1E                           | PG          | Power Good output. Asserted high when the product is ready to provide regulated output voltage to the load. Open drain. See section Power Good. |
| 1F                           | SA0         | PMBus address pin strap. Used with external resistors to assign a unique PMBus address to the product. See section PMBus Interface.             |
| 3E                           | SA1         |                                                                                                                                                 |

|        |         |                                                                                                                                                                                                               |
|--------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2F     | VSET    | Output voltage pin strap. Used with external resistor to set the nominal output voltage or to select tracking mode. See section Output Voltage Adjust using Pin-strap Resistor.                               |
| 3F     | PREF    | Pin-strap reference. Ground reference for pin-strap resistors.                                                                                                                                                |
| 6D     | CTRL    | Remote Control. Can be used to enable/disable the output voltage of the product. See section Remote Control.                                                                                                  |
| 2E     | SYNC    | External switching frequency synchronization input. See section Synchronization.                                                                                                                              |
| 5F     | SALERT  | PMBus Alert. Asserted low when any of the configured protection mechanisms indicate a fault.                                                                                                                  |
| 6E     | SDA     | PMBus Data. Data signal for PMBus communication. See section PMBus Interface.                                                                                                                                 |
| 6F     | SCL     | PMBus Clock. Clock for PMBus communication. See section PMBus Interface.                                                                                                                                      |
| 4F     | CS_VTRK | Voltage Tracking input. Allows for tracking of output voltage to an external voltage. See section Voltage Tracking.<br><br>In normal operation when tracking is not used, this pin must be connected to PREF. |
| 4E     | RSVD    | Reserved. Connect to PREF.                                                                                                                                                                                    |
| 5D, 5E | NC      | No connection                                                                                                                                                                                                 |

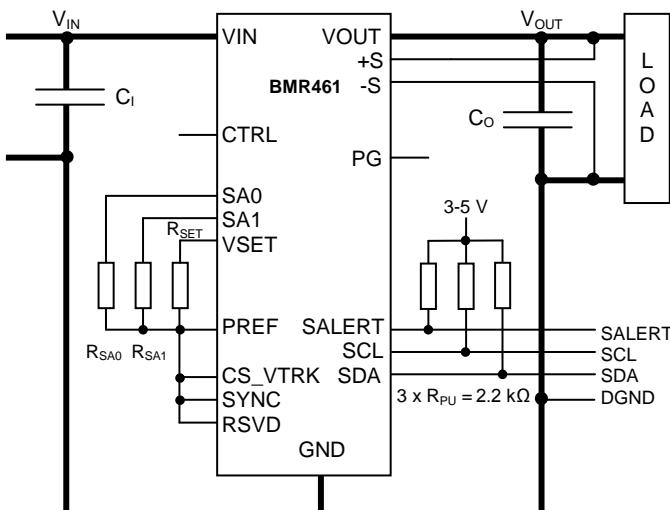
|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

### Unused Pins

Unused pins should be connected according to the table below. Note that connection of CS\_VTRK to PREF is required for normal standalone operation. VSET should always have a pin strap resistor.

| Unused Pin | Connection                          |
|------------|-------------------------------------|
| CS_VTRK    | PREF. Required for normal operation |
| CTRL       | Open (pin has internal pull-up)     |
| RSVD       | PREF or pulled down to PREF         |
| SYNC       | PREF or pulled down to PREF         |
| SA0        | PREF or Open                        |
| SA1        | PREF or Open                        |
| SDA        | Pull-up resistor to voltage > 2 V   |
| SCL        | Pull-up resistor to voltage > 2 V   |
| PG         | Open                                |
| SALERT     | Open                                |

### Typical Application Circuit



Typical standalone operation with PMBus communication.

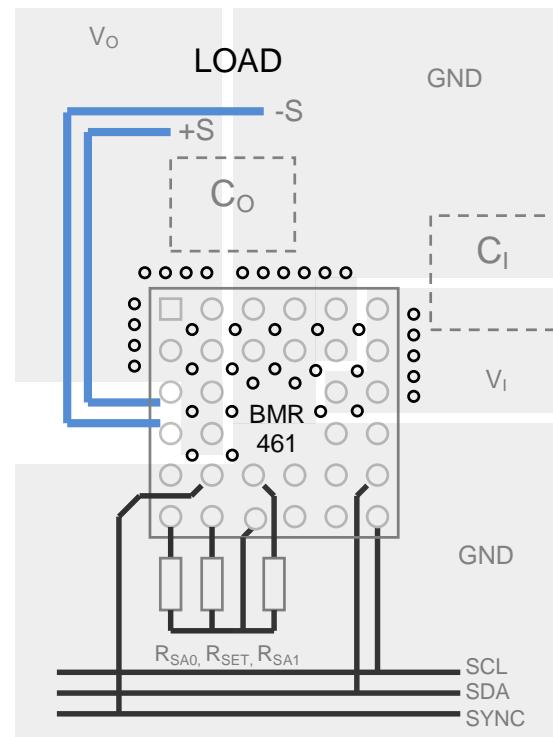
### PCB Layout Consideration

The radiated EMI performance of the product will depend on the PCB layout and ground layer design. If a ground layer is used, it should be connected to the output of the product and the equipment ground or chassis.

A ground layer will increase the stray capacitance in the PCB and improve the high frequency EMC performance.

Further layout recommendations are listed below.

- The pin strap resistors,  $R_{SET}$ , and  $R_{SA0}/R_{SA1}$  should be placed as close to the product as possible to minimize loops that may pick up noise.
- Avoid current carrying planes under the pin strap resistors and the PMBus signals.
- The capacitors  $C_I$  should be placed as close to the input pins as possible.
- The capacitors  $C_O$  should be placed close to the load.
- The point of output voltage sense should be "downstream" of  $C_O$  according to figure below.
- Care should be taken in the routing of the connections from the sensed output voltage to the S+ and S- terminals. These sensing connections should be routed as a differential pair, preferably between ground planes which are not carrying high currents. The routing should avoid areas of high electric or magnetic fields.
- If possible use planes on several layers to carry  $V_I$ ,  $V_O$  and GND. There should be a large number of vias close to the VIN, VOUT and GND pads in order to lower input and output impedances and improve heat spreading between the product and the host board.



Layout guidelines.

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

### PMBus Interface

This product provides a PMBus digital interface that enables the user to configure many aspects of the device operation as well as to monitor the input and output voltages, output current and device temperature. The product can be used with any standard two-wire I<sup>2</sup>C or SMBus host device. In addition, the product is compatible with PMBus version 1.1 and includes an SALERT line to help mitigate bandwidth limitations related to continuous fault monitoring. The PMBus signals, SCL, SDA and SALERT require passive pull-up resistors as stated in the SMBus Specification. Pull-up resistors are required to guarantee the rise time as follows:

$$\tau = R_p C_p \leq 1\mu\text{s}$$

where  $R_p$  is the pull-up resistor value and  $C_p$  is the bus loading. The maximum allowed bus load is 400 pF. The pull-up resistor should be tied to an external supply voltage in range from 2.7 to 5.5 V, which should be present prior to or during power-up. If the proper power supply is not available, voltage dividers may be applied. Note that in this case, the resistance in the equation above corresponds to parallel connection of the resistors forming the voltage divider.

See application note AN304 for details on interfacing the product with a microcontroller.

### Monitoring via PMBus

It is possible to monitor a wide variety of parameters through the PMBus interface. Fault conditions can be monitored using the SALERT pin, which will be asserted when any number of pre-configured fault or warning conditions occur. It is also possible to continuously monitor one or more of the power conversion parameters including but not limited to the following:

- Input voltage (READ\_VIN)
- Output voltage (READ\_VOUT)
- Output current (READ\_IOUT)
- Internal junction temperature (READ\_TEMPERATURE\_1)
- Switching frequency (READ\_FREQUENCY)
- Duty cycle (READ\_DUTY\_CYCLE)

### Reading Set Parameters

To clearly display the true performance of the product, PMBus command reads of set levels, limits and timing parameters will return the internally used values. For this reason, due to rounding or internal representation in the controller of the product, there may be a difference between written and read value of a PMBus command. This applies to PMBus commands of type Linear or VoutLinear. When verifying write transactions, tolerances according to the table below can be used.

| PMBus Command        | Read back accuracy |
|----------------------|--------------------|
| COMP_MODEL           | ±0                 |
| VIN_ON               | ±0.1 V             |
| VIN_OFF              |                    |
| VIN_UV_FAULT_LIMIT   |                    |
| VIN_OV_FAULT_LIMIT   |                    |
| IOUT_OC_FAULT_LIMIT  | ±0.1 A             |
| TON_DELAY            | ±0.3 ms            |
| TOFF_DELAY           |                    |
| TON_RISE             |                    |
| TOFF_FALL            |                    |
| VOUT_COMMAND         | ±0.001 V           |
| VOUT_MAX             |                    |
| VOUT_MARGIN_HIGH     |                    |
| VOUT_MARGIN_LOW      |                    |
| VOUT_TRANSITION_RATE | ±0.5 V             |
| VOUT_OV_FAULT_LIMIT  | ±0.01 V            |
| VOUT_UV_FAULT_LIMIT  |                    |
| POWER_GOOD_ON        |                    |
| POWER_GOOD_OFF       |                    |

### Non-Volatile Memory (NVM)

The product incorporates two Non-Volatile Memory areas for storage of the supported PMBus commands; the Default NVM and the User NVM.

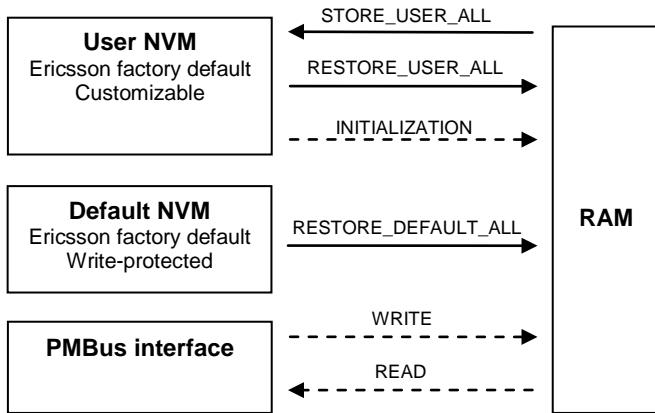
The Default NVM is pre-loaded with Ericsson factory default values. The Default NVM is write-protected and can be used to restore the Ericsson factory default values through the command RESTORE\_DEFAULT\_ALL. The RESTORE\_DEFAULT\_ALL command will load a nominal output level of 0 V. Therefore, after a RESTORE\_DEFAULT\_ALL command is sent, the input voltage must be cycled in order to load correct output voltage level according to VSET pin-strap resistor (see section Startup procedure).

The User NVM is pre-loaded with Ericsson factory default values. The User NVM is writable and open for customization. The values in the User NVM are loaded during initialization whereafter commands can be changed through the PMBus Interface. The STORE\_USER\_ALL command will store the changed parameters to the User NVM.

**BMR461 series PoL Regulators**  
Input 4.5-14 V, Output up to 18 A / 60 W

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB


**Protecting Commands**

The user may write-protect specific PMBus commands in the User NVM by following the steps below.

1. Enter the default password 0x0000 through the command `USER_PASSWD`. After the correct password is entered, `SECURITY_LEVEL` will read back 0x01 instead of default 0x00.
2. If desired, define a new password by writing it to the `USER_LOCK` command.
3. Define which commands should be locked by using the 256 bit command `USER_CONF`. Setting bit X will write-protect the PMBus command with code X.
4. Send command `STORE_USER_ALL`.
5. Cycle the input voltage.

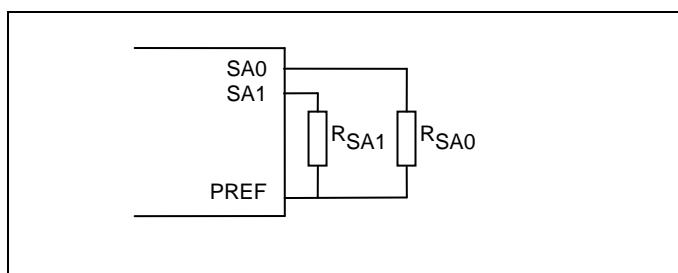
**Software Tools for Design and Production**

Ericsson provides software tools for configuration and monitoring of this product via the PMBus interface. For more information please contact your local Ericsson sales representative.

**PMBus Addressing**

The PMBus address should be configured with resistors connected between the SA0/SA1 pins and the PREF pin, as shown in the table and figure below. Note that five different values of  $R_{SA1}$  produce the same address. Recommended resistor values for hard-wiring PMBus addresses are shown in the table. 1% tolerance resistors are required. The configurable PMBus addresses range from 0x0A to 0x7F. In total 118 device address combinations are provided.

| R <sub>SA1</sub> [kΩ] |        |      |      |      |      |
|-----------------------|--------|------|------|------|------|
| R <sub>SA0</sub> [kΩ] | ≤ 4.22 | 5.11 | 6.19 | 7.15 | 8.25 |
| ≤ 4.22                | 0x0A   | 0x22 | 0x3A | 0x52 | 0x6A |
| 5.11                  | 0x0B   | 0x23 | 0x3B | 0x53 | 0x6B |
| 6.19                  | 0x0C   | 0x24 | 0x3C | 0x54 | 0x6C |
| 7.15                  | 0x0D   | 0x25 | 0x3D | 0x55 | 0x6D |
| 8.25                  | 0x0E   | 0x26 | 0x3E | 0x56 | 0x6E |
| 9.53                  | 0x0F   | 0x27 | 0x3F | 0x57 | 0x6F |
| 11.0                  | 0x10   | 0x28 | 0x40 | 0x58 | 0x70 |
| 12.7                  | 0x11   | 0x29 | 0x41 | 0x59 | 0x71 |
| 14.7                  | 0x12   | 0x2A | 0x42 | 0x5A | 0x72 |
| 17.8                  | 0x13   | 0x2B | 0x43 | 0x5B | 0x73 |
| 21.5                  | 0x14   | 0x2C | 0x44 | 0x5C | 0x74 |
| 26.1                  | 0x15   | 0x2D | 0x45 | 0x5D | 0x75 |
| 31.6                  | 0x16   | 0x2E | 0x46 | 0x5E | 0x76 |
| 38.3                  | 0x17   | 0x2F | 0x47 | 0x5F | 0x77 |
| 44.2                  | 0x18   | 0x30 | 0x48 | 0x60 | 0x78 |
| 51.1                  | 0x19   | 0x31 | 0x49 | 0x61 | 0x79 |
| 59.0                  | 0x1A   | 0x32 | 0x4A | 0x62 | 0x7A |
| 68.1                  | 0x1B   | 0x33 | 0x4B | 0x63 | 0x7B |
| 86.6                  | 0x1C   | 0x34 | 0x4C | 0x64 | 0x7C |
| 115                   | 0x1D   | 0x35 | 0x4D | 0x65 | 0x7D |
| 140                   | 0x1E   | 0x36 | 0x4E | 0x66 | 0x7E |
| 169                   | 0x1F   | 0x37 | 0x4F | 0x67 | 0x7F |
| 205                   | 0x20   | 0x38 | 0x50 | 0x68 | 0x7F |
| ≥ 237                 | 0x21   | 0x39 | 0x51 | 0x69 | 0x7F |



Schematic of connection of address resistor.

|                                          |
|------------------------------------------|
| <b>BMR461 series PoL Regulators</b>      |
| Input 4.5-14 V, Output up to 18 A / 60 W |

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

### Optional PMBus Addressing

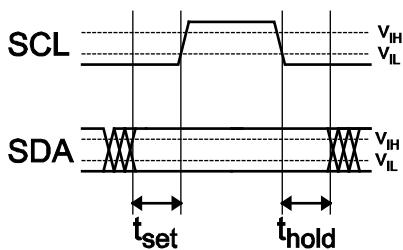
The user may leave SA0/SA1 open or shorted to PREF. Shorting SA0/SA1 to PREF corresponds to  $R_{SA0}/R_{SA1} \leq 4.22$  kΩ in the address table above. Leaving SA0/SA1 open corresponds to  $R_{SA0}/R_{SA1} \geq 274$  kΩ in the address table above.

### Reserved Addresses

Addresses listed in the table below are reserved or assigned according to the SMBus specification and may not be usable. Refer to the SMBus specification for further information.

| Address     | Comment                                                  |
|-------------|----------------------------------------------------------|
| 0x00        | General Call Address / START byte                        |
| 0x01        | CBUS address                                             |
| 0x02        | Address reserved for different bus format                |
| 0x03 - 0x07 | Reserved for future use                                  |
| 0x08        | SMBus Host                                               |
| 0x09 - 0x0B | Assigned for Smart Battery                               |
| 0x0C        | SMBus Alert Response Address                             |
| 0x28        | Reserved for ACCESS.bus host                             |
| 0x2C - 0x2D | Reserved by previous versions of the SMBus specification |
| 0x37        | Reserved for ACCESS.bus default address                  |
| 0x40 - 0x44 | Reserved by previous versions of the SMBus specification |
| 0x48 - 0x4B | Unrestricted addresses                                   |
| 0x61        | SMBus Device Default Address                             |
| 0x78 - 0x7B | 10-bit slave addressing                                  |
| 0x7C - 0x7F | Reserved for future use                                  |

### I<sup>2</sup>C/SMBus – Timing



Setup and hold times timing diagram

The setup time,  $t_{set}$ , is the time data, SDA, must be stable before the rising edge of the clock signal, SCL. The hold time  $t_{hold}$ , is the time data, SDA, must be stable after the rising edge of the clock signal, SCL. If these times are violated incorrect data may be captured or meta-stability may occur and the bus communication may fail. All standard SMBus protocols must be followed, including clock stretching. Refer to the SMBus

specification, for SMBus electrical and timing requirements. The bus-free time (time between STOP and START packet) according to Electrical Specification must be followed.

The product supports PEC (Packet Error Checking) according to the SMBus specification.

In operation cases according to the list below the product's controller will be executing processor-intensive tasks and may not respond to PMBus commands.

- During the presence of an overcurrent fault.
- Just after the output voltage has been enabled. It is recommended to wait until PG is asserted (or the equivalent time) before sending commands.
- When sending subsequent commands to the same unit it is recommended to insert additional delays after *write* transactions according to the table below.

| PMBus Command       | Delay after write before additional command |
|---------------------|---------------------------------------------|
| STORE_USER_ALL      | 500 ms                                      |
| STORE_DEFAULT_ALL   |                                             |
| DEADTIME_GCTRL      |                                             |
| USER_CONF           | 350 ms                                      |
| MANUF_CONF          |                                             |
| RESTORE_USER_ALL    |                                             |
| RESTORE_DEFAULT_ALL | 10 ms                                       |
| FREQUENCY_SWITCH    |                                             |
| VOUT_DROOP          |                                             |
| IOUT_CAL_GAIN       | 0.5 ms                                      |
| ADAPTIVE_MODE       |                                             |
| FEEDBACK EFFORT     |                                             |
| LOOP_CONFIG         |                                             |
| COMP_MODEL          |                                             |
| ZETAP               |                                             |

|                                          |
|------------------------------------------|
| <b>BMR461 series PoL Regulators</b>      |
| Input 4.5-14 V, Output up to 18 A / 60 W |

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

**PMBus Commands**

The product is PMBus compliant. The following table lists all the implemented PMBus read commands. For more detailed information see PMBus Power System Management Protocol Specification; Part I – General Requirements, Transport and Electrical Interface and PMBus Power System Management Protocol; Part II – Command Language.

| Designation                    | Code | Impl |
|--------------------------------|------|------|
| <b>Standard PMBus Commands</b> |      |      |
| <b>Control Commands</b>        |      |      |
| PAGE                           | 00h  | No   |
| OPERATION                      | 01h  | Yes  |
| ON_OFF_CONFIG                  | 02h  | Yes  |
| WRITE_PROTECT                  | 10h  | Yes  |
| <b>Output Commands</b>         |      |      |
| CAPABILITY (read only)         | 19h  | Yes  |
| VOUT_MODE (read Only)          | 20h  | Yes  |
| VOUT_COMMAND                   | 21h  | Yes  |
| VOUT_TRIM                      | 22h  | Yes  |
| VOUT_CAL_OFFSET                | 23h  | Yes  |
| VOUT_MAX                       | 24h  | Yes  |
| VOUT_MARGIN_HIGH               | 25h  | Yes  |
| VOUT_MARGIN_LOW                | 26h  | Yes  |
| VOUT_TRANSITION_RATE           | 27h  | Yes  |
| VOUT_DROOP                     | 28h  | Yes  |
| MAX_DUTY                       | 32h  | No   |
| FREQUENCY_SWITCH               | 33h  | Yes  |
| VIN_ON                         | 35h  | Yes  |
| VIN_OFF                        | 36h  | Yes  |
| IOUT_CAL_GAIN                  | 38h  | Yes  |
| IOUT_CAL_OFFSET                | 39h  | Yes  |
| VOUT_SCALE_LOOP                | 29h  | No   |
| VOUT_SCALE_MONITOR             | 2Ah  | No   |
| COEFFICIENTS                   | 30h  | No   |
| <b>Fault Limit Commands</b>    |      |      |
| POWER_GOOD_ON                  | 5Eh  | Yes  |
| POWER_GOOD_OFF                 | 5Fh  | Yes  |
| VOUT_OV_FAULT_LIMIT            | 40h  | Yes  |
| VOUT_OV_WARN_LIMIT             | 42h  | No   |
| VOUT_UV_WARN_LIMIT             | 43h  | No   |
| VOUT_UV_FAULT_LIMIT            | 44h  | Yes  |
| IOUT_OC_FAULT_LIMIT            | 46h  | Yes  |
| IOUT_OC_LV_FAULT_LIMIT         | 48h  | No   |
| IOUT_OC_WARN_LIMIT             | 4Ah  | No   |

| Designation                         | Code | Impl |
|-------------------------------------|------|------|
| IOUT_UC_FAULT_LIMIT                 | 4Bh  | No   |
| OT_FAULT_LIMIT                      | 4Fh  | Yes  |
| OT_WARN_LIMIT                       | 51h  | Yes  |
| UT_WARN_LIMIT                       | 52h  | No   |
| UT_FAULT_LIMIT                      | 53h  | No   |
| VIN_OV_FAULT_LIMIT                  | 55h  | Yes  |
| VIN_OV_WARN_LIMIT                   | 57h  | No   |
| VIN_UV_WARN_LIMIT                   | 58h  | No   |
| VIN_UV_FAULT_LIMIT                  | 59h  | Yes  |
| <b>Fault Response Commands</b>      |      |      |
| VOUT_OV_FAULT_RESPONSE              | 41h  | Yes  |
| VOUT_UV_FAULT_RESPONSE              | 45h  | Yes  |
| OT_FAULT_RESPONSE                   | 50h  | Yes  |
| UT_FAULT_RESPONSE                   | 54h  | No   |
| VIN_OV_FAULT_RESPONSE               | 56h  | Yes  |
| VIN_UV_FAULT_RESPONSE               | 5Ah  | Yes  |
| IOUT_OC_FAULT_RESPONSE              | 47h  | Yes  |
| IOUT_OC_LV_FAULT_RESPONSE           | 49h  | No   |
| IOUT_UC_FAULT_RESPONSE              | 4Ch  | No   |
| TON_MAX_FAULT_RESPONSE              | 63h  | Yes  |
| <b>Time setting Commands</b>        |      |      |
| TON_DELAY                           | 60h  | Yes  |
| TON_RISE                            | 61h  | Yes  |
| TOFF_DELAY                          | 64h  | Yes  |
| TOFF_FALL                           | 65h  | Yes  |
| TON_MAX_FAULT_LIMIT                 | 62h  | Yes  |
| <b>Status Commands (Read Only)</b>  |      |      |
| CLEARFAULTS                         | 03h  | Yes  |
| STATUS_BYTE                         | 78h  | Yes  |
| STATUS_WORD                         | 79h  | Yes  |
| STATUS_VOUT                         | 7Ah  | Yes  |
| STATUS_IOUT                         | 7Bh  | Yes  |
| STATUS_INPUT                        | 7Ch  | Yes  |
| STATUS_TEMPERATURE                  | 7Dh  | Yes  |
| STATUS_CML                          | 7Eh  | Yes  |
| STATUS_MFR_SPECIFIC                 | 80h  | Yes  |
| <b>Monitor Commands (Read Only)</b> |      |      |
| READ_VIN                            | 88h  | Yes  |
| READ_IIN                            | 89h  | No   |
| READ_VOUT                           | 8Bh  | Yes  |
| READ_IOUT                           | 8Ch  | Yes  |
| READ_TEMPERATURE_1                  | 8Dh  | Yes  |

|                                                                                 |  |  |
|---------------------------------------------------------------------------------|--|--|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W |  |  |
| 1/287 01 - BMR 461 Uen C Feb 2014                                               |  |  |
| © Ericsson AB                                                                   |  |  |

| Designation                      | Code | Impl |
|----------------------------------|------|------|
| READ_TEMPERATURE_2               | 8Eh  | Yes  |
| READ_FAN_SPEED_1                 | 90h  | No   |
| READ_DUTY_CYCLE                  | 94h  | Yes  |
| READ_FREQUENCY                   | 95h  | Yes  |
| READ_POUT                        | 96h  | No   |
| READ_PIN                         | 97h  | No   |
| <b>Group Commands</b>            |      |      |
| INTERLEAVE                       | 37h  | Yes  |
| PHASE_CONTROL                    | F0h  | No   |
| <b>Identification Commands</b>   |      |      |
| PMBUS_REVISION                   | 98h  | Yes  |
| MFR_ID                           | 99h  | Yes  |
| MFR_MODEL                        | 9Ah  | Yes  |
| MFR_REVISION                     | 9Bh  | Yes  |
| MFR_LOCATION                     | 9Ch  | Yes  |
| MFR_DATE                         | 9Dh  | Yes  |
| MFR_SERIAL                       | 9Eh  | Yes  |
| IC_DEVICE_ID                     | ADh  | Yes  |
| IC_DEVICE_REV                    | AEh  | Yes  |
| <b>Supervisory Commands</b>      |      |      |
| STORE_DEFAULT_ALL                | 11h  | Yes  |
| RESTORE_DEFAULT_ALL              | 12h  | Yes  |
| STORE_USER_ALL                   | 15h  | Yes  |
| RESTORE_USER_ALL                 | 16h  | Yes  |
| <b>Product Specific Commands</b> |      |      |
| ADAPTIVE_MODE                    | D0h  | Yes  |
| FEEDBACK EFFORT                  | D3h  | Yes  |
| LOOP_CONFIG                      | D5h  | Yes  |
| TEST_MODE                        | D9h  | Yes  |
| COMP_MODEL                       | DBh  | Yes  |
| STRAP_DISABLE                    | DCh  | Yes  |
| MANUF_CONF                       | E0h  | Yes  |
| MANUF_LOCK                       | E1h  | Yes  |
| MANUF_PASSWD                     | E2h  | Yes  |
| USER_CONF                        | E3h  | Yes  |
| USER_LOCK                        | E4h  | Yes  |
| USER_PASSWD                      | E5h  | Yes  |
| SECURITY_LEVEL                   | E6h  | Yes  |
| DEADTIME_GCTRL                   | E7h  | Yes  |
| ZETAP                            | E8h  | Yes  |

Impl is short for Implemented.

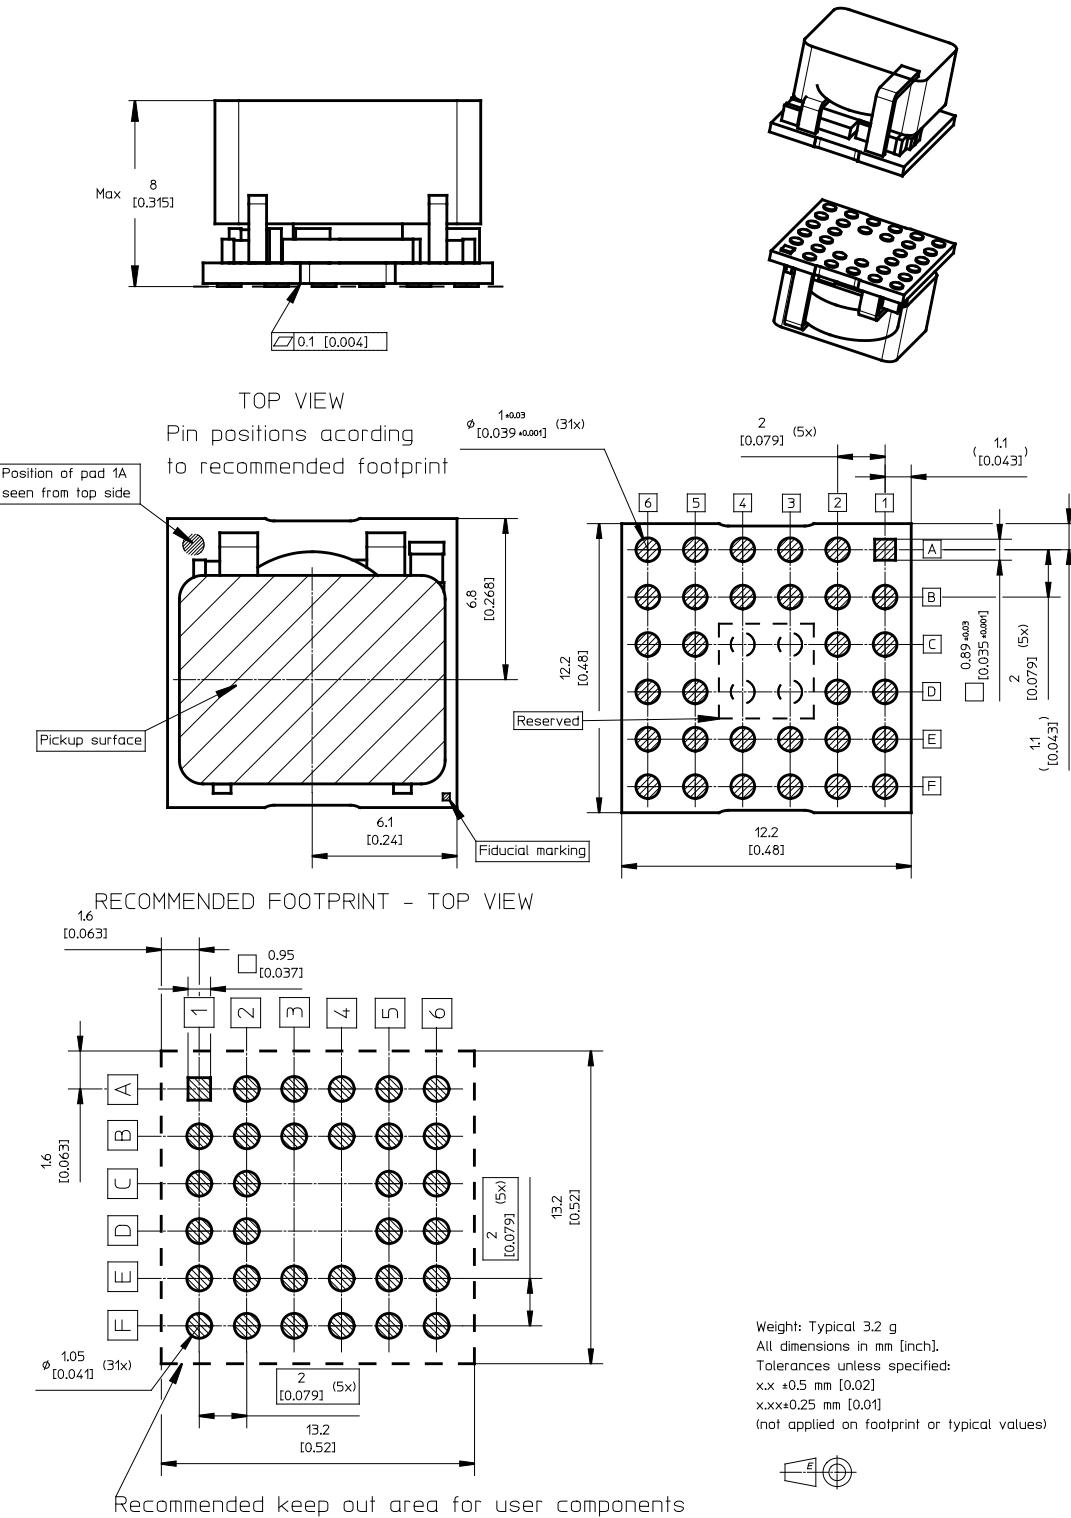
**BMR461 series** PoL Regulators

Input 4.5-14 V, Output up to 18 A / 60 W

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

## **Mechanical Information - Surface Mount Version**



All component placements – whether shown as physical components or symbolical outline – are for reference only and are subject to change throughout the product's life cycle, unless explicitly described and dimensioned in this drawing.

**BMR461 series PoL Regulators**  
Input 4.5-14 V, Output up to 18 A / 60 W

1/287 01 - BMR 461 Uen C Feb 2014

© Ericsson AB

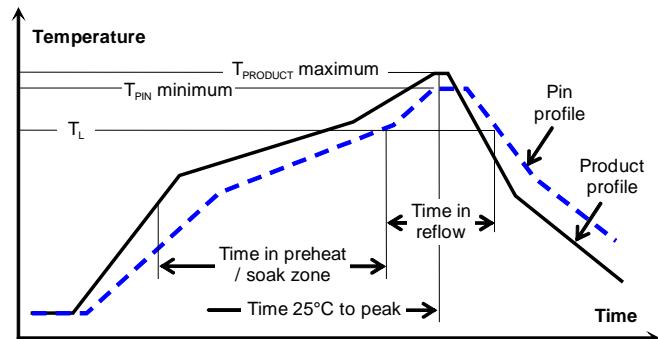
**Soldering Information -Surface Mounting**

The surface mount product is intended for forced convection or vapor phase reflow soldering in SnPb or Pb-free processes.

The reflow profile should be optimised to avoid excessive heating of the product. It is recommended to have a sufficiently extended preheat time to ensure an even temperature across the host PCB and it is also recommended to minimize the time in reflow.

A no-clean flux is recommended to avoid entrapment of cleaning fluids in cavities inside the product or between the product and the host board, since cleaning residues may affect long time reliability and isolation voltage.

| General reflow process specifications         |               | SnPb eutectic | Pb-free   |
|-----------------------------------------------|---------------|---------------|-----------|
| Average ramp-up ( $T_{PRODUCT}$ )             |               | 3°C/s max     | 3°C/s max |
| Typical solder melting (liquidus) temperature | $T_L$         | 183°C         | 221°C     |
| Minimum reflow time above $T_L$               |               | 30 s          | 30 s      |
| Minimum pin temperature                       | $T_{PIN}$     | 210°C         | 235°C     |
| Peak product temperature                      | $T_{PRODUCT}$ | 225°C         | 260°C     |
| Average ramp-down ( $T_{PRODUCT}$ )           |               | 6°C/s max     | 6°C/s max |
| Maximum time 25°C to peak                     |               | 6 minutes     | 8 minutes |

**Minimum Pin Temperature Recommendations**

Pin number C1 or D1 are chosen as reference location for the minimum pin temperature recommendation since these will likely be the coolest solder joint during the reflow process.

**SnPb solder processes**

For SnPb solder processes, a pin temperature ( $T_{PIN}$ ) in excess of the solder melting temperature, ( $T_L$ , 183°C for Sn63Pb37) for more than 30 seconds and a peak temperature of 210°C is recommended to ensure a reliable solder joint.

For dry packed products only: depending on the type of solder paste and flux system used on the host board, up to a recommended maximum temperature of 245°C could be used, if the products are kept in a controlled environment (dry pack handling and storage) prior to assembly.

**Lead-free (Pb-free) solder processes**

For Pb-free solder processes, a pin temperature ( $T_{PIN}$ ) in excess of the solder melting temperature ( $T_L$ , 217 to 221°C for SnAgCu solder alloys) for more than 30 seconds and a peak temperature of 235°C on all solder joints is recommended to ensure a reliable solder joint.

**Maximum Product Temperature Requirements**

Top of the product PCB near pin A2 or A5 is chosen as reference locations for the maximum (peak) allowed product temperature ( $T_{PRODUCT}$ ) since these will likely be the warmest part of the product during the reflow process.

**SnPb solder processes**

For SnPb solder processes, the product is qualified for MSL 1 according to IPC/JEDEC standard J-STD-020C.

During reflow  $T_{PRODUCT}$  must not exceed 225 °C at any time.

**Pb-free solder processes**

For Pb-free solder processes, the product is qualified for MSL 3 according to IPC/JEDEC standard J-STD-020C.

During reflow  $T_{PRODUCT}$  must not exceed 260 °C at any time.

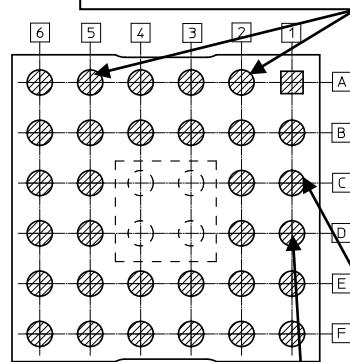
**Dry Pack Information**

Surface mounted versions of the products are delivered in standard moisture barrier bags according to IPC/JEDEC standard J-STD-033 (Handling, packing, shipping and use of moisture/reflow sensitivity surface mount devices).

Using products in high temperature Pb-free soldering processes requires dry pack storage and handling. In case the products have been stored in an uncontrolled environment and no longer can be considered dry, the modules must be baked according to J-STD-033.

**Thermocoupler Attachment**

Top of PWB near pin A2 or A5 for measurement of maximum product temperature,  $T_{PRODUCT}$



Pin C1 or D1 for measurement of minimum Pin (solder joint) temperature  $T_{PIN}$

|                                          |                                   |
|------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b>      | 1/287 01 - BMR 461 Uen C Feb 2014 |
| Input 4.5-14 V, Output up to 18 A / 60 W | © Ericsson AB                     |

### Surface Mount Assembly and Repair

The LGA of the product require particular care during assembly since the LGA's are hidden between the host board and the product's PCB. Special procedures are required for successful rework of these products.

#### Assembly

Automatic pick and place equipment should be used to mount the product on the host board. The use of a vision system, utilizing the fiducials on the bottom side of the product, will ensure adequate accuracy. Manual mounting of solder bump products is not recommended.

This module is not recommended for assembly on the bottom side of a customer board. If such an assembly is attempted, components may fall off the module during the second reflow process.

#### Repair

For a successful repair (removal and replacement) of a LGA product, a dedicated rework system should be used. The rework system should preferably utilize a reflow station and a bottom side heater might also be needed for the operation.


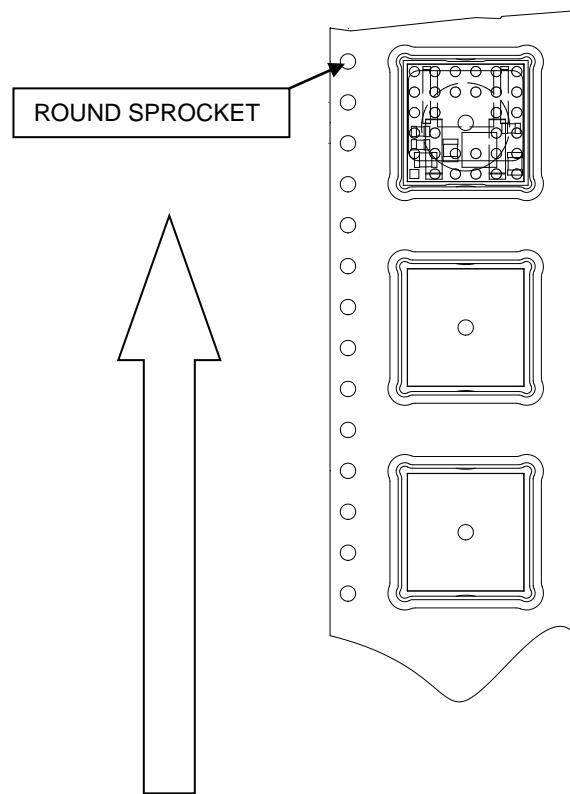
The product is an open frame design with a pick up surface on a large central component (in this case the choke). This pick up surface can be used for removal of the module provided that it is glued against module PCB before removal to prevent it from separating from the module PCB.

For specific instructions regarding removal and re-solder of the module refer to 1541 - BMR 461.

### Delivery Package Information

The products are delivered in antistatic carrier tape (EIA 481 standard).

| Carrier Tape Specifications           |                         |
|---------------------------------------|-------------------------|
| <b>Material</b>                       | PS, antistatic          |
| <b>Surface resistance</b>             | < $10^7$ Ohm/square     |
| <b>Bakeability</b>                    | The tape is not bakable |
| <b>Tape width, W</b>                  | 24 mm [0.94 inch]       |
| <b>Pocket pitch, <math>P_1</math></b> | 20 mm [0.79 inch]       |
| <b>Pocket depth, <math>K_0</math></b> | 8.6 mm [0.339 inch]     |
| <b>Reel diameter</b>                  | 330 mm [13 inch]        |
| <b>Reel capacity</b>                  | 280 products /reel      |
| <b>Reel weight</b>                    | 1160 g/full reel        |



|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>BMR461 series PoL Regulators</b><br>Input 4.5-14 V, Output up to 18 A / 60 W | 1/287 01 - BMR 461 Uen C Feb 2014 |
|                                                                                 | © Ericsson AB                     |

**Product Qualification Specification**

| Characteristics                                |                                                                    |                                                                       |                                                                                         |
|------------------------------------------------|--------------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| External visual inspection                     | IPC-A-610                                                          |                                                                       |                                                                                         |
| Change of temperature<br>(Temperature cycling) | IEC 60068-2-14 Na                                                  | Temperature range<br>Number of cycles<br>Dwell/transfer time          | -40 to 100°C<br>1000<br>15 min/0-1 min                                                  |
| Cold (in operation)                            | IEC 60068-2-1 Ad                                                   | Temperature $T_A$<br>Duration                                         | -45°C<br>72 h                                                                           |
| Damp heat                                      | IEC 60068-2-67 Cy                                                  | Temperature<br>Humidity<br>Duration                                   | 85°C<br>85 % RH<br>1000 hours                                                           |
| Dry heat                                       | IEC 60068-2-2 Bd                                                   | Temperature<br>Duration                                               | 125°C<br>1000 h                                                                         |
| Electrostatic discharge<br>susceptibility      | IEC 61340-3-1, JESD 22-<br>A114<br>IEC 61340-3-2, JESD 22-<br>A115 | Human body model (HBM)<br>Machine Model (MM)                          | Class 2, 2000 V<br>Class 3, 200 V                                                       |
| Immersion in cleaning<br>solvents              | IEC 60068-2-45 XA, method<br>2                                     | Water<br>Glycol ether<br>Isopropyl alcohol                            | 55°C<br>35°C<br>35°C                                                                    |
| Mechanical shock                               | IEC 60068-2-27 Ea                                                  | Peak acceleration<br>Duration                                         | 100 g<br>6 ms                                                                           |
| Moisture reflow sensitivity                    | J-STD-020C                                                         | Level 1 (SnPb-eutectic)<br>Level 3 (Pb Free)                          | 225°C<br>260°C                                                                          |
| Operational life test                          | MIL-STD-202G, method<br>108A                                       | Duration                                                              | 1000 h                                                                                  |
| Robustness of terminations                     | IEC 60068-2-21 Test Ua1<br>IEC 60068-2-21 Test Ue1                 | Through hole mount<br>products<br>Surface mount products              | All leads<br>All leads                                                                  |
| Solderability                                  | IEC 60068-2-58 test Td                                             | Preconditioning<br>Temperature, SnPb Eutectic<br>Temperature, Pb-free | 150°C dry bake 16 h<br>215°C<br>235°C                                                   |
| Vibration, broad band<br>random                | IEC 60068-2-64 Fh, method<br>1                                     | Frequency<br>Spectral density<br>Duration                             | 10 to 500 Hz<br>0.07 g <sup>2</sup> /Hz<br>10 min in each 3<br>perpendicular directions |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ericsson Power Modules:](#)

[BMR4613001/001](#) [BMR4612001/001](#) [BMR4614001/001](#)