



Automotive NJU7870-Z2 Amplifier for resolver excitation


FEATURES

- AEC-Q100 Grade 1
- Differential Voltage Input/ Differential Current Output Transconductance 13.5mA_p/V_{pp} typ.
- Operating Voltage 2.4V to 5.5V
- Supply Current 4.5mA typ.
- Thermal shutdown
- Shutdown function
- Operating Temperature -40°C to 125°C
- Package SSOP16-B3

APPLICATIONS

- Angle Resolver

BLOCK DIAGRAM

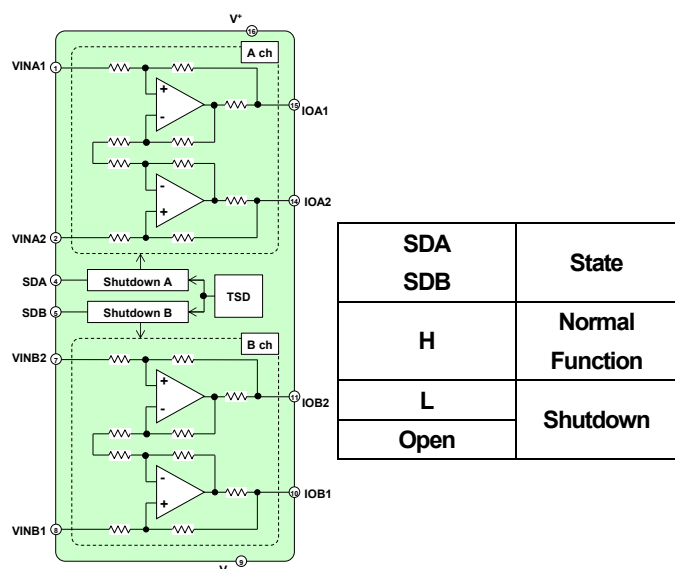

GENERAL DESCRIPTION


NJU7870 is an IC with integrated resolver excitation function. It has a built-in 2-channel excitation circuit for differential voltage input and differential current output. It is possible to control each circuit from the external input, and combine with various resolver systems such as 1-phase excitation or 2-phase excitation.

In addition, the NJU7870 achieves high precision performance matching for each phase that has been difficult to achieve with a discrete configuration.


The NJU7870 adopts the small package SSOP16-B3, and the external parts are only the capacitor connected to the power supply. It contributes to a significant reduction in mounting area compared with the conventional discrete circuit configuration.

TYPICAL APPLICATION


●1-phase excitation 2-phase output

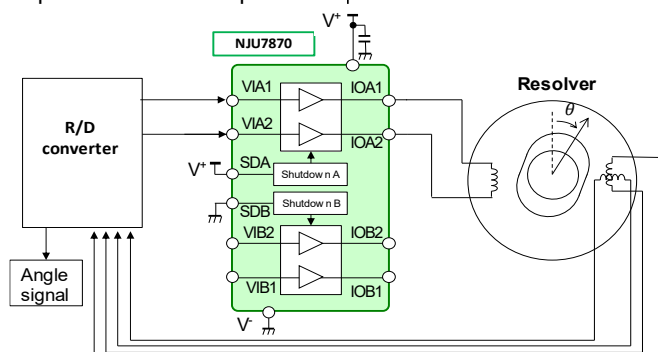

●2-phase excitation 2-phase output

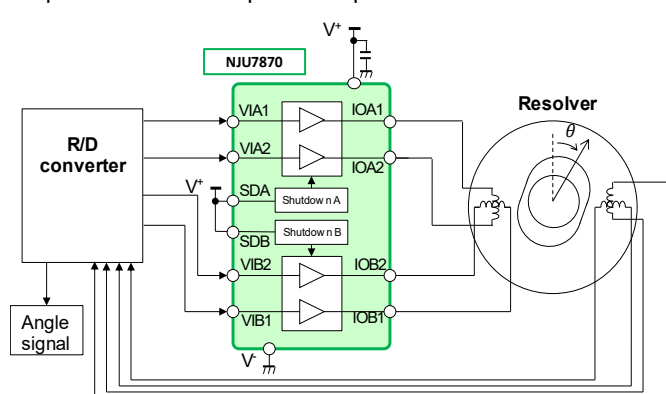

■ PIN CONFIGURATIONS

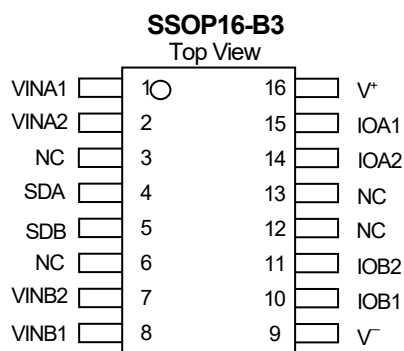


PIN NO	NAME	I/O	FUNCTION	REMARKS *1
1	VINA1	I	Ach Analog Input 1	
2	VINA2	I	Ach Analog Input 2	
3	NC	-	No Connect	*2
4	SDA	I	Ach Shutdown Input (High Active)	100k pull-down
5	SDB	I	Bch Shutdown Input (High Active)	100k pull-down
6	NC	-	No Connect	*2
7	VINB2	I	Bch Analog Input 2	
8	VINB1	I	Bch Analog Input 1	
9	V ⁻	G	GND	
10	IOB1	O	Bch Analog Output 1	
11	IOB2	O	Bch Analog Output 2	
12	NC	-	No Connect	*2
13	NC	-	No Connect	*2
14	IOA2	O	Ach Analog Output 2	
15	IOA1	O	Ach Analog Output 1	
16	V ⁺	-	Supply	

*1 Treatment of unused channels: "Lo" (or "V-") is recommended for shutdown terminals, and "Floating" is recommended for input/output terminals.

*2 Treatment of NC terminals: "Floating" is recommended for NC terminals.

■ PRODUCT NAME INFORMATION

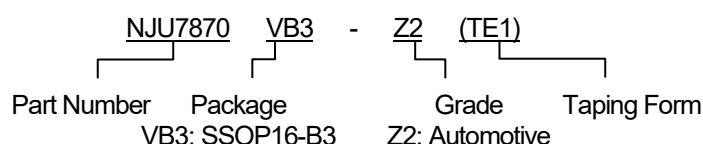

■ ORDERING INFORMATION

PRODUCT NAME	PACKAGE	RoHS	HALOGEN FREE	TERMINAL FINISH	MARKING	WEIGHT (mg)	QUANTITY (pcs)
NJU7870VB3-Z2 (TE1)	SSOP16-B3	yes	yes	Sn2Bi	7870Z2	68	2000

* The detail information of automotive grades and recommended applications are described in Nisshinbo Micro Devices Web site.
(<https://www.nisshinbo-microdevices.co.jp/en/applications/quality-grade/>)

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	$V^+ - V^-$	7	V
Differential Input Voltage ⁽¹⁾	V_{ID}	± 7	V
Input Voltage ⁽²⁾	V_{IN}	$V^- - 0.3$ to $V^+ + 0.3$	V
Power Dissipation ($T_a = 25^\circ\text{C}$) SSOP16-B3	P_D	2-Layer / 4-Layer 870 ⁽³⁾ / 1200 ⁽⁴⁾	mW
Storage Temperature	T_{stg}	-55 to 150	$^\circ\text{C}$
Junction Temperature	T_j	150	$^\circ\text{C}$

(1) Differential voltage is the voltage difference between VINA1 and VINA2.

(2) Input voltage is the voltage should be allowed to apply to the input terminal independent of the magnitude of V^+ .

(3) 2-Layer: Mounted on glass epoxy board (76.2 mm × 114.3 mm × 1.6 mm: based on EIA/JEDEC standard, 2-layer FR-4).

(4) 4-Layer: Mounted on glass epoxy board (76.2 mm × 114.3 mm × 1.6 mm: based on EIA/JEDEC standard, 4-layer FR-4), internal Cu area: 74.2 mm × 74.2 mm.

■ RECOMMENDED OPERATING CONDITIONS


PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	$V^+ - V^-$	2.4 to 5.5	V
Operating Temperature	T_{opr}	-40 to 125	$^\circ\text{C}$

■ ELECTRICAL CHARACTERISTICS

(V⁺ = 3.0V to 5.5V, V⁻ = 0V, V_{IC} = V⁺/2, Z_L: resolver model (note1), V_{SDA}=V_{SDB}=V⁺, T_a = 25°C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
AMP (Propagation Characteristic)						
Transconductance	G _m	ΔV _{IN} = 1V _{pp} (note2), f = 10kHz, Sin wave, T _a = -40°C to 125°C	9.45	13.50	17.55	mA _p /V _{pp}
Channel to Channel Matching (Transconductance)	δG _m		-1.9	-	+1.9	%
Linearity 1 (V ⁺ = 3V)	L _{Gm1}	V ⁺ = 3V, f = 10kHz, Sin wave, {G _m (ΔV _{IN} = 1.5V _{pp}) - G _m (ΔV _{IN} = 1V _{pp})} / G _m (ΔV _{IN} = 1V _{pp}), T _a = -40°C to 125°C	-3	-	+3	%
Linearity 2 (V ⁺ = 5.5V)	L _{Gm2}	V ⁺ = 5.5V, f = 10kHz, Sin wave, {G _m (ΔV _{IN} = 3V _{pp}) - G _m (ΔV _{IN} = 1V _{pp})} / G _m (ΔV _{IN} = 1V _{pp}), T _a = -40°C to 125°C	-3	-	+3	%
G _m Flatness	ΔG _m	V ⁺ = 3.3V, {G _m (f = 20kHz) - G _m (f = 10kHz)} / G _m (f = 10kHz), ΔV _{IN} = 1V _{pp}	-5	-	+5	%
Phase Difference between Input and Output	φ	ΔV _{IN} = 1V _{pp} , f = 10kHz, Sin wave, V _{in} →I _{out} , T _a = -40°C to 125°C	-8	-3	+2	deg
Channel to Channel Matching (Phase Difference between Input and Output)	δφ		-0.95	-	+0.95	deg
Common-mode Gain	G _{cm}	ΔV _{IN} = 0V, V _{IC} = 0.5V to (V ⁺) - 0.5V, T _a = -40°C to 125°C	0.97	1.00	1.03	V/V
Common-mode Input Voltage Range	V _{ICM}	T _a = -40°C to 125°C	0.5	-	(V ⁺)-0.5	V
AMP (Output Characteristics)						
Maximum Output Current 1	I _{OMAX1}	DC, V ⁺ = 5V, ΔV _{IN} = ±5V, T _a = -40°C to 125°C	30	-	-	mA
Maximum Output Current 2	I _{OMAX2}	DC, V ⁺ = 3.3V, ΔV _{IN} = ±3.3V T _a = -40°C to 125°C	18	-	-	mA
Maximum Output Voltage High	V _{OH}	DC, Z _L = open, V _{IN1} = V ⁺ , V _{IN2} = 0V, T _a = -40°C to 125°C	(V ⁺)-75m	-	-	V
Maximum Output Voltage Low	V _{OL}	DC, Z _L = open, V _{IN1} = 0V, V _{IN2} = V ⁺ , T _a = -40°C to 125°C	-	-	(V ⁻)+75m	V
Output Offset Current	I _{OS}	DC, ΔV _{IN} = 0V, T _a = -40°C to 125°C	-	-	0.4	mA
AMP (Input Characteristics)						
Input Sink Current	I _{IN_Sink}	DC, ΔV _{IN} = 0V, T _a = -40°C to 125°C	-	80	160	μA
AMP (Power Supply)						
Supply Current	I _{SUPPLY}	No Signal, T _a = -40°C to 125°C	-	4.5	8.5	mA
AMP (Dynamic characteristics)						
Slew Rate	SR	V ⁺ = 3.3V, ΔV _{IN} = 1V _{pp}	-	1.5	-	V/μs
Shutdown						
High Level Input Voltage (Normal Function)	V _{IH}	T _a = -40°C to 125°C	(V ⁺)*0.7	-	-	V
Low Level Input Voltage (Shutdown)	V _{IL}	T _a = -40°C to 125°C	-	-	(V ⁺)*0.3	V
Supply Current (Shutdown)	I _{SDN}	V _{SDA} = V _{SDB} = V ⁻ , T _a = -40°C to 125°C	-	-	150	μA

(note 1) Resolver model

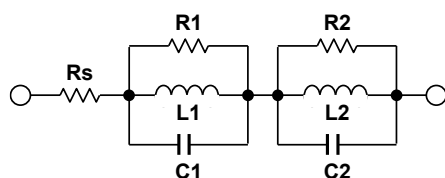

$R_s = 10\Omega$, $R_1 = 2400\Omega$, $R_2 = 3600\Omega$
 $L_1 = 1\text{mH}$, $L_2 = 0.39\text{mH}$.
 $C_1 = 82\text{pF}$, $C_2 = 39\text{pF}$

(note 2) ΔV_{IN} means differential input voltage; $\Delta V_{IN} = V_{INA1} - V_{INA2}$ or $V_{INB1} - V_{INB2}$


■ THERMAL CHARACTERISTICS

PACKAGE	SYMBOL	VALUE	UNIT
Junction-To-Ambient Thermal Resistance SSOP16-B3	θ_{ja}	2-Layer / 4-Layer 145 ⁽³⁾ / 102 ⁽⁴⁾	°C/W
Junction-To-Top of Package Characterization Parameter SSOP16-B3	ψ_{jt}	2-Layer / 4-Layer 19 ⁽³⁾ / 16 ⁽⁴⁾	°C/W

(3) 2-Layer: Mounted on glass epoxy board (76.2 mm × 114.3 mm × 1.6 mm: based on EIA/JEDEC standard, 2-layer FR-4).

(4) 4-Layer: Mounted on glass epoxy board (76.2 mm × 114.3 mm × 1.6 mm: based on EIA/JEDEC standard, 4-layer FR-4), internal Cu area: 74.2 mm × 74.2 mm.






■ POWER DISSIPATION vs. AMBIENT TEMPERATURE

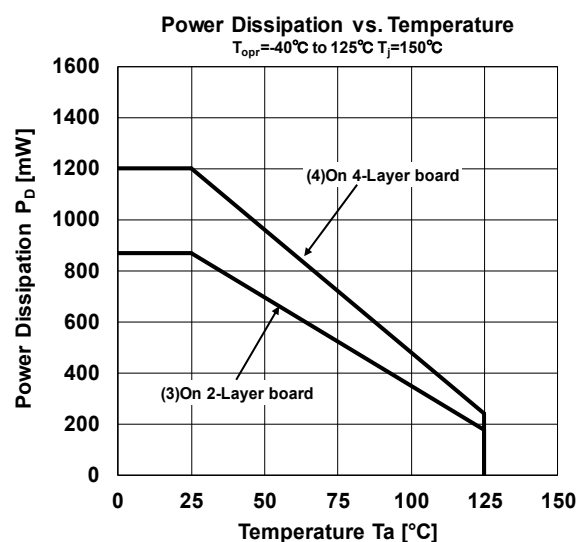






(3) 2-Layer: Mounted on glass epoxy board (76.2 mm × 114.3 mm × 1.6 mm: based on EIA/JEDEC standard, 2-layer FR-4).

(4) 4-Layer: Mounted on glass epoxy board (76.2 mm × 114.3 mm × 1.6 mm: based on EIA/JEDEC standard, 4-layer FR-4), internal Cu area: 74.2 mm × 74.2 mm.







■ TYPICAL CHARACTERISTICS

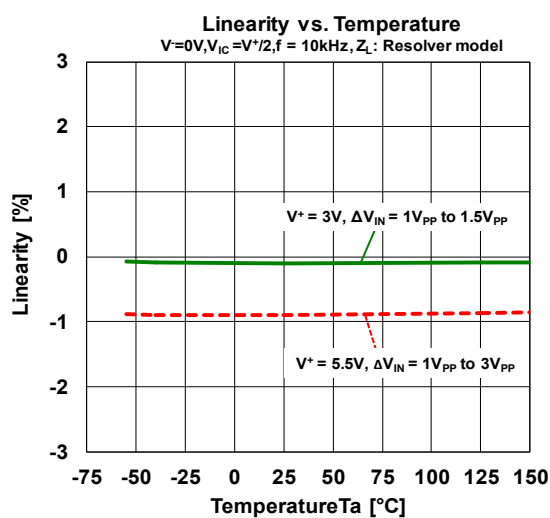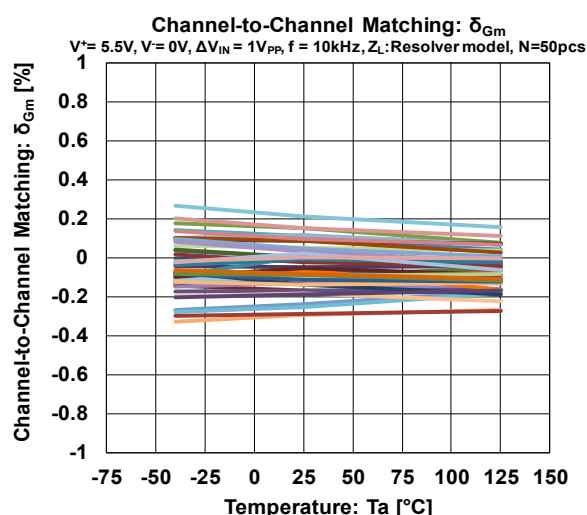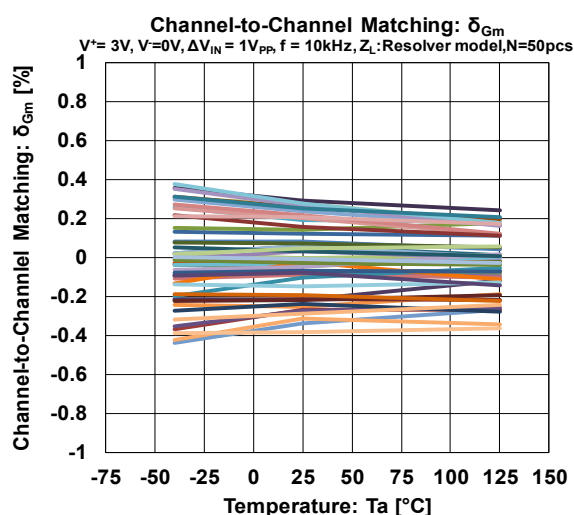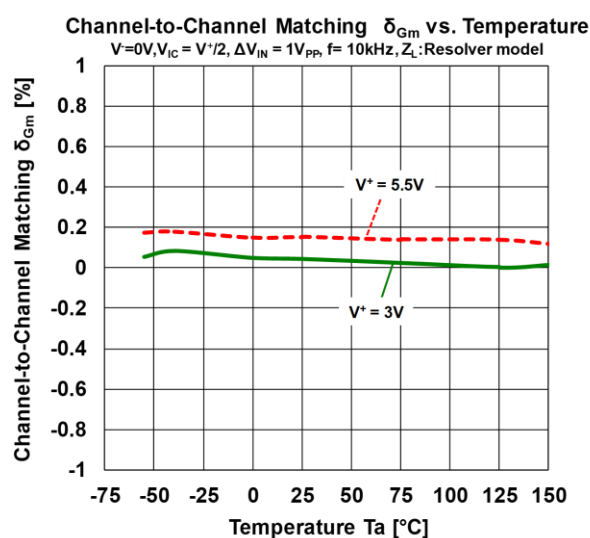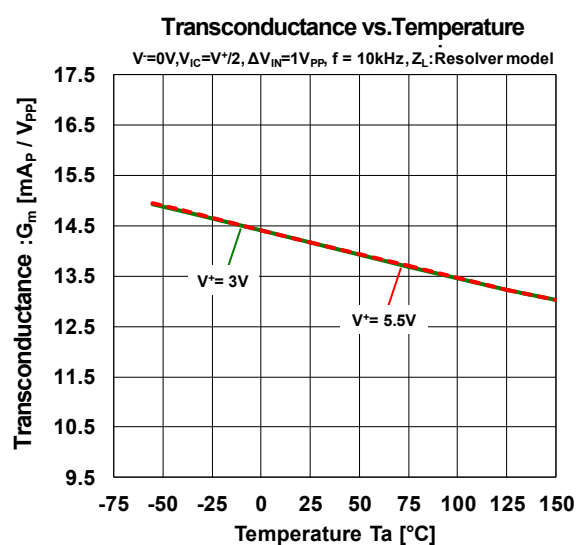






■ TYPICAL CHARACTERISTICS

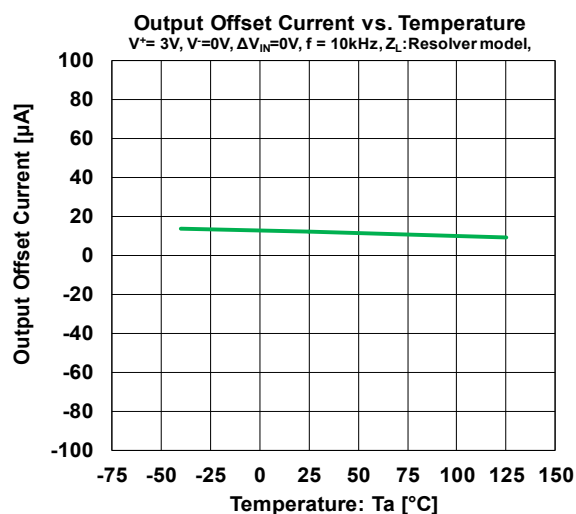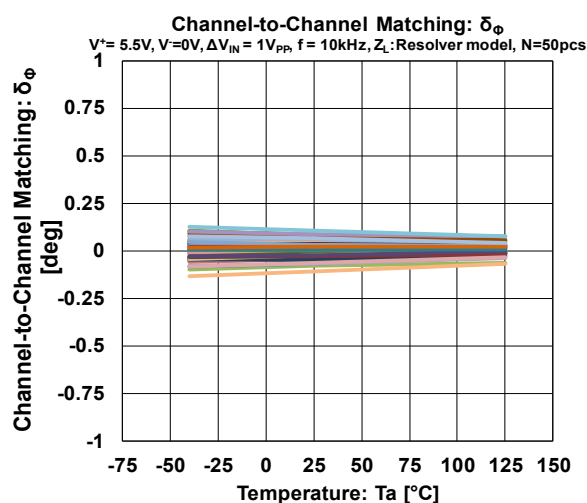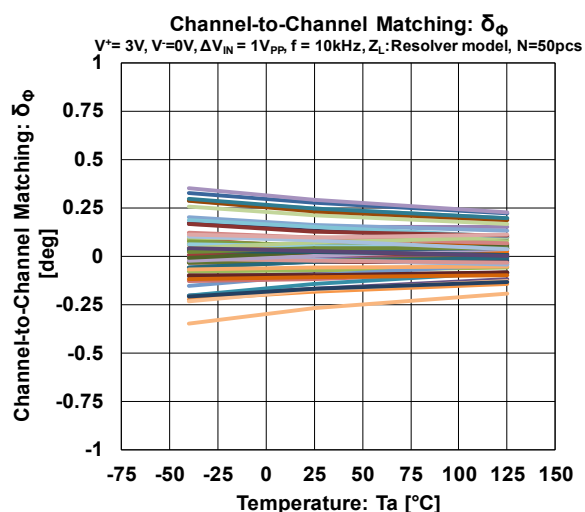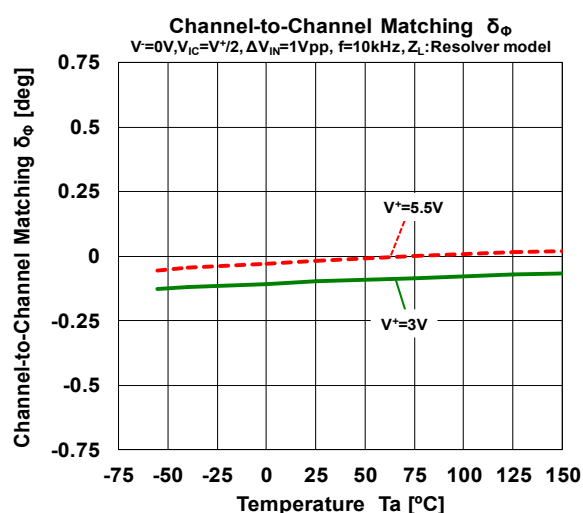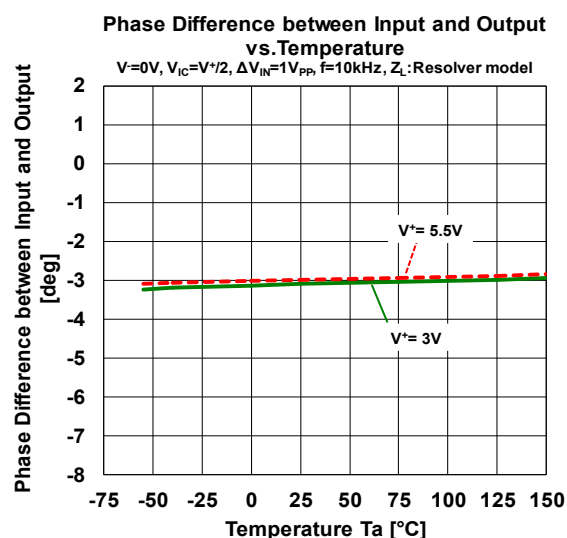

■ TYPICAL CHARACTERISTICS

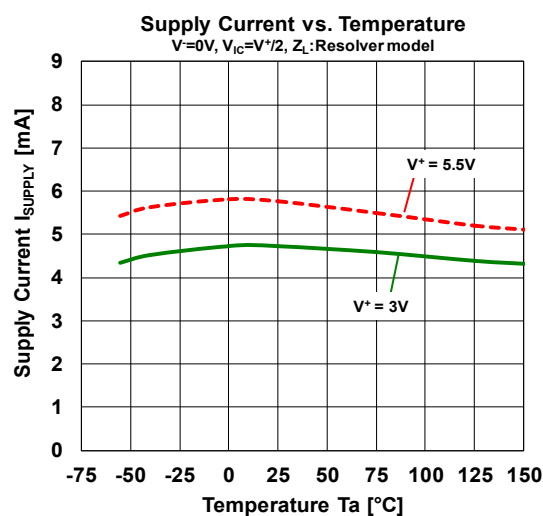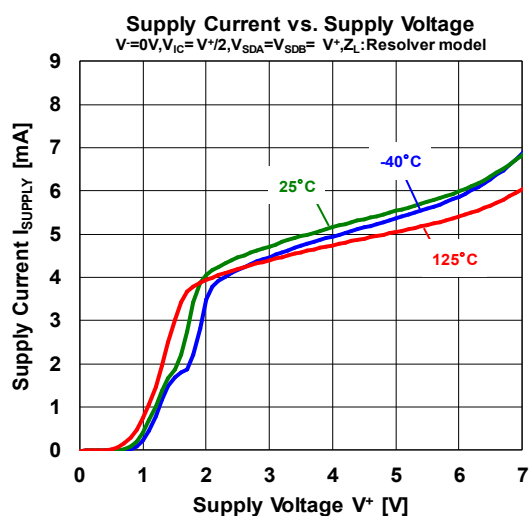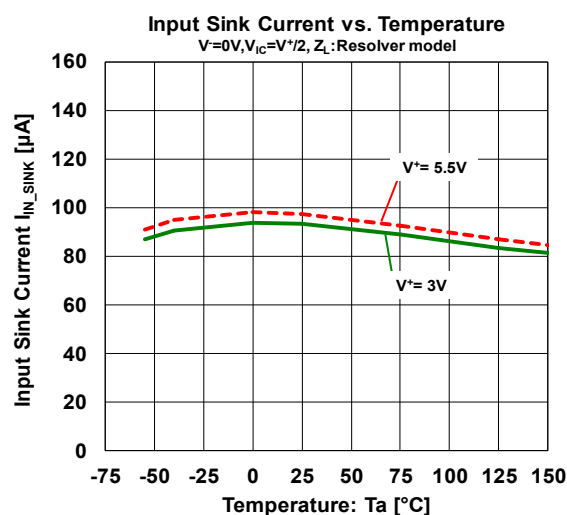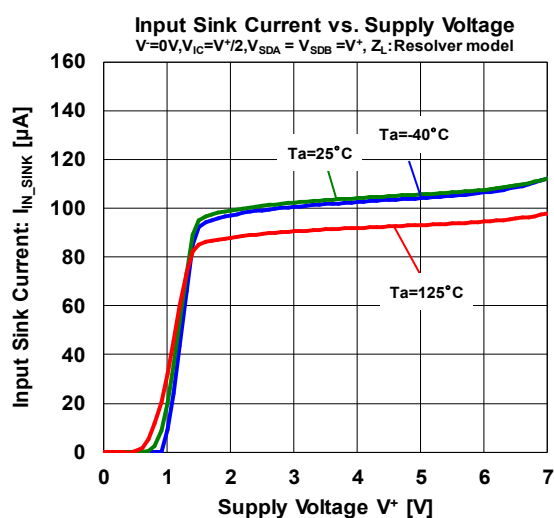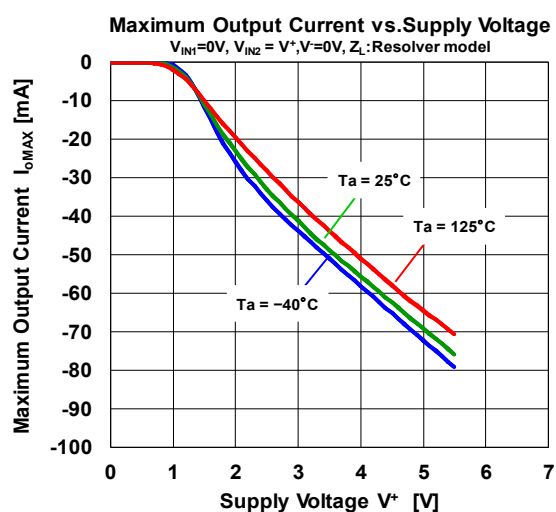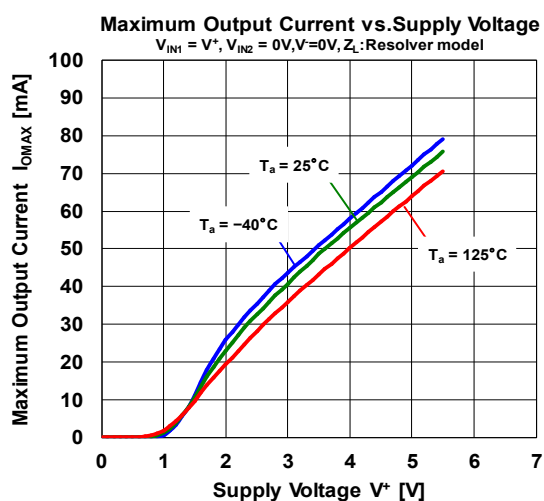

■ TYPICAL CHARACTERISTICS

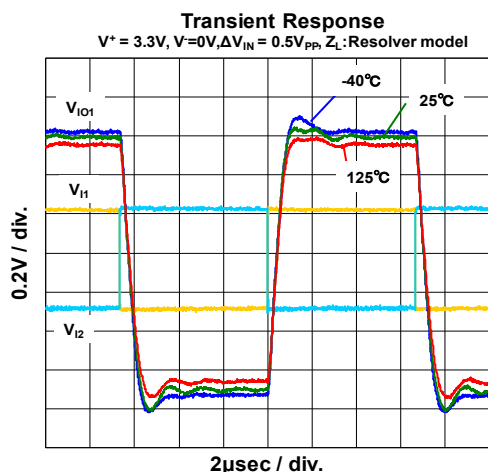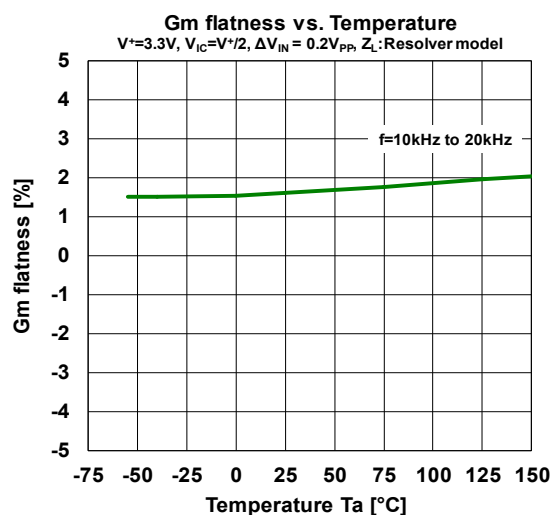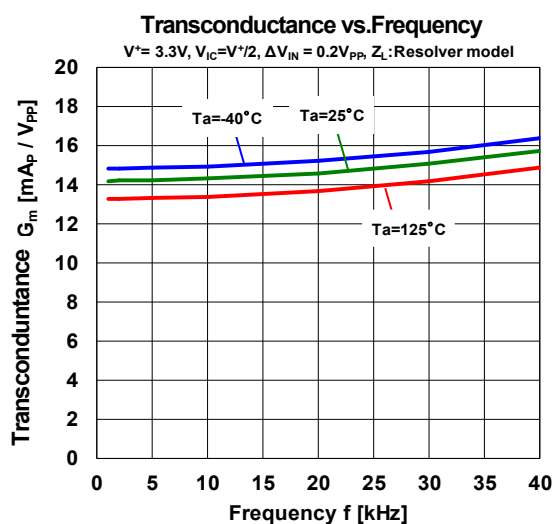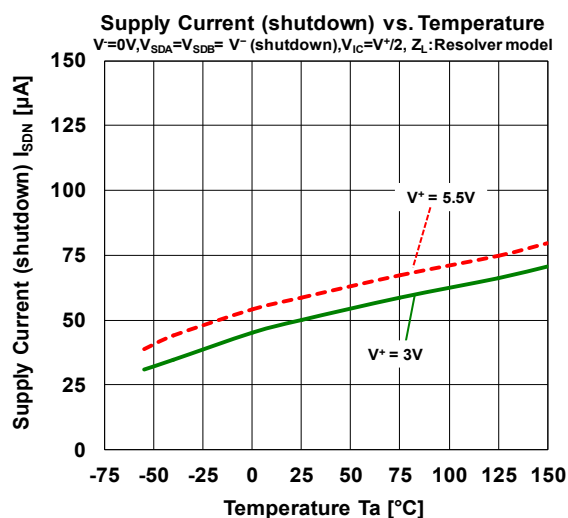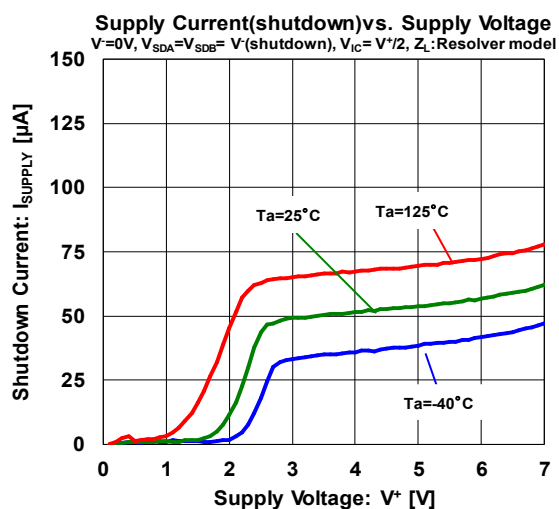

APPLICATION NOTE

Operating principle

NJU7870 is a transconductance amplifier with differential voltage input and differential current output. The relationship between the output current and input voltage is expressed by the following formula.

$$I_{OUT} = G_m \times \Delta V_{IN}$$

(*) G_m : Transconductance,

ΔV_{IN} : input voltage ($\Delta V_{IN} = V_{IN1} - V_{IN2}$)

example

Figure 1 shows an image of the input voltage ΔV_{IN} and output current I_{OUT} in a sinusoidal response.

$t = t_1$

$$I_{OUT} = G_m \times \Delta V_{IN} = 13.5[\text{mA}_P/\text{V}_{PP}] \times (3 - 2)[\text{V}_{PP}] = 13.5[\text{mA}_P] \quad (\text{From } I_{O1} \text{ to } I_{O2})$$

$t = t_2$

$$I_{OUT} = G_m \times \Delta V_{IN} = 13.5[\text{mA}_P/\text{V}_{PP}] \times (2 - 3)[\text{V}_{PP}] = -13.5[\text{mA}_P] \quad (\text{From } I_{O2} \text{ to } I_{O1})$$

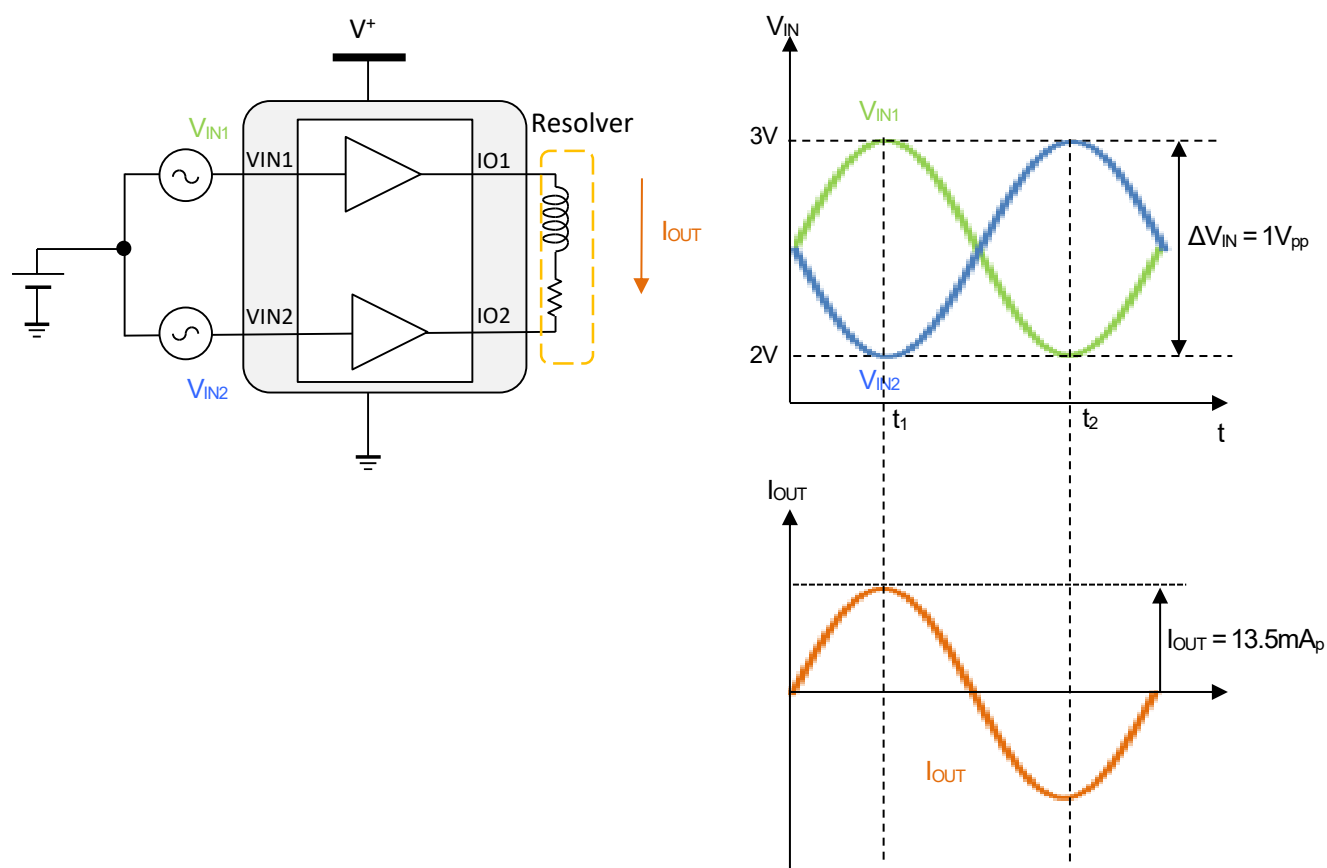


Figure 1. Operation example

Description of electrical characteristics

This section describes electrical characteristics of NJU7870. Please check the electrical characteristics on page 4 of the data sheet for detailed conditions.

AMP (Propagation Characteristic)**Transconductance (G_m)**

As shown in the formula below.

$$G_m = \frac{I_{OUT}}{\Delta V_{IN}}$$

(*) I_{OUT} : Variation of output current., ΔV_{IN} : Variation of input voltage

Channel to Channel Matching (Transconductance) (δ_{Gm})

The difference between the transconductance channels is shown as shown in the following formula.

$$\delta_{Gm} = \frac{G_{mA} - G_{mB}}{G_{mA}} \times 100[\%]$$

(*) G_{mA} : transconductance of Ach. G_{mB} : transconductance of Bch.

Linearity (L_{Gm1} , L_{Gm2})

It shows the variation of transconductance due to the input amplitude. In NJU7870, two conditions (linearity 1 and 2) with different power supply voltage and input amplitude are specified.

Phase Difference between Input and Output (Φ)

As shown in the Figure2. below, the phase difference of the output current I_{OUT} (sine wave) is shown based on the input voltage (sine wave / $f = 10\text{kHz}$).

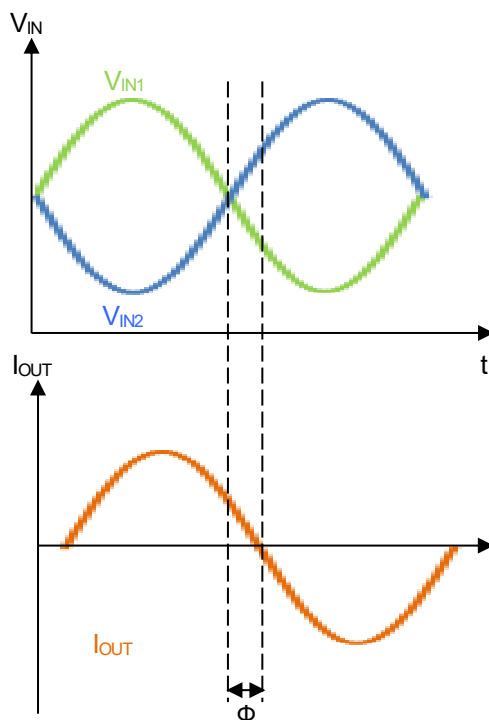


Figure2. Phase Difference between Input and Output

Channel to Channel Matching(Phase Difference between Input and Output) ($\delta\Phi$)


As shown in the following formula, the difference between the channels of the phase difference between input and output is shown.

$$\delta\Phi = \frac{\Phi_A - \Phi_B}{\Phi_A} \times 100[\%]$$

(*) Φ_A : Phase Difference between Input and Output of Ach. Φ_B : Phase Difference between Input and Output of Bch.

Common-mode Gain (G_{cm})

As shown in the formula below.

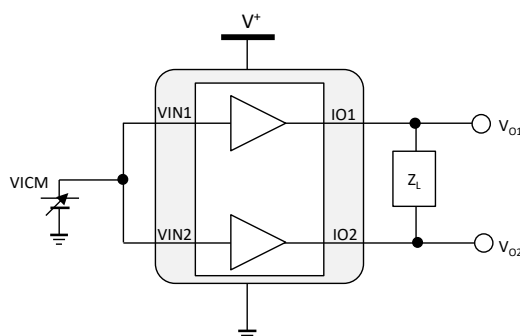

$$V_{OCM} = \frac{V_{O1} + V_{O2}}{2}$$

$$G_{cm} = \frac{\Delta V_{OCM}}{\Delta V_{ICM}}$$

(*) ΔV_{OCM} : Variation of the common mode output voltage, ΔV_{ICM} : Variation of the common mode input voltage

Figure3. Common-mode Gain

AMP (Output Characteristics)**Maximum output current (I_{OMAX1} , I_{OMAX2})**

This is the current value that can be output. As the lower limit (min.), it is specified as 30mA /ch. at $V^+ = 5V$ (maximum output current 1) and 18mA/ch. at $V^+ = 3.3V$ (maximum output current 2). However, depending on the impedance of the load, the output voltage may be distorted even if the current value is smaller than the specified lower limit. For details, refer to "Output voltage limit".

Maximum Output Voltage (V_{OH} , V_{OL})

It shows the voltage range that the amplifier can output when there is no load. V_{OH} indicates the upper limit of the outputable range, and V_{OL} indicates the lower limit of the outputable range.

Output Offset Current (I_{OS})

It shows the error current flowing from the output when the input voltage (V_{IN1} , V_{IN2}) is the same voltage.

precautions for use**Bypass Capacitor**

Connect a bypass capacitor near the power supply pin (pin 16) to supply a stable power supply voltage with less noise to the IC. Install bypass capacitors as close to the power supply pin (pin 16) as possible, especially if the wiring from the power supply to the power supply pins is long, or if you are using a noisy signal as the power supply.

Input Current

The NJU7870 has a constant current source connected to V₋ from the input terminals (1pin, 2pin, 7pin, 8pin) to prevent oscillation when the input terminal is open. Therefore, it is not possible to insert a capacitor in series with the input signal as shown in figure 4. The value of the input current is specified by "Input Sink Current", and use an input signal source that can drive this current value.

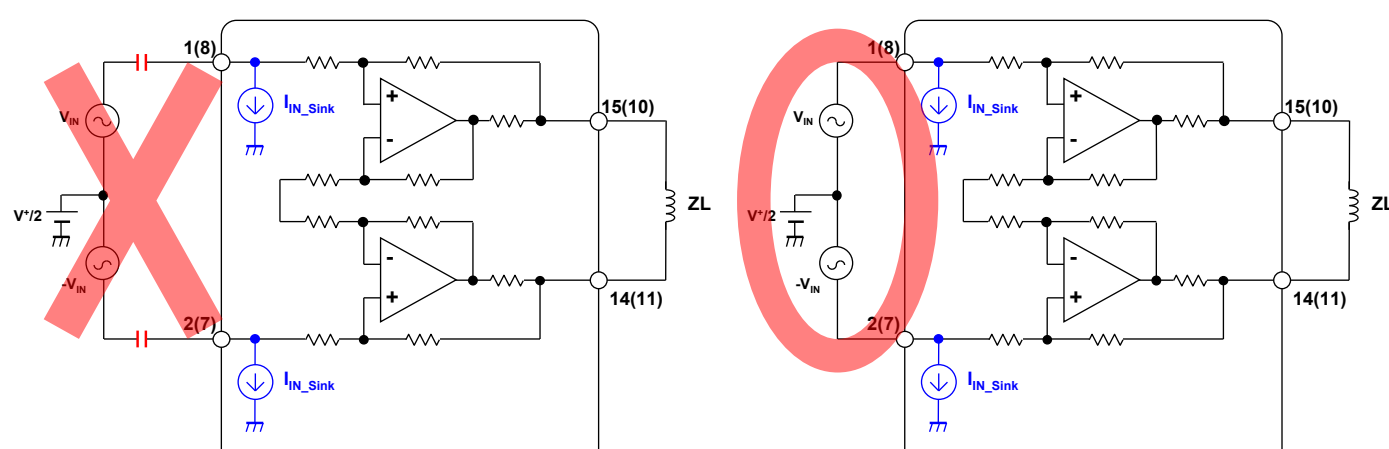


Figure 4. An AC-coupled connection example that does not function properly (left) and a DC-coupled connection example that functions correctly (right).

Output voltage limit

The amplitude of the input voltage must be set within the range where the output voltage is not distorted. Figure 5-1 is an example of the distortion waveform when an inductive load such as a resolver is driven. Figure 5-2 plots the limits of the amplitude that the NJU7870 can output without distortion for each power supply voltage. Assuming that the load impedance is Z_L , the differential input amplitude is ΔV_{IN} , and the transconductance of NJU7870 is G_m , the output voltage V_{OUT} can be calculated using the following formula.

$$V_{OUT} = \Delta V_{IN} \times G_m \times Z_L$$

Set the input voltage amplitude using Fig. 5-2 as a guide so that the output voltage amplitude does not fall into the area where it is distorted by your load. In addition, please fully evaluate the actual machine, including temperature and variations.

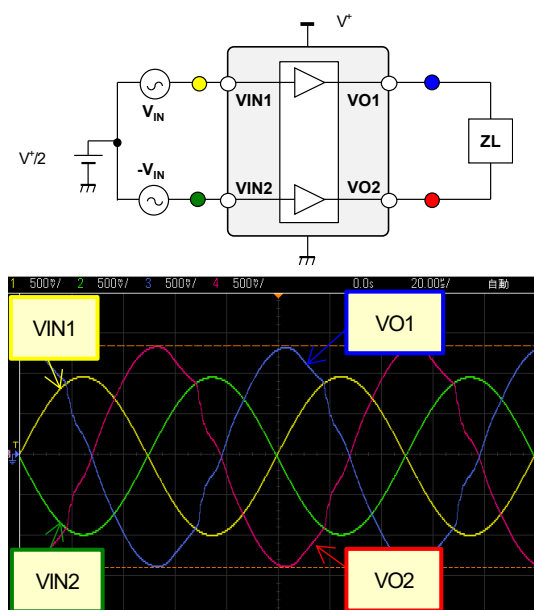


Figure5-1. Waveform at large amplitude
(Z_L : Resolver model)

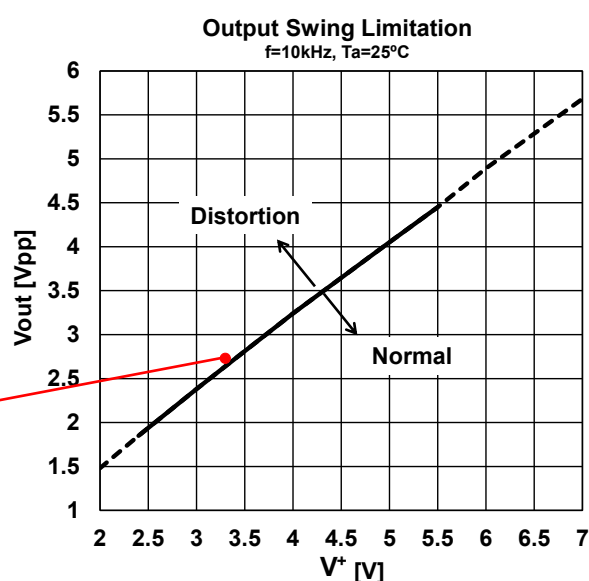


Figure5-2. Output voltage limit

e.g. Load: TS2224N1112E102 (TAMAGAWA TRADING CO., LTD. VR type Resolver), $Z_L = 120\Omega$ ($f = 10\text{kHz}$)

$V^+ = 3.3\text{V}$, $V^- = 0\text{V}$

If you want to set $V_{OUT} < 2.5V_{pp}$ from Fig. 5-2, then from $G_m = 13.5\text{mA}_p/V_{pp}$,


$$\Delta V_{IN} < 2.5 / 13.5 / 120 \doteq 1.54V_{pp}$$

Thermal shutdown


The NJU7870 is designed with Thermal Shut Down (TSD) circuit that protects itself from damage caused by overload condition. The TSD circuit operates at a junction temperature of approximately 175°C, which reduces the power consumption of the IC by blocking the output current. After that, when the junction temperature of the NJU7870 is cooled down to approximately 150°C, the NJU7870 automatically returns to normal operation and can output the current. However, the TSD circuit does not have the active cooling function of a heat sink, and continued use of the NJU7870 with the TSD circuit in operation can destroy the IC. To maintain stable operation, it is recommended to use below the specified power dissipation.

■ TYPICAL TEST CIRCUIT

Transconductance, Phase Difference between Input and Output

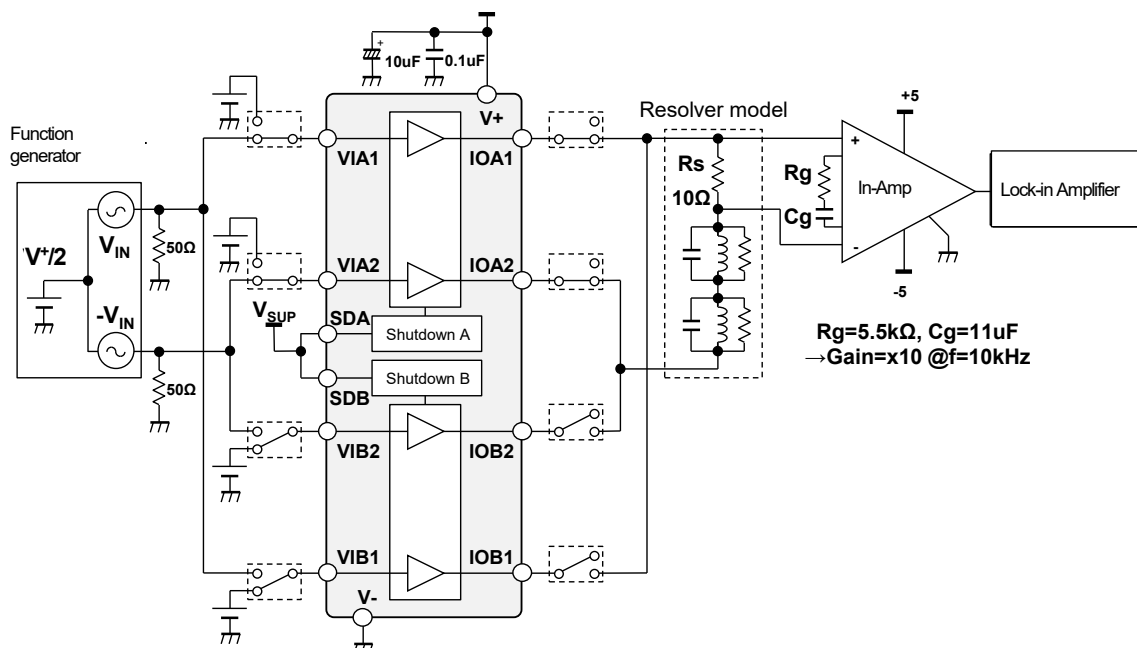


Maximum Output Current

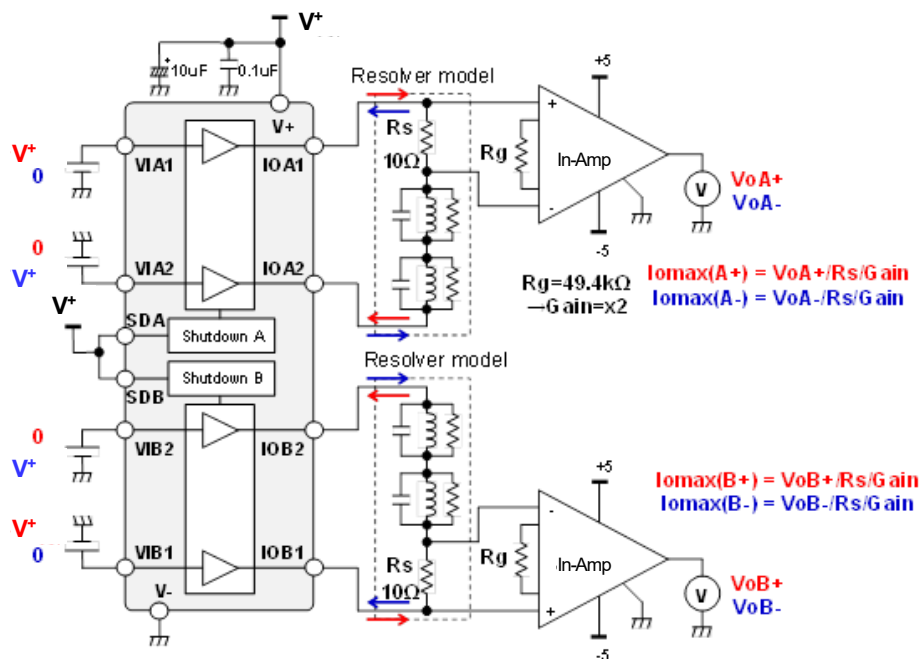

■ REVISION HISTORY

Date	Revision	Changes
October 25, 2021	Ver.1.0	•Initial release
February 01, 2024	Ver.1.1	•Change of company name and design form •Revision number (Ver.1.0→ Ver.1.1) •AEC—Q100 Grade 1 is planning → AEC-Q100 Grade 1 •Added revision history
2025.07.07	Ver. 1.2	•Added Connection of unused terminals

■ HEAT-RESISTANCE PROFILES

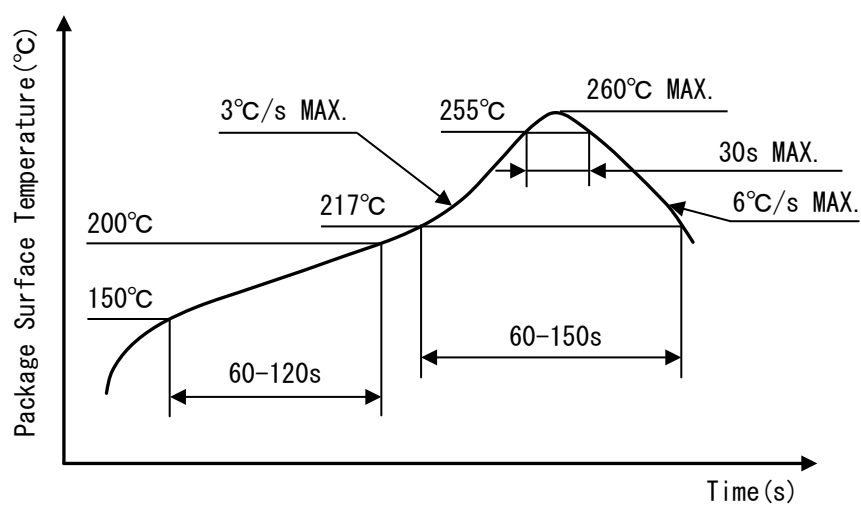

Reflow profile


Nisshinbo Micro Devices Inc.

SSOP16-B3


PI-SSOP16-B3-E-A

■ PACKAGE DIMENSIONS

UNIT: mm

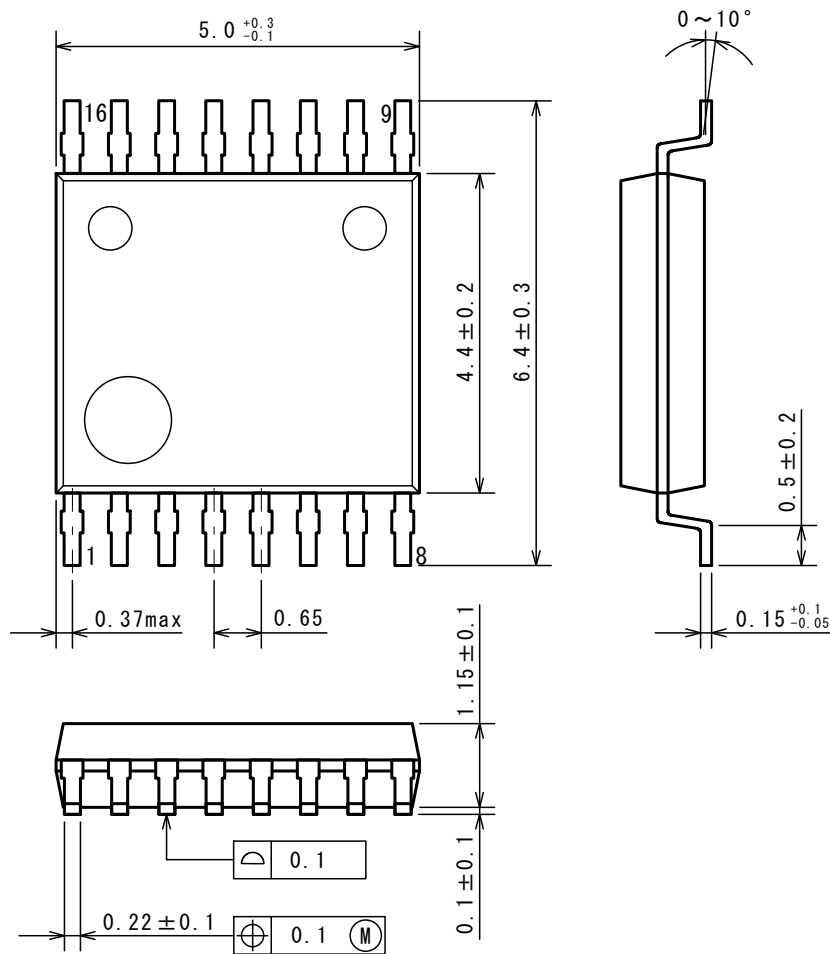

■ EXAMPLE OF SOLDER PADS DIMENSIONS

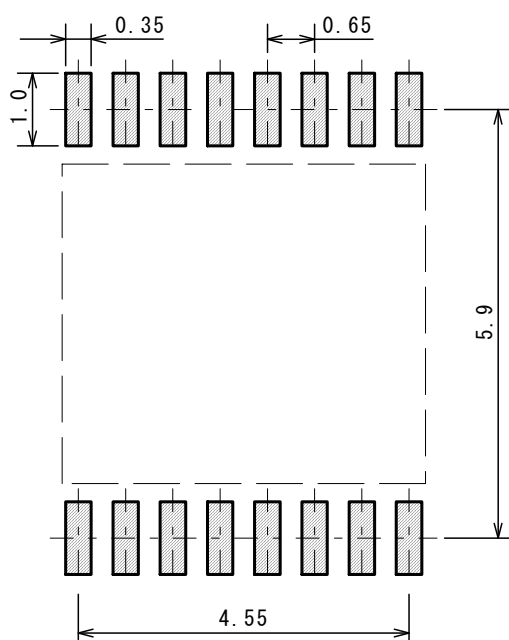

Nisshinbo Micro Devices Inc.


SSOP16-B3

PI-SSOP16-B3-E-A

■ PACKING SPEC


UNIT: mm

TAPING DIMENSIONS

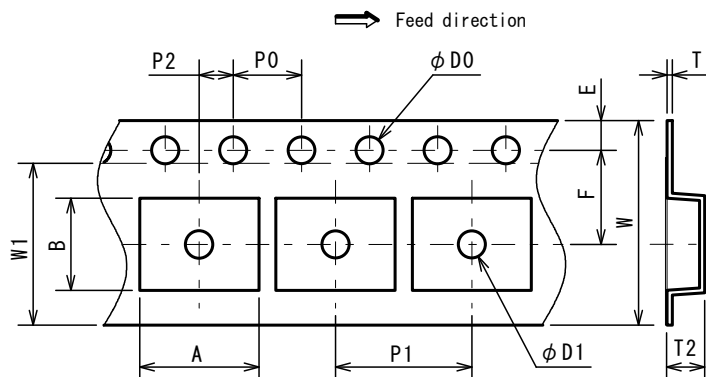


SYMBOL	DIMENSION	REMARKS
A	6.95	BOTTOM DIMENSION
B	5.4	BOTTOM DIMENSION
D0	1.55 ± 0.05	
D1	1.55 ± 0.1	
E	1.75 ± 0.1	
F	5.5 ± 0.05	
P0	4.0 ± 0.1	
P1	8.0 ± 0.1	
P2	2.0 ± 0.05	
T	0.3 ± 0.05	
T2	2.2	
W	12.0 ± 0.3	
W1	9.5	THICKNESS 0.1max

REEL DIMENSIONS

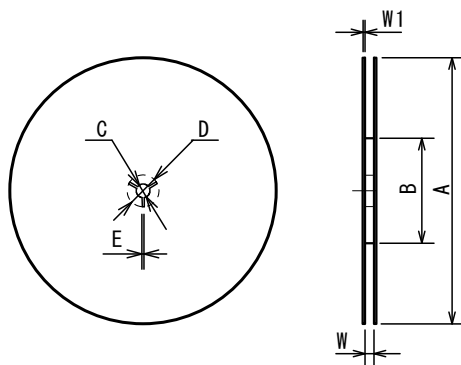


SYMBOL	DIMENSION
A	$\phi 254 \pm 2$
B	$\phi 100 \pm 1$
C	$\phi 13 \pm 0.2$
D	$\phi 21 \pm 0.8$
E	2 ± 0.5
W	13.5 ± 0.5
W1	2 ± 0.2

TAPING STATE

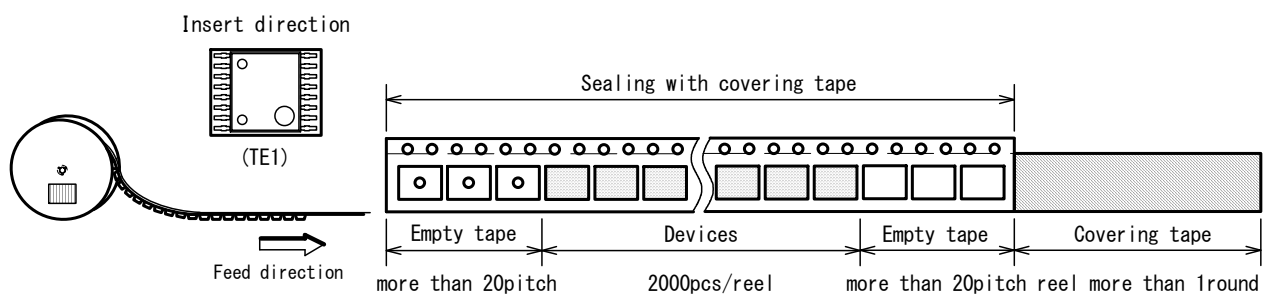

PACKING STATE

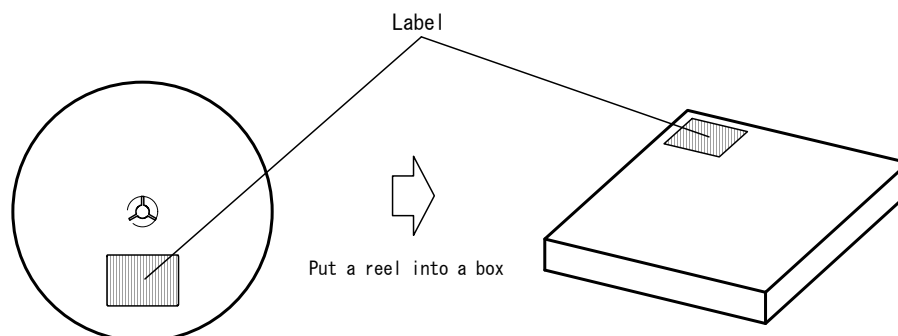

1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to our sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without the prior written consent of us.
3. This product and any technical information relating thereto are subject to complementary export controls (so-called KNOW controls) under the Foreign Exchange and Foreign Trade Law, and related politics ministerial ordinance of the law. (Note that the complementary export controls are inapplicable to any application-specific products, except rockets and pilotless aircraft, that are insusceptible to design or program changes.) Accordingly, when exporting or carrying abroad this product, follow the Foreign Exchange and Foreign Trade Control Law and its related regulations with respect to the complementary export controls.
4. The technical information described in this document shows typical characteristics and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under our or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for automotive applications. Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death should first contact us.
 - Aerospace Equipment
 - Equipment Used in the Deep Sea
 - Power Generator Control Equipment (nuclear, steam, hydraulic, etc.)
 - Life Maintenance Medical Equipment
 - Fire Alarms / Intruder Detectors
 - Vehicle Control Equipment (airplane, railroad, ship, etc.)
 - Various Safety Devices
 - Traffic control system
 - Combustion equipment

In case your company desires to use this product for any applications other than general electronic equipment mentioned above, make sure to contact our company in advance. Note that the important requirements mentioned in this section are not applicable to cases where operation requirements such as application conditions are confirmed by our company in writing after consultation with your company.

6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. The products have been designed and tested to function within controlled environmental conditions. Do not use products under conditions that deviate from methods or applications specified in this datasheet. Failure to employ the products in the proper applications can lead to deterioration, destruction or failure of the products. We shall not be responsible for any bodily injury, fires or accident, property damage or any consequential damages resulting from misuse or misapplication of the products.
8. **Quality Warranty**
 - 8-1. **Quality Warranty Period**
In the case of a product purchased through an authorized distributor or directly from us, the warranty period for this product shall be one (1) year after delivery to your company. For defective products that occurred during this period, we will take the quality warranty measures described in section 8-2. However, if there is an agreement on the warranty period in the basic transaction agreement, quality assurance agreement, delivery specifications, etc., it shall be followed.
 - 8-2. **Quality Warranty Remedies**
When it has been proved defective due to manufacturing factors as a result of defect analysis by us, we will either deliver a substitute for the defective product or refund the purchase price of the defective product.
Note that such delivery or refund is sole and exclusive remedies to your company for the defective product.
 - 8-3. **Remedies after Quality Warranty Period**
With respect to any defect of this product found after the quality warranty period, the defect will be analyzed by us. On the basis of the defect analysis results, the scope and amounts of damage shall be determined by mutual agreement of both parties. Then we will deal with upper limit in Section 8-2. This provision is not intended to limit any legal rights of your company.
9. Anti-radiation design is not implemented in the products described in this document.
10. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
11. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
12. Warning for handling Gallium and Arsenic (GaAs) products (Applying to GaAs MMIC, Photo Reflector). These products use Gallium (Ga) and Arsenic (As) which are specified as poisonous chemicals by law. For the prevention of a hazard, do not burn, destroy, or process chemically to make them as gas or power. When the product is disposed of, please follow the related regulation and do not mix this with general industrial waste or household waste.
13. Please contact our sales representatives should you have any questions or comments concerning the products or the technical information.



Nisshinbo Micro Devices Inc.

Official website

<https://www.nisshinbo-microdevices.co.jp/en/>

Purchase information

<https://www.nisshinbo-microdevices.co.jp/en/buy/>