

CoolGaN™
CoolGaN™ Transistor 100 V G3

PG-TSON-6

Features

- Ultra fast switching and high efficiency
- Space saving and highly robust package
- No reverse recovery charge
- Ultra low gate charge and output charge
- Exposed die for top-side thermal excellence
- Moisture rating MSL1
- Industrial grade 3x5 package

Potential applications

- Telecom & Datacenter 48V IBC
- Sync Rectification for AC-DC and DC-DC converters
- Robotics and drones
- Battery powered tools
- 48V servo drive
- e-Mobility, UAVs
- Class D Audio
- Solar & Energy storage systems
- Point of Load Converters



Product validation

Fully qualified according to JEDEC for Industrial Applications

Table 1 Key performance parameters

Parameter	Value	Unit
V_{DS}	100	V
$R_{DS(on)}$	2.4	mΩ
I_D	76	A
Q_{oss}	43	nC
Q_G	11	nC
Q_{rr}	0	nC

Type / Ordering code	Package	Marking	Related links
IGC033S10S1	PG-TSON-6	33SA1	see Appendix A

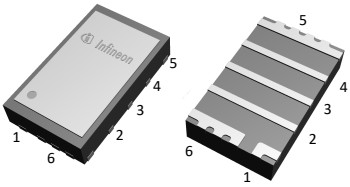

Top side is exposed silicon substrate,
internally connected to source terminal.
Not recommended to use as an electrical
connection.






Table of contents

Description 1

Maximum ratings 3

Recommended operating conditions 4

Thermal characteristics 5

Electrical Characteristics 6

Electrical characteristics diagrams 8

Package outlines 13

Appendix A 16

Revision history 17

Trademarks 17

Disclaimer 17

1 Maximum ratings

at $T_j = 25\text{ °C}$, unless otherwise specified. Stresses beyond max ratings may cause permanent damage to the device. For optimum lifetime and reliability, Infineon recommends operating conditions that do not continuously exceed 80 % of the maximum ratings stated (unless otherwise explicitly stated). For further information, contact your local Infineon sales office.

Table 2 Maximum ratings

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Continuous drain-source voltage	V_{DS}	-	-	100	V	$V_{GS}=0\text{ V}$
Pulsed drain-source voltage ¹⁾	$V_{DS, pulse}$	-	-	120	V	$V_{GS}=0\text{ V}$, 1 h total time
Continuous drain current	I_D	-	-	76 21	A	$V_{GS}=5\text{ V}$, $T_C=25\text{ °C}$ $V_{GS}=5\text{ V}$, $T_A=25\text{ °C}$, $R_{thJA}=38\text{ °C/W}$ ²⁾
Pulsed drain current ³⁾	$I_{D, pulse}$	-	-	700 330	A	$T_j=25\text{ °C}$ $T_j=150\text{ °C}$
Pulsed gate-source voltage ¹⁾	V_{GS}	-6.5	-	6.5	V	Pulsed 100 h total time
Power dissipation	P_{tot}	-	-	45 3.3	W	$T_C=25\text{ °C}$ $T_A=25\text{ °C}$, $R_{thJA}=38\text{ °C/W}$ ²⁾
Storage temperature	T_{stg}	-55	-	150	°C	-
Junction temperature	T_j	-40	-	150	°C	

¹⁾ Provided as measure of robustness under abnormal operating conditions and not recommended for normal operation.

²⁾ Device on 4-layer FR4 PCB, vertical in still air.

³⁾ Pulse current limited by transfer characteristic.

2 Recommended operating conditions

Table 3 Recommended operating conditions

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Gate-source voltage	V_{GS}	-4.0	5.0	5.5	V	-

3 Thermal characteristics

Table 4 Thermal characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Thermal resistance, junction - case, top	R_{thJC}	-	0.5	0.6	°C/W	-
Thermal resistance, junction - case, bottom	R_{thJC}	-	1.9	2.8	°C/W	
Thermal resistance, junction - ambient 1s0p	R_{thJA}	-	60	-	°C/W	On 1 layer PCB, vertical in still air.
Thermal resistance, junction - ambient 2s2p	R_{thJA}	-	38	-	°C/W	With vias on 4 layer PCB, vertical in still air.

4 Electrical Characteristics

at $T_j=25\text{ °C}$, unless otherwise specified

Table 5 Static characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Gate threshold voltage	$V_{GS(th)}$	1.2	1.9	2.9	V	$V_{DS}=V_{GS}$, $I_D=8.0\text{ mA}$
Drain-source leakage current	I_{DSS}	-	0.3 6.0	1.5 50	μA	$V_{DS}=100\text{ V}$, $V_{GS}=0\text{ V}$, $T_j=25\text{ °C}$ $V_{DS}=100\text{ V}$, $V_{GS}=0\text{ V}$, $T_j=125\text{ °C}$
Gate-source leakage current	I_{GSS}	-	16 0.01 120 0.01	150 0.03 1100 0.04	μA	$V_{GS}=5\text{ V}$, $T_j=25\text{ °C}$ $V_{GS}=-4\text{ V}$, $T_j=25\text{ °C}$ $V_{GS}=5\text{ V}$, $T_j=125\text{ °C}$ $V_{GS}=-4\text{ V}$, $T_j=125\text{ °C}$
Drain-source on-state resistance	$R_{DS(on)}$	-	2.4	3.3	$\text{m}\Omega$	$V_{GS}=5\text{ V}$, $I_D=20\text{ A}$
Gate resistance ⁴⁾	R_G	-	0.5	-	Ω	-

⁴⁾ Defined by design. Not subject to production test.

Table 6 Capacitance characteristics ⁵⁾

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Input capacitance	C_{iss}	-	1200	1400	pF	$V_{GS}=0\text{ V}$, $V_{DS}=50\text{ V}$, $f=1\text{ MHz}$
Output capacitance	C_{oss}	-	540	590	pF	
Reverse transfer capacitance	C_{rss}	-	6.1	8.0	pF	

⁵⁾ Defined by design. Not subject to production test.

Table 7 Gate charge characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Gate to source charge	Q_{gs}	-	2.8	-	nC	$V_{DS}=50\text{ V}$, $I_D=20\text{ A}$, $V_{GS}=0\text{ to }5\text{ V}$
Gate charge at threshold	$Q_{g(th)}$	-	2.1	-	nC	
Gate to drain charge ⁶⁾	Q_{gd}	-	2.6	-	nC	
Switching charge	Q_{sw}	-	3.3	-	nC	
Gate charge total ⁶⁾	Q_g	-	11	14	nC	
Gate plateau voltage	$V_{plateau}$	-	2.6	-	V	
Output charge ⁶⁾	Q_{oss}	-	43	47	nC	$V_{DS}=50\text{ V}$, $V_{GS}=0\text{ V}$

⁶⁾ Defined by design. Not subject to production test.

Table 8 Reverse operation

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Reverse continuous current	I_S	-	-	16	A	$T_C = 25\text{ °C}$
Pulsed current, reverse	$I_{S,pulse}$	-	-	304	A	
Source-Drain reverse voltage	V_{SD}	-	2.4 2.0	3.1 -	V	$V_{GS}=0\text{ V}, I_{S,pulse}=20\text{ A}, T_j=25\text{ °C}$ $V_{GS}=0\text{ V}, I_{S,pulse}=0.5\text{ A}, T_j=25\text{ °C}$
Reverse recovery charge ⁷⁾	Q_{rr}	-	0	-	nC	$V_R=50\text{ V}, I_{S,pulse}=20\text{ A}, di_{S,pulse}/dt=100\text{ A}/\mu\text{s}$

⁷⁾ Defined by design. Not subject to production test.

5 Electrical characteristics diagrams




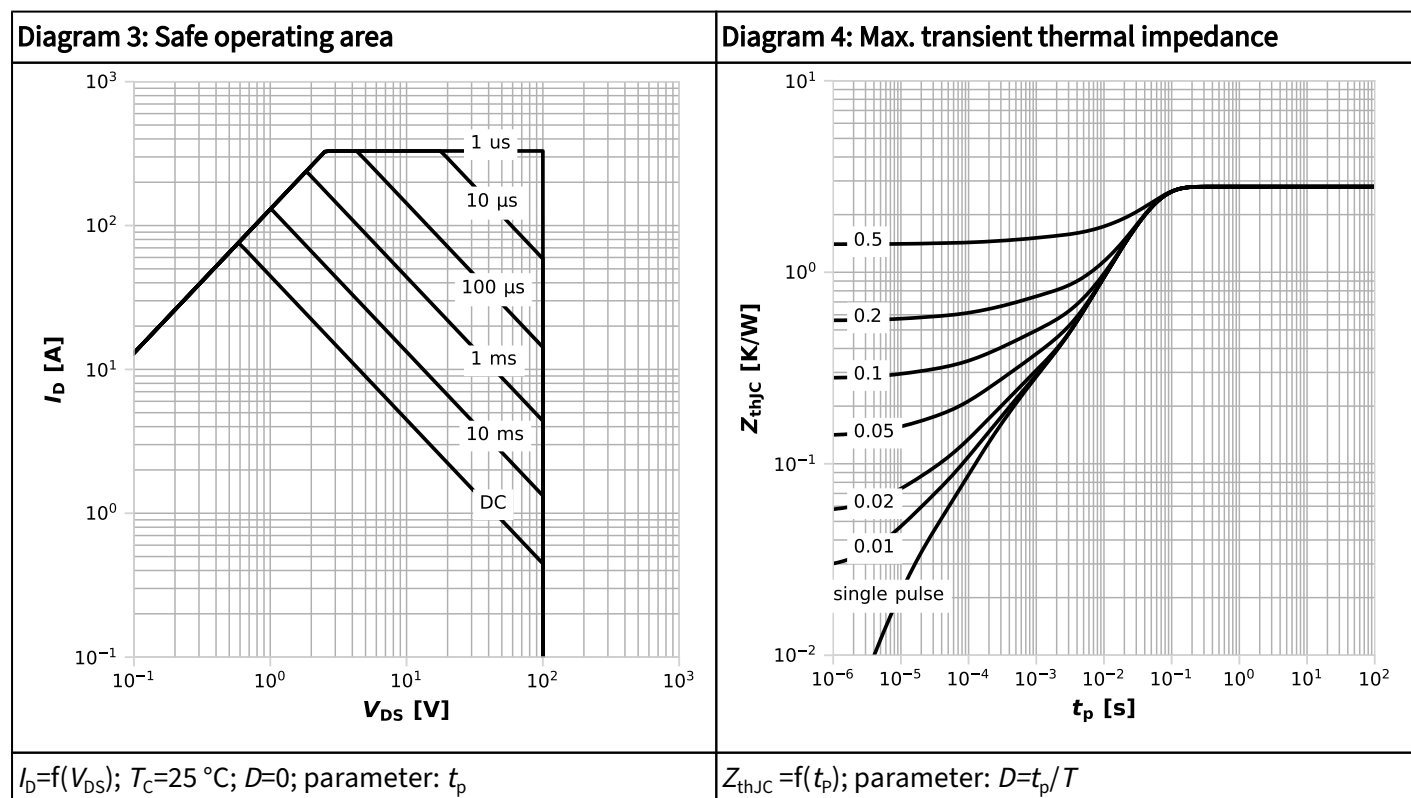


Diagram 5: Typ. output characteristics

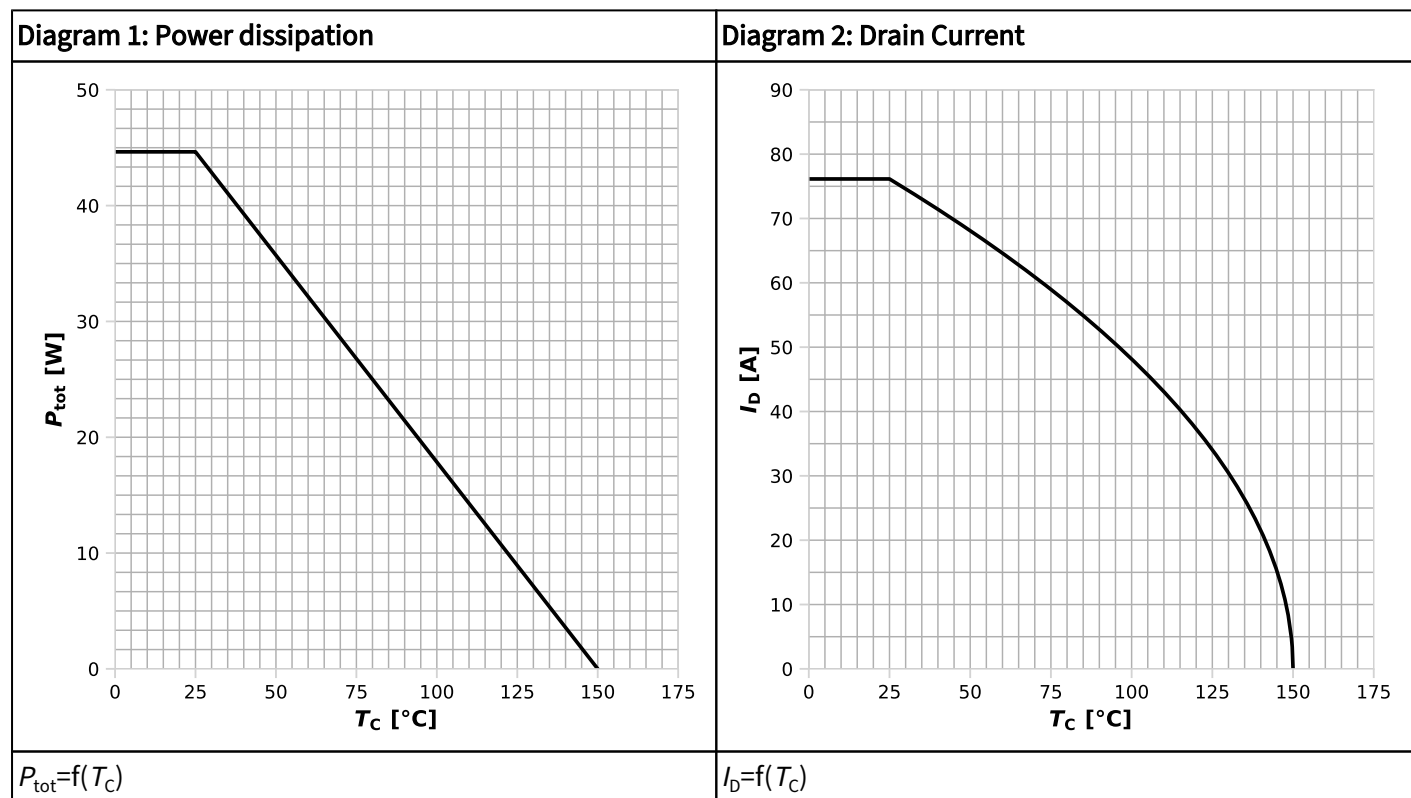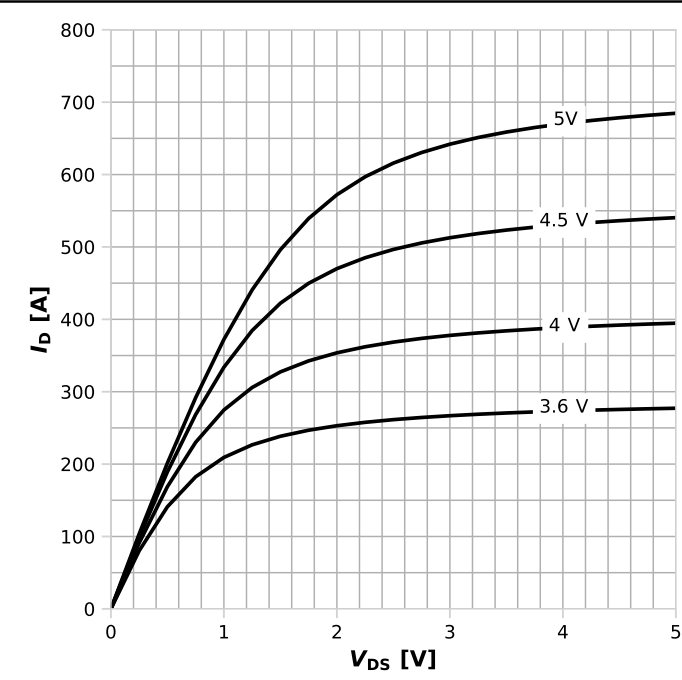


$I_D=f(V_{DS})$; $T_j=25\text{ }^{\circ}\text{C}$; parameter: V_{GS}

Diagram 6: Typ. transfer characteristics

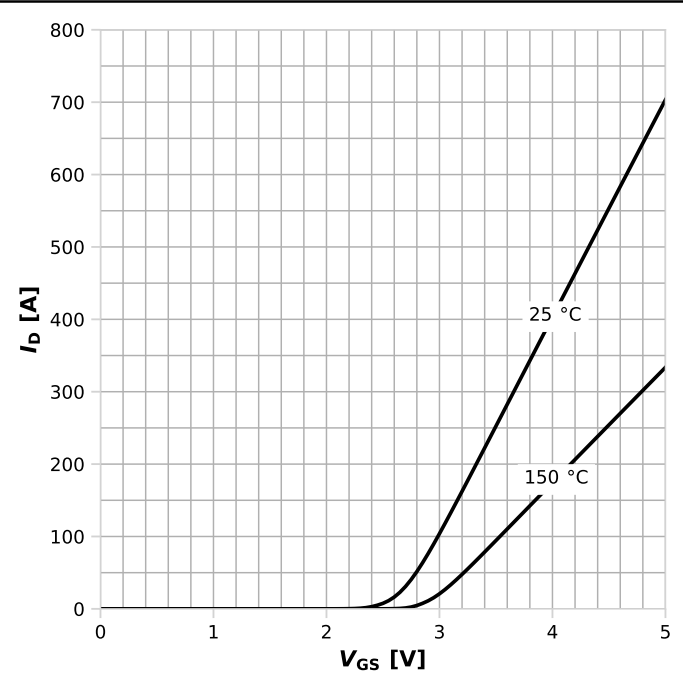


$I_D=f(V_{GS})$; $|V_{DS}|>2|I_D|R_{DS(on)max}$; parameter: T_j

Diagram 7: Typ. channel reverse characteristics

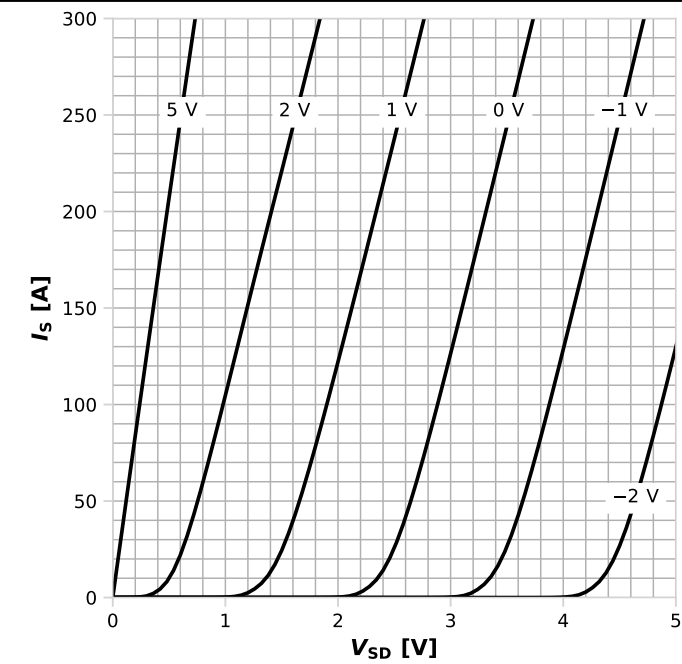


$I_S=f(V_{SD})$; $T_j=25\text{ }^{\circ}\text{C}$; parameter: V_{GS}

Diagram 8: Typ. channel reverse characteristics

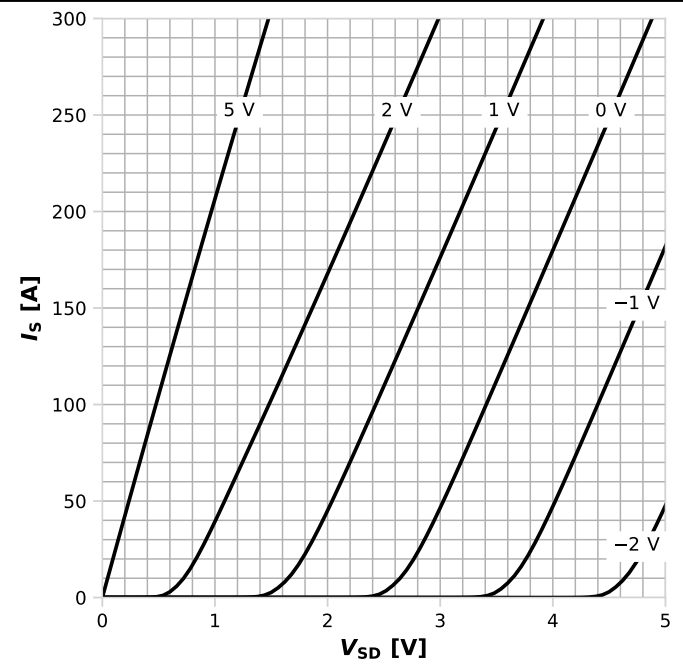


$I_S=f(V_{SD})$; $T_j=125\text{ }^{\circ}\text{C}$; parameter: V_{GS}

Diagram 9: Typ. drain-source on-state resistance

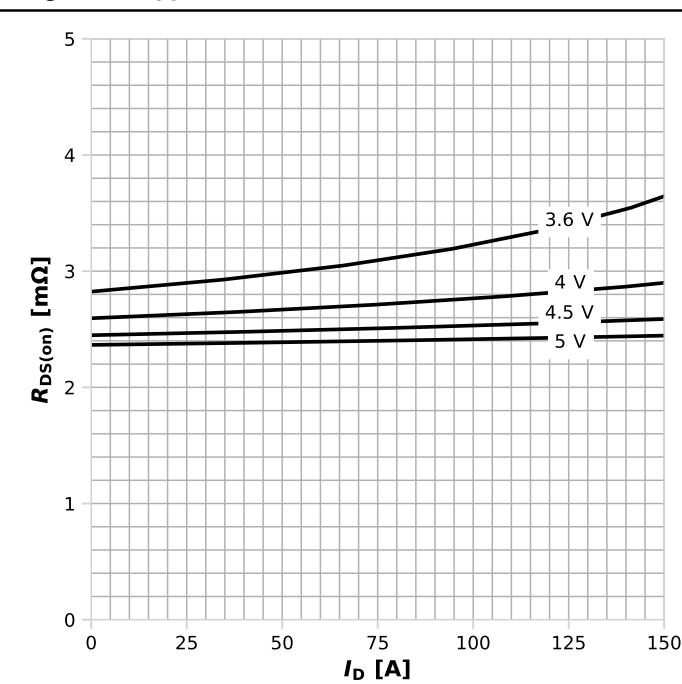


$R_{DS(on)} = f(I_D); T_j = 25^\circ\text{C}; \text{parameter: } V_{GS}$

Diagram 10: Typ. Drain-source on-state resistance

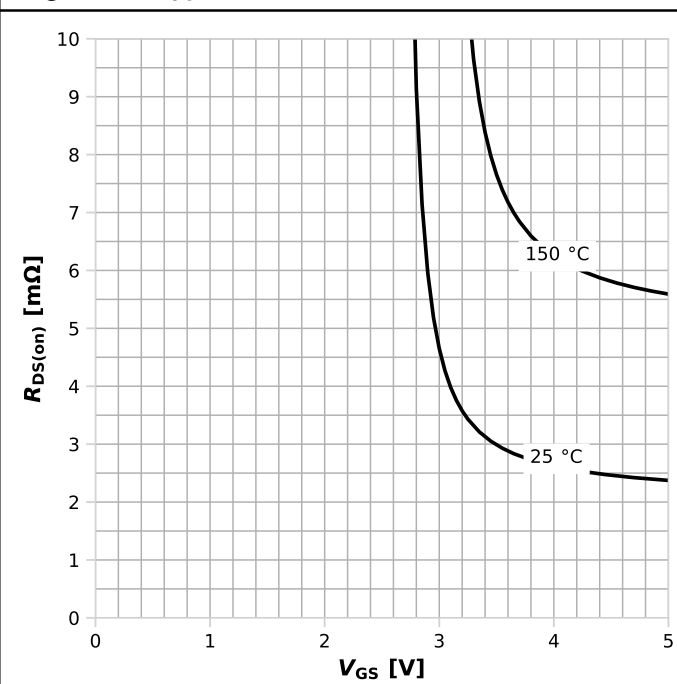


$R_{DS(on)} = f(V_{GS}); I_D = 20\text{ A}; \text{parameter: } T_j$

Diagram 11: Drain-source on-state resistance

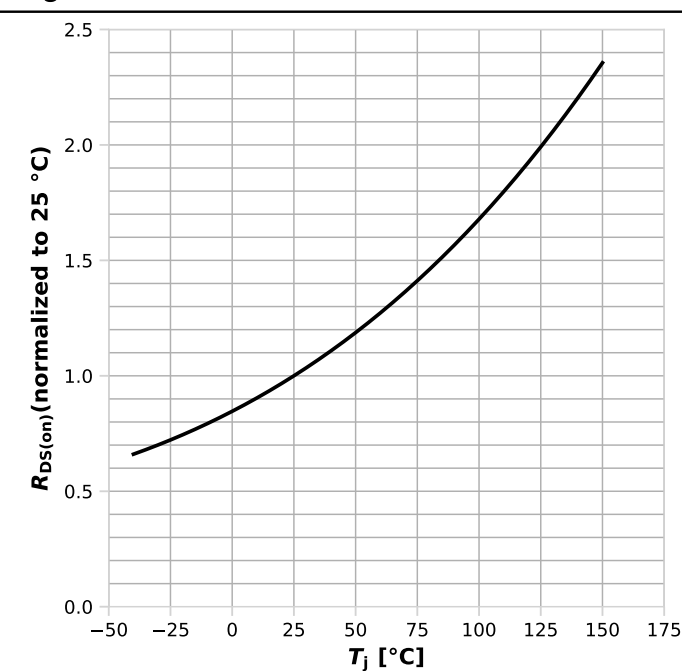


$R_{DS(on)} = f(T_j); I_D = 20\text{ A}, V_{GS} = 5\text{ V}$

Diagram 12: Typ. gate threshold voltage

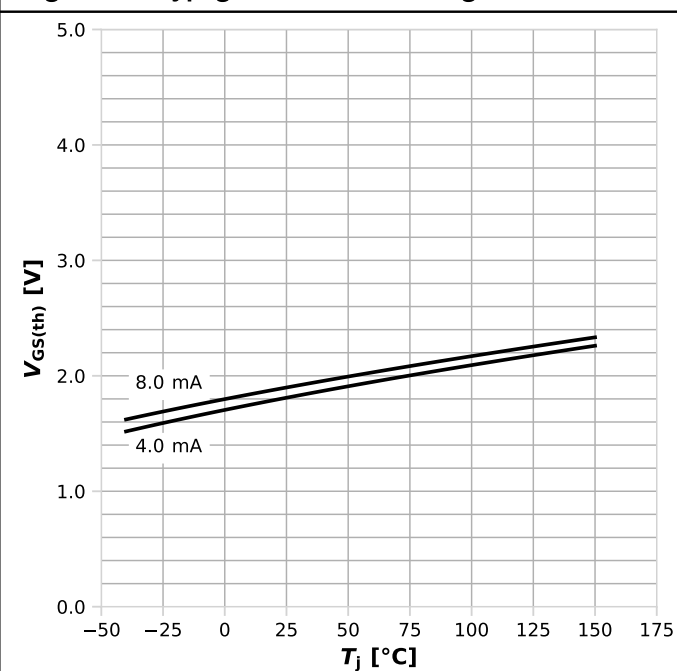


$V_{GS(th)} = f(T_j), V_{GS} = V_{DS}; \text{parameter: } I_D$

Diagram 13: Typ. capacitances

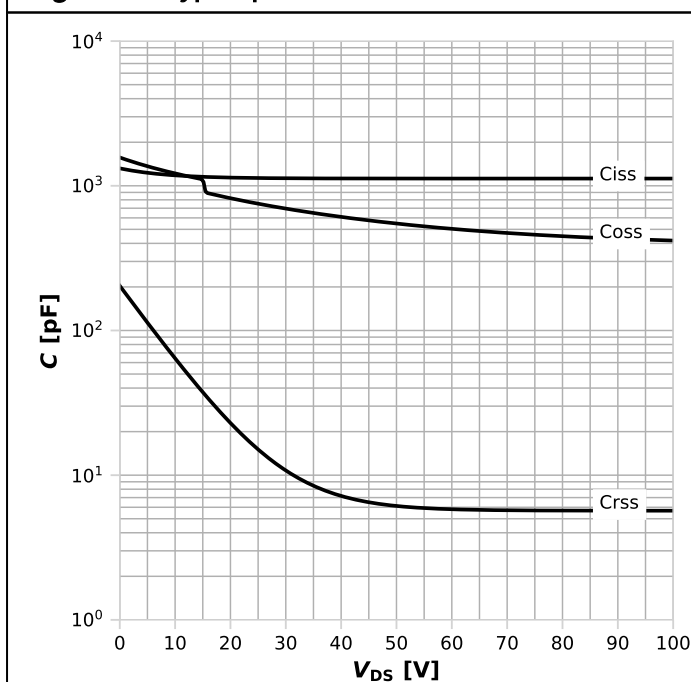


$$C=f(V_{DS}); V_{GS}=0\text{ V}$$

Diagram 14 Typ. gate charge

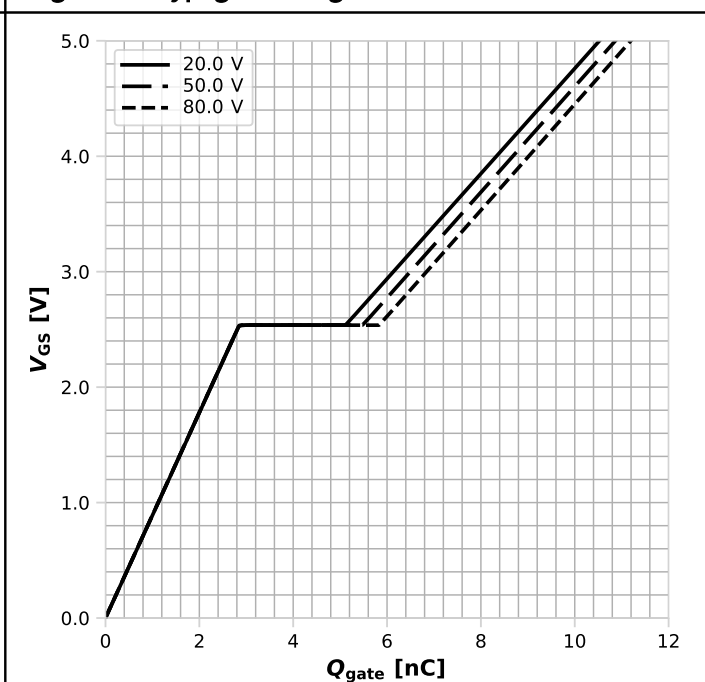


$$V_{GS}=f(Q_{gate}); I_D=20\text{ A pulsed; parameter: }V_{DS}$$

Diagram 15: Typ. output charge

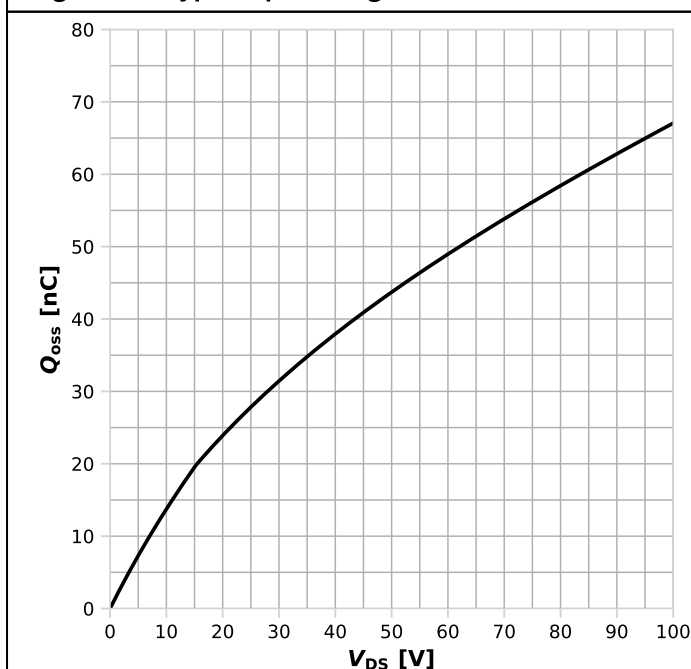


$$Q_{oss}=f(V_{DS}), V_{GS}=0\text{ V}$$

Diagram 16: Typ. Coss stored Energy

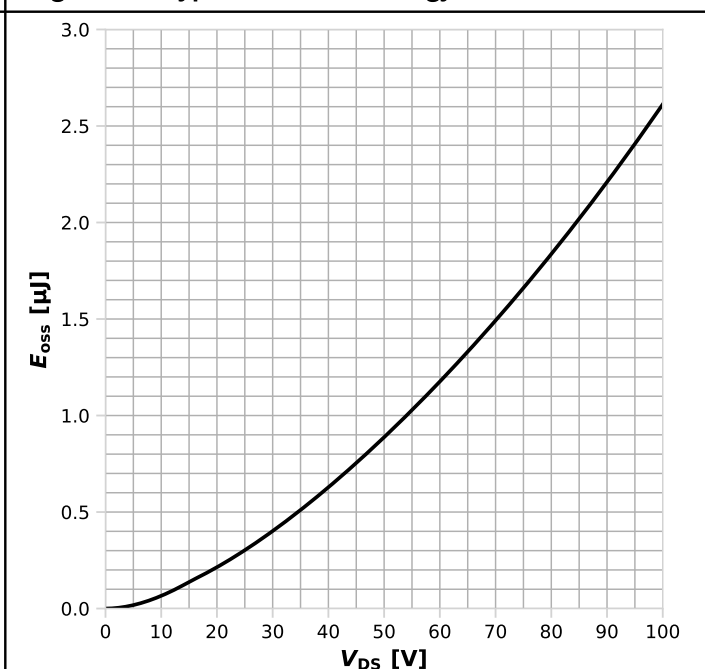


$$E_{oss}=f(V_{DS}), V_{GS}=0\text{ V}$$

Diagram 17: Typ. gate characteristics forward

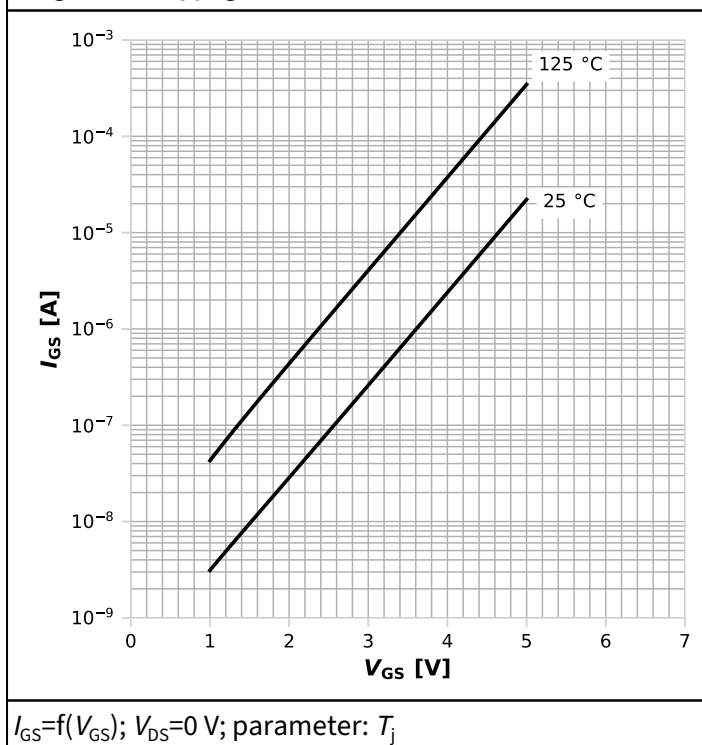

6 Package outlines

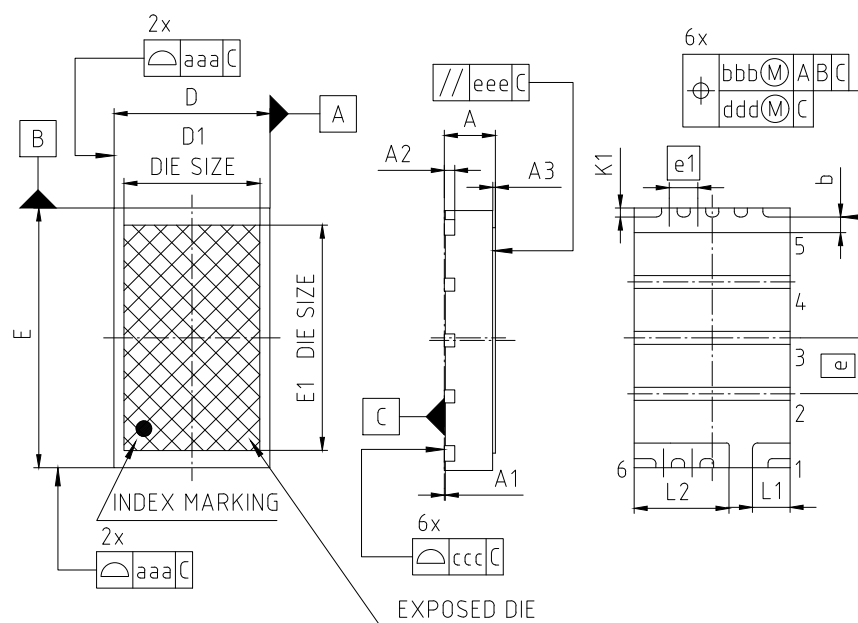

PACKAGE - GROUP NUMBER: PG-TSON-6-U01		
DIMENSIONS	MILLIMETERS	
	MIN.	MAX.
A	-	1.032
A1	-	0.05
A2	0.20	
A3	-	0.05
b	0.18	0.30
D	2.90	3.10
D1	2.616	
E	4.90	5.10
E1	4.336	
e	1.075	
e1	0.55	
K1	0.125	0.225
L1	0.625	0.825
L2	1.725	1.925
aaa	0.05	
bbb	0.10	
ccc	0.08	
ddd	0.05	
eee	0.10	

NOTE:
 DIMENSIONS DO NOT INCLUDE MOLD FLASH,
 PROTRUSION OR GATE BURRS

Figure 1 Outline PG-TSON-6, dimensions in mm

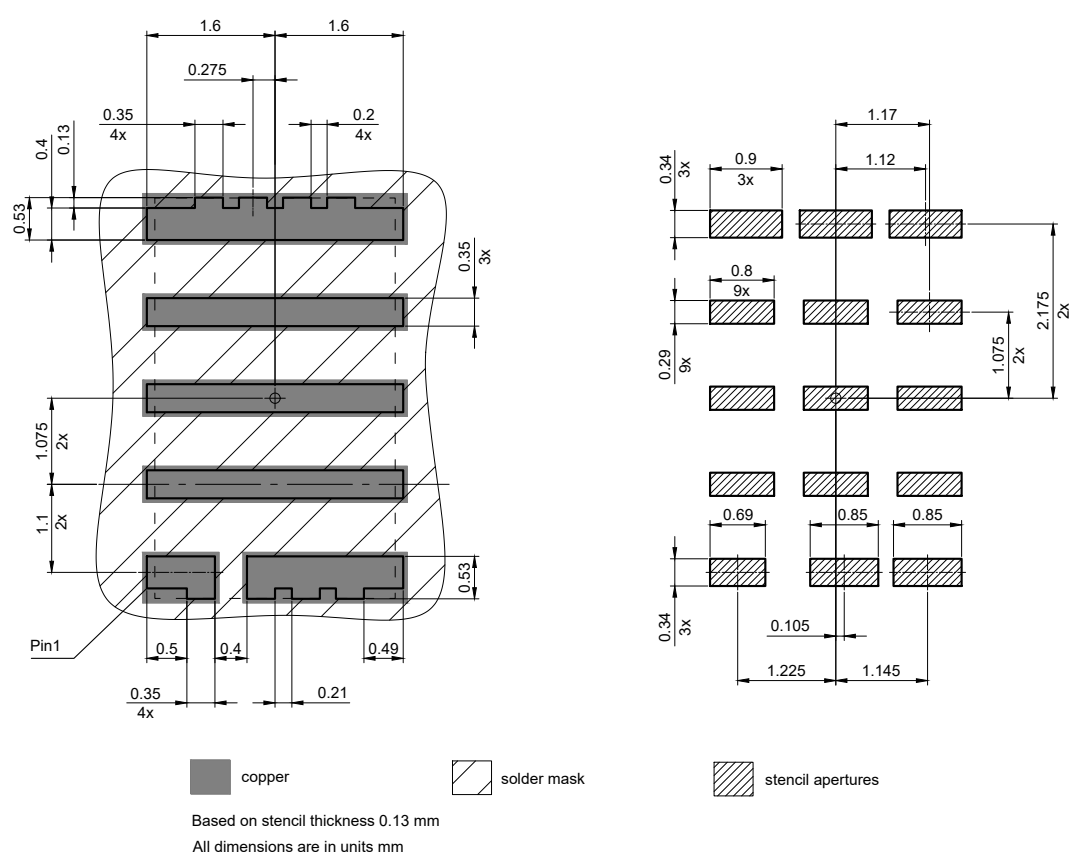


Figure 2 Footprint drawing PG-TSON-6, dimensions in mm

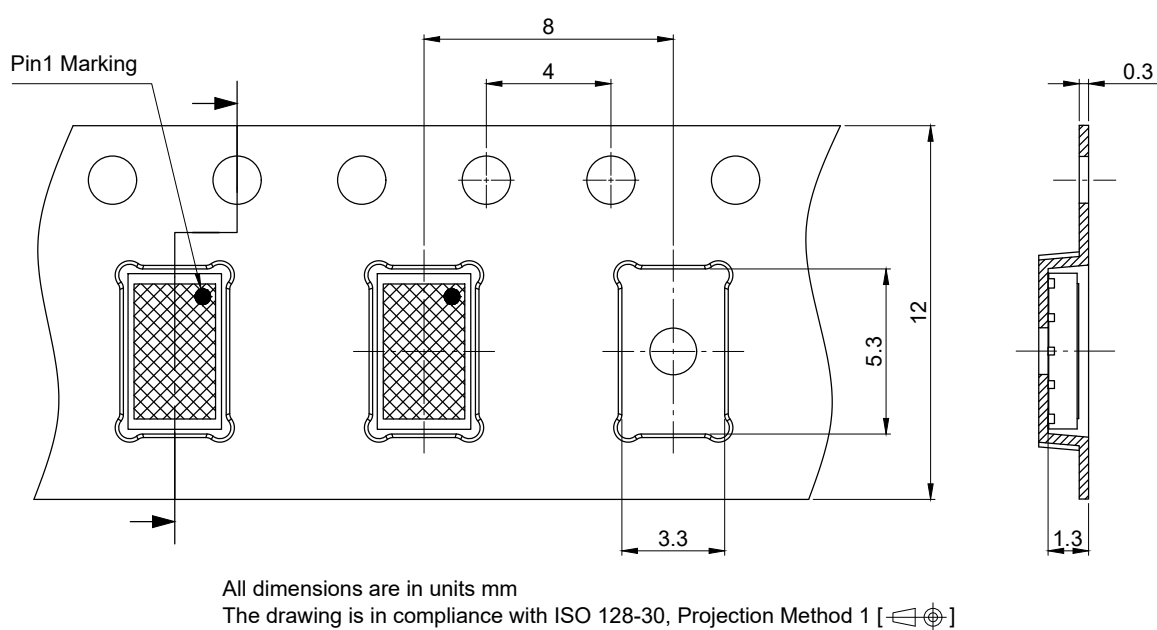


Figure 3 Packaging variant PG-TSON-6, dimensions in mm

7 Appendix A

Table 9 **Related links**

- [IFX CoolGaN™ GaN webpage](#)
- [IFX CoolGaN™ reliability white paper](#)
- [IFX CoolGaN™ gate driver application note](#)
- [IFX CoolGaN™ Evaluation Boards](#)
- [IFX Packages Description-PG-TSON-6-2](#)

Revision history

IGC033S10S1

Revision 2024-12-10, Rev. 1.0

Previous revisions

Revision	Date	Subjects (major changes since last revision)
1.0	2024-12-10	Release of final

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

We Listen to Your Comments Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to: erratum@infineon.com

Published by

Infineon Technologies AG
81726 München, Germany
© 2024 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infiniteon:](#)

[IGC033S10S1XTMA1](#)