

PTRM-216T, PTRM-216K | Multifunction time relay with potential-free control input



5 YEAR
WARRANTY



EAN code
PTRM-216T/UNI: 8595188175586
PTRM-216K/UNI: 8595188175579

Technical parameters

Power supply

	PTRM-216T	PTRM-216K
Power pins:	2, 10	
Voltage range:	AC/DC 12 – 240 V (AC 50-60 Hz)	
Power input (max.):	2.5 VA/1.5 W	
Supply voltage tolerance:	±10 %	
Supply indication:	green LED	

Time circuit

Number of functions:	10
Time ranges:	50 ms - 30 days
Time setting:	rotary switch and potentiometer
Time deviation*:	5 % - mechanical setting
Repeat accuracy:	0.2 % - set value stability
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)

Output

Number of contacts:	2x changeover/SPDT (AgNi)
Current rating:	16 A/AC1; 1 HP/240 Vac, 1/2 HP/120 Vac; PD. B300
Breaking capacity:	4000 VA/AC1, 384 W/DC
Switching voltage:	250 V AC/24 V DC
Max. power dissipation:	2.4 W
Output indication:	multifunction red LED
Mechanical life:	10.000.000 ops.
Electrical life (AC1):	100.000 ops.

Control

Control pins:	5 - 6
Impulse length:	min. 25 ms/max. unlimited
Reset time:	max. 150 ms


Other information

Operating temperature:	-20 .. +55 °C (-4 ..131 °F)
Storage temperature:	-30 .. +70 °C (-22 .. 158 °F)
Dielectric strength:	
supply - output 1 (1, 3, 4)	2.5 kV AC
supply - output 2 (8, 9, 11)	2.5 kV AC
output 1 - output 2	2.5 kV AC
Operating position:	any
Mounting:	11 pin octal socket
Protection degree:	IP40 from front panel
Overtoltage category:	
for supply voltage 12-150V AC/DC	III.
for supply voltage 150-240V AC/DC	II.
Pollution degree:	2
Dimensions:	48x48x79mm (1.7" x1.7" x3.1")
Weight:	111 g (3.9 oz.)
Standards:	EN 61812-1


* for adjustable delay <100 ms, a time deviation of ± 10 ms applies

- Multifunction time relay for universal use in automation, control and regulation or in house installations.
- Potential-free control input (Control Switch Trigger).
- Possibility to select the control element for fine time setting:
- PTRM-216K - knob, for easy handling without the need for tools.
- PTRM-216T - rotary switch, for the possibility of using a sealable cover.
- All functions initiated by the supply voltage, except for the flasher function, can use the control input to inhibit the delay (pause).
- Mode selection - according to the set function, permanently closed, permanently open, and switching of the second output contact according to the supply voltage.
- Multifunction red LED flashes or shines depending on the operating status.

Description


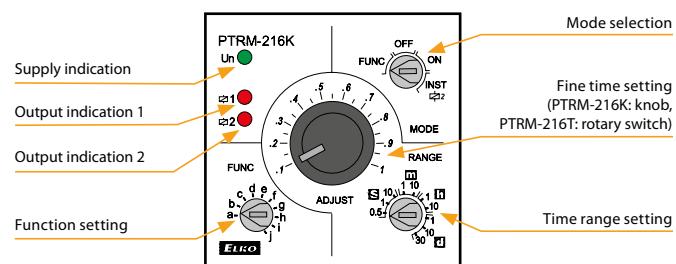


Connection



Do not apply voltage to
terminals 5, 6, 7!

Indication of operating states

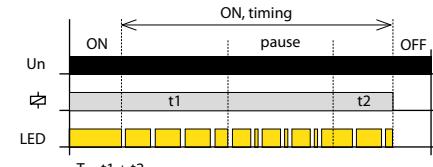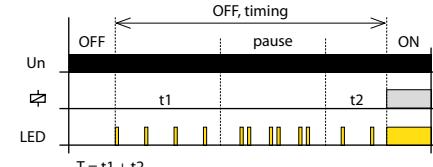

Mode selection

FUNC. Settings function mode

The desired function a-j is set with the FUNC rotary switch.

OFF. Output contact open mode



ON. Output contact closed mode



Φ2 INST. Second output contact instantaneous



The second output contact switches according to the supply voltage.

The first output contact switches according to the function (a-j) set by the trimmer FUNC.

Function

Functions (page 28).

PTRM-216T, PTRM-216K


Function

a. ON DELAY



When the supply voltage is applied, the time delay T begins. When the timing is complete, the relay closes and this condition continues until the supply voltage is disconnected.


ON DELAY with Inhibit

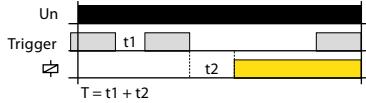

If the control contact is closed and the supply voltage is connected, the relay is opened and timing does not start until the control contact opens.


When the timing is complete, the relay closes. If the control contact is closed during timing, the timing is interrupted and continues only after the control contact opens.

b. INTERVAL ON



After supply voltage relay closes and starts the delay time T . After the end of the timing relay opens and this state lasts until the supply voltage is disconnected.


INTERVAL ON with Inhibit

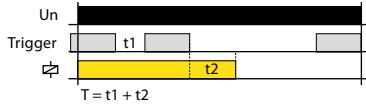

If the control contact is closed and the supply voltage is connected, the relay will close and the timing will start only after the control contact has been opened.


When the timing is complete, the relay opens. If the control contact is closed during timing, the timing is interrupted and continues only after the control contact opens.

c. FLASHER - ON first




After supply voltage relay closes and starts the delay time T . After the end of the timing relay opens and again runs delay time T . When the timing is complete, the relay closes again and the sequence is repeated until the supply voltage is disconnected. If the control contact is closed during timing, this does not affect the operation of the cycler.

FLASHER - OFF first




If the control contact is closed during timing; this does not affect the operation of the cycler. If the control contact is closed and the supply voltage is connected, the cycler starts with a pause (relay open).

d. MEMORY LATCH




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes. The status does not change when the control contact is opened. When the control contact is closed again, the relay opens. Each time the control contact is closed, the relay changes status.

e. OFF DELAY




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes. When the control contact opens, the time delay T begins. If the control contact is closed during timing, the time is reset and the relay remains closed. When the control contact opens, the time delay T starts again and opens when the relay closes.

f. SINGLE SHOT




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. Closing the control contact during timing is ignored.

g. WATCHDOG




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. Closing the control contact during timing triggers a new time delay T - the relay closing time is thus increased.

h. PULSE GENERATOR 0.5 s





After the supply voltage has been applied, the time delay T begins. When the timing is complete, the relay closes for a fixed time (0.5 s).

PULSE GENERATOR 0.5 s with Inhibit

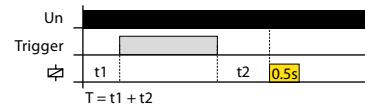


After supply voltage starts the time delay T . By closing timing of the control contact during timing is suspended. When the control contact opens, the time interval is completed and the relay closes for a fixed time (0.5 s).

i. INTERVAL ON/OFF

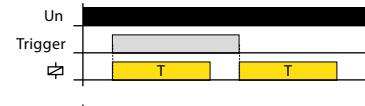

When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. When the control contact is opened, the relay closes and the time delay T begins. If the control contact is open during timing, the relay remains closed for $2T$. When the timing is complete, the relay opens. Any other change of control contact status during timing is ignored.

j. ON/OFF DELAY

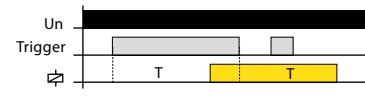

When the supply voltage is applied, the relay is open. If control contact is closed, time delay T starts. When the control contact is opened, a new time delay T begins. If the control contact is open during timing, the relay closes at the end of the timing and opens the relay after the new time delay. Any other change of control contact status during timing is ignored.