

Overview

The KEMET SCR-XV coils are common mode chokes with a wide variety of characteristics for automotive & harsh environment industrial application. These toroidal coils are designed with our proprietary high permeability ferrite S15H cores and are useful in various noise countermeasure fields.

Applications

- On board charger for EV/PHEV
- Wireless charging systems with 85 kHz
- Medium power drives for steering, air conditioning and mild hybrid 48 V systems
- High voltage automotive and harsh environment industrial EMI filtering

Benefits

- Proprietary S15H ferrite material
- High rated voltage up to 1,000 V AC/DC
- Operating temperature range from -40°C to +120°C
- High permeability
- High impedance
- UL 94 V-0 flame retardant rated base and cap
- AEC-Q200 qualified

SCR**XV-JV



SCR**XV-JH



Part Number System

SCR	19XV	080-	1R0	A	011	J
Series	Dimension Code (See Dimensions)	Rated Current (A)	Wire Diameter (mm)	Windings	Number of Turns	Terminal Base Type
SCR	19XV 25XV 29XV	xxx- = xx.x A Examples: 080 = 8.0 A 200 = 20.0 A	R = Decimal point Examples: 1R0 = 1.0 mm 2R4 = 2.4 mm	A = Single	00x = x turns 0xx = xx turns Examples: 005 = 5 turns 011 = 11 turns	JV = Vertical type JH = Horizontal type

Magnetic Permeability of Ferrite Material


In order to achieve most efficient noise reduction, it is important to select the material according to the target frequency band. Depending on its magnetic permeability, a particular ferrite material will be effective in a certain frequency band. A schematic representation of the relationship between the magnetic permeability of each material and the corresponding effective band range is shown in Figure 1.

Materials with higher magnetic permeability are effective in the lower frequency range, while those with lower magnetic permeability are effective in the higher frequency range. Thus, Mn-Zn products are mainly used for reducing conduction noise, while Ni-Zn products are commonly used for radiation noise countermeasures.

The effective frequency range varies depending on core shape, size and number of windings. This frequency dependence of the magnetic permeability as shown in the figure serves for reference purposes only and it should be tested on the actual device to determine its effectiveness.

S18H, S15H, 10H, 7H, 5H, 1400L and 700L are KEMET's proprietary ferrite material names. Other materials can also be available on request.

Figure 1 - Relationship between the magnetic permeability of each material and its effective frequency range

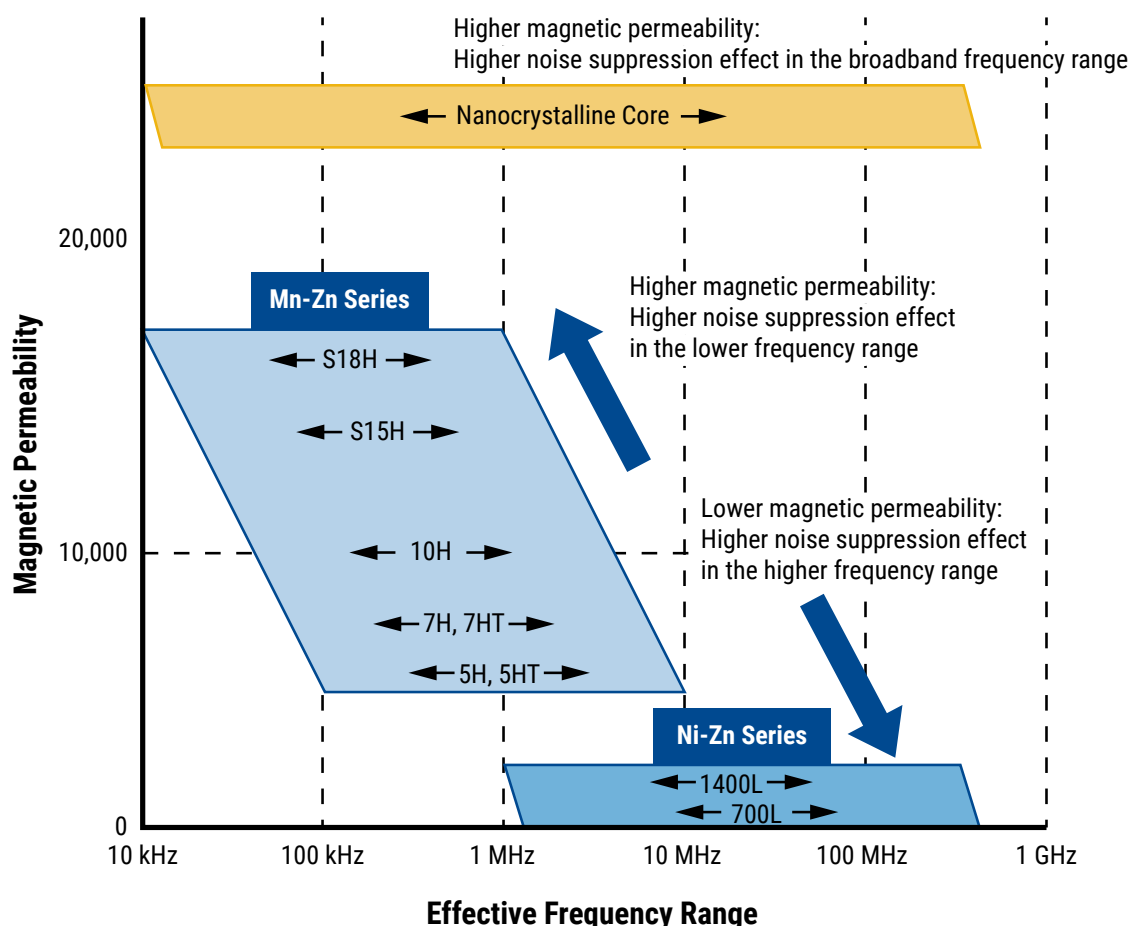

Dimensions – Millimeters

Figure 1


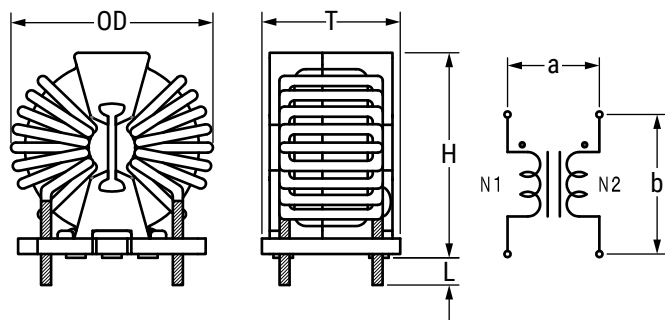


Figure 2

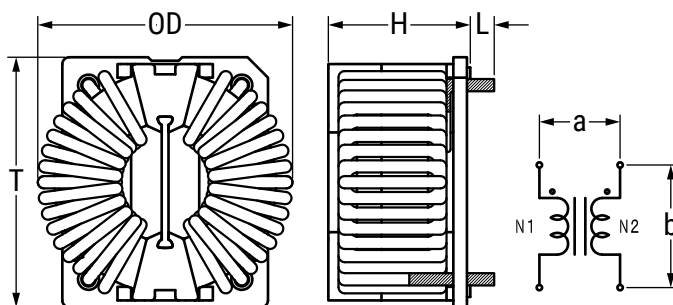

Part Name	Dimensions (mm)				Pin Pitch ¹ (Reference)		Figure
	OD (Maximum)	T (Maximum)	H (Maximum)	L	a	b	
SCR19-JV	30.0	18.9	28.5	3.50 ±0.5	17.0	12.0	Fig. 1
SCR25-JV	38.5	26.5	35.0	3.50 ±0.5	20.5	18.5	Fig. 1
SCR29-JV	41.5	26.5	38.7	3.50 ±0.5	22.5	13.5	Fig. 1
SCR19-JH	30.0	27.5	19.9	3.50 ±0.5	17.0	19.0	Fig. 2
SCR25-JH	38.5	33.5	27.5	3.50 ±0.5	20.5	24.5	Fig. 2
SCR29-JH	41.5	37.7	22.9	3.50 ±0.5	22.5	28.5	Fig. 2

¹ Pin pitch listed above for reference only. Values not guaranteed.

Environmental Compliance

All KEMET AC line filters are RoHS Compliant.



Performance Characteristics

Item	Performance Characteristics
Rated Voltage	1,000 VAC/VDC
Withstanding Voltage	2,400 VAC (2 seconds, between lines)
Insulation Resistance	> 100 MΩ at 1,000 VDC (between lines)
Rated Current Range	5 – 35 A
Rated Inductance Range	0.056 – 11.8 mH ±35%
Inductance Measurement Condition	100 kHz
Thermal Class	E (120°C)
Operating Temperature Range	-40°C to +120°C (include self temperature rise)

Table 1 – Ratings & Part Number Reference

Part Number	Rated Voltage AC/DC (V)	Rated Current (A)	Inductance ¹ (mH) ±35%	DC Resistance/ Line (mΩ) ±13%	Temperature Rise (K) Maximum	Wire Diameter (mm)	Weight (g) Approximate
SCR19XV-080-1R0A011JV	1000	8	0.750	8.700	55	1.0	15.9
SCR19XV-100-1R1A009JV	1000	10	0.500	6.030	45	1.1	16.1
SCR19XV-120-1R2A007JV	1000	12	0.300	3.990	50	1.2	15.8
SCR19XV-150-1R3A006JV	1000	15	0.220	2.910	50	1.3	15.8
SCR19XV-190-1R5A005JV	1000	19	0.160	1.890	50	1.5	16.6
SCR19XV-220-1R6A004JV	1000	22	0.100	1.380	50	1.6	16.1
SCR19XV-300-1R9A003JV	1000	30	0.056	0.747	55	1.9	16.8
SCR19XV-080-1R0A011JH	1000	8	0.750	8.980	55	1.0	16.4
SCR19XV-100-1R1A009JH	1000	10	0.500	6.230	45	1.1	16.6
SCR19XV-120-1R2A007JH	1000	12	0.300	4.190	50	1.2	16.3
SCR19XV-150-1R3A006JH	1000	15	0.220	3.010	50	1.3	16.2
SCR19XV-190-1R5A005JH	1000	19	0.160	1.950	50	1.5	17.1
SCR19XV-220-1R6A004JH	1000	22	0.100	1.430	50	1.6	16.7
SCR19XV-300-1R9A003JH	1000	30	0.056	0.767	55	1.9	17.6
SCR25XV-050-1R0A027JV	1000	5	8.900	30.590	45	1.0	46.7
SCR25XV-070-1R1A022JV	1000	7	5.900	20.830	55	1.1	47.0
SCR25XV-080-1R2A018JV	1000	8	4.000	14.410	50	1.2	47.0
SCR25XV-100-1R3A016JV	1000	10	3.100	10.910	55	1.3	47.6
SCR25XV-110-1R4A013JV	1000	11	2.100	7.720	50	1.4	46.8
SCR25XV-130-1R5A012JV	1000	13	1.770	6.330	55	1.5	48.5
SCR25XV-150-1R6A010JV	1000	15	1.230	4.620	50	1.6	47.4
SCR25XV-170-1R7A009JV	1000	17	1.000	3.710	55	1.7	47.9
SCR25XV-190-1R8A008JV	1000	19	0.780	2.980	55	1.8	47.7
SCR25XV-220-1R9A007JV	1000	22	0.600	2.350	55	1.9	47.6
SCR25XV-240-2R0A006JV	1000	24	0.440	1.840	55	2.0	46.5
SCR25XV-280-2R1A005JV	1000	28	0.310	1.390	55	2.1	45.5
SCR25XV-310-2R3A004JV	1000	31	0.197	0.950	50	2.3	45.2
SCR25XV-350-2R4A003JV	1000	35	0.110	0.690	50	2.4	42.2







¹ Inductance Measurement Condition: 100 kHz

Table 1 – Ratings & Part Number Reference cont.







Part Number	Rated Voltage AC/DC (V)	Rated Current (A)	Inductance ¹ (mH) ±35%	DC Resistance/ Line (mΩ) ±13%	Temperature Rise (K) Maximum	Wire Diameter (mm)	Weight (g) Approximate
SCR25XV-050-1R0A027JH	1000	5	8.900	32.600	45	1.0	47.1
SCR25XV-070-1R1A022JH	1000	7	5.900	21.350	55	1.1	47.1
SCR25XV-080-1R2A018JH	1000	8	4.000	13.500	50	1.2	47.3
SCR25XV-100-1R3A016JH	1000	10	3.100	12.270	55	1.3	48.1
SCR25XV-110-1R4A013JH	1000	11	2.100	7.890	50	1.4	47.3
SCR25XV-130-1R5A012JH	1000	13	1.770	6.430	55	1.5	49.0
SCR25XV-150-1R6A010JH	1000	15	1.230	4.740	50	1.6	47.9
SCR25XV-170-1R7A009JH	1000	17	1.000	3.830	55	1.7	48.8
SCR25XV-190-1R8A008JH	1000	19	0.780	3.070	55	1.8	48.7
SCR25XV-220-1R9A007JH	1000	22	0.600	2.450	55	1.9	48.6
SCR25XV-240-2R0A006JH	1000	24	0.440	1.920	55	2.0	48.1
SCR25XV-280-2R1A005JH	1000	28	0.310	1.440	55	2.1	46.2
SCR25XV-310-2R3A004JH	1000	31	0.197	1.000	50	2.3	46.2
SCR25XV-350-2R4A003JH	1000	35	0.110	0.700	50	2.4	43.5
SCR29XV-050-1R0A044JV	1000	5	11.800	40.300	55	1.0	44.7
SCR29XV-060-1R1A036JV	1000	6	7.900	27.200	55	1.1	45.0
SCR29XV-070-1R2A030JV	1000	7	5.500	19.200	50	1.2	45.1
SCR29XV-080-1R3A026JV	1000	8	4.150	14.200	45	1.3	45.4
SCR29XV-090-1R4A022JV	1000	9	2.950	10.200	40	1.4	45.6
SCR29XV-110-1R5A019JV	1000	11	2.200	8.000	45	1.5	45.8
SCR29XV-120-1R6A017JV	1000	12	1.760	6.430	40	1.6	46.3
SCR29XV-150-1R7A015JV	1000	15	1.370	5.040	55	1.7	46.7
SCR29XV-180-1R8A013JV	1000	18	1.040	3.990	60	1.8	46.4
SCR29XV-190-1R9A012JV	1000	19	0.880	3.280	55	1.9	47.5
SCR29XV-200-2R0A011JV	1000	20	0.740	2.730	50	2.0	48.4
SCR29XV-210-2R1A010JV	1000	21	0.610	2.300	45	2.1	49.1
SCR29XV-250-2R2A008JV	1000	25	0.390	1.680	50	2.2	45.1
SCR29XV-270-2R3A006JV	1000	27	0.220	1.190	45	2.3	41.1
SCR29XV-300-2R4A005JV	1000	30	0.153	0.930	45	2.4	39.8
SCR29XV-050-1R0A044JH	1000	5	11.800	39.900	55	1.0	45.4
SCR29XV-060-1R1A036JH	1000	6	7.900	27.400	55	1.1	46.2
SCR29XV-070-1R2A030JH	1000	7	5.500	19.200	50	1.2	46.1
SCR29XV-080-1R3A026JH	1000	8	4.150	14.200	45	1.3	46.8
SCR29XV-090-1R4A022JH	1000	9	2.950	10.600	40	1.4	46.8
SCR29XV-110-1R5A019JH	1000	11	2.200	8.070	45	1.5	47.2
SCR29XV-120-1R6A017JH	1000	12	1.760	6.450	40	1.6	47.6
SCR29XV-150-1R7A015JH	1000	15	1.370	5.140	55	1.7	48.0
SCR29XV-180-1R8A013JH	1000	18	1.040	4.100	60	1.8	47.6
SCR29XV-190-1R9A012JH	1000	19	0.880	3.350	55	1.9	48.9
SCR29XV-200-2R0A011JH	1000	20	0.740	2.840	50	2.0	49.6
SCR29XV-210-2R1A010JH	1000	21	0.610	2.330	45	2.1	50.0
SCR29XV-250-2R2A008JH	1000	25	0.390	1.680	50	2.2	46.2
SCR29XV-270-2R3A006JH	1000	27	0.220	1.180	45	2.3	42.1
SCR29XV-300-2R4A005JH	1000	30	0.153	0.920	45	2.4	40.9

¹ Inductance Measurement Condition: 100 kHz





Frequency Characteristics

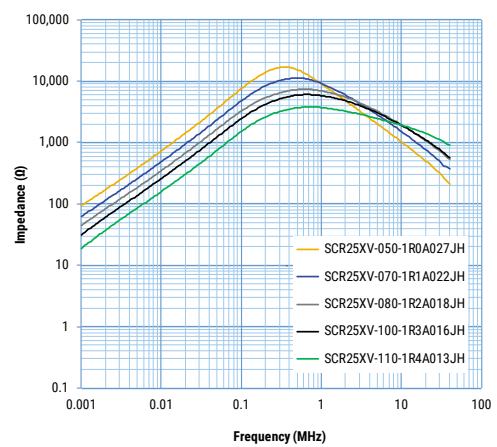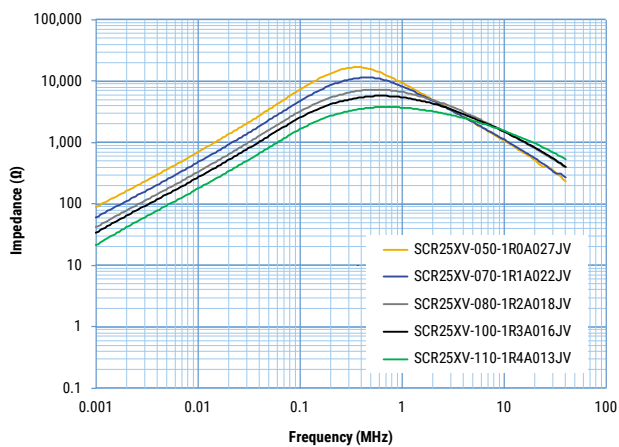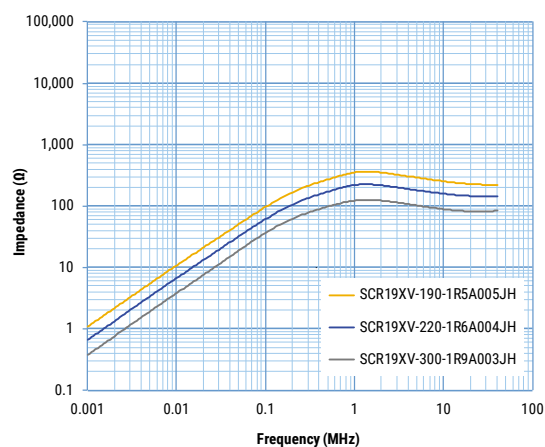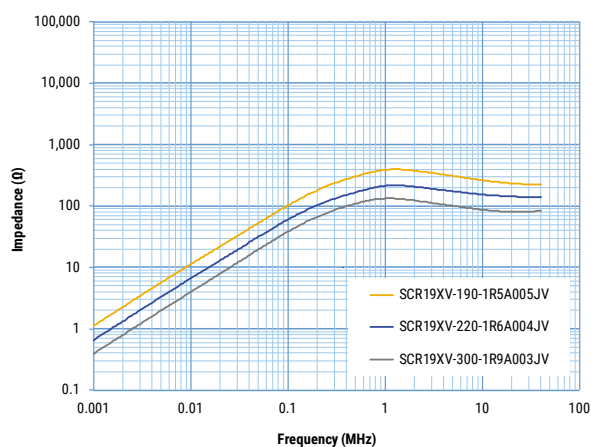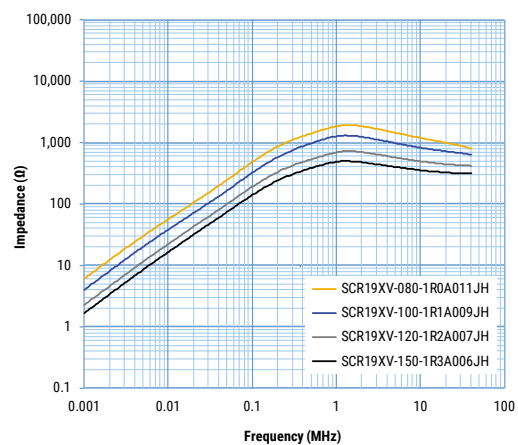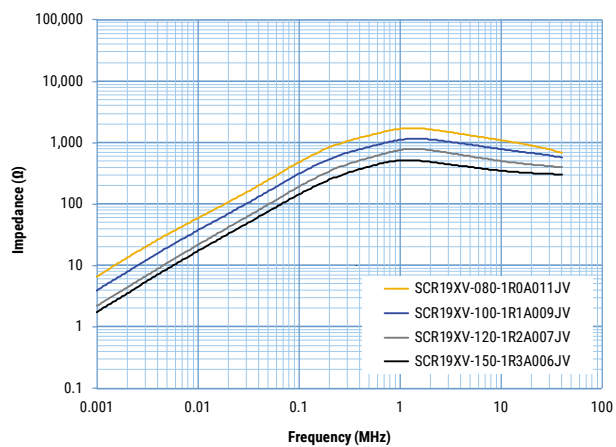

Frequency Characteristics cont.

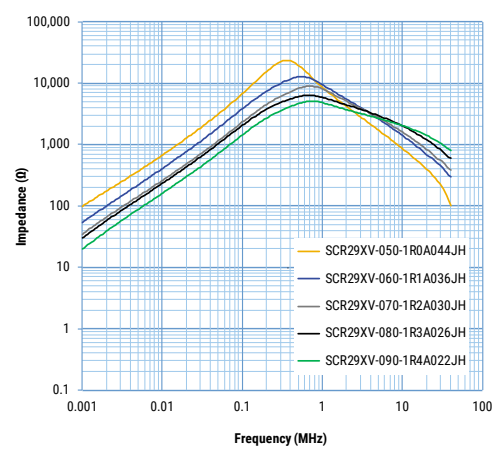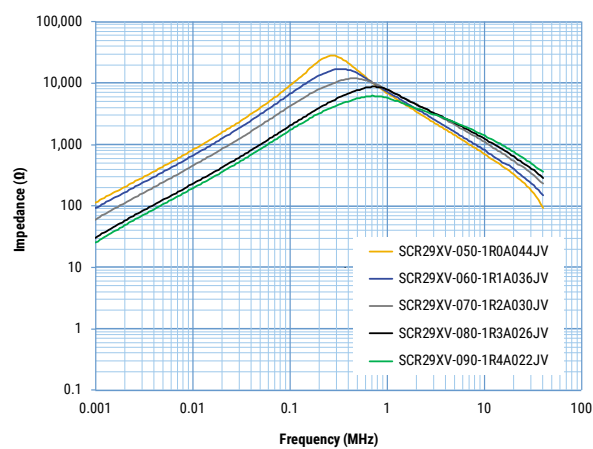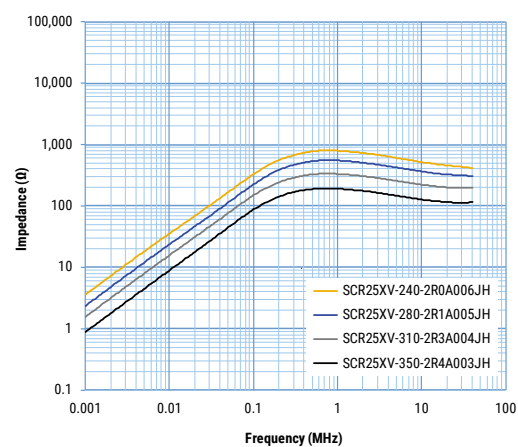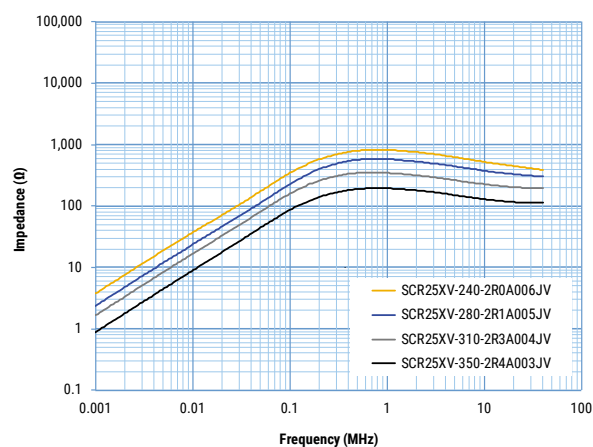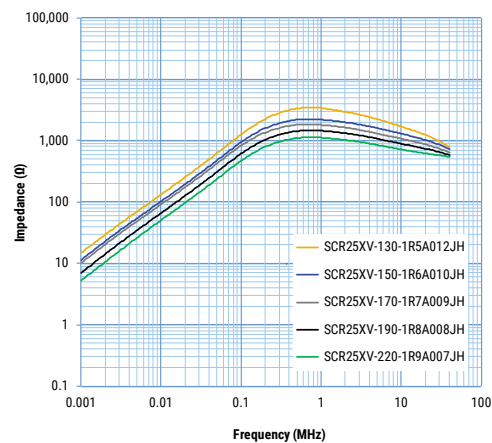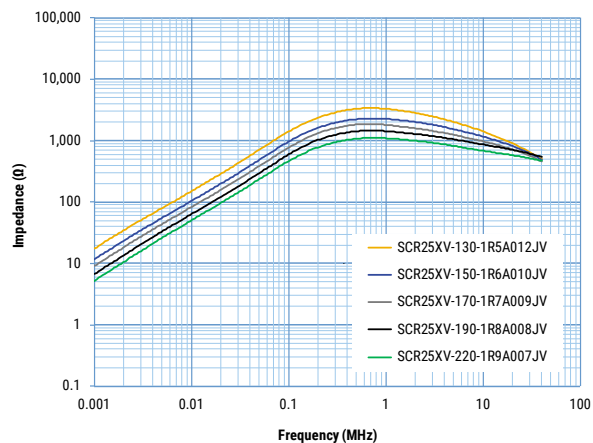

Frequency Characteristics cont.

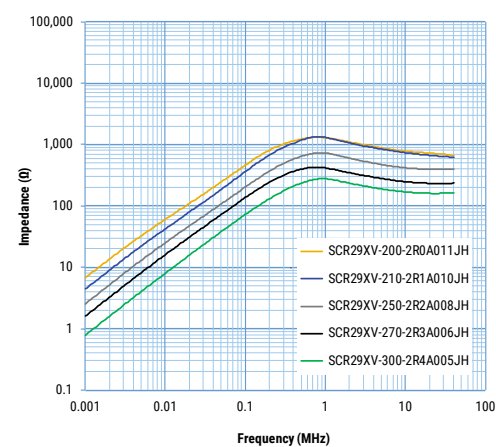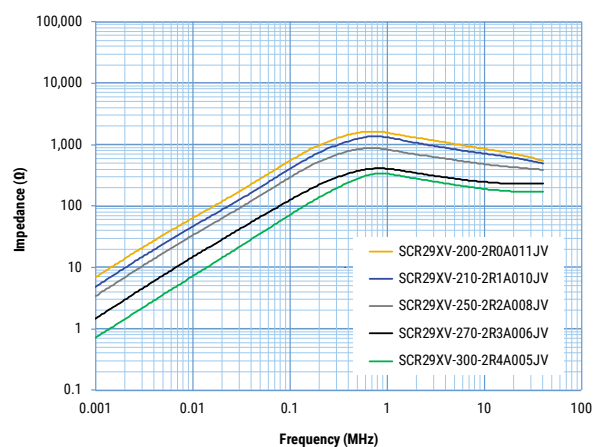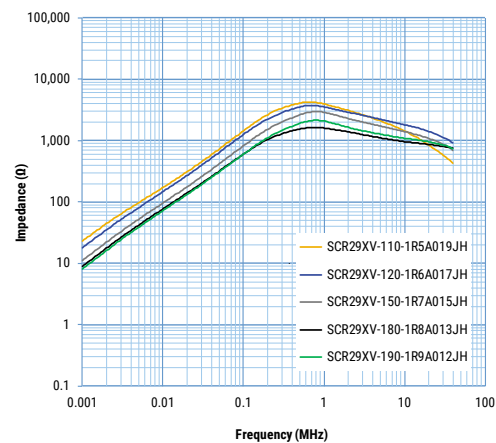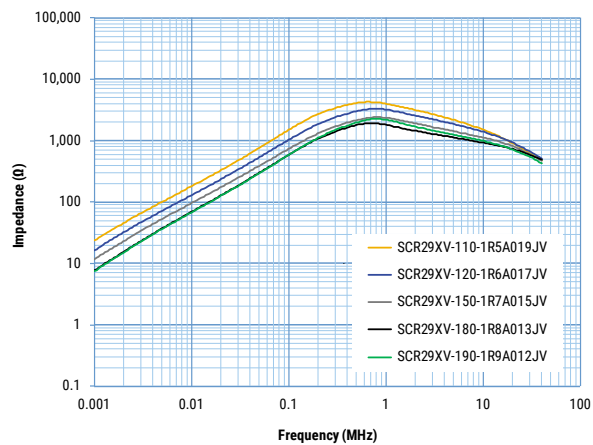

Packaging

Type	Packaging Type	Pieces Per Box
SCR19XV-JV	Tray	210
SCR19XV-JH		150
SCR25XV-JV	Tray	140
SCR25XV-JH		120
SCR29XV-JV	Tray	120
SCR29XV-JH		80

Handling Precautions

Precautions for product storage

AC Line Filters should be stored in normal working environments. While the chokes themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage.

KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 70% relative humidity. Atmospheres should be free of chlorine and sulfur bearing compounds. Temperature fluctuations should be minimized to avoid condensation on the parts. Avoid storage near strong magnetic fields, as this might magnetize the product.

For optimized solderability, AC line filters stock should be used promptly and preferably within 6 months of receipt.

Product temperature rise values

The values listed for temperature rise are the result of self-heating in wires when the rated current (commercial frequency) is applied.

When using the product, check and evaluate the value of the core temperature rise under actual operating conditions.

KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

When providing KEMET products and technologies contained herein to other countries, the customer must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the International Traffic in Arms Regulations (ITAR), the US Export Administration Regulations (EAR) and the Japan Foreign Exchange and Foreign Trade Act.

KEMET is a registered trademark of KEMET Electronics Corporation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KEMET:

<u>SCR19XV-080-1R0A011JH</u>	<u>SCR19XV-080-1R0A011JV</u>	<u>SCR19XV-100-1R1A009JH</u>	<u>SCR19XV-100-1R1A009JV</u>
<u>SCR19XV-120-1R2A007JH</u>	<u>SCR19XV-120-1R2A007JV</u>	<u>SCR19XV-150-1R3A006JH</u>	<u>SCR19XV-150-1R3A006JV</u>
<u>SCR19XV-190-1R5A005JH</u>	<u>SCR19XV-190-1R5A005JV</u>	<u>SCR19XV-220-1R6A004JH</u>	<u>SCR19XV-220-1R6A004JV</u>
<u>SCR19XV-300-1R9A003JH</u>	<u>SCR19XV-300-1R9A003JV</u>	<u>SCR25XV-050-1R0A027JH</u>	<u>SCR25XV-050-1R0A027JV</u>
<u>SCR25XV-070-1R1A022JH</u>	<u>SCR25XV-070-1R1A022JV</u>	<u>SCR25XV-080-1R2A018JH</u>	<u>SCR25XV-080-1R2A018JV</u>
<u>SCR25XV-100-1R3A016JH</u>	<u>SCR25XV-100-1R3A016JV</u>	<u>SCR25XV-110-1R4A013JH</u>	<u>SCR25XV-110-1R4A013JV</u>
<u>SCR25XV-130-1R5A012JH</u>	<u>SCR25XV-130-1R5A012JV</u>	<u>SCR25XV-150-1R6A010JH</u>	<u>SCR25XV-150-1R6A010JV</u>
<u>SCR25XV-170-1R7A009JH</u>	<u>SCR25XV-170-1R7A009JV</u>	<u>SCR25XV-190-1R8A008JH</u>	<u>SCR25XV-190-1R8A008JV</u>
<u>SCR25XV-220-1R9A007JH</u>	<u>SCR25XV-220-1R9A007JV</u>	<u>SCR25XV-240-2R0A006JH</u>	<u>SCR25XV-240-2R0A006JV</u>
<u>SCR25XV-280-2R1A005JH</u>	<u>SCR25XV-280-2R1A005JV</u>	<u>SCR25XV-310-2R3A004JH</u>	<u>SCR25XV-310-2R3A004JV</u>
<u>SCR25XV-350-2R4A003JH</u>	<u>SCR25XV-350-2R4A003JV</u>	<u>SCR29XV-050-1R0A044JH</u>	<u>SCR29XV-050-1R0A044JV</u>
<u>SCR29XV-060-1R1A036JH</u>	<u>SCR29XV-060-1R1A036JV</u>	<u>SCR29XV-070-1R2A030JH</u>	<u>SCR29XV-070-1R2A030JV</u>
<u>SCR29XV-080-1R3A026JH</u>	<u>SCR29XV-080-1R3A026JV</u>	<u>SCR29XV-090-1R4A022JH</u>	<u>SCR29XV-090-1R4A022JV</u>
<u>SCR29XV-110-1R5A019JH</u>	<u>SCR29XV-110-1R5A019JV</u>	<u>SCR29XV-120-1R6A017JH</u>	<u>SCR29XV-120-1R6A017JV</u>
<u>SCR29XV-150-1R7A015JH</u>	<u>SCR29XV-150-1R7A015JV</u>	<u>SCR29XV-180-1R8A013JH</u>	<u>SCR29XV-180-1R8A013JV</u>
<u>SCR29XV-190-1R9A012JH</u>	<u>SCR29XV-190-1R9A012JV</u>	<u>SCR29XV-200-2R0A011JH</u>	<u>SCR29XV-200-2R0A011JV</u>
<u>SCR29XV-210-2R1A010JH</u>	<u>SCR29XV-210-2R1A010JV</u>	<u>SCR29XV-250-2R2A008JH</u>	<u>SCR29XV-250-2R2A008JV</u>
<u>SCR29XV-270-2R3A006JH</u>	<u>SCR29XV-270-2R3A006JV</u>	<u>SCR29XV-300-2R4A005JH</u>	<u>SCR29XV-300-2R4A005JV</u>