



MLC capacitors with silver/palladium (Ag/Pd) terminations have often been used in medical applications where non-magnetic components are required, for example in MRI equipment - however, conventional nickel barrier terminations are not suitable due to their magnetic properties. In addition, RoHS requirement to use lead-free solders would cause an increase in soldering temperatures and cause solder leaching problems for the Ag/Pd termination. This has meant alternatives have had to be found and one solution is to use a copper barrier instead of a nickel barrier, with a tin finish on top. This non-magnetic termination is offered with selected non-magnetic C0G/NP0, High Q and X7R dielectrics, providing a fully non-magnetic component ($\mu_r = 1.0000$).

To meet high temperature 260°C soldering reflow profiles as detailed in J-STD-020, C0G/NP0 dielectrics are supplied with FlexiCap™ or sintered termination whilst X7R dielectrics are supplied only with the FlexiCap™ termination.

Available in chip or ribbon lead format for certain case sizes (consult sales office).



High Q, C0G/NP0 - minimum / maximum capacitance values

Chip Size	0402	0603	0505	0805	1206	1111 1210	1808	1812	2220
Min Cap	0.1pF	0.1pF	0.2pF	0.2pF	0.5pF	0.3pF	1.0pF	1.0pF	2.0pF
50V 63V	22pF	100pF	220pF	470pF	1.5nF	-	-	-	-
100V	15pF	68pF	150pF	330pF	1.0nF	2.2nF	2.2nF	4.7nF	10nF
150V	10pF	47pF	100pF	220pF	680pF	1.5nF	1.5nF	3.3nF	6.8nF
200V250V	6.8pF	33pF	56pF	150pF	470pF	1.0nF	1.0nF	2.2nF	4.7nF
300V	-	27pF	47pF	120pF	390pF	820pF	820pF	1.8nF	3.9nF
500V				68pF	270pF	680pF	680pF	1.5nF	3.3nF
630V				-	150pF	390pF	390pF	1.0nF	2.2nF
1000V				-	82pF	220pF	220pF	680pF	1.5nF
2000V				-	18pF	68pF	68pF	150pF	470pF
3000V				-	-	-	-	68pF	150pF

Min Capacitance Tolerance
 ±0.05pF (<4.7pF)
 0.1pF (≥4.7pF & <10pF)
 ±1% (≥10pF)

X7R - minimum / maximum capacitance values

Chip Size	0402	0603	0805	1206	1210	1808	1812	2220
Min Cap	47pF	100pF	330pF	680pF	1.5nF	2.2nF	3.3nF	6.8nF
16V	10nF	100nF	330nF	1.0μF	1.5μF	1.5μF	3.3μF	5.6μF
25V	6.8nF	68nF	220nF	820nF	1.2μF	1.2μF	2.2μF	4.7μF
50V 63V	4.7nF	47nF	150nF	470nF	1.0μF	680nF	1.5μF	3.3μF
100V	1.5nF	10nF	47nF	150nF	470nF	330nF	1.0μF	1.5μF
200V250V	680pF	5.6nF	27nF	100nF	220nF	180nF	470nF	1.0μF
500V	-	1.5nF	8.2nF	33nF	100nF	100nF	270nF	560nF
630V			4.7nF	10nF	27nF	33nF	150nF	330nF
1000V			3.3nF	4.7nF	15nF	18nF	56nF	120nF
1200V			-	3.3nF	10nF	10nF	33nF	82nF
1500V			-	2.7nF	6.8nF	6.8nF	22nF	47nF
2000V			-	2.2nF	4.7nF	4.7nF	10nF	27nF

Min Capacitance Tolerance
 ±5%

High Q, C0G/NP0 High Power RF capacitors - minimum / maximum capacitance values

A range of ultra-low loss High Q ceramic capacitors with C0G/NP0 characteristics suitable for high power applications where minimal power loss and very low self heating is demanded.

Common applications include MRI body coils and wireless charging systems operating in the kHz and MHz frequencies.

Available in chip or ribbon lead format.




Chip size	Case size 25 - 2225		Case size 40 - 4040	
	Min.	Max.	Min.	Max.
200V	6.2nF	10nF	16nF	27nF
500V	5.1nF	5.6nF	13nF	15nF
630V	3.9nF	4.7nF	12nF	12nF
1kV	1.2nF	3.3nF	5.6nF	10nF
2kV	510pF	1.0nF	1.6nF	5.1nF
3kV	1pF	47*/470pF	910pF	1.5nF
4kV			620pF	820pF
5kV			390pF	560pF
6kV			160pF	330pF
7.0/7.2kV			1pF	56**/150pF

*47pF max. for dual rated @2.5kVac 30MHz
 **56pF max. for dual rated @5kVac 30MHz.

Non-Magnetic Capacitors - High Q, C0G/NP0, X7R - 16V to 7.2kV

Surface Mount See page 20 for dimensions

Ribbon Leaded Silver plated copper ribbon attached with HMP solder - (MP greater than 260°C)

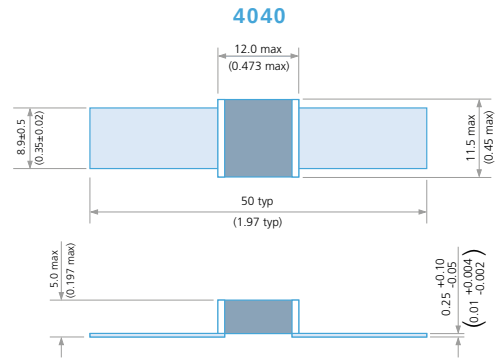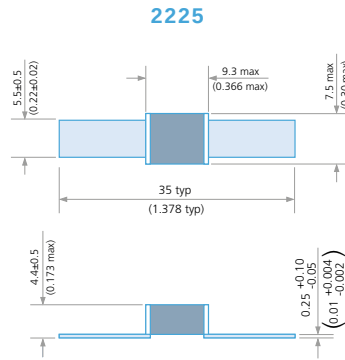

Ordering information - Syfer Non-Magnetic capacitors

Chip size	Termination or Coating (Ribbon Leaded)	Voltage	Capacitance in picofarads (pF)	Capacitance tolerance	Dielectric	Packing	Lead Options	Suffix code
1206	2	500	0223	J	Q	T	-	-
4040	2	7K0	0470	G	Q	B	-	AF9
2225	B	3K0	6P80	G	Q	B	R	W221
0402*	2 = Sintered silver with copper barrier*	50 = 50V	<10pF Insert a P for the decimal point, eg 2P20 = 2.2pF.	<4.7pF H = ±0.05pF B = ±0.1pF C = ±0.25pF D = ±0.5pF ≥4.7pF ~ <10pF B = ±0.1pF C = ±0.25pF D = ±0.5pF ≥10pF F = ±1% G = ±2% J = ±5% K = ±10% M = ±20%	C = C0G/NP0 (1B) Q = High Q X = X7R (2R1)	T = 178mm (7") reel R = 330mm (13") reel B = Bulk pack - tubs or trays	R = Ribbon leaded Blank = SM chip	W221 = Leaded W211 = Leaded marked **AF9 = SM standard chip **AF9LM = SM marked standard chip
0603	3 = FlexiCap™ with copper barrier.	100 = 100V	>10pF. 1st digit is 0. 2nd and 3rd digits are significant figures of capacitance code. The 4th digit is number of 0's following eg. 0470 = 47pF 0512 = 5100pF					
0505		1K0 = 1kV						
0805	4 = Sintered silver with copper barrier*	2K0 = 2kV						
1206		3K0 = 3kV						
1111	5 = FlexiCap™ base with copper barrier.	4K0 = 4kV						
1210		5K0 = 5kV						
1808		6K0 = 6kV						
1812		7K0 = 7kV						
2220	Ribbon Leaded							
2225†	B = Uncoated							
4040†	V = Coated with modified silicone laquer		Values <1pF in 0.1pF steps, above this values are E24 series					

Note: *0402 - C0G/NP0 and High Q only. †Ribbon Leads available. **AF9 and AF9LM suffix code only available in 1111, 2225 and 4040 chip sizes.

Ordering information - Voltronics Non-Magnetic capacitors

Chip size	Capacitance	Tolerance	Voltage	Termination	Material	Lead / Packaging
4 0402*	0R1 0.1pF	A ±0.05pF	50 = 50V	W = Ag/Cu/Sn	Q = High Q	R = Ribbon
5 0505	100 10pF	B ±0.1pF	100 = 100V	S = Pd/Ag	0±30ppm/°C	T* = Tape & Reel
6 0603*	101 100pF	C ±0.25pF	1000 = 1000V	M = Poly/Cu/Sn	X = X7R (2R1)	B* = Bulk
8 0805*	102 1000pF	D ±0.5pF		2 = Ag/Cu/Sn - (Q dielectric only)		
11 1111†		F ±1%		3 = Poly/Cu/Sn - (X dielectric only)		
12 1206*		G ±2%		B = Silver - (Q ribbon only)		
13 1210*		J ±5%		V = Silver, laquer Coated - (Q ribbon only)		
18 1812*		K ±10%				
22 2220*		M ±20%				
25 2225†						
38 3838†						
40 4040†						

Note: *Q and X dielectric only. †Ribbon Leads available.



Non-Magnetic Capacitors, High Power RF - Porcelain High Q



Made from highly stable, low loss dielectric formulations, these traditional porcelain MLCs are known for their high RF power handling capability. Available in all industry common case sizes. The special silver-palladium termination and the proprietary ceramic formulations guarantee consistent non-magnetic performance. All MLCs in these series are RoHS compliant. Chips are available either with standard termination or can be fitted with ribbon leads, depending on your application.

Description

- Porcelain Capacitors • Zero TC • Low Noise • Low ESR, High Q
- High Self-resonance • Established Reliability
- Capacitance range 0.1pF to 5.1nF

Functional Applications

- Impedance Matching • DC Blocking • Bypass • Coupling
- Tuning and Feedback



High Power RF capacitors - F & H materials - Minimum / maximum capacitance values - see ordering information

Chip Size	Case size 5 0505		Case size 11 1111		Case size 25 2225		Case size 38 3838	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
50V	-	-	680pF	1nF	-	-	-	-
100V	-	-	510pF	620pF	-	-	-	-
200V	36pF	100pF	220pF	470pF	-	-	-	-
250V	0.1pF	33pF	-	-	-	-	-	-
300V	-	-	-	-	2.2nF	2.7nF	-	-
500V	-	-	110pF	200pF	1.5nF	1.8nF	2.7nF	5.1nF
1kV	-	-	0.1pF	100pF	510pF	1.2nF	750pF	2.2nF
1.5kV	-	-	-	-	300pF	470pF	-	-
2kV	-	-	-	-	-	-	-	-
2.5kV	-	-	-	-	0.3pF	270pF	430pF	680pF
3.6kV	-	-	-	-	-	-	110pF	390pF
7.2kV	-	-	-	-	-	-	0.3pF	100pF

Note: Special capacitance values available upon request.

Ordering information - Non-Magnetic capacitors

11	470	J	1000	W	F	R
Chip size	Capacitance	Tolerance	Voltage	Termination	Material	Lead
5 0505	0R1 0.1pF	A ±0.05pF	50 50V	W Ag/Cu/Sn	H AH +90±20ppm/°C	B = Chip
11 1111†	100 10pF	B ±0.1pF	100 100V	S Pd/Ag	F CF 0±15ppm/°C	R = Ribbon
25 2225†	101 100pF	C ±0.25pF	1000 1000V	M Poly/Cu/Sn		
38 3838†	102 1000pF	D ±0.5pF				
		F ±1%				
		G ±2%				
		J ±5%				
		K ±10%				

Note: †Available in chip or ribbon lead format.


Reeled Quantities

Chip Size	0402	0505	0603	0805	1206	1111 1210	1808	1812	2220	2225
7" Reel	10000	2500	4000	3000	2500	10002000	1500	500	500	500
13" Reel	13" reel quantities available on request						6000	2000	2000	2000







Note: Other capacitance values may become available, please contact the Sales Office if you need values other than those shown in the above tables. For dimensions and soldering information, please go to our website www.knowlescapacitors.com.

Non-Magnetic Capacitors - High Q, X7R

Typical performance data - chip size 0805 High Q

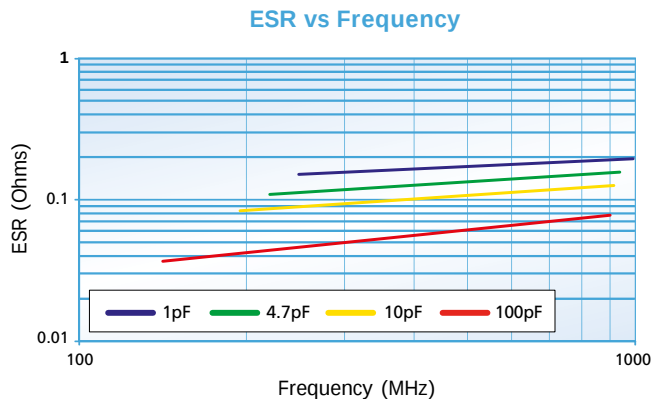

Typical performance data - chip size 1111 High Q

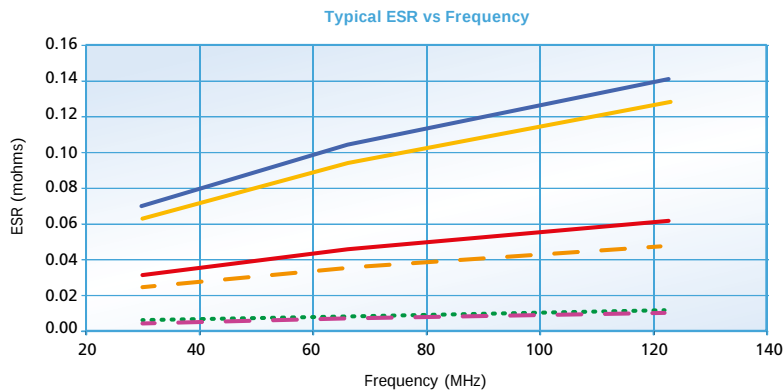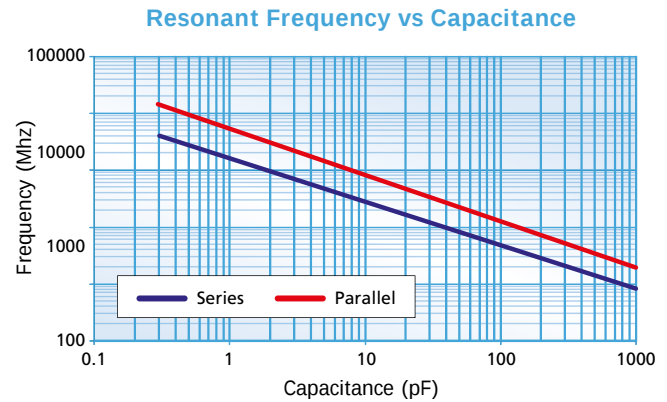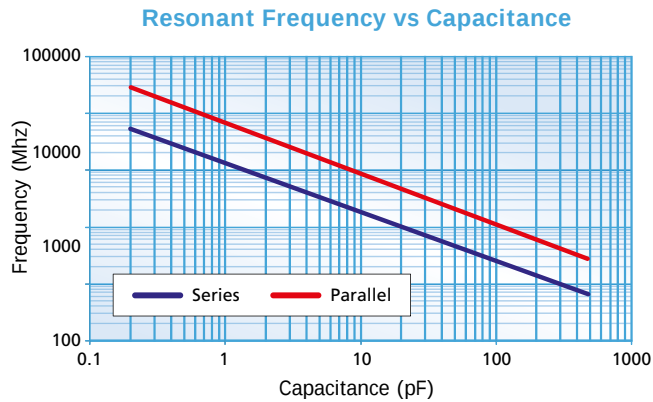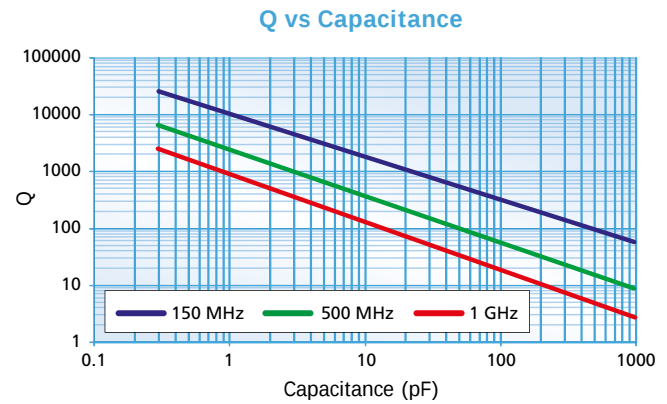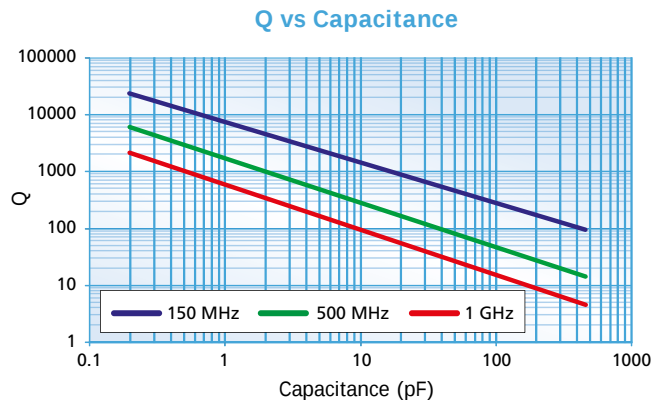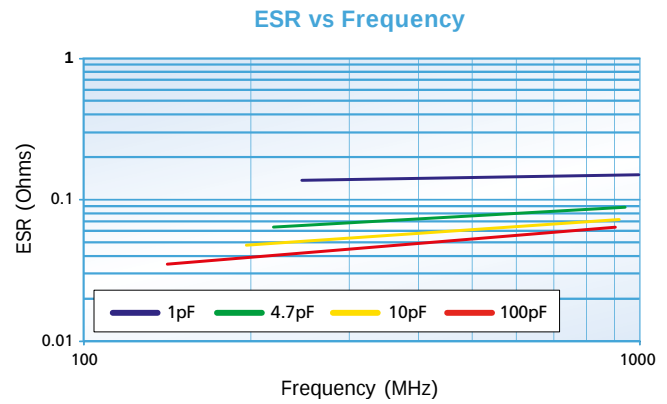

- 4040 56pF
- 4040 18pF
- 2225 2.2nF
- 2225 39pF
- 2225 10pF
- 4040 5.1nF

ESR Measurement

All ESR figures are measured using a VNA and 2m copper resonant tube and extrapolating to 30MHz by ratio. Measured data can be supplied on request. Measurement of ESR can vary with test method and components should only be compared when tested back-to-back on the same equipment under controlled conditions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Knowles:](#)

111122K00560GQTAF9LM	111121K00151GQTAF9LM	111122K01P50BQTAF9LM	111122K06P80BQTAF9LM
111122500821GQTAF9LM	222521K00152JQTAF9LM	222522000822JQTAF9LM	222523K60390GQTAF9LM
222523K63P30BQTAF9LM	111122K00180GQTAF9LM	111122K03P60BQTAF9LM	222521K00332JQTAF9LM
222523K00471JQTAF9LM	222523K60510GQTAF9LM	111121K00820GQTAF9LM	111122K03P00BQTAF9LM
222523K60101GQTAF9LM	222523K60750GQTAF9LM	222523K63P60BQTAF9LM	111122K00270GQTAF9LM
111122K00390GQTAF9LM	111122K02P00BQTAF9LM	222522K00102JQTAF9LM	222523K00221GQTAF9LM
222523K60100GQTAF9LM	222523K60560GQTAF9LM	222523K65P60BQTAF9LM	111125000681GQTAF9LM
111122K02P40BQTAF9LM	222523K00151GQTAF9LM	222523K00331JQTAF9LM	222523K61P20BQTAF9LM
111121K00680GQTAF9LM	222522K00681JQTAF9LM	222522K00821JQTAF9LM	222526300392JQTAF9LM
111121500152GQTAF9LM	222521K00122JQTAF9LM	222523K60180GQTAF9LM	222523K60470GQTAF9LM
111125000561GQTAF9LM	111121000222GQTAF9LM	111125000471GQTAF9LM	222523K60360GQTAF9LM
222523K66P80BQTAF9LM	222523K65P10BQTAF9LM	111121K00221GQTAF9LM	111122K00510GQTAF9LM
111121000182GQTAF9LM	111122K01P80BQTAF9LM	111126300271GQTAF9LM	222522000103JQTAF9LM
222523K61P00BQTAF9LM	222523K62P70BQTAF9LM	111121K00910GQTAF9LM	111122K00200GQTAF9LM
111122K02P70BQTAF9LM	222521K00272JQTAF9LM	222523K60680GQTAF9LM	222523K63P90BQTAF9LM
111122K00360GQTAF9LM	111122K00150GQTAF9LM	111122K00240GQTAF9LM	111122K03P30BQTAF9LM
222521K00182JQTAF9LM	222523K00391JQTAF9LM	111121K00121GQTAF9LM	222523K62P00BQTAF9LM
111121K00181GQTAF9LM	111121K00101GQTAF9LM	111122K01P20BQTAF9LM	111122K09P10BQTAF9LM
222523K60270GQTAF9LM	222523K60300GQTAF9LM	222523K61P50BQTAF9LM	222523K62P20BQTAF9LM
222525000562JQTAF9LM	111122500102GQTAF9LM	111122K00100GQTAF9LM	111122K03P90BQTAF9LM
111122K05P10BQTAF9LM	111122K06P20BQTAF9LM	222523K60120GQTAF9LM	222523K68P20BQTAF9LM
111126300331GQTAF9LM	111121500122GQTAF9LM	111122K02P20BQTAF9LM	111122K04P70BQTAF9LM
222523K00181GQTAF9LM	222523K60820GQTAF9LM	222523K67P50BQTAF9LM	222522000682JQTAF9LM
222523K60910GQTAF9LM	222523K62P40BQTAF9LM	222523K63P00BQTAF9LM	111126300391GQTAF9LM
111122K05P60BQTAF9LM	222523K60150GQTAF9LM	111122K00620GQTAF9LM	222522K00561JQTAF9LM