


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

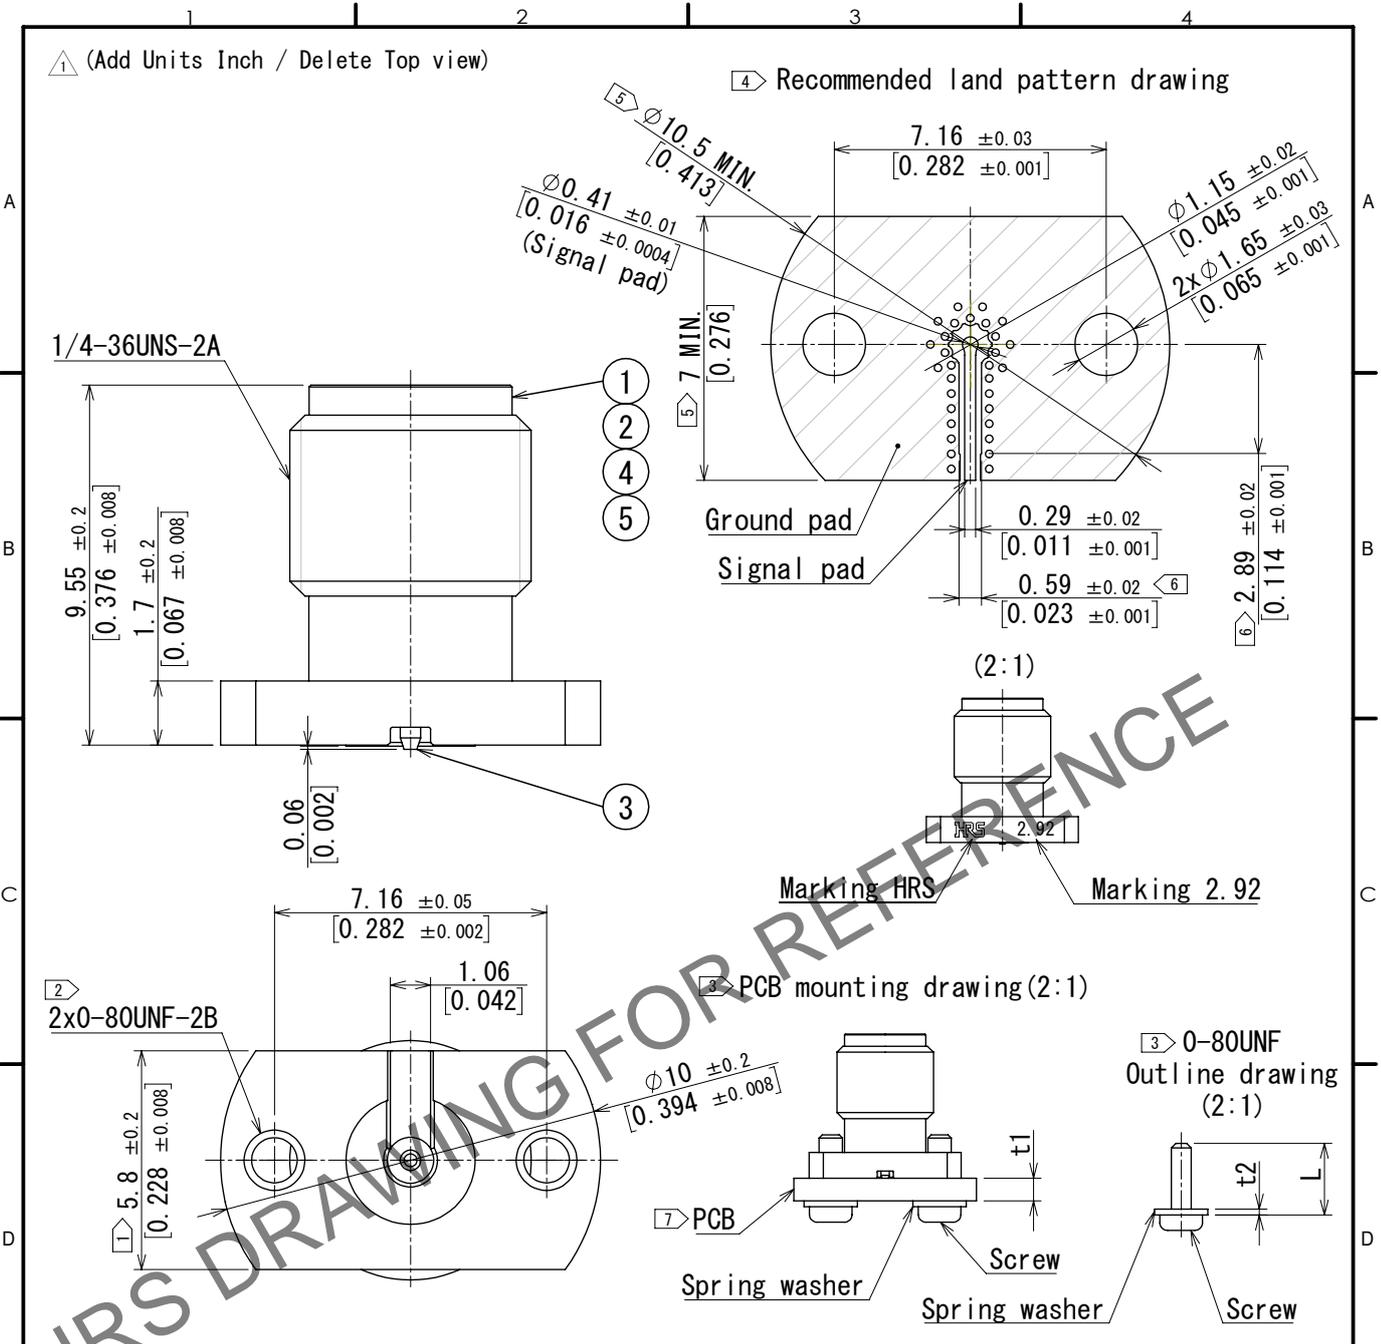

- ① Please hold the connector flange with a spanner to avoid any torque acting on the PCB when the connector is mating.
- ② 0-80UNF screws recommended tightening torque is 0.09N·m. Please tighten the screws evenly during the connector mounting to ensure stable electrical contact.
- ③ Recommended length of the screws:  $L = t1(\text{PCB}) + t2(\text{spring washer}) + 2 \text{ mm}$  [0.08 in].
- ④ PCB design is changed depending on the PCB material, thickness and stackup.
- ⑤ The solder mask prohibited area is indicated.
- ⑥ The connector is placed over this area.
- ⑦ PCB thickness  $t1$  should be 0.8 mm [0.032 in] or more.
- 8. This connector is not recommended for use in actual commercial equipment.

3	BERYLLIUM COPPER	GOLD PLATING					
2	STAINLESS STEEL	PASSIVATED	5	PTFE			
1	BRASS	NICKEL PLATING	4	PEI			
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

UNITS $\triangle$ mm [inch]		SCALE 5:1	COUNT $\triangle$ 2	DESCRIPTION OF REVISIONS DIS-D-00016021	DESIGNED TS. KANEKO	CHECKED TS. NAKAGAWA	DATE 2023.06.01
HIROSE ELECTRIC CO., LTD.				APPROVED : TS. NAKAGAWA 2023.04.07 CHECKED : TS. KANEKO 2023.04.07 DESIGNED : YK. KIUCHI 2023.04.07 DRAWN : YK. KIUCHI 2023.04.07	DRAWING NO. EDC-401976-00-00 PART NO. HK-R-SR2-SA CODE NO. CL0338-0028-0-00		