



**Microtips Technology**

*Innovative Solutions. Your Vision. Our Goal.*

## TFT Module Specification

**MODEL: AWL-240960T37N01**

This module uses ROHS material

|             |
|-------------|
| CUSTOMER    |
|             |
| APPROVED BY |
|             |
| DATE:       |

| Approved by                              | Checked by                              |  | Made by                                 |
|------------------------------------------|-----------------------------------------|--|-----------------------------------------|
| <div>MTUSA<br/>2024/05/07<br/>NICK</div> | <div>MTUSA<br/>2024/05/07<br/>JOE</div> |  | <div>MTUSA<br/>2024/05/07<br/>TOM</div> |

Tel:1 (888) 499-8477

Fax: (407) 273-0771

E-mail: [mtusainfo@microtipsusa.com](mailto:mtusainfo@microtipsusa.com)

Web: [www.microtipsusa.com](http://www.microtipsusa.com)



## Revision Record

[illegible]



|                       |        |                  |          |              |        |
|-----------------------|--------|------------------|----------|--------------|--------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.  |
|                       |        |                  | A        | 2024/05/07   | 3 / 23 |

## Table of Contents

| List | Description                             | Page No. |
|------|-----------------------------------------|----------|
|      | Cover                                   | 1        |
|      | Revision Record                         | 2        |
|      | Table of Contents                       | 3        |
| 1    | Scope                                   | 4        |
| 2    | General Information                     | 4        |
| 3    | External Dimensions                     | 5        |
| 4    | Interface Description                   | 6        |
| 5    | Absolute Maximum Ratings                | 7        |
| 6    | DC Characteristics                      | 7        |
| 7    | Timing Characteristics                  | 8        |
| 8    | Backlight Characteristics               | 13       |
| 9    | Optical Characteristics                 | 14       |
| 10   | Reliability Test Conditions and Methods | 16       |
| 11   | Inspection Standard                     | 17       |
| 12   | Handling Precautions                    | 21       |
| 13   | Precaution for Use                      | 23       |



|                       |        |                  |          |              |        |
|-----------------------|--------|------------------|----------|--------------|--------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.  |
|                       |        |                  | A        | 2024/05/07   | 4 / 23 |

## 1. Scope


This specification defines general provisions as well as inspection standards for TFT module supplied by Micotips Technology. If the event of unforeseen problem or unspecified items may occur, naturally shall negotiate and agree to solution

### 1. 2. General Information

| Item                   | Standard Values           | Units |
|------------------------|---------------------------|-------|
| LCD type               | 3.71" TFT                 | --    |
| Dot arrangement        | 240 (H)×960(V)            | dots  |
| Color filter array     | RGB vertical stripe       | --    |
| Display mode           | IPS / Normally Black      | -     |
| Eyes Viewing Direction | ALL                       | --    |
| Driver IC              | ST7701S                   | --    |
| Module size            | 25.30(W)×98.89(H)×2.10(T) | mm    |
| Active area            | 22.96(W)×91.44(H)         | mm    |
| Dot pitch              | --                        | mm    |
| Interface              | SPI+RGB (666) 18bit       | --    |
| Operating temperature  | -20 ~ +70                 | °C    |
| Storage temperature    | -30 ~ +80                 | °C    |
| Back Light             | 4 White LEDS              | --    |
| Weight                 | TBD                       | g     |



### 3. External Dimensions

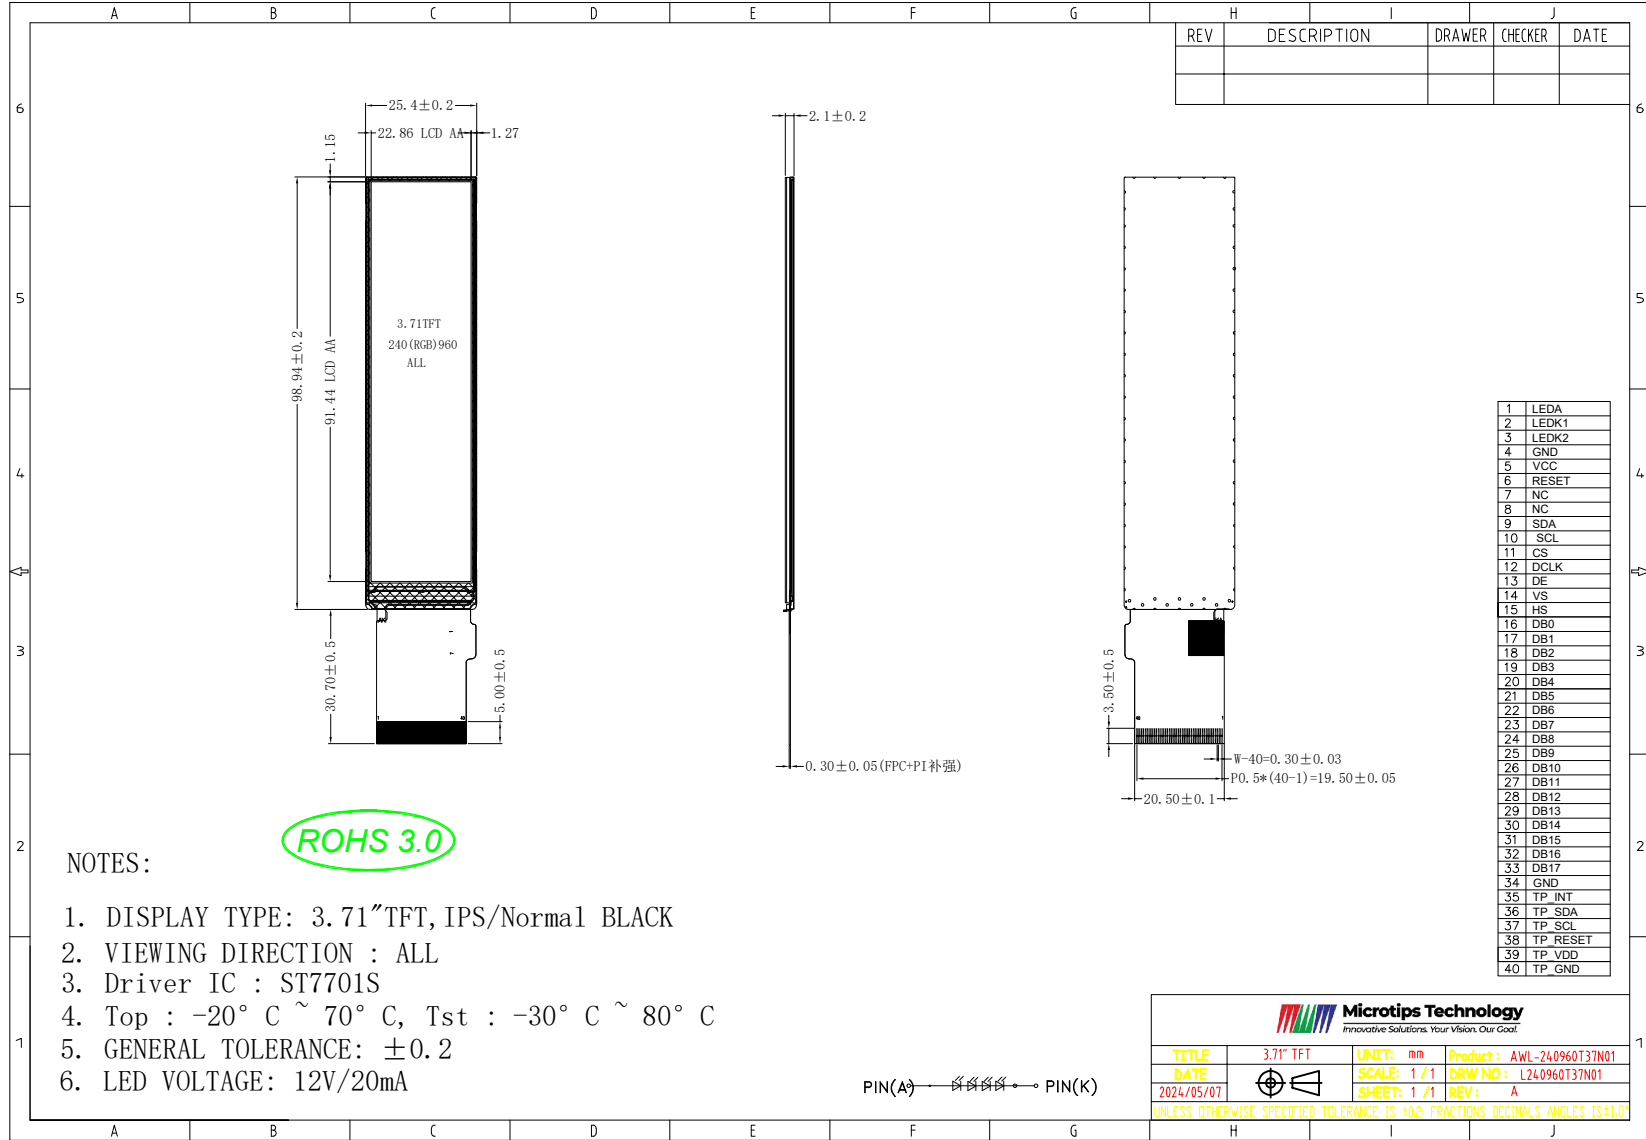



|                       |        |                  |          |              |        |
|-----------------------|--------|------------------|----------|--------------|--------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.  |
|                       |        |                  | A        | 2024/05/07   | 6 / 23 |

## 4. Interface Description

| PIN NO. | PIN NAME    | DESCRIPTION                                             |
|---------|-------------|---------------------------------------------------------|
| 1       | LED+        | LED backlight (Anode).                                  |
| 2       | LEDK-       | LED backlight (Cathode).                                |
| 3       | LEDK-       | LED backlight (Cathode).                                |
| 4       | GND         | Power ground                                            |
| 5       | VDD         | Digital Power +3.3V                                     |
| 6       | RSTB        | Reset input pin                                         |
| 7~8     | NC          | Not Connect                                             |
| 9       | SDA         | Serial in/out signal pin.                               |
| 10      | SCL         | Serial interface clock pin.                             |
| 11      | CS          | Chip select input pin.                                  |
| 12      | DCLK        | Dot clock signal for RGB interface operation            |
| 13      | DE          | Data enable signal for RGB interface operation.         |
| 14      | VS          | Frame synchronizing signal for RGB interface operation. |
| 15      | HS          | Line synchronizing signal for RGB interface operation.  |
| 16~33   | DB0~DB17    | RGB data input pin.                                     |
| 34      | GND         | Power ground                                            |
| 35      | TP_INT/NC   | Not Connect                                             |
| 36      | TP_SDA/NC   | Not Connect                                             |
| 37      | TP_SCL/NC   | Not Connect                                             |
| 38      | TP_RESET/NC | Not Connect                                             |
| 39      | TP_VCI/NC   | Not Connect                                             |
| 40      | TP_GND      | Power ground                                            |



|                       |        |                  |          |              |        |
|-----------------------|--------|------------------|----------|--------------|--------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.  |
|                       |        |                  | A        | 2024/05/07   | 7 / 23 |

## 5. Absolute Maximum Ratings

| Item                  | Symbol | Min. | Max. | Unit |
|-----------------------|--------|------|------|------|
| Power supply voltage  | VDD    | -0.3 | 3.6  | V    |
| Operating Temperature | TOP    | -30  | 85   | °C   |
| Storage Temperature   | TST    | -30  | 85   | °C   |
| Storage Humidity      | HD     | 20   | 90   | %RH  |

## 6. DC Characteristics

| Item                 | Symbol          | Min.   | Typ. | Max.   | Unit | Remark |
|----------------------|-----------------|--------|------|--------|------|--------|
| Power supply voltage | VDD             | 2.8    | 3.3  | 3.6    | V    | -      |
| Power supply Current | IVDD            | -      | 30   | -      | mA   | -      |
| Input High Voltage   | V <sub>IH</sub> | 0.7VDD | -    | VDD    | V    | -      |
| Input Low Voltage    | V <sub>IL</sub> | GND    | -    | 0.3VDD | V    | -      |
| Output High Voltage  | V <sub>OH</sub> | 0.8VDD | -    | VDD    | V    | -      |
| Output Low Voltage   | V <sub>OL</sub> | GND    | -    | 0.2VDD | V    | -      |
| I/O Leak Current     | ILI             | -0.1   | -    | 1      | uA   | -      |

| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.  |
|-----------------------|--------|------------------|----------|--------------|--------|
|                       |        |                  | A        | 2024/05/07   | 8 / 23 |

## 7. Timing Characteristics


### 7.1. Power ON/OFF Sequence

VDDI and VDDA can be applied or powered down in any order. During the Power Off sequence, if the LCD is in the Sleep Out mode, VDDA and VDDI must be powered down with minimum 120msec. If the LCD is in the Sleep In mode, VDDA and VDDI can be powered down with minimum 0msec after the RESX is released. CSX can be applied at any timing or can be permanently grounded. RESX has high priority over CSX.

Notes:

1. There will be no damage to the ST7701 if the power sequences are not met.
2. There will be no abnormal visible effects on the display panel during the Power On/Off Sequences.
3. There will be no abnormal visible effects on the display between the end of Power On Sequence and before receiving the Sleep Out command, and also between receiving the Sleep In command and the Power Off Sequence.
4. If the RESX line is not steadily held by the host during the Power On Sequence as defined in Sections 9.1 and 9.2, then it will be necessary to apply the Hardware Reset (RESX) after the completion of the Host Power On Sequence to ensure correct operations. Otherwise, all the functions are not guaranteed.

The power on/off sequence is illustrated below

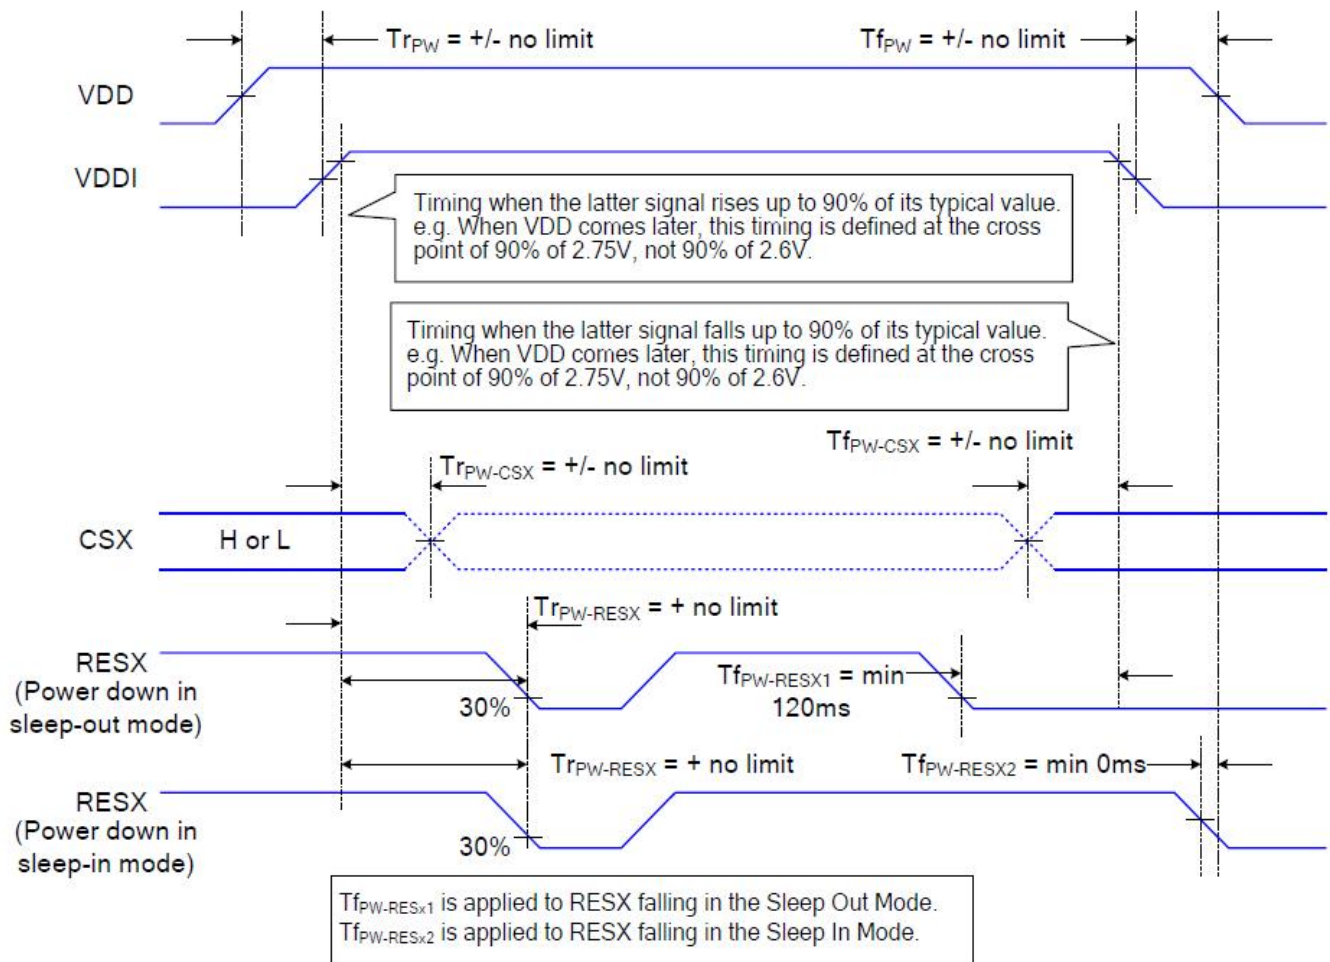




|                       |        |                  |          |              |        |
|-----------------------|--------|------------------|----------|--------------|--------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.  |
|                       |        |                  | A        | 2024/05/07   | 9 / 23 |

## 7.2 AC Characteristics

### RGB Interface Characteristics

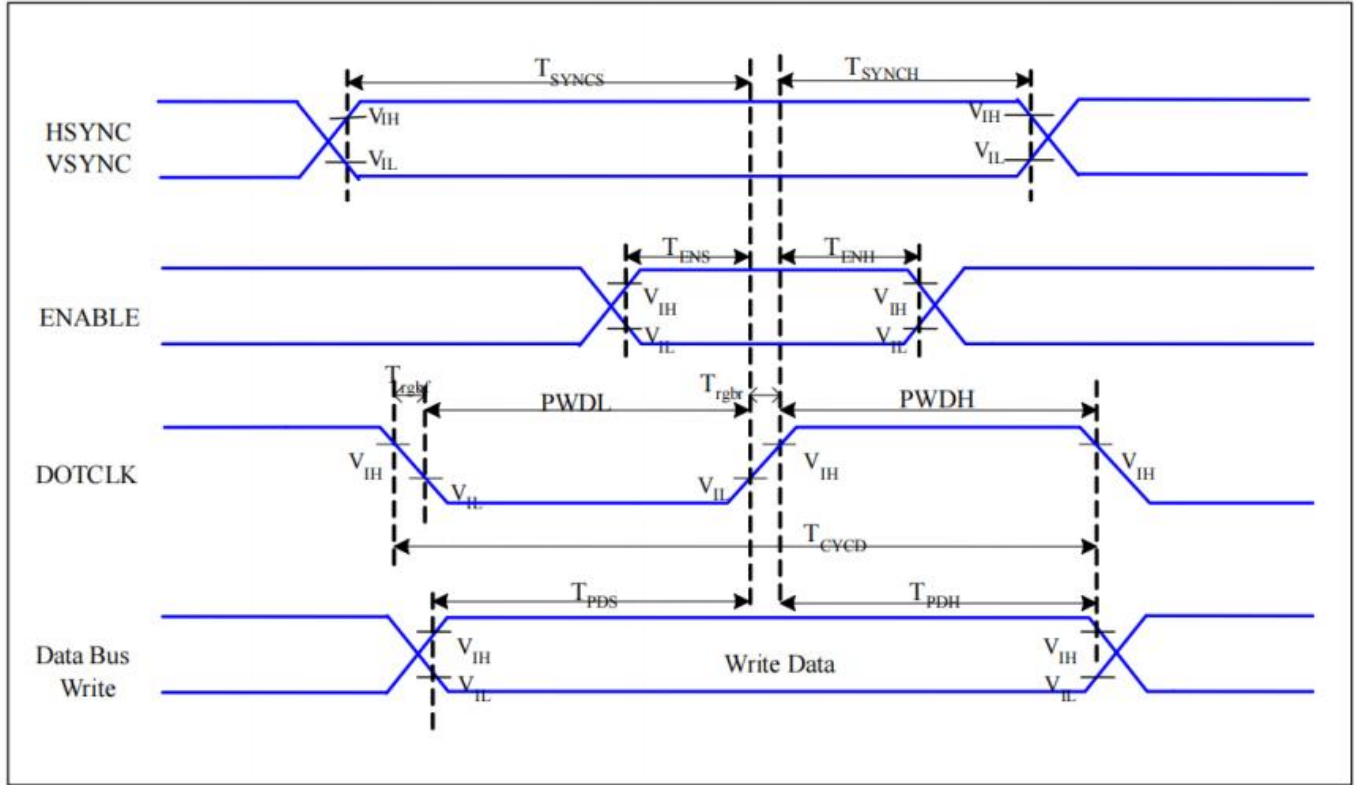


$V_{DDI}=1.8, V_{DD}=2.8, AGND=DGND=0V, T_a=25\text{ }^{\circ}\text{C}$

| Signal       | Symbol         | Parameter                     | MIN | MAX | Unit | Description |
|--------------|----------------|-------------------------------|-----|-----|------|-------------|
| HSYNC, VSYNC | $T_{SYNCS}$    | VSYSN, HSYN Setup Time        | 5   | -   | ns   |             |
| ENABLE       | $T_{ENS}$      | Enable Setup Time             | 5   | -   | ns   |             |
|              | $T_{ENH}$      | Enable Hold Time              | 5   | -   | ns   |             |
| DOTCLK       | $PWDH$         | DOTCLK High-level Pulse Width | 15  | -   | ns   |             |
|              | $PWDL$         | DOTCLK Low-level Pulse Width  | 15  | -   | ns   |             |
|              | $T_{CYCD}$     | DOTCLK Cycle Time             | 33  | -   | ns   |             |
|              | $Trghr, Trghf$ | DOTCLK Rise/Fall time         | -   | 15  | ns   |             |
| DB           | $T_{PDS}$      | PD Data Setup Time            | 5   | -   | ns   |             |
|              | $T_{PDH}$      | PD Data Hold Time             | 5   | -   | ns   |             |

|                       |        |                  |          |              |         |
|-----------------------|--------|------------------|----------|--------------|---------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|                       |        |                  | A        | 2024/05/07   | 10 / 23 |

## 7.3 Reset Timing Characteristics

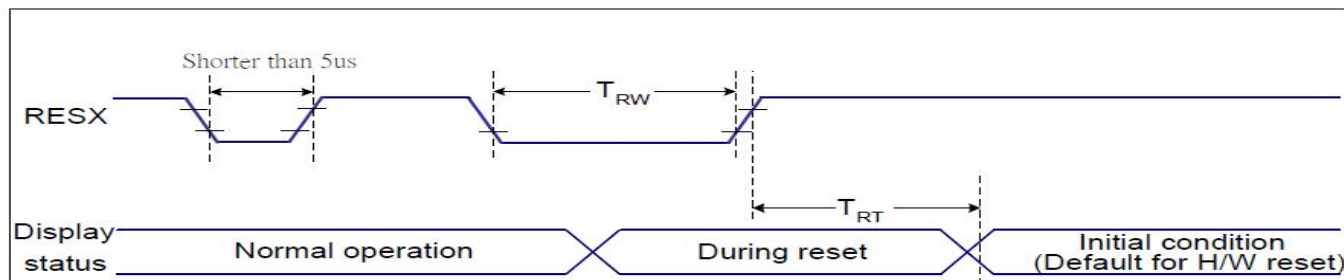

**Reset Timing**

VDDI=1.8, VDD=2.8, AGND=DGND=0V, Ta=25 °C

| Related Pins | Symbol | Parameter            | MIN | MAX                | Unit |
|--------------|--------|----------------------|-----|--------------------|------|
| RESX         | TRW    | Reset pulse duration | 10  | -                  | us   |
|              | TRT    | Reset cancel         | -   | 5 (Note 1, 5)      | ms   |
|              |        |                      |     | 120 (Note 1, 6, 7) | ms   |

**Reset Timing**


**Notes:**

- The reset cancel includes also required time for loading ID bytes, VCOM setting and other settings from NVM (or similar device) to registers. This loading is done every time when there is HW reset cancel time ( $t_{RT}$ ) within 5 ms after a rising edge of RESX.
- Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below:

| RESX Pulse          | Action         |
|---------------------|----------------|
| Shorter than 5us    | Reset Rejected |
| Longer than 9us     | Reset          |
| Between 5us and 9us | Reset starts   |

3. During the Resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out –mode. The display remains the blank state in Sleep In –mode.) and then return to Default condition for Hardware Reset.

4. Spike Rejection also applies during a valid reset pulse as shown below:

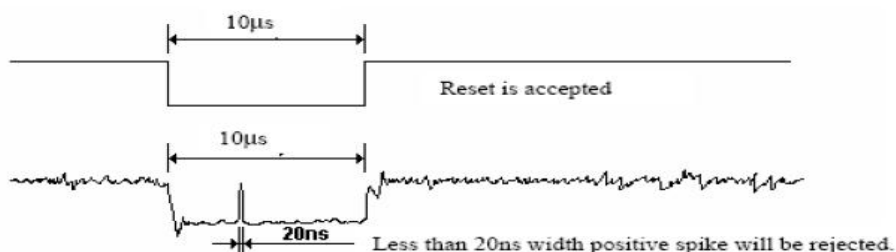


- When Reset applied during Sleep In Mode.
- When Reset applied during Sleep Out Mode.
- It is necessary to wait 5msec after releasing RESX before sending commands. Also Sleep Out command cannot be sent for 120msec.

|                       |        |                  |          |              |         |
|-----------------------|--------|------------------|----------|--------------|---------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|                       |        |                  | A        | 2024/05/07   | 11 / 23 |

## 7.4 RGB Interface Definition

The display operation via the RGB interface is synchronized with the VSYNC, HSYNC, and DOTCLK signals. The data can be written only within the specified area with low power consumption by using window address function. The back porch and front porch are used to set the RGB interface timing.

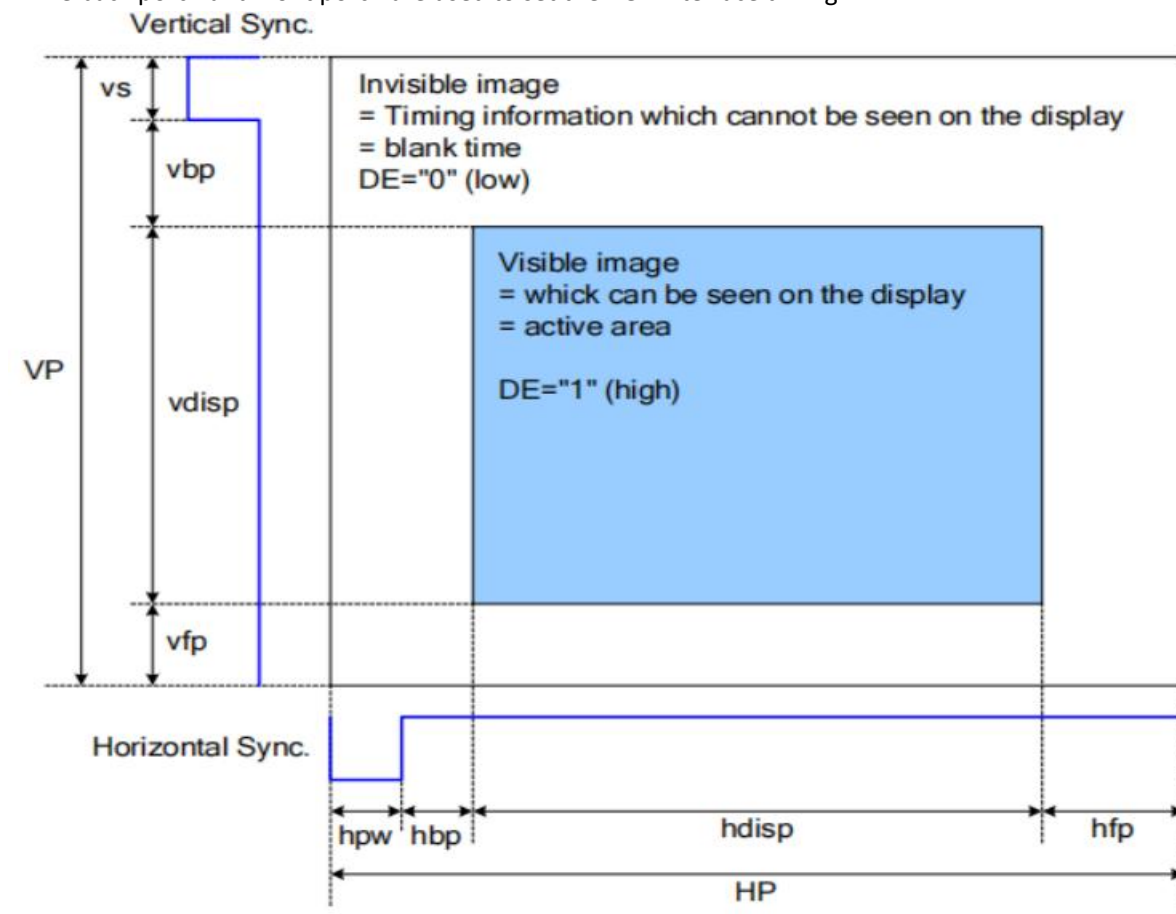

Please refer to the following table for the setting limitation of RGB interface signals.

| Parameter                    | Symbol | Min. | Typ. | Max.         | Unit  |
|------------------------------|--------|------|------|--------------|-------|
| Horizontal Sync. Width       | hwp    | 2    | -    | 255 (Note 2) | Clock |
| Horizontal Sync. Back Porch  | hbp    | 2    | --   | 255 (Note 2) | Clock |
| Horizontal Sync. Front Porch | hfp    | 2    | --   | -            | Clock |
| Vertical Sync. Width         | vs     | 2    | --   | 254 (Note 2) | Line  |
| Vertical Sync. Back Porch    | vbp    | 2    | --   | 254 (Note 2) | Line  |
| Vertical Sync. Front Porch   | vfp    | 2    | --   | --           | Line  |


Note:

1. Typical value are related to the setting frame rate is 60Hz..
2.  $VS+VBP \leq 254$ ,  $HPW+HBP \leq 255$




| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|-----------------------|--------|------------------|----------|--------------|---------|
|                       |        |                  | A        | 2024/05/07   | 12 / 23 |

## 7.5 RGB Interface Timing

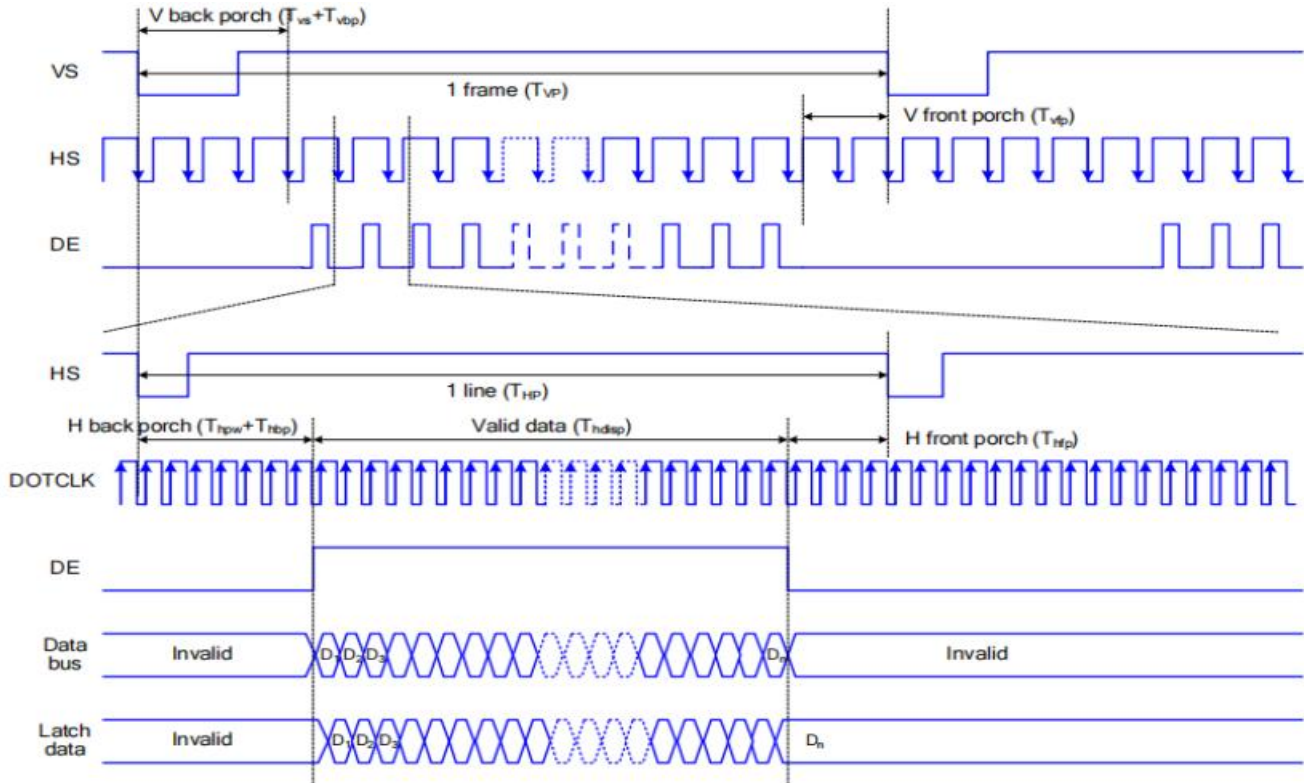

Note: The setting of front porch and back porch in host must match that in IC as this mode.

The timing chart of RGB interface HV mode is shown as follows.

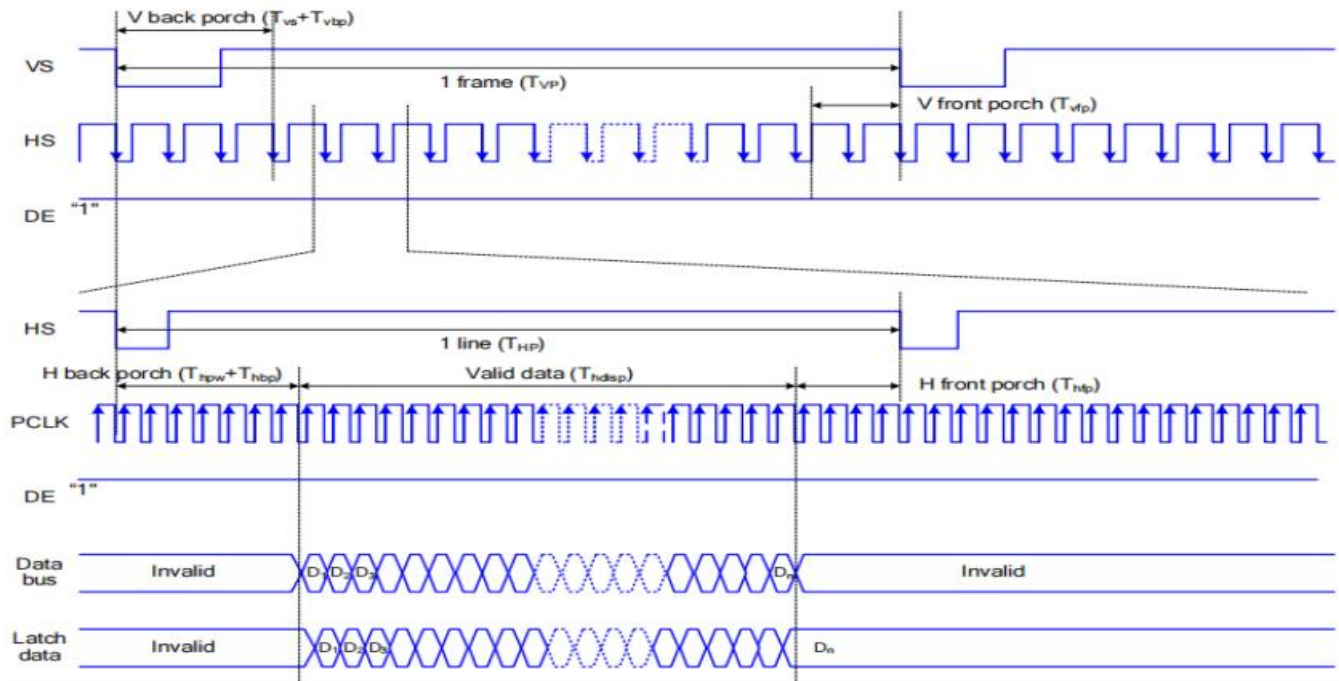

|                       |        |                  |          |              |         |
|-----------------------|--------|------------------|----------|--------------|---------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|                       |        |                  | A        | 2024/05/07   | 13 / 23 |


## 8. Backlight Characteristic

PIN(A)  PIN(K)

| Item            | Symbol | MIN   | TYP | MAX | UNIT | Remark   |
|-----------------|--------|-------|-----|-----|------|----------|
| Supply Voltage  | Vf     | 10.4  | 12  | 14  | V    | Note 1   |
| Supply Current  | If     | -     | 20  | -   | mA   | Note 2   |
| Life Time       | -      | 25000 | -   | -   | Hr   | Note 3,4 |
| Backlight Color | White  |       |     |     |      |          |


Note 1: The LED Supply Voltage is defined by the number of LED at Ta=25°C and If=20mA.

Note 2: LED current is measured by utilizing a high frequency current meter as shown below:

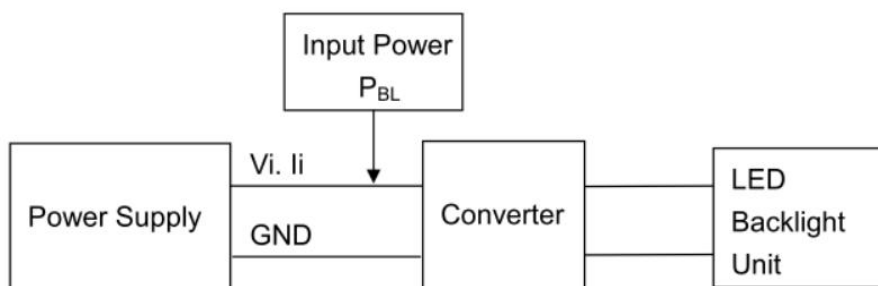

Note 3: The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25 °C and If =20mA. The LED lifetime could be decreased if operating If is larger than 20mA.

Note 4: LED light bar circuit:

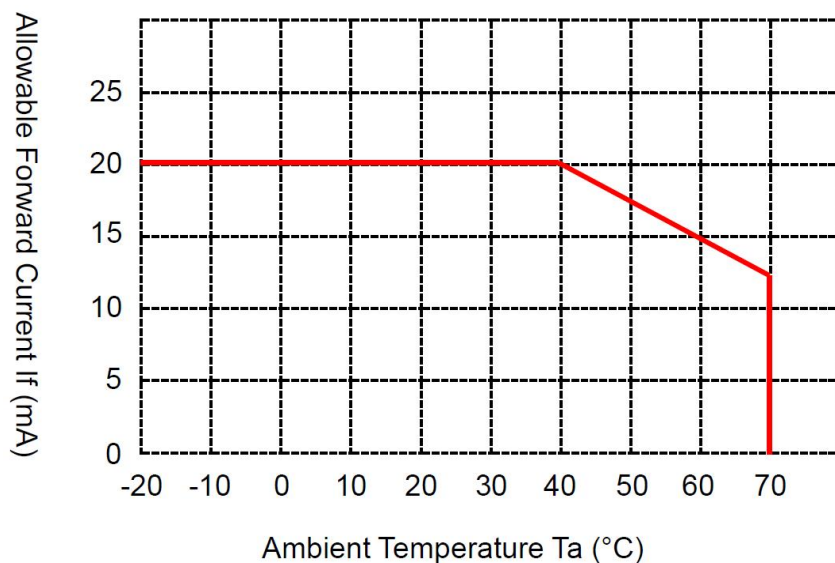




|                       |        |                  |          |              |         |
|-----------------------|--------|------------------|----------|--------------|---------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|                       |        |                  | A        | 2024/05/07   | 14 / 23 |

## 9. Optical Characteristics


| Item                                  | Conditions |    | Min.  | Typ.  | Max.  | Unit   | Note        |
|---------------------------------------|------------|----|-------|-------|-------|--------|-------------|
| Viewing Angle<br>(CR>10)              | Horizontal | θL | -     | 85    | -     | degree | (1),(2),(6) |
|                                       |            | θR | -     | 85    | -     |        |             |
|                                       | Vertical   | θT | -     | 85    | -     |        |             |
|                                       |            | θB | -     | 85    | -     |        |             |
| Luminous Intensity<br>for LCM         | -          |    | 300   | 350   | -     | cd/m2  | If=20mA     |
| Uniformity for<br>LCM                 | -          |    | 80    | -     | -     | %      | If=20mA     |
| Contrast Ratio                        | Center     |    | 1000  | 1500  | -     | 1000   | (1),(3),(6) |
| Response Time                         | Rising     |    | -     | 35    | -     | ms     | (1),(4),(6) |
|                                       | Falling    |    |       |       |       |        |             |
| CF Color<br>Chromaticity<br>(CIE1931) | White x    |    | 0.253 | 0.303 | 0.353 | -      | (1), (6)    |
|                                       | White y    |    | 0.282 | 0.332 | 0.382 | -      |             |
|                                       | Red x      |    | 0.553 | 0.603 | 0.653 | -      |             |
|                                       | Red y      |    | 0.272 | 0.322 | 0.372 | -      |             |
|                                       | Green x    |    | 0.255 | 0.305 | 0.355 | -      |             |
|                                       | Green y    |    | 0.505 | 0.555 | 0.605 | -      |             |
|                                       | Blue x     |    | 0.098 | 0.148 | 0.198 | -      |             |
|                                       | Blue y     |    | 0.094 | 0.144 | 0.194 | -      |             |

Note (1) Measurement Setup: The LCD module should be stabilized at given temp. 25°C for 15 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 15 minutes in a windless room.

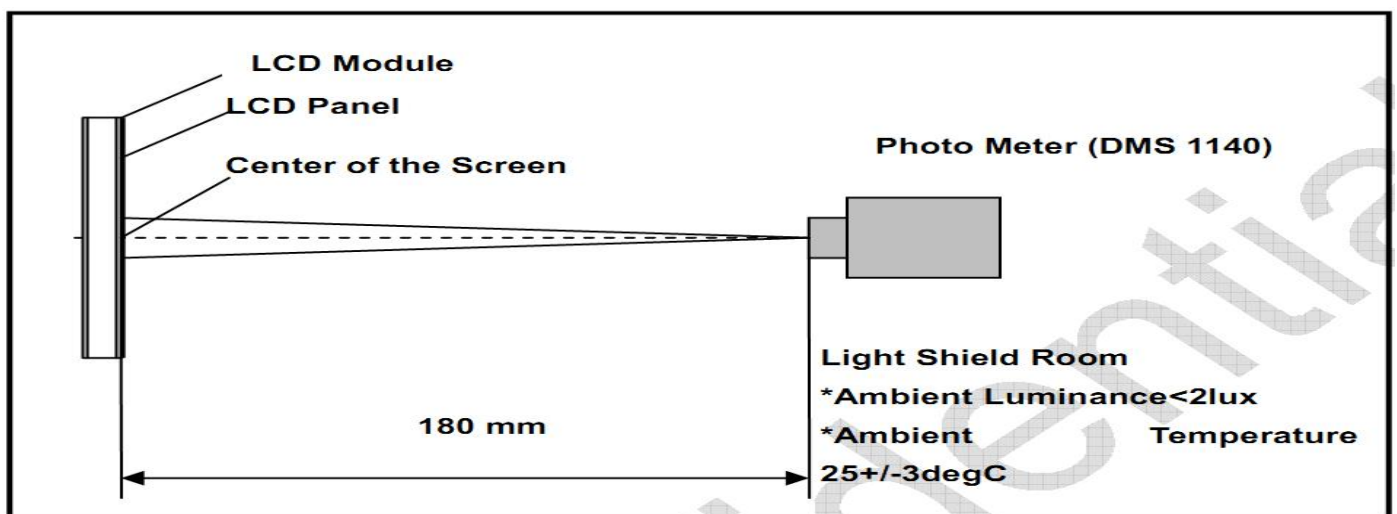

| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|-----------------------|--------|------------------|----------|--------------|---------|
|                       |        |                  | A        | 2024/05/07   | 15 / 23 |

Note (2) Definition of Viewing Angle

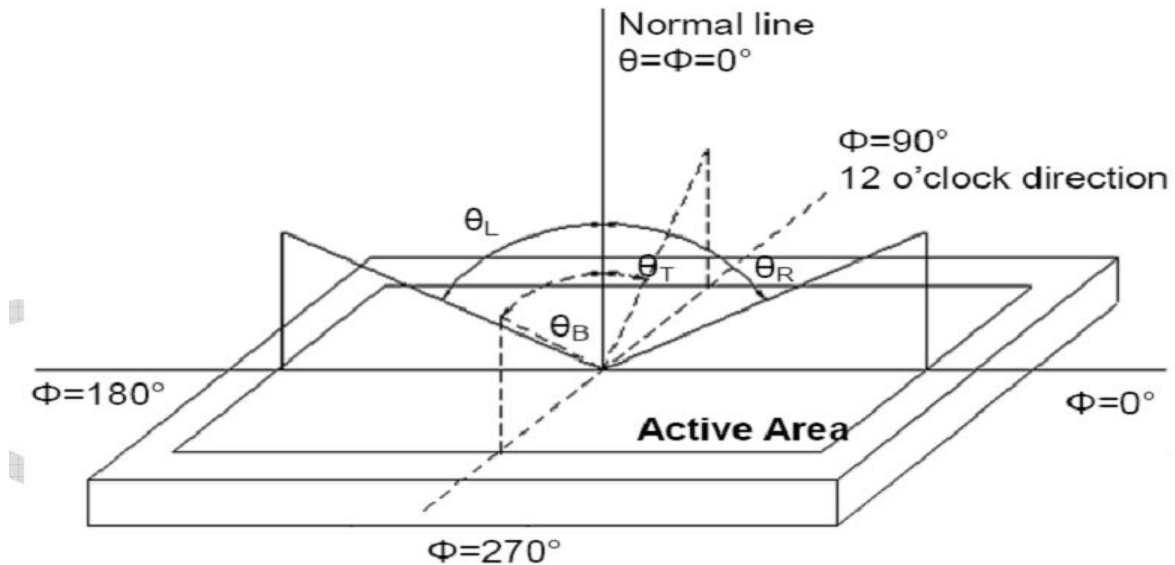


Note (3) Definition of Contrast Ratio (CR)

The contrast ratio can be calculated by the following expression

$$\text{Contrast Ratio (CR)} = L_{255} / L_0$$

L255: Luminance of gray level 255, L0: Luminance of gray level 0

Note (4) Definition of response time

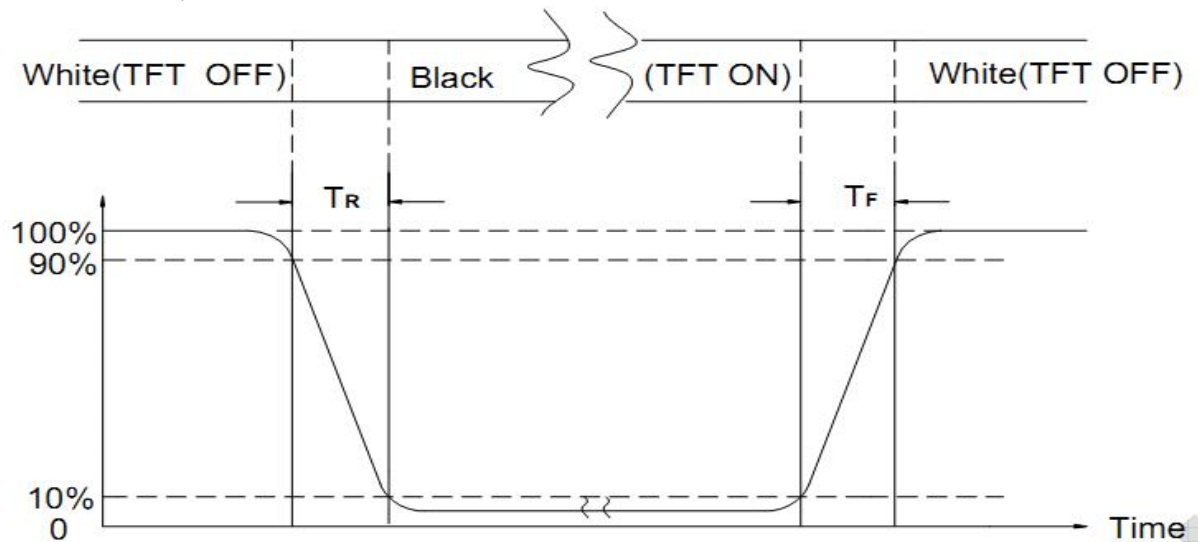

Note (5) Definition of Transmittance (Module is without signal input)


$$\text{Transmittance} = \text{Center Luminance of LCD} / \text{Center Luminance of Back Light} \times 100\%$$

Note (6) Definition of color chromaticity (CIE1931)

Color coordinates measured at the center point of LCD

|                       |        |                  |          |              |         |
|-----------------------|--------|------------------|----------|--------------|---------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|                       |        |                  | A        | 2024/05/07   | 16 / 23 |

## 10. Reliability Test Conditions and Methods

| No. | Test Items                 | Test Condition                                                                                                                                                                                                                                                                                                                                                                         | Inspection After Test                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | High Temperature Storage   | 85°C±2°C×96Hours                                                                                                                                                                                                                                                                                                                                                                       | <p>Inspection after 2~4hours storage at room temperature, the samples should be free from defects:</p> <ol style="list-style-type: none"> <li>1, Air bubble in the LCD.</li> <li>2, Seal leak.</li> <li>3, Non-display.</li> <li>4, Missing segments.</li> <li>5, Glass crack.</li> <li>6, Current IDD is twice higher than initial value.</li> <li>7, The surface shall be free from damage.</li> <li>8, The electric characteristic requirements shall be satisfied.</li> </ol> |
| 2   | Low Temperature Storage    | -30°C±2°C×96Hours                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 3   | High Temperature Operating | 85°C±2°C×96Hours                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 4   | Low Temperature Operating  | -30°C±2°C×96Hours                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 5   | Temperature Cycle(Storage) | $  \begin{array}{c}  -20^{\circ}\text{C} \xleftrightarrow{(30\text{min})} 25^{\circ}\text{C} \xleftrightarrow{(5\text{min})} 60^{\circ}\text{C} \\  \xleftarrow{(30\text{min})} \quad \quad \quad \xleftarrow{(30\text{min})} \\  \text{1 cycle} \\  \text{Total 10cycle}  \end{array}  $                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 6   | Damp Proof Test (Storage)  | 50°C±5°C×90%RH×96Hours                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 7   | Vibration Test             | Frequency:10Hz~55Hz~10Hz<br>Amplitude:1.5mm<br>X,Y,Z direction for total 3hours<br>(packing condition test will be tested by a carton)                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 8   | Drooping Test              | Drop to the ground from 1M height one time every side of carton.<br>(packing condition test will be tested by a carton)                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 9   | ESD Test                   | Voltage:±6KV,R:330Ω,C:150PF,Air Mode,10times                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 10  | Image Sticking Test        | 25 ± 2°C<br>Operation with test pattern sustained for 2 hrs, then change to gray pattern immediately. After 5 mins, the mura must be disappeared completely<br><br>Image Sticking -pattern <br>Mid-Gray pattern |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

### REMARK:

- 1, The Test samples should be applied to only one test item.
- 2, Sample side for each test item is 5~10pcs.
- 3,For Damp Proof Test, Pure water(Resistance> 10MΩ)should be used.
- 4,In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judge as a good part.
- 5, EL evaluation should be accepted from reliability test with humidity and temperature: Some defects such as black spot/blemish can happen by natural chemical reaction with humidity and Fluorescence EL has.
- 6, Failure Judgment Criterion: Basic Specification Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.



|                       |        |                  |          |              |         |
|-----------------------|--------|------------------|----------|--------------|---------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|                       |        |                  | A        | 2024/05/07   | 17 / 23 |

## 11. Inspection Standard

### 11.1 Scope

Specifications contain

11.1.1 Display Quality Evaluation

11.1.2 Mechanics Specification

### 11.2 Sampling Plan

Unless there is other agreement, the sampling plan for incoming inspection shall follow MIL-STD-105E.

11.2.1 Lot size: Quantity per shipment as one lot (different model as different lot ).

11.2.2 Sampling type: Normal inspection, single sampling.

11.2.3 Sampling level: Level II.

11.2.4 AQL: Acceptable Quality Level

Major defect: AQL=0.65

Minor defect: AQL=1.5

### 11.3 Panel Inspection Condition

11.3.1 Environment:

Room Temperature:  $25\pm 5^{\circ}\text{C}$ .

Humidity:  $65\pm 5\%$  RH.

Illumination: 300 ~ 700 Lux.

11.3.2 Inspection Distance:

$35\pm 5$  cm

11.3.3 Inspection Angle:

The vision of inspector should be perpendicular to the surface of the Module.

11.3.4 Inspection time:

Perceptibility Test Time: 20 seconds max.



|                       |        |                  |          |              |         |
|-----------------------|--------|------------------|----------|--------------|---------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|                       |        |                  | A        | 2024/05/07   | 18 / 23 |


## 11.4 Inspection Plan

| Class              | Item                                                                      | Judgment                                                                                                                            | Class |
|--------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-------|
| Packing & Indicate | 1. Outside and inside package.                                            | "MODEL NO.", "LOT NO." and "QUANTITY" should indicate on the package.                                                               | Minor |
|                    | 2. Model mixed and quantity.                                              | Other model mixed<br>Quantity short or over                                                                                         | Major |
|                    | 3. Product indication.                                                    | "MODEL NO." should indicate on the product.                                                                                         | Major |
| Assembly           | 4. Dimension,<br>LCD glass scratch and scribe defect.                     | According to specification or drawing.                                                                                              | Major |
| Appearance         | 5. Viewing area.                                                          | Polarizer edge or LCD's sealing line is visible in the viewing area.....Rejected.                                                   | Minor |
|                    | 6. Blemish, black spot, white spot in the LCD and LCD glass cracks.       | According to standard of visual inspection.(inside viewing area)                                                                    | Minor |
|                    | 7. Blemish, black spot, white spot and scratch on the polarizer.          | According to standard of visual inspection.(inside viewing area)                                                                    | Minor |
|                    | 8. Bubble in polarizer.                                                   | According to standard of visual inspection.(inside viewing area)                                                                    | Minor |
|                    | 9. LCD's rainbow color.                                                   | Strong deviation color (or newton ring) of LCD.....Rejected.<br>Or according to limited sample.(if needed, and inside viewing area) | Minor |
| Electrical         | 10. Electrical and optical characteristics.(contrast chromaticity....etc) | According to specification or drawing.(inside viewing area)                                                                         | Major |
|                    | 11. Missing line.                                                         | Missing dot line character                                                                                                          | Major |
|                    | 12.Short circuit.<br>Wrong pattern display.                               | No display, wrong pattern display, current consumption.<br>Out of specification                                                     | Major |
|                    | 13. Dot defect.(for color and TFT)                                        | According to standard of visual Inspection.                                                                                         | Minor |










|                       |        |                  |          |              |         |
|-----------------------|--------|------------------|----------|--------------|---------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|                       |        |                  | A        | 2024/05/07   | 19 / 23 |

### 11.5 Standard Of Visual Inspection

| No.                    | Class                                  | Item                                                                        | Judgment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
|------------------------|----------------------------------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|-----------------|----------------------------------------|------------------------|----------------------------------------|---------------|------------|--------|-------------|-----------------|----|---------------|-----------|--------------|----------------------|-----------------|----|------------|-------------------|
| 11.5.1                 | Minor                                  | Black and white spot.<br>Foreign materiel.<br>Dust.<br>Blemish.<br>Scratch. | <div>(A) Round type:Unit: mm<table><tr><td>Diameter (mm.)</td><td>Acceptable Q'ty</td></tr><tr><td><math>\Phi \leq 0.2</math></td><td>Disregard</td></tr><tr><td><math>0.2 &lt; \Phi \leq 0.25</math></td><td>3(Distance&gt;5mm)</td></tr><tr><td><math>0.25 &lt; \Phi</math></td><td>0</td></tr></table>Note: <math>\Phi = (\text{length}+\text{width})/2</math><div>(B) Linear type:Unit: mm<table><tr><td>Length</td><td>Width (mm.)</td><td>Acceptable Q'ty</td></tr><tr><td>--</td><td><math>W \leq 0.03</math></td><td>Disregard</td></tr><tr><td><math>L \leq 5.0</math></td><td><math>0.03 &lt; W \leq 0.07</math></td><td>2(Distance&gt;5mm)</td></tr><tr><td>--</td><td><math>0.07 &lt; W</math></td><td>FOLLOW ROUND TYPE</td></tr></table></div></div>                                                                                                                  | Diameter (mm.) | Acceptable Q'ty | $\Phi \leq 0.2$ | Disregard                              | $0.2 < \Phi \leq 0.25$ | 3(Distance>5mm)                        | $0.25 < \Phi$ | 0          | Length | Width (mm.) | Acceptable Q'ty | -- | $W \leq 0.03$ | Disregard | $L \leq 5.0$ | $0.03 < W \leq 0.07$ | 2(Distance>5mm) | -- | $0.07 < W$ | FOLLOW ROUND TYPE |
| Diameter (mm.)         | Acceptable Q'ty                        |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| $\Phi \leq 0.2$        | Disregard                              |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| $0.2 < \Phi \leq 0.25$ | 3(Distance>5mm)                        |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| $0.25 < \Phi$          | 0                                      |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| Length                 | Width (mm.)                            | Acceptable Q'ty                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| --                     | $W \leq 0.03$                          | Disregard                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| $L \leq 5.0$           | $0.03 < W \leq 0.07$                   | 2(Distance>5mm)                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| --                     | $0.07 < W$                             | FOLLOW ROUND TYPE                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| 11.5.2                 | Minor                                  | Dent on polarizer.                                                          | <div>Unit: mm.<table><tr><td>Diameter</td><td>Acceptable Q'ty</td></tr><tr><td><math>\Phi \leq 0.2</math></td><td>Disregard</td></tr><tr><td><math>0.2 &lt; \Phi \leq 0.5</math></td><td>2(Distance&gt;5mm)</td></tr><tr><td><math>0.5 &lt; \Phi</math></td><td>0</td></tr></table></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Diameter       | Acceptable Q'ty | $\Phi \leq 0.2$ | Disregard                              | $0.2 < \Phi \leq 0.5$  | 2(Distance>5mm)                        | $0.5 < \Phi$  | 0          |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| Diameter               | Acceptable Q'ty                        |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| $\Phi \leq 0.2$        | Disregard                              |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| $0.2 < \Phi \leq 0.5$  | 2(Distance>5mm)                        |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| $0.5 < \Phi$           | 0                                      |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| 11.5.3                 | Minor                                  | Bubble in polarizer.                                                        | <div>Unit: mm.<table><tr><td>Diameter</td><td>Acceptable Q'ty</td></tr><tr><td><math>\Phi \leq 0.2</math></td><td>Disregard</td></tr><tr><td><math>0.2 &lt; \Phi \leq 0.5</math></td><td>2(Distance&gt;5mm)</td></tr><tr><td><math>0.5 &lt; \Phi</math></td><td>0</td></tr></table></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Diameter       | Acceptable Q'ty | $\Phi \leq 0.2$ | Disregard                              | $0.2 < \Phi \leq 0.5$  | 2(Distance>5mm)                        | $0.5 < \Phi$  | 0          |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| Diameter               | Acceptable Q'ty                        |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| $\Phi \leq 0.2$        | Disregard                              |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| $0.2 < \Phi \leq 0.5$  | 2(Distance>5mm)                        |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| $0.5 < \Phi$           | 0                                      |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| 11.5.4                 | Minor                                  | Dot defect                                                                  | <table><tr><td>Items</td><td>Acceptable Q'ty</td></tr><tr><td>Bright dot</td><td><math>N \leq 2(\text{Distance}&gt;5\text{mm})</math></td></tr><tr><td>Dark dot</td><td><math>N \leq 2(\text{Distance}&gt;5\text{mm})</math></td></tr><tr><td>Total dot</td><td><math>N \leq 4</math></td></tr></table> <div>Pixel define :</div> <div>Note1: The definition of dot: The size of a defective dot over 1/2 of whole dot is regarded as one defective dot.<br/>Note 2: Bright dot: Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern.<br/>Note 3: The bright dot defect must be visible through 2% ND filter<br/>Note 4: Dark dot: Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue pattern.</div> | Items          | Acceptable Q'ty | Bright dot      | $N \leq 2(\text{Distance}>5\text{mm})$ | Dark dot               | $N \leq 2(\text{Distance}>5\text{mm})$ | Total dot     | $N \leq 4$ |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| Items                  | Acceptable Q'ty                        |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| Bright dot             | $N \leq 2(\text{Distance}>5\text{mm})$ |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| Dark dot               | $N \leq 2(\text{Distance}>5\text{mm})$ |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| Total dot              | $N \leq 4$                             |                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |
| 11.5.5                 | Minor                                  | Mura                                                                        | ND 5% (In 50% gray screen)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                |                 |                 |                                        |                        |                                        |               |            |        |             |                 |    |               |           |              |                      |                 |    |            |                   |



|                       |        |                  |          |              |         |
|-----------------------|--------|------------------|----------|--------------|---------|
| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|                       |        |                  | A        | 2024/05/07   | 20 / 23 |
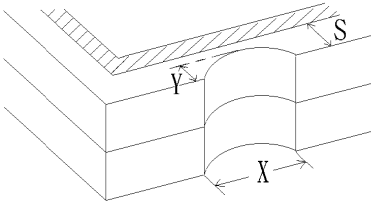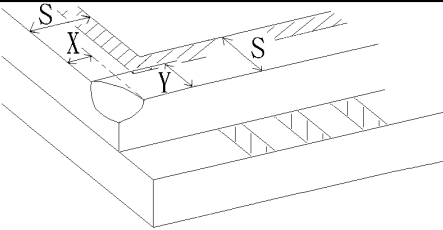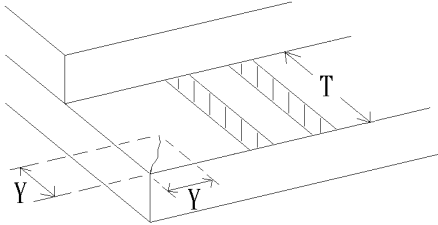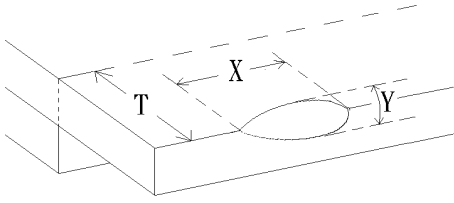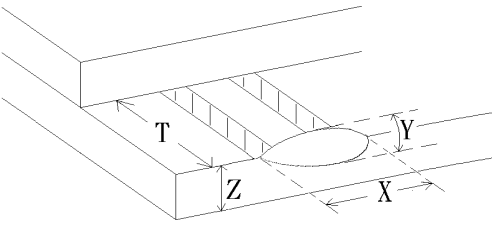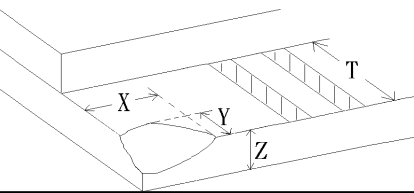
| No.     | Class | Item                                             | Judgment                                                                                                                                                                                              |
|---------|-------|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11.5.6  | Minor | LCD glass chipping.                              |  $Y > S$ Reject                                                                                                     |
| 11.5.7  | Minor | LCD glass chipping.                              |  $X \text{ or } Y > S$ Reject                                                                                       |
| 11.5.8  | Major | LCD glass crack.                                 |  $Y > (1/2) T$ Reject                                                                                              |
| 11.5.9  | Major | LCD glass scribe defect.                         |  <p>1. <math>a &gt; L/3</math>, <math>A &gt; 1.5\text{mm}</math><br/>Reject<br/>2. B : According to dimension</p> |
| 11.5.10 | Minor | LCD glass chipping.<br>(on the terminal area)    |  $\Phi = (x+y)/2 > 2.5\text{mm}$ Reject                                                                           |
| 11.5.11 | Minor | LCD glass chipping.<br>(on the terminal surface) |  $Y > (1/3) T$ Reject                                                                                             |
| 11.5.12 | Minor | LCD glass chipping.                              |  $Y > T$ Reject                                                                                                   |

| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|-----------------------|--------|------------------|----------|--------------|---------|
|                       |        |                  | A        | 2024/05/07   | 21 / 23 |

## 12. Handling Precautions

### 12.1 Mounting Method

The LCD panel of MTUSATFT module consists of two thin glass plates with polarizes which easily be damaged. And since the module is so constructed as to be fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be needed when handling the LCD modules.

### 12.2 Caution of LCD Handling And Cleaning

When cleaning the display surface, Use soft cloth with solvent

[Recommended below] and wipe lightly

- Isopropyl alcohol
- Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns

Do not use the following solvent on the pad or prevent it from being contaminated:

- Soldering flux
- Chlorine (Cl) , Sulfur (S)

If goods were sent without being silicon coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happens by miss-handling or using some materials such as Chlorine (Cl), Sulfur (S) from customer, Responsibility is on customer.

### 12.3 Caution Against Static Charge

The LCD module uses C-MOS LSI drivers, so we recommend that you:

Connect any unused input terminal to power or ground, do not input any signals before power is turned on, and ground your body, work/assembly areas, and assembly equipment to protect against static electricity.

### 12.4 Packing

- Module employs LCD elements and must be treated as such.
- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity

### 12.5 Caution for operation

It is an indispensable condition to drive LCD's within the specified voltage limit since the higher

| Product Specification | Model: | AWL-240960T37N01 | Rev. No. | Issued Date. | Page.   |
|-----------------------|--------|------------------|----------|--------------|---------|
|                       |        |                  | A        | 2024/05/07   | 22 / 23 |

- voltage then the limit cause the shorter LCD life.
- An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- Response time will be extremely delayed at lower temperature then the operating temperature range and on the other hand at higher temperature LCD's how dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operation temperature.
- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- Slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit. Usage under the maximum operating temperature, 50%Rh or less is required.

## 12.6 Storing

In the case of storing for a long period of time for instance, for years for the purpose or replacement use, the following ways are recommended.

- Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it. And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light's keeping the storage temperature range.
- Storing with no touch on polarizer surface by the anything else.

[It is recommended to store them as they have been contained in the inner container at the time of delivery from us

## 12.7 Safety

- It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water



|                              |               |                         |                 |                     |              |
|------------------------------|---------------|-------------------------|-----------------|---------------------|--------------|
| <i>Product Specification</i> | <i>Model:</i> | <i>AWL-240960T37N01</i> | <i>Rev. No.</i> | <i>Issued Date.</i> | <i>Page.</i> |
|                              |               |                         | A               | 2024/05/07          | 23 / 23      |

## 13. Precaution for Use

### 13.1

A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

### 13.2

On the following occasions, the handing of problem should be decided through discussion and agreement between responsible of the both parties.

- When a question is arisen in this specification
- When a new problem is arisen which is not specified in this specifications
- When an inspection specifications change or operating condition change in customer is reported to Microtips TFT , and some problem is arisen in this specification due to the change
- When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microtips Technology:](#)

[AWL-240960T37N01](#)