

CERAMIC BASE SMD QUARTZ CRYSTAL

ABM11-0022-T3



2.0 x 1.6 x 0.55 mm
RoHS/RoHS II Compliant
MSL Level = N/A

Features

- Reference design for Silabs EFR32 Wireless Gecko Series 2
- Operating Temp Range: -40 ~ +95°C
- Frequency Tolerance @ +25°C: ±8ppm
- Frequency Stability over the Operating Temp. Range (ref. to +25°C): ±13ppm

Applications

- Internet of Things (IoT)
- Medical Devices
- Industrial Control & Automation
- Wireless collar
- Glucose Monitor
- LED Lighting

Key Standard Electrical Specifications

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency		39.000		MHz	
Operation Mode		Fundamental			
Operating Temperature	-40		+95	°C	
Storage Temperature	-40		+95	°C	
Frequency Tolerance @+25°C	-8		+8	ppm	
Frequency Stability over the Operating Temperature (ref. to 25°C)	-13		+13	ppm	
Equivalent series resistance (R1)			35	Ω	
Shunt capacitance (C0)			3.0	pF	
Load capacitance (CL)		10		pF	
Drive Level		10	100	μW	
Aging	-2		+2	ppm	@25°C±3°C First year
Insulation Resistance	500			M Ω	@ 100Vdc ± 15V

Options and Part Identification

ABM11-0022-

Packaging
Blank: Bulk
T3: 3000pcs/reel


CERAMIC BASE SMD QUARTZ CRYSTAL

ABM11-0022-T3




2.0 x 1.6 x 0.55 mm
RoHS/RoHS II Compliant
MSL Level = N/A



Mechanical Dimensions

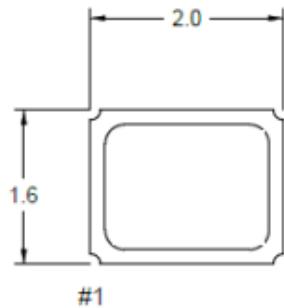

Top View

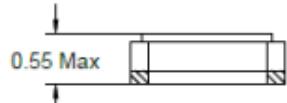


Side View

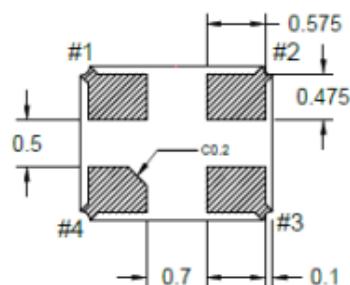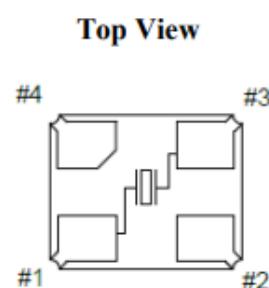

Bottom View

Recommended Land Pattern

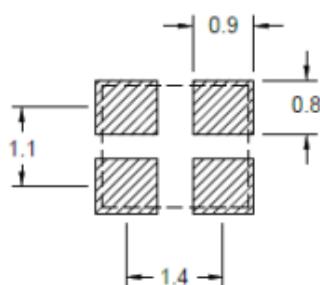

Dimensions: mm

 **ABRACON**

5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 03-13-24

ABRACON IS
ISO9001-2015
CERTIFIED

CERAMIC BASE SMD QUARTZ CRYSTAL

ABM11-0022-T3

2.0 x 1.6 x 0.55 mm
RoHS/RoHS II Compliant
MSL Level = N/A



Reflow Profile [JEDEC J-STD-020]

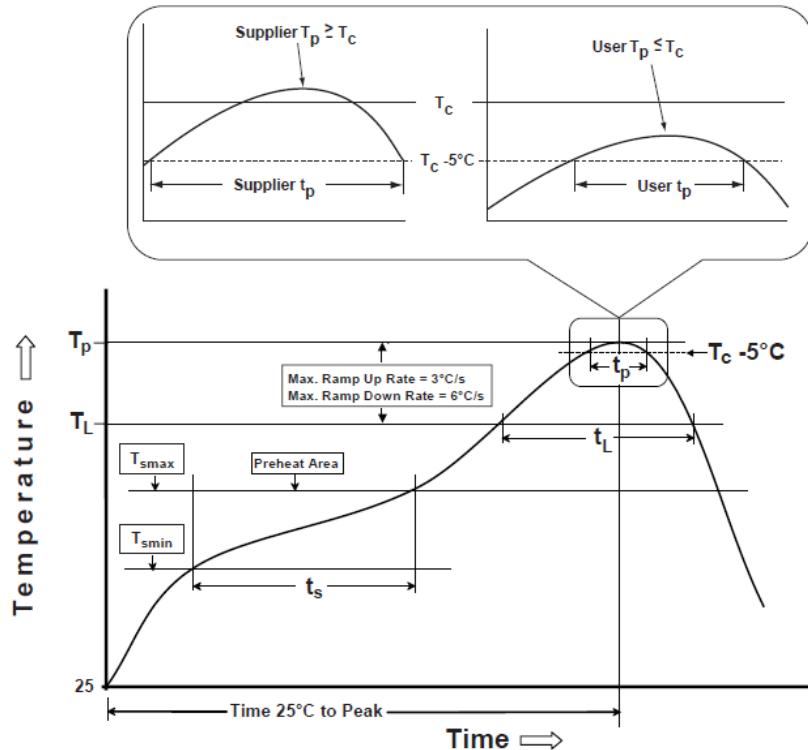


Table 1

SnPb Eutectic Process Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2

Pb-Free Process Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_p)*	see Table 1	see Table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20 sec.	30 sec.
Ramp-down rate (T_p to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.

CERAMIC BASE SMD QUARTZ CRYSTAL


ABM11-0022-T3

2.0 x 1.6 x 0.55 mm
RoHS/RoHS II Compliant
MSL Level = N/A



Packaging

T3: Tape and reel (3,000pcs/reel)

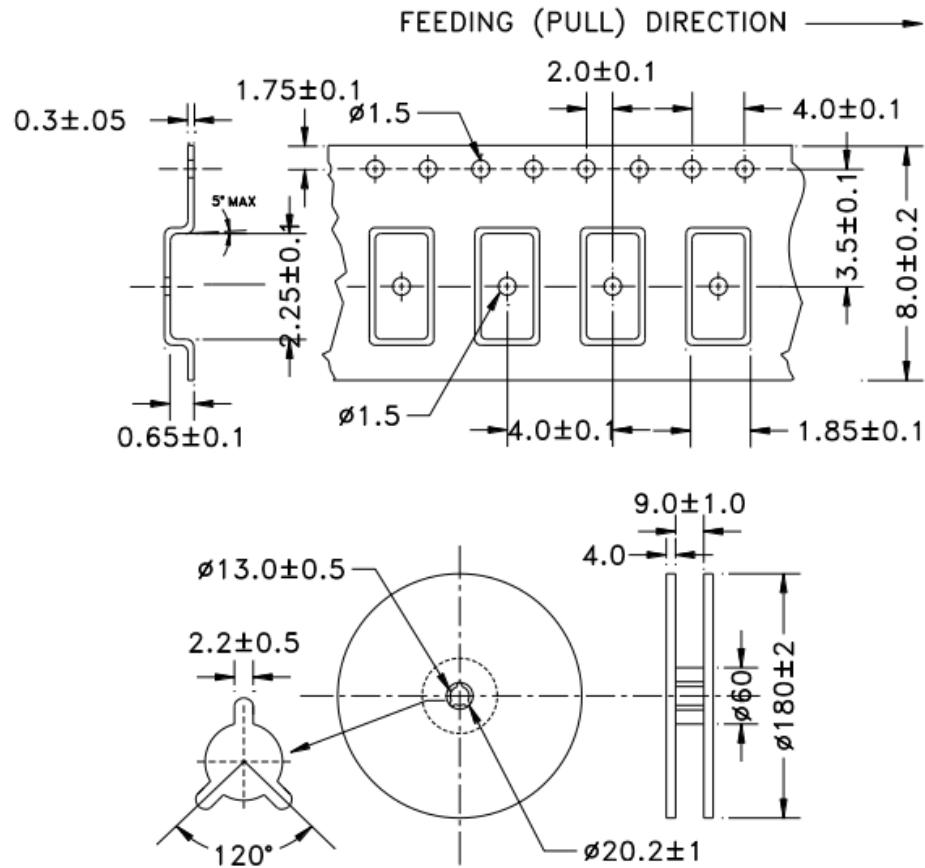

Dimensions: mm

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON](#):

[ABM11-0022-T3](#)