



DBL POWER DISTRIBUTION BLOCKS


ENTRELEC Terminal Blocks

DBL power distribution blocks



The clever distribution concept

The exclusive compact and modular design of our power distribution blocks allows easy installation combined with a great flexibility of use.



Easy to install

3 configurations in 1 product:


Single pole splitter: split of power main input into several outputs

Multiple poles splitter: interlocking function and ready to use marking kit (L1, L2, L3, N, PE, +, -) delivered with each block

Grouping: of several inputs into 1 output (solar application).

Flexible cover facilitates identification & wiring:

- Reversible, two directions opening, snap-on
- All wiring data's and specifications visible on top.

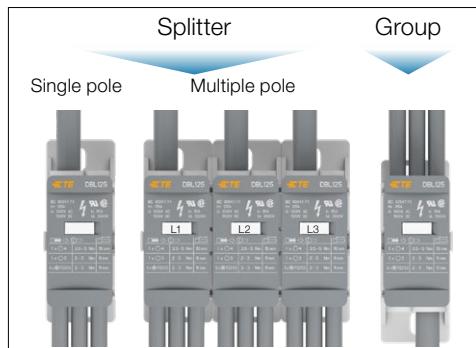

Space saving

Panel space saving:

Save up to 50 % rail space compare to conventional distribution bars thanks to our modular compact design

1 500 V DC:

Voltage rating adapted to most recent solar inverters requirements.



Increased productivity

Reduced wiring, inventories, hardware and assembly costs:

- Reduce assembly time by 80 % compared to conventional systems.
- Our modular and touch proof concept eliminates the needs for bus bars, isolators, fasteners, protection screens...
- Accept **aluminum & copper** conductors
- **1 product in stock for 3 possible configurations.**




DBL power distribution blocks

1 product, 2 applications

Distributing power in industrial and commercial panels HVAC, machinery, power distribution unit (PDU), commercial panel


3 Phases

DBL80, DBL125, DBL160, DBL175, DBL250, DBL400, DBL125-3, DBL175-C-3

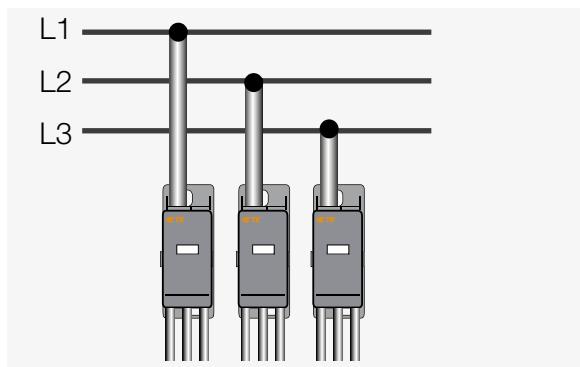


3 Phases for flat conductor

DBL250-F, DBL500-F

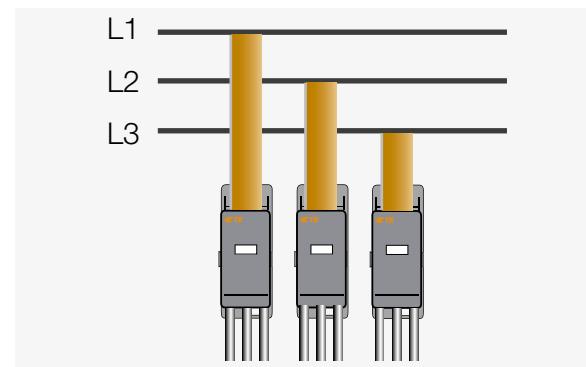


3 Phases with jumpering wire

DBL80, DBL125, DBL160, DBL175, DBL400-PV, DBL125-3, DBL175-C-3 and DBL500-22

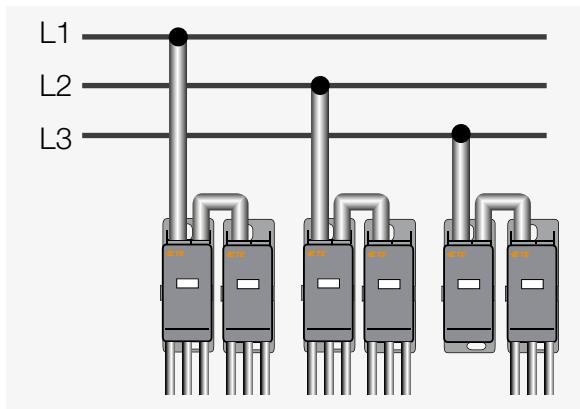

2 in/2 out configuration

DBL500-22

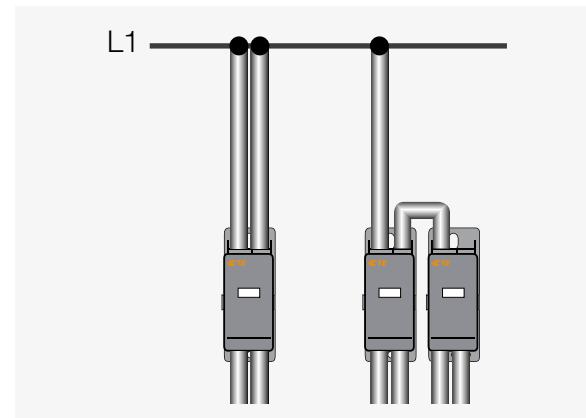


Combining PV strings in one single output
PV combiner box, central inverter in a solar power plant

Up to 12 PV strings

DBL80...400

DBL400-PV specifically designed for solar application with 12 inputs of 16 mm².

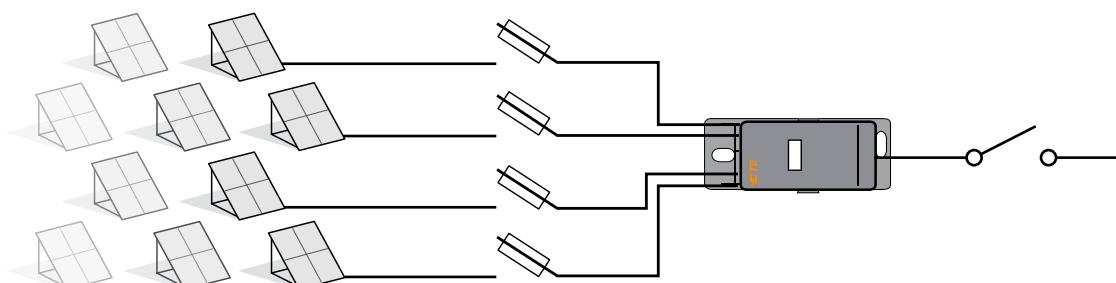

DBL power distribution blocks


Range overview

Single pole, solar, three poles, flat conductor and 2 in/2 out

Single pole


DBL80

7 connections




DBL125

8 connections




DBL160

8 connections



DBL175



12 connections



DBL250 and

DBL400

12 connections

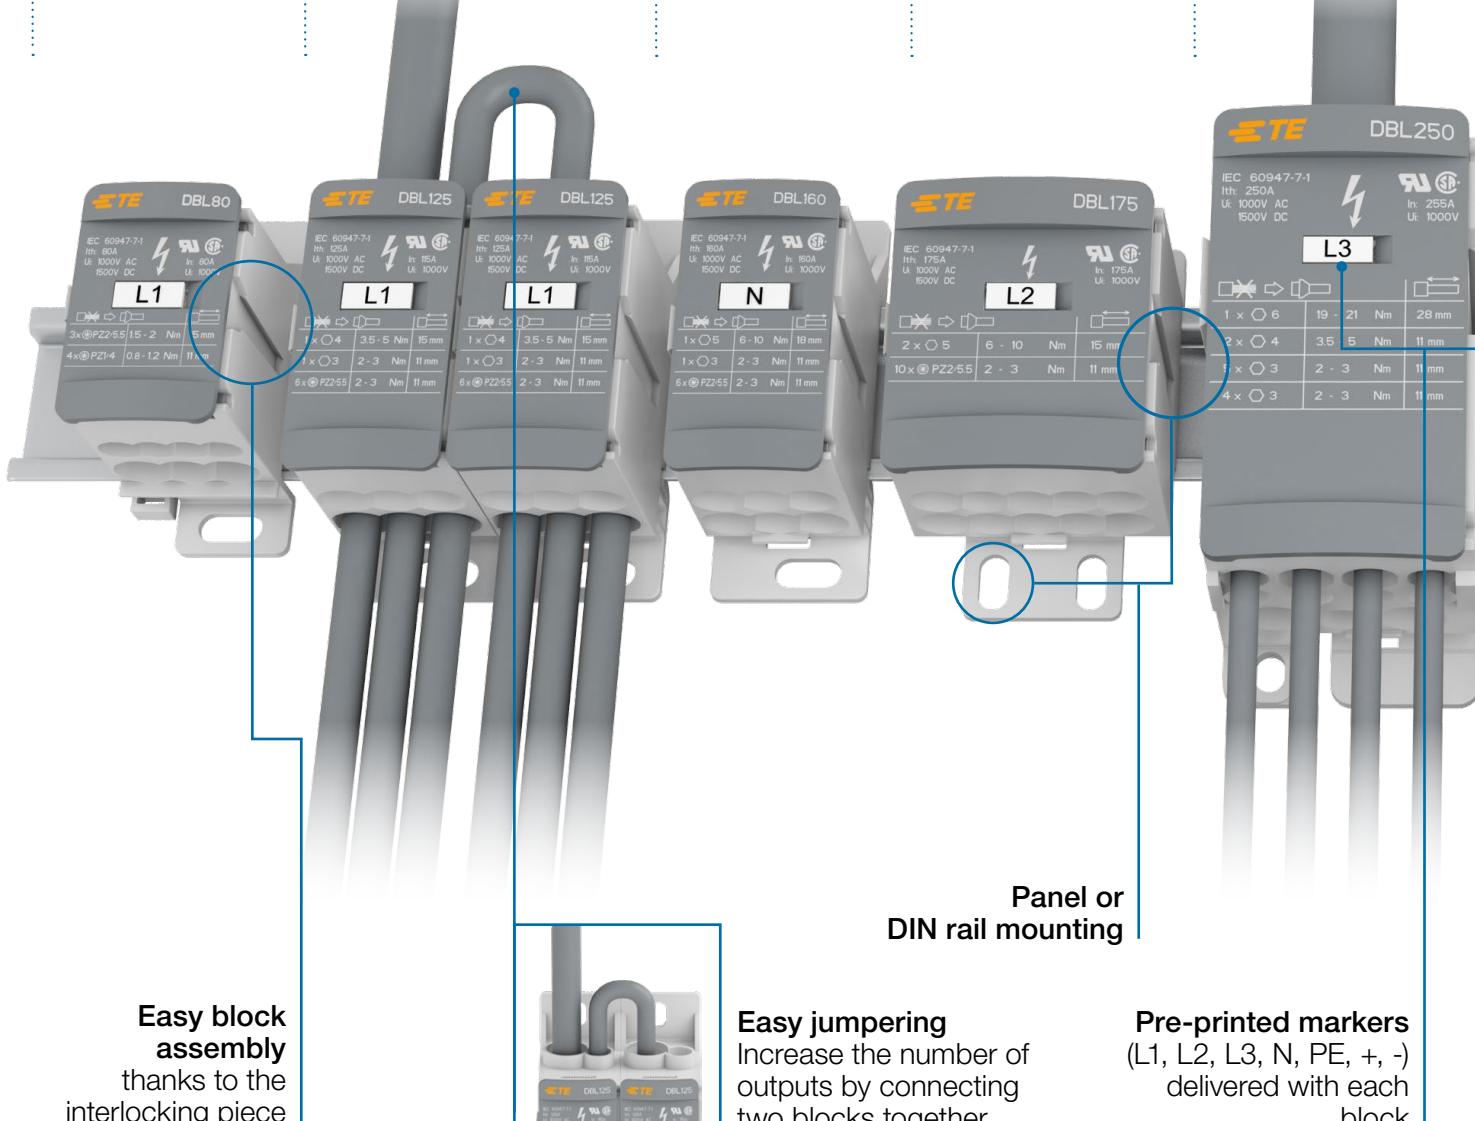

Easy block assembly
thanks to the interlocking piece





Easy jumping
Increase the number of outputs by connecting two blocks together

Pre-printed markers
(L1, L2, L3, N, PE, +, -)
delivered with each block

Solar

DBL400-PV


14 connections

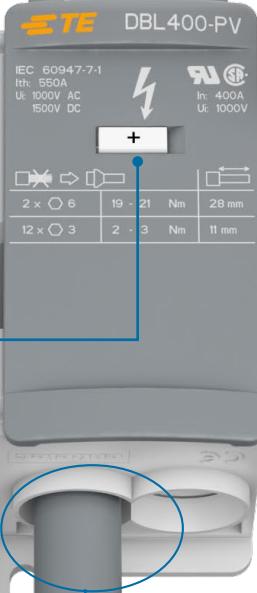

Three poles

DBL125-3 and
DBL175-C-3




8x3 connections



Flat conductor

DBL250-F and
DBL500-F



7 and 12 connections

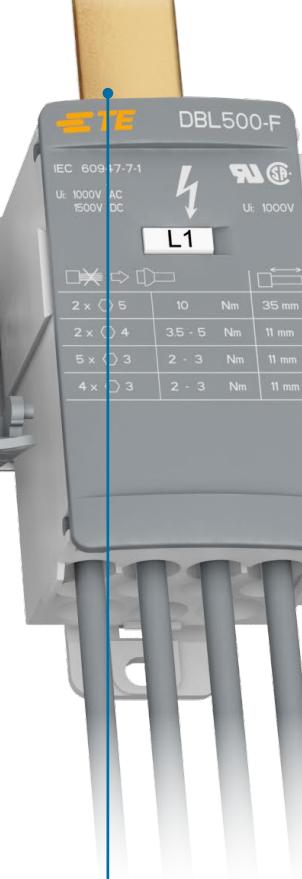

2 in/2 out

DBL500-22

4 connections

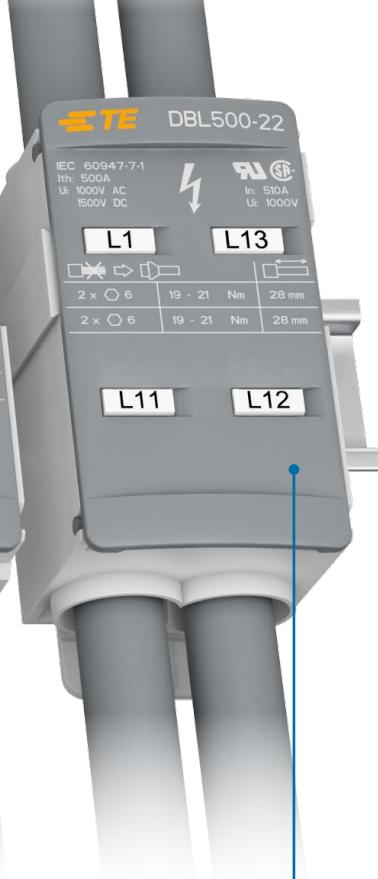

Combining of 12 photovoltaic strings
to collect solar energy up to 1500 V DC (IEC), 1000 V DC (UL)

Flexible cover for easy wiring:

- Two directions opening
- Removable & snap-on

Flat conductor feed-in

Main technical data printed on the cover and visible from top

DBL power distribution blocks

Panorama



Input/ Output
Round conductors

Single pole



		Number of connections		7	8	8	12	12	12
		Max current	Cross section						
IEC	UL								
Cu 80 A	80 A	16 mm ²	4 AWG	DBL80					
Al 63 A	-	16 mm ²	-						
Cu 125 A	115 A	35 mm ²	2 AWG		DBL125				
Al 100 A	-	35 mm ²	-						
Cu 160 A	160 A	70 mm ²	2/0 AWG			DBL160			
Al 135 A	-	70 mm ²	-						
Cu 175 A	175 A	70 mm ²	2/0 AWG				DBL175		
Al 135 A	-	70 mm ²	-						
Cu 250 A	255 A	120 mm ²	250 Kcmil					DBL250	
Al 200 A	-	120 mm ²	-						
Cu 400 A	335 A	185 mm ²	400 Kcmil						DBL400
Al 300 A	-	185 mm ²	-						
Cu 500 A	510 A	95 mm ²	250 Kcmil						
Cu 550 A	400 A	95 mm ²	250 Kcmil						



Input:
Flat conductors
Output:
Round conductors

Flat conductors



		Number of connections		7	12
		Max current	Max cross section		
IEC	UL				
Cu 250 A	250 A	15.5 x 7.5 mm	DBL250-F		
					DBL500-F Coming soon

Three poles



8x3



DBL125-3



8x3



DBL175-C-3

2 in/2 out



4



DBL500-22

Solar



14




DBL400-PV

DBL80 power distribution blocks

Single pole - 28.4 mm 1.11 in spacing




DBL80

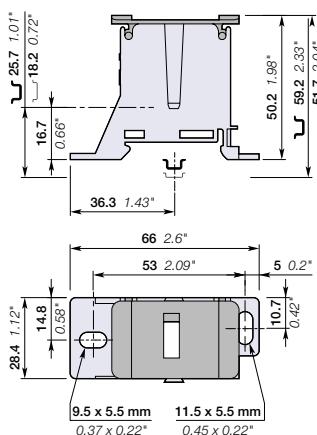

28.4 mm 1.11 in spacing

Mounting instructions



Description

- 3 configurations: distribute unipolar and multipolar power lines, or combine several inputs
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Increase the number of outputs by using the optional input and connecting two DBL together
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.

Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Single pole distribution, 7 connections	Grey	DBL80	1SNL308010R0000	1	70

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Copper 80 A / 16 mm ² Aluminium 63 A / 16 mm ²	80 A / 4 AWG
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (Icw 1s)	1920 A	
Short Circuit Current Rating (SCCR)		100 kA
Rated peak withstand current (Ipk)	27 kA	
Protection	IP20	NEMA 1

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail	TH 35-7.5, TH 35-15	Wire type	Wire stripping length	Tool	Torque	
Connection Number	Size					
Input						
3 x	Ø 0.6 mm Ø 0.26 in	2.5 ... 16 mm ² 14 ... 6 AWG	2.5 ... 16 mm ² 14 ... 4 AWG	15 mm 0.59 in	5.5 mm 0.22 in	1.5 ... 2 Nm 13.5 ... 18 lb.in
Output	4 x	Ø 0.45 mm Ø 0.18 in	2.5 ... 6 mm ² 14 ... 10 AWG	11 mm 0.43 in	4 mm 0.16 in	0.8 ... 1.2 Nm 7.2 ... 10.8 lb.in
Not allowed						
Flexible without ferrule (IEC V-K, UL class G...K)						
Flexible with ferrule (IEC V-K, UL class G...K)						
Solid (IEC V-U class 1, UL solid)						
Rigid stranded (IEC V-R class 2, UL class B/C)						

Ⓐ Allen key ⓒ Posidriv - flat screwdriver

Accessories



Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
1 End stops	Dark grey	BAM4	1SNK900001R0000	50	14.00
		BAZ1	1SNK900002R0000	50	5.30
		BAZH1	1SNK900102R0000	20	24.00
2 Terminal block markers	White	MG-CPM 13 41790	1SNB041790R0512	1960	0.236
		MC512PA-GN	1SNK149997R0000	20	10.00
		MC512PA-BL	1SNK149998R0000	20	10.00
	White	MC512PA	1SNK149999R0000	20	10.00
		MC512PA	1SNK149002R0000	1	10.00


Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

DBL125 power distribution blocks

Single pole - 28.2 mm 1.11 in spacing




DBL125

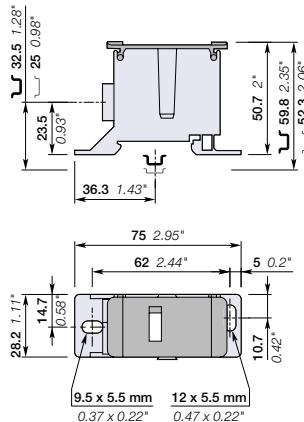

28.2 mm 1.11 in spacing

Mounting instructions



Description

- 3 configurations: distribute unipolar and multipolar power lines, or combine several inputs
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Increase the number of outputs by using the optional input and connecting two DBL together
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.


Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Single pole distribution, 8 connections	Grey	DBL125	1SNL312510R0000	1	122

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Copper 125 A / 35 mm ² Aluminium 100 A / 35 mm ²	115 A / 2 AWG
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (Icw 1s)	4200 A	
Short Circuit Current Rating (SCCR)		100 kA
Rated peak withstand current (Ipk)	30 kA	
Protection	IP20	NEMA 1

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail TH 35-7.5,
TH 35-15

Connection Number	Wire type	Wire stripping length	Tool	Torque
Input				
1 x Ø 0.98 mm Ø 0.39 in	10 ... 35 mm ² 8 ... 2 AWG	10 ... 35 mm ² 8 ... 2 AWG	15 mm 0.59 in	4 mm 0.16 in 3.5 ... 5 Nm 31 ... 44 lb.in
1 x Ø 0.6 mm Ø 0.27 in	2.5 ... 16 mm ² 14 ... 6 AWG	6 ... 16 mm ² 10 ... 6 AWG	11 mm 0.43 in	3 mm 0.12 in 2 ... 3 Nm 18 ... 26.5 lb.in
6 x Ø 0.4 mm Ø 0.25 in	2.5 ... 16 mm ² 14 ... 6 AWG	2.5 ... 16 mm ² 14 ... 6 AWG	11 mm 0.43 in	5.5 mm 0.22 in 2 ... 3 Nm 18 ... 26.5 lb.in

When using maximum cable size with insulated ferrules, use a maximum of 2 non-adjacent holes in each row.

Not allowed	Flexible without ferrule (IEC V-K, UL class G...K)	Flexible with ferrule (IEC V-K, UL class G...K)	Solid (IEC V-U class 1, UL solid)	Rigid stranded (IEC V-R class 2, UL class B/C)
-------------	--	---	-----------------------------------	--

Ⓐ Allen key ⓒ Posidriv - flat screwdriver

Accessories

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g	
1 End stops	10 mm 5.2 mm 10 mm	0.394 in 0.205 in 0.394 in	Dark grey BAM4 BAZ1 BAZH1	1SNK900001R0000 1SNK900002R0000 1SNK900102R0000	50 50 20	14.00 5.30 24.00
2 Terminal block markers	Blank marker Blank card		White MG-CPM 13 41790 Green MC512PA-GN Blue MC512PA-BL White MC512PA Pre-printed marker card (L1-L2-L3-N-PE)	1SNB041790R0512 1SNK149997R0000 1SNK149998R0000 1SNK149999R0000 1SNK149002R0000	1960 20 20 20 1	0.236 10.00 10.00 10.00 10.00


Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

DBL125-3 power distribution blocks

3x1 pole - 84.6 mm 3.33 in spacing




DBL125-3

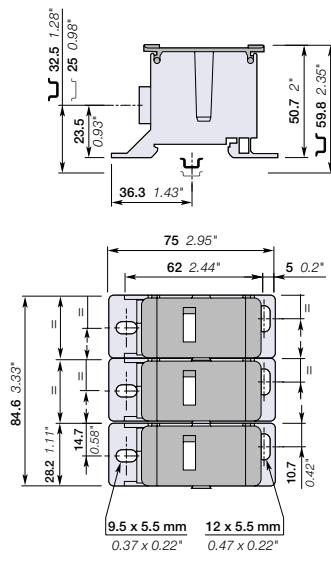

84.6 mm 3.33 in spacing

Mounting instructions



Description

- The usage of three poles distribution block is recommended for L1, L2, L3 applications
- Each pole can be separated from the assembly to align the poles with upstream equipment configuration
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.

Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Three poles distribution block 3x8 connections	Grey	DBL125-3	1SNL312530R0000	1	367

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Copper 125 A / 35 mm ² Aluminium 100 A / 35 mm ²	115 A / 2 AWG
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (Icw 1s)	4200 A	
Short Circuit Current Rating (SCCR)		
Rated peak withstand current (Ipk)	30 kA	
Protection	IP20	NEMA 1

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail TH 35-7.5,
TH 35-15

Connection Number by pole	Wire type	Wire stripping length	Tool	Torque	
Input					
1 x Ø 0.39 in	10 ... 35 mm ² 8 ... 2 AWG	10 ... 35 mm ² 8 ... 2 AWG	15 mm 0.59 in	4 mm 0.16 in	3.5 ... 5 Nm 31 ... 44 lb.in
Output					
1 x Ø 0.27 in	2.5 ... 16 mm ² 14 ... 6 AWG	6 ... 16 mm ² 10 ... 6 AWG	11 mm 0.43 in	3 mm 0.12 in	2 ... 3 Nm 18 ... 26.5 lb.in
6 x Ø 0.25 in	2.5 ... 16 mm ² 14 ... 6 AWG	2.5 ... 16 mm ² 14 ... 6 AWG	11 mm 0.43 in	5.5 mm 0.22 in	2 ... 3 Nm 18 ... 26.5 lb.in

When using maximum cable size with insulated ferrules, use a maximum of 2 non-adjacent holes in each row.

Not allowed	Flexible without ferrule (IEC V-K, UL class G...K)	Flexible with ferrule (IEC V-K, UL class G...K)	Solid (IEC V-U class 1, UL solid)	Rigid stranded (IEC V-R class 2, UL class B/C)
--------------------	--	---	-----------------------------------	--

Ⓐ Allen key Ⓑ Posidriv - flat screwdriver

Accessories

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g	
1 End stops	10 mm 5.2 mm 10 mm	0.394 in 0.205 in 0.394 in	Dark grey BAM4 BAZ1 BAZH1	1SNK900001R0000 1SNK900002R0000 1SNK900102R0000	50 50 20	14.00 5.30 24.00
2 Terminal block markers	Blank marker Blank card		White MG-CPM 13 41790 Green MC512PA-GN Blue MC512PA-BL White MC512PA MC512PA	1SNB041790R0512 1SNK149997R0000 1SNK149998R0000 1SNK149999R0000 1SNK149002R0000	1960 20 20 20 1	0.236 10.00 10.00 10.00 10.00
	Pre-printed marker card (L1-L2-L3-N-PE)					


Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

DBL160 power distribution blocks

Single pole - 28.2 mm 1.11 in spacing




DBL160

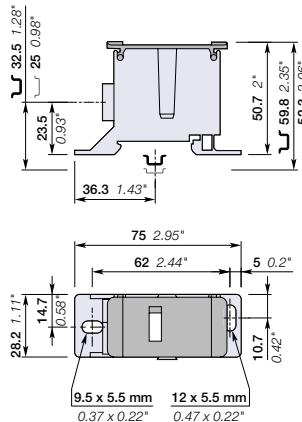

28.2 mm 1.11 in spacing

Mounting instructions



Description

- 3 configurations: distribute unipolar and multipolar power lines, or combine several inputs
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Increase the number of outputs by using the optional input and connecting two DBL together
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.

Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Single pole distribution, 8 connections	Grey	DBL160	1SNL316010R0000	1	120

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Copper 160 A / 70 mm ² Aluminium 135 A / 70 mm ²	160 A / 2/0 AWG
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (Icw 1s)	6000 A	
Short Circuit Current Rating (SCCR)		100 kA
Rated peak withstand current (Ipk)	30 kA	
Protection	IP10	NEMA 1

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail TH 35-7.5,
TH 35-15

Connection Number	Wire type	Wire stripping length	Tool	Torque	
Input					
1 x Ø 0.11 mm Ø 0.46 in	16 ... 50 mm ² 6 ... 1/0 AWG	16 ... 70 mm ² 6 ... 2/0 AWG	18 mm 0.708 in	5 mm 0.20 in	6... 10 Nm 53... 88 lb.in
1 x Ø 0.6 mm Ø 0.27 in	2.5 ... 16 mm ² 14 ... 6 AWG	6 ... 16 mm ² 10 ... 6 AWG	11 mm 0.43 in	3 mm 0.12 in	2... 3 Nm 18... 26.5 lb.in
6 x Ø 0.4 mm Ø 0.25 in	2.5 ... 16 mm ² 14 ... 6 AWG	2.5 ... 16 mm ² 14 ... 6 AWG	11 mm 0.43 in	5.5 mm 0.22 in	2... 3 Nm 18... 26.5 lb.in

When using maximum cable size with insulated ferrules, use a maximum of 2 non-adjacent holes in each row.

Not allowed	Flexible without ferrule (IEC V-K, UL class G...K)	Flexible with ferrule (IEC V-K, UL class G...K)	Solid (IEC V-U class 1, UL solid)	Rigid stranded (IEC V-R class 2, UL class B/C)
-------------	--	---	-----------------------------------	--

Ⓐ Allen key ⓒ Posidriv - flat screwdriver

Accessories

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g	
1 End stops	10 mm 5.2 mm 10 mm	0.394 in 0.205 in 0.394 in	Dark grey BAM4 BAZ1 BAZH1	1SNK900001R0000 1SNK900002R0000 1SNK900102R0000	50 50 20	14.00 5.30 24.00
2 Terminal block markers	Blank marker Blank card		White MG-CPM 13 41790 Green MC512PA-GN Blue MC512PA-BL White MC512PA	1SNB041790R0512 1SNK149997R0000 1SNK149998R0000 1SNK149999R0000	1960 20 20 20	0.236 10.00 10.00 10.00
	Pre-printed marker card (L1-L2-L3-N-PE)		MC512PA	1SNK149002R0000	1	10.00

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.





DBL175 power distribution blocks

Single pole - 46.2 mm 1.82 in spacing




DBL175



46.2 mm 1.81 in spacing

Mounting instructions



Description

- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Increase the number of outputs by using the optional input and connecting two DBL together, or increase the current rating with two wires, 300 A with 50 mm² wires and 350 A with 2/0 AWG wires
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.

Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Single pole distribution, 12 connections	Grey	DBL175	1SNL317510R0000	1	200

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Copper 175 A / 70 mm ² Aluminium 135 A / 70 mm ²	175 A / 2/0 AWG
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (lcw 1s)	6000 A	
Short Circuit Current Rating (SCCR)		100 kA
Rated peak withstand current (Ipk)	30 kA	
Protection	IP10	NEMA 1

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail TH 35-7.5,
TH 35-15

Connection Number	Size	Wire type	Wire stripping length	Tool	Torque	
Input	2 x Ø 0.46 in	10 ... 50 mm ² 8 ... 1/0 AWG	10 ... 70 mm ² 6 ... 2/0 AWG	15 mm 0.708 in	5 mm 0.20 in	6... 10 Nm 53... 88 lb.in
Output	10 x Ø 0.25 in	2.5 ... 16 mm ² 14 ... 6 AWG	2.5 ... 16 mm ² 14 ... 6 AWG	11 mm 0.43 in	5.5 mm 0.22 in	2... 3 Nm 18... 26.5 lb.in

Not allowed Flexible without ferrule (IEC V-K, UL class G...K) Solid (IEC V-U class 1, UL solid) Rigid stranded (IEC V-R class 2, UL class B/C)

Ⓐ Allen key ⓒ Posidriv - flat screwdriver

Accessories

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
1 End stops	Dark grey	BAM4	1SNK900001R0000	50	14.00
		BAZ1	1SNK900002R0000	50	5.30
		BAZH1	1SNK900102R0000	20	24.00
2 Terminal block markers	White	MG-CPM 13 41790	1SNB041790R0512	1960	0.236
		MC512PA-GN	1SNK149997R0000	20	10.00
	Green	MC512PA-BL	1SNK149998R0000	20	10.00
		MC512PA	1SNK149999R0000	20	10.00
	White	MC512PA	1SNK149002R0000	1	10.00


Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

DBL175-C-3 power distribution blocks

3x1 pole - 84.6 mm 3.33 in spacing





DBL175-C-3

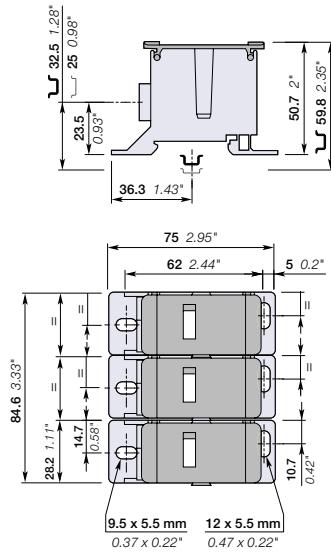

84.6 mm 3.33 in spacing

Mounting instructions



Description

- The usage of three poles distribution block is recommended for L1, L2, L3 applications
- Each pole can be separated from the assembly to align the poles with upstream equipment configuration
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.

Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Three poles distribution block 3x8 connections	Grey	DBL175-C-3	1SNL317531R0000	1	360

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Copper 175 A / 70 mm ² Aluminium 135 A / 70 mm ²	175 A / 2/0 AWG
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (Icw 1s)	6000 A	
Short Circuit Current Rating (SCCR)		
Rated peak withstand current (Ipk)	30 kA	
Protection	IP10	NEMA 1

The connecting capacity data for one Rigid / Solid / Stranded / Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail TH 35-7.5,
TH 35-15

Connection Number by pole	Wire type	Wire stripping length	Tool	Torque	
Input					
1 x Ø 0.18 mm Ø 0.46 in	16 ... 50 mm ² 8 ... 1/0 AWG	16 ... 70 mm ² 6 ... 2/0 AWG	18 mm 0.708 in	5 mm 0.20 in	6... 10 Nm 53... 88 lb.in
Output					
1 x Ø 0.6 mm Ø 0.27 in	2.5 ... 16 mm ² 14 ... 6 AWG	6 ... 16 mm ² 10 ... 6 AWG	11 mm 0.43 in	3 mm 0.12 in	2... 3 Nm 18... 26.5 lb.in
6 x Ø 0.4 mm Ø 0.25 in	2.5 ... 16 mm ² 14 ... 6 AWG	2.5 ... 16 mm ² 14 ... 6 AWG	11 mm 0.43 in	5.5 mm 0.22 in	2... 3 Nm 18... 26.5 lb.in

When using maximum cable size with insulated ferrules, use a maximum of 2 non-adjacent holes in each row.

Not allowed				
--------------------	--	--	--	--

Ⓐ Allen key Ⓑ Posidriv - flat screwdriver

Accessories

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g	
1 End stops	10 mm 5.2 mm 10 mm	0.394 in 0.205 in 0.394 in	Dark grey BAM4 BAZ1 BAZH1	1SNK900001R0000 1SNK900002R0000 1SNK900102R0000	50 50 20	14.00 5.30 24.00
2 Terminal block markers	Blank marker Blank card		White MG-CPM 13 41790 Green MC512PA-GN Blue MC512PA-BL White MC512PA MC512PA	1SNB041790R0512 1SNK149997R0000 1SNK149998R0000 1SNK149999R0000 1SNK149002R0000	1960 20 20 20 1	0.236 10.00 10.00 10.00 10.00
	Pre-printed marker card (L1-L2-L3-N-PE)					



Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

DBL250 power distribution blocks

Single pole - 46 mm 1.81 in spacing




DBL250



46 mm 1.81 in spacing

Mounting instructions

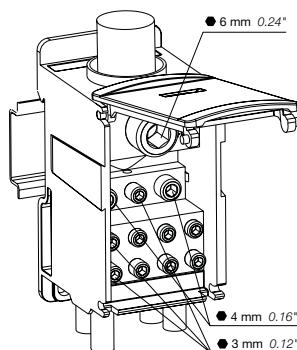

Description

- 3 configurations: distribute unipolar and multipolar power lines, or combine several inputs
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.

Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Single pole distribution, 12 connections	Grey	DBL250	1SNL325010R0000	1	439

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Copper 250 A / 120 mm ² Aluminium 200 A / 120 mm ²	255 A / 250 Kcmil
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (lcw 1s)	11400 A	
Short Circuit Current Rating (SCCR)		100 kA
Rated peak withstand current (pk)	51 kA	
Protection	IP10	NEMA 1

The connecting capacity data for one Rigid / Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail TH 35-7.5,
TH 35-15

Connection Number	Size	Wire type	Wire stripping length	Tool	Torque
Input					
1 x	Ø 15.3 mm Ø 0.60 in	35 ... 95 mm ² 2 ... 3/0 AWG	35 ... 120 mm ² 2 ... 250 Kcmil	28 mm 1.10 in	6 mm 0.24 in 19 ... 21 Nm 168 ... 185 lb.in
2 x	Ø 8.7 mm Ø 0.34 in	2.5 ... 25 mm ² 14 ... 4 AWG	2.5 ... 35 mm ² 14 ... 2 AWG	11 mm 0.43 in	4 mm 0.16 in 3.5 ... 5 Nm 31 ... 44 lb.in
5 x	Ø 6.4 mm Ø 0.25 in	2.5 ... 16 mm ² 14 ... 6 AWG	2.5 ... 16 mm ² 14 ... 6 AWG	11 mm 0.43 in	3 mm 0.12 in 2 ... 3 Nm 18 ... 26.5 lb.in
4 x	Ø 5.7 mm Ø 0.22 in	2.5 ... 10 mm ² 14 ... 8 AWG	2.5 ... 10 mm ² 14 ... 8 AWG	11 mm 0.43 in	3 mm 0.12 in 2 ... 3 Nm 18 ... 26.5 lb.in

When using maximum cable size with insulated ferrules, use a maximum of 2 non-adjacent holes in each row.

Not allowed		Flexible with ferrule (IEC V-K, UL class G..K)		Solid (IEC V-U class 1, UL solid)		Rigid stranded (IEC V-R class 2, UL class B/C)
-------------	--	--	--	-----------------------------------	--	--

● Allen key ● Posidriv - flat screwdriver

Accessories

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g	
1 End stops	10 mm 5.2 mm 10 mm	0.394 in 0.205 in 0.394 in	Dark grey BAM4 BAZ1 BAZH1	1SNK900001R0000 1SNK900002R0000 1SNK900102R0000	50 50 20	14.00 5.30 24.00
2 Terminal block markers	Blank marker Blank card		White MG-CPM 13 41790 Green MC512PA-GN Blue MC512PA-BL White MC512PA MC512PA	1SNB041790R0512 1SNK149997R0000 1SNK149998R0000 1SNK149999R0000 1SNK149002R0000	1960 20 20 20 1	0.236 10.00 10.00 10.00 10.00
	Pre-printed marker card (L1-L2-L3-N-PE)					


Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

DBL250-F power distribution blocks

Single pole - Flat entry - 29 mm 1.14 in spacing




DBL250-F

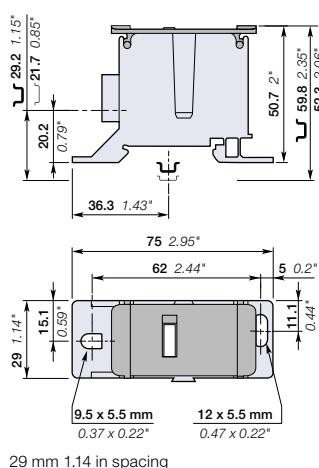

29 mm 1.14 in spacing

Mounting instructions



Description

- Suitable for distributing power from flat conductors: flexible or solid bars
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.

Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Single pole distribution - Flat entry, 7 connections	Grey	DBL250-F	1SNL325060R0000	1	119

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Flexible busbar 250 A / 6 x 15.5 x 0.8 mm	250 A / 6 x 15.5 x 0.8 mm
	Rigid busbar 208 A / 12 x 4 mm	160 A / 12 x 4 mm
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (lcw 1s)	11400 A	
Short Circuit Current Rating (SCCR)		Please consult us
Rated peak withstand current (pk)	22.8 kA	
Protection	IP20	NEMA 1

The connecting capacity data for one Rigid / Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail

Connection Number	Size	Wire type	Wire stripping length	Tool	Torque
Input					
1 x	15.5 x 7.5 mm 0.59 x 0.28 in	12 x 4 mm 3 x 9 x 0.8 mm 6 x 15.5 x 0.8 mm	15 mm 0.59 in	5 mm 0.20 in	13.5 Nm 120 lb.in
Output	6 x	Ø 6.6 mm Ø 0.26 in 2.5 ... 16 mm ² 14 ... 6 AWG	2.5 ... 16 mm ² 14 ... 6 AWG	11 mm 0.43 in	5.5 mm 0.22 in 2 ... 3 Nm 18 ... 26.5 lb.in

When using maximum cable size with insulated ferrules, use a maximum of 2 non-adjacent holes in each row.

Not allowed									
--------------------	--	--	--	--	--	--	--	--	--

Ⓐ Allen key ⓒ Posidriv - flat screwdriver

Accessories

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g	
1 End stops	10 mm	0.394 in	BAM4	1SNK900001R0000	50	14.00
	5.2 mm	0.205 in	BAZ1	1SNK900002R0000	50	5.30
	10 mm	0.394 in	BAZH1	1SNK900102R0000	20	24.00
2 Terminal block markers	Blank marker	White	MG-CPM 13 41790	1SNB041790R0512	1960	0.236
	Blank card	Green	MC512PA-GN	1SNK149997R0000	20	10.00
		Blue	MC512PA-BL	1SNK149998R0000	20	10.00
	Pre-printed marker card (L1-L2-L3-N-PE)	White	MC512PA	1SNK149999R0000	20	10.00
			MC512PA	1SNK149902R0000	1	10.00

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.





DBL400 power distribution blocks

Single pole - 46 mm 1.81 in spacing




DBL400



46 mm 1.81 in spacing

Mounting instructions



Description

- 3 configurations: distribute unipolar and multipolar power lines, or combine several inputs
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.

Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Single pole distribution, 12 connections	Grey	DBL400	1SNL340010R0000	1	425

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Copper 400 A / 185 mm ² Aluminium 300 A / 185 mm ²	335 A / 400 Kcmil
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (lcw 1s)	18000 A	
Short Circuit Current Rating (SCCR)		100 kA
Rated peak withstand current (pk)	51 kA	
Protection	IP10	NEMA 1

The connecting capacity data for one Rigid / Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail TH 35-7.5,
TH 35-15

Connection Number	Size	Wire type	Wire stripping length	Tool	Torque
Input					
1 x	Ø 18.8 mm Ø 0.74 in	95 ... 150 mm ² 3/0 ... 300 Kcmil	28 mm 1.10 in	8 mm 0.31 in	25 Nm 221 lb.in
2 x	Ø 8.7 mm Ø 0.34 in	2.5 ... 25 mm ² 14 ... 4 AWG	11 mm 0.43 in	4 mm 0.16 in	3.5 ... 5 Nm 31 ... 44 lb.in
5 x	Ø 6.4 mm Ø 0.25 in	2.5 ... 16 mm ² 14 ... 6 AWG	11 mm 0.43 in	3 mm 0.12 in	2 ... 3 Nm 18 ... 26.5 lb.in
4 x	Ø 5.7 mm Ø 0.22 in	2.5 ... 10 mm ² 14 ... 8 AWG	11 mm 0.43 in	3 mm 0.12 in	2 ... 3 Nm 18 ... 26.5 lb.in

When using maximum cable size with insulated ferrules, use a maximum of 2 non-adjacent holes in each row.

Not allowed		Flexible with ferrule (IEC V-K, UL class G..K)		Solid (IEC V-U class 1, UL solid)		Rigid stranded (IEC V-R class 2, UL class B/C)
-------------	--	--	--	-----------------------------------	--	--

Allen key Posidriv - flat screwdriver

Accessories

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
1 End stops	Dark grey	BAM4	1SNK900001R0000	50	14.00
		BAZ1	1SNK900002R0000	50	5.30
		BAZH1	1SNK900102R0000	20	24.00
2 Terminal block markers	White	MG-CPM 13 41790	1SNB041790R0512	1960	0.236
		MC512PA-GN	1SNK149997R0000	20	10.00
	Green	MC512PA-BL	1SNK149998R0000	20	10.00
		MC512PA	1SNK149999R0000	20	10.00
	White	MC512PA	1SNK149002R0000	1	10.00



Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

DBL400-PV power distribution blocks

Single pole - 46 mm 1.81 in spacing




DBL400-PV



46 mm 1.81 in spacing

Mounting instructions



Description

- Suitable for solar application with the possibility to combine 12 photovoltaic strings
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Increase the number of outputs by using the optional input and connecting two DBL together
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.

Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Single pole distribution, 14 connections	Grey	DBL400-PV	1SNL340011R0000	1	202

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Copper 550 A / (2x) 95 mm ²	400 A / (2x) 250 Kcmil
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (Icw 1s)	22800 A	
Short Circuit Current Rating (SCCR)		Please consult us
Rated peak withstand current (Ipk)	47.88 kA	
Protection	IP10	NEMA 1

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail TH 35-7.5, TH 35-15

Connection Number	Wire type	Wire stripping length	Tool	Torque		
Input						
2 x	Ø 0.55 mm Ø 0.59 in	25 ... 95 mm ² 4 ... 3/0 AWG	25 ... 120 mm ² 4 ... 250 Kcmil	28 mm 1.1 in	6 mm 0.24 in	19 ... 21 Nm 168 ... 185 lb.in
Output	12 x	Ø 0.6 mm Ø 0.26 in	2.5 ... 16 mm ² 14 ... 6 AWG	11 mm 0.43 in	3 mm 0.19 in	2 ... 3 Nm 18 ... 26.5 lb.in

Not allowed Flexible without ferrule (IEC V-K, UL class G...K) Flexible with ferrule (IEC V-K, UL class G...K) Solid (IEC V-U class 1, UL solid) Rigid stranded (IEC V-R class 2, UL class B/C)

Ⓐ Allen key ⓒ Posidriv - flat screwdriver

Accessories

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g	
1 End stops	10 mm 5.2 mm 10 mm	0.394 in 0.205 in 0.394 in	Dark grey BAZ1 BAZH1	1SNK900001R0000 1SNK900002R0000 1SNK900102R0000	50 50 20	14.00 5.30 24.00
2 Terminal block markers	Blank marker Blank card		White MC512PA-GN MC512PA-BL White MC512PA MC512PA	MG-CPM 13 41790 1SNB041790R0512 1SNK149997R0000 1SNK149998R0000 1SNK149999R0000 1SNK149002R0000	1960 20 20 20 20 1	0.236 10.00 10.00 10.00 10.00 10.00
	Pre-printed marker card (L1-L2-L3-N-PE)					



Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

DBL500-22 Power Distribution Blocks

Single pole - 46 mm 1.81 in spacing




DBL500-22



46 mm 1.81 in spacing

Mounting instructions



Description

- Suitable for distributing or connecting main power lines with 2 inputs and 2 outputs
- Mount it on Din rail or plate and save up to 50% rail space compared to conventional copper bars
- Reduce the assembly time by 80% by avoiding to use fastening and isolating components
- Increase the number of outputs by using the second input and connecting two DBL together
- Easy identification with the reversible cover and delivered pre-printed markers L1, L2, L3, N, PE, +, -.

Ordering details

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
Feed-through Single pole distribution, 4 connections	Grey	DBL500-22	1SNL850001R0000	1	224

Main technical data

Connecting capacity	IEC	UL
Max current / Cross section	Copper	500 A / (2x) 95 mm ²
		510 A / (2x) 250 Kcmil
Rated voltage	1000 V AC / 1500 V DC	1000 V
Rated impulse voltage	8 kV	
Short-time withstand current (Icw 1s)	22800 A	
Short Circuit Current Rating (SCCR)		Please consult us
Rated peak withstand current (Ipk)	47.88 kA	
Protection	IP10	NEMA 1

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards (Copper conductors). All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.TE.com>



Mounting & wiring instructions

Rail TH 35-7.5, TH 35-15

Connection Number	Wire type	Wire stripping length	Tool	Torque		
Input						
2 x	Ø 15.5 mm Ø 0.61 in	25 ... 95 mm ² 4 ... 3/0 AWG	25 ... 120 mm ² 4 ... 250 Kcmil	28 mm 1.1 in	6 mm 0.24 in	19 ... 21 Nm 168 ... 185 lb.in
2 x	Ø 15.5 mm Ø 0.61 in	25 ... 95 mm ² 4 ... 3/0 AWG	25 ... 120 mm ² 4 ... 250 Kcmil	28 mm 1.1 in	6 mm 0.24 in	19 ... 21 Nm 168 ... 185 lb.in
Not allowed						
Flexible without ferrule (IEC V-K, UL class G...K)						
Flexible with ferrule (IEC V-K, UL class G...K)						
Solid (IEC V-U class 1, UL solid)						
Rigid stranded (IEC V-R class 2, UL class B/C)						

Ⓐ Allen key ⓒ Posidriv - flat screwdriver

Accessories

Description	Color	Type	Part Number	Pkg qty	Weight 1 pce g
1 End Stops	Dark Grey	BAM4	1SNK900001R0000	50	14.00
		BAZ1	1SNK900002R0000	50	5.30
		BAZH1	1SNK900102R0000	20	24.00
2 Terminal Block Markers	White	MG-CPM 13 41790	1SNB041790R0512	1960	0.236
		MC512PA-GN	1SNK149997R0000	20	10.00
	Green	MC512PA-BL	1SNK149998R0000	20	10.00
		MC512PA	1SNK149999R0000	20	10.00
	White	MC512PA	1SNK149002R0000	1	10.00

Complete list of accessories is indicated in the terminal block datasheet including end stops. Some accessories such as jumper bars may modify the terminal block's ratings. Complete information available in the accessories section of the catalog.

Index

Part Number/Type classification

Part Number	Type	Page
1SNB		
1SNB041790R0512	MG-CPM 13 41790	8
1SNK		
1SNK149002R0000	MC512PA	8
1SNK149997R0000	MC512PA-GN	8
1SNK149998R0000	MC512PA-BL	8
1SNK149999R0000	MC512PA	8
1SNK900001R0000	BAM4	8
1SNK900002R0000	BAZ1	8
1SNK900102R0000	BAZH1	8
1SNL		
1SNL308010R0000	DBL80	8
1SNL312510R0000	DBL125	9
1SNL312530R0000	DBL125-3	10
1SNL316010R0000	DBL160	11
1SNL317510R0000	DBL175	12
1SNL317531R0000	DBL175-C-3	13
1SNL325010R0000	DBL250	14
1SNL325060R0000	DBL250-F	15
1SNL340010R0000	DBL400	16
1SNL340011R0000	DBL400-PV	17
1SNL850001R0000	DBL500-22	18

Type	Part Number	Page
B		
BAM4	1SNK900001R0000	8
BAZ1	1SNK900002R0000	8
BAZH1	1SNK900102R0000	8
D		
DBL125	1SNL312510R0000	9
DBL125-3	1SNL312530R0000	10
DBL160	1SNL316010R0000	11
DBL175	1SNL317510R0000	12
DBL175-C-3	1SNL317531R0000	13
DBL250	1SNL325010R0000	14
DBL250-F	1SNL325060R0000	15
DBL400	1SNL340010R0000	16
DBL400-PV	1SNL340011R0000	17
DBL500-22	1SNL850001R0000	18
DBL80	1SNL308010R0000	8
M		
MC512PA	1SNK149002R0000	8
MC512PA	1SNK149999R0000	8
MC512PA-BL	1SNK149998R0000	8
MC512PA-GN	1SNK149997R0000	8
MG-CPM 13 41790	1SNB041790R0512	8

LET'S CONNECT

We make it easy to connect with our experts and are ready to provide all the support you need. For additional information or product assistance, please contact your field representative or our customer service department. Additional information is also available on the website <http://www.te.com/entrelec>.

TECHNICAL SUPPORT

te.com/support-center

Asia:

+86 400-820-6015

Europe, Middle East, & Africa:

+49 6251-133-0

North America:

+1-888-441-9982

te.com

ENTRELEC, TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.

1-1773959-2_EN

02/19

INDUSTRIAL // ENTRELEC - ESSAILEC® TEST BLOCKS

TE Connectivity

3, rue Jean Perrin
69687 Chassieu cedex
France

Tel: +33 472172222

www.te.com/



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DBL125](#) [DBL160](#) [DBL250](#) [DBL400](#) [DBL400-PV](#) [DBL80](#)