




1092 Series

LED Panel Mount Indicators

Wire Leads

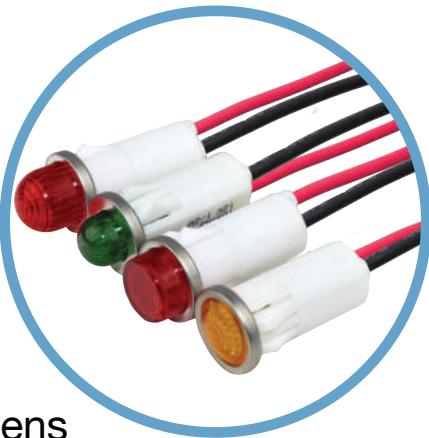

Available in four different lens styles, three diffused lens colors and operating voltage range of 12V, 28V and 125V
Snap fit into 0.500" (12.7mm) panel hole diameter



Applications

- Industrial
- Transportation
- Food Service
- People Movers
- Medical
- Maritime
- Oil and Gas Industry
- Manufacturing
- Automation & Control

Key Features

- Snaps fit into 0.500" (12.7mm) panel hole
- LED illumination
- Four different lens styles available: Hi Hat, Hi Dome, Semi Dome and Small Dome
- Front-panel mount
- Front panel snap-in mounting requires no additional hardware
- Life expectancy of 100,000 hours
- High brightness LEDs for daylight viewing
- UL/cUL Listed. File Number E20356
- Order speed nuts separately to provide maximum fastening power with minimal installation torque.
- Order gasket separately to provide water, oil, air and dust tight.
- 4.4"/4.8" wire leads
- 0.187" (4.75mm) tab terminal version also available
- Available in wide operating voltage of 12V, 28V and 125V
- Three colors available: Red, Green, Amber
- Transparent and clear lenses provide visibility during the daylight
- Solution to retrofit: save energy and reduce the costs
- 'D' mounting hole aids anti-rotation
- Compliant with RoHS and REACH requirements
- For customized options, please contact us

Ordering Data

The 1092 Series is available in a range of standard features and options. To specify your Panel Mount Indicator, simply choose one option from each column. An example is shown below

Series	Lens Style	Color	Voltage
1092			-
Hi-Dome	A		12V
Hi-Hat	C		28V
Semi-Dome	D		125VAC
Small-Dome	M		125VAC
		luminous intensity (Typ)	
	Red	1	13,000 mcd
	Amber	3	13,000 mcd
	Green	5	12,000 mcd

Example: 1092A5-12V
1092 with Hi-Dome lens - Green LED and 12 Volts



Accessories Ordering Data [order separately]

Speed Nut: SN0461-C





O-Ring Gasket: SPC472




Product Dimensions



Hi Dome

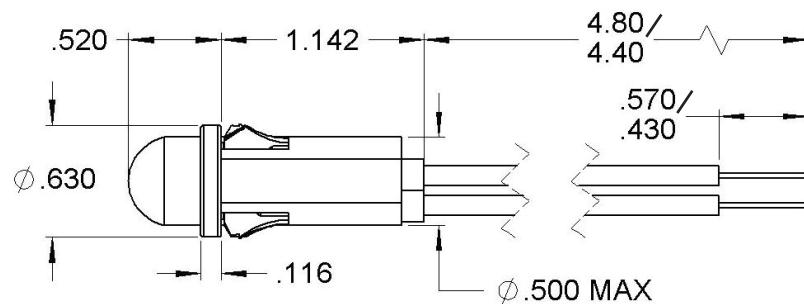



Hi Hat

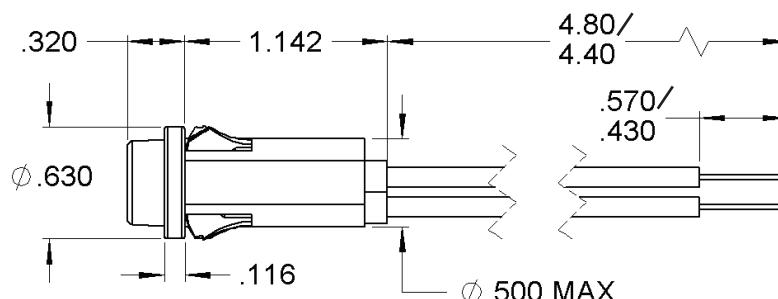


Semi Dome

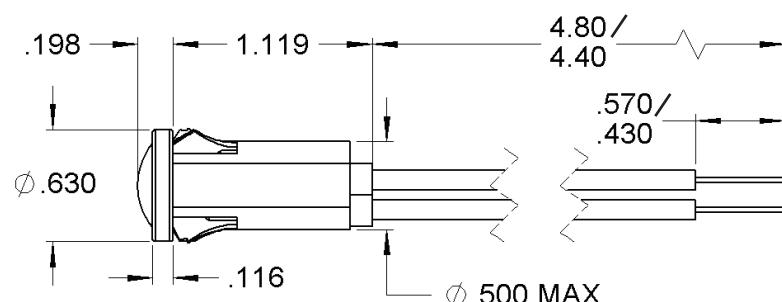

Small Dome

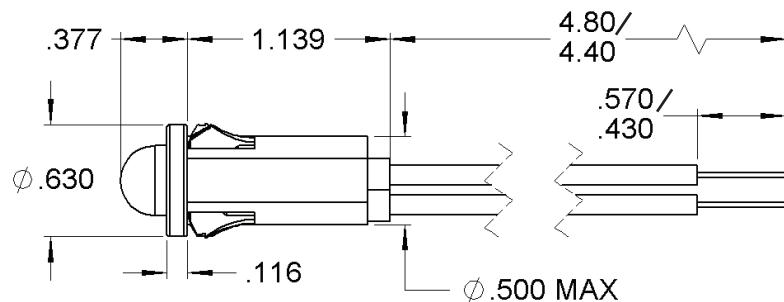

Mounting Hole (All)

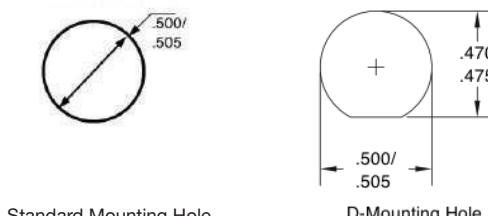

Dimensions in inches

1.800.522.5546

03/16 Rev 2

Product Specifications

Materials			Installation Specifications
Housing	White Nylon UL94 V-2		Mounting Hole 0.500" to 0.505" (12.70 to 12.83 mm)
Lens	Transparent Polycarbonate UL94 V-2		D-Mounting Hole 0.470" to 0.475" (11.94 to 12.07 mm)
Bezel	Polished stainless steel		Panel Thickness 0.020" to 0.100" (0.51 to 2.54 mm)
Wire Leads	Tinned Copper Conductor PVC Insulation		Wire Leads 18 AWG -105°C - 600V lead color: red and black, 4.40"/4.80" (111.8/121.9 mm) long, stripped .430"/.570" (10.9/14.5 mm) Anode(+): Red lead
Voltage Table			Internal Resistor
Nominal	VAC	VDC	12V 390Ω
12V	10 to 14	10 to 14	28V 1200Ω
28V	26 to 30	26 to 30	125V 15000Ω + rectifier diode
125V	105 to 125	—	Forward Current Rating 25mA
Temperature Specifications			
Operating Temperature	-40°C to +85°C -40°F to +185°F		
Storage Temperature	-40°C to +85°C -40°F to +185°F		


Accessory options [order separately]

O-Ring Gasket

Part Number **SPC472**

The 1092 Gasket is designed to seal many types of media, including water, air, dust, and oil. The panel gasket is intended to provide a seal between the panel and the 1092 Panel Mount Indicator.

Meets ASTM D2000 standard.

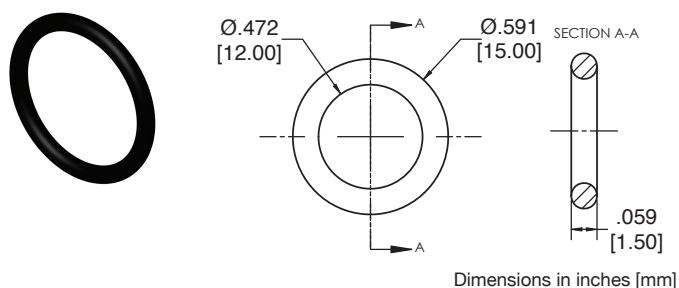

Material	
Buna-N, Durometer A50, black	
Installation Specification	
Internal Diameter	0.472" (12 mm)
Thickness	0.059" (1.5 mm)
Operational Temperature	-30°F to +225°F



Accessory options [order separately]

Push-on speed nut

Part Number **SN0461-C**

Description: Speed nut with coating, which secures the indicator in place

- One piece, self-locking, heat-treated, spring-steel fastener that replaces threaded nut, lock washer or spanner washer
- Eliminates time-consuming assembly operations.
- Fast and easy to apply, the speed nut fastener provides maximum holding power at minimum cost per fastener
- It does not shake loose from vibration, yet can be easily loosened without worry about rust-frozen screw threads.
- For smaller components where space is premium
- Requires less torque than standard hex-nuts
- Can be installed prior to painting process so threads won't fill.

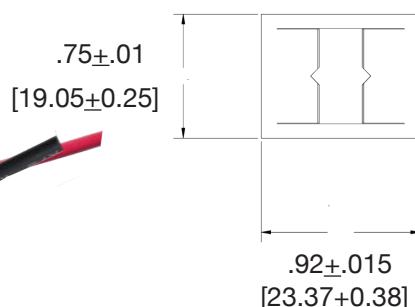

Dimensions in inches [mm]

Material	
Speed Nut (one piece)	Spring Steel

Installation Specification	
Stud Size	0.485" (12.319mm)

Compliances and Approvals



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[1092C1-12V](#) [1092M1-12V](#) [1092M5-12V](#) [1092M3-12V](#) [1092D1-12V](#) [1092A1-28V](#) [1092M3-28V](#) [1092A3-12V](#)
[1092D5-28V](#) [1092A1-12V](#) [1092D3-12V](#) [1092A3-28V](#) [1092C1-28V](#) [1092M1-28V](#) [1092M5-28V](#) [1092C3-28V](#)
[1092D5-12V](#) [1092C5-28V](#) [1092C5-12V](#) [1092D1-28V](#) [1092C3-12V](#) [1092A5-28V](#) [1092A5-12V](#) [1092D3-28V](#)