

## Features

- 1 Bit Digital Attenuator
- Low Insertion Loss: 1 dB
- 2 dB Attenuation
- 50 Ω Impedance
- Bare Die
- RoHS\* Compliant
- Chip Size: 645 x 605 μm

## Applications

- Telecom Infrastructure
- Fiber Optics
- Phase Array Radars, Sensors
- Test Instruments
- Microwave Radio & VSAT
- General Purpose

## Description

The MAAD-011053-DIE is a broadband bidirectional, 1-bit GaAs (pHEMT) digital step attenuator of 2 dB step size. Complementary 0 V and -5 V logic input is necessary to change the attenuators states from insertion loss to attenuation.

The MAAD-011053-DIE is part of a series of single bit digital attenuators covering the same frequency range and having the same physical size:


MAAD-011054-DIE: 4 dB

MAAD-011055-DIE: 6 dB

MAAD-011056-DIE: 8 dB

MAAD-011057-DIE: 10 dB

## Functional Schematic

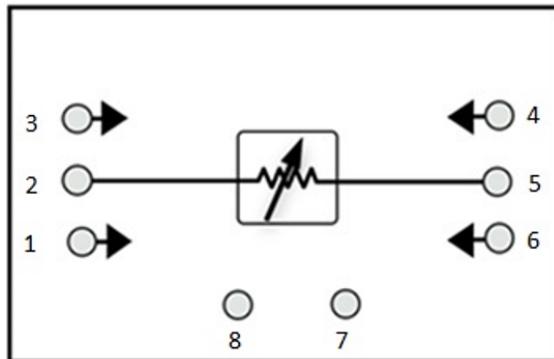

## Pad Configuration<sup>1</sup>

Pad #	Name	Function
1,3,4,6	GND	Ground
2	RF <sub>IN</sub>	RF Input
5	RF <sub>OUT</sub>	RF Output
7	VC2	Control Voltage 2
8	VC1	Control Voltage 1

1. GND bond pads 1,3,4 and 6 are connected to the backside of the die through via holes. Therefore, these bond pads may be left open.

## Ordering Information

Part Number	Package
MAAD-011053-DIE	Gel Pack

\* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

**Electrical Specifications:**

Freq. = DC - 30 GHz,  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50 \Omega$  (measured with 150  $\mu\text{m}$  G-S-G RF probes)

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	6 GHz 18 GHz 30 GHz	dB	—	0.4 0.6 0.9	0.75 1.2 1.5
Attenuation	6 GHz 18 GHz 30 GHz	dB	1.45 1.50 1.50	2.1 2.1 2.1	2.65 2.70 2.70
Return Losses	RF Input RF Output	dB	—	17 17	—
Input IP3	Two-tone, 10 MHz, +5 dBm	dBm	—	40	—
$T_{\text{RISE}}$ $T_{\text{FALL}}$	10% RF to 90% RF 90% RF to 10% RF	ns	—	10 35	—
$T_{\text{ON}}$ $T_{\text{OFF}}$	50% Control to 90% RF 50% Control to 10% RF	ns	—	15 30	—
VC1, VC2	LOW-level input voltage HIGH-level input voltage	V	-5.5 -0.2	-5 0	-3 0.2
$I_{\text{VC}}$ (Input Control Currents)	$V_C = -5 \text{ V or } 0 \text{ V}$	$\mu\text{A}$	—	1	—

**Truth Table<sup>2</sup>**

VC1	VC2	Attenuation
0	1	Insertion Loss
1	0	2 dB

2. "0" = -5 V; "1" = 0 V.

**Maximum Operating Conditions**

Parameter	Maximum
Input Power	27 dBm
VC1 and VC2	-5.5 V to +0.2 V
Operating Temperature	-40°C to +85°C

**Handling Procedures**

Please observe the following precautions to avoid damage:

**Static Sensitivity (ESD Rating)**

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

This device has a CLASS 0 ESD rating


**Absolute Maximum Ratings<sup>3,4</sup>**

Parameter	Absolute Maximum
Input Power	30 dBm
VC1 and VC2	-6 V to +0.5 V
Storage Temperature	-65°C to +150°C


3. Exceeding any one or combination of these limits may cause permanent damage to this device.
4. MACOM does not recommend sustained operation near these survivability limits.

**Typical Performance Curves: measured with 150  $\mu$ m G-S-G RF probes**


**Insertion Loss, over temperature**

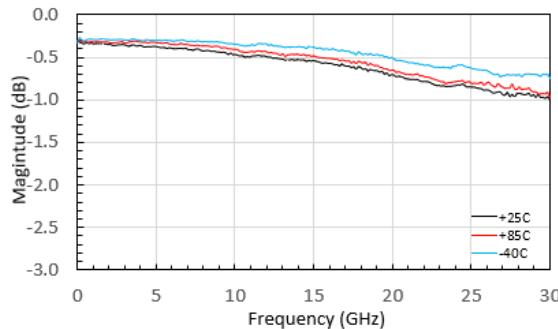


**Relative Attenuation, over Temperature**

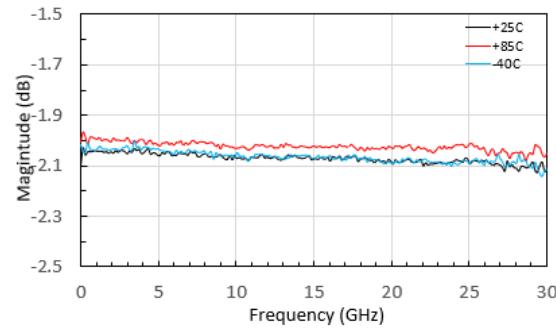


**Input Return Loss, over Temperature**

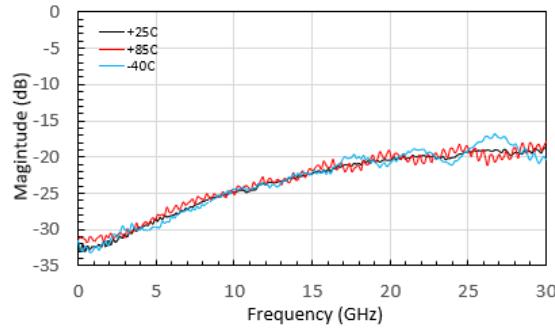


**Input Power Compression (Insertion Loss @ 15 GHz)**

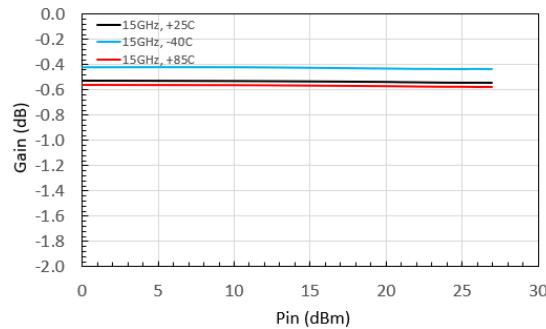


**Output Return Loss, over Temperature**

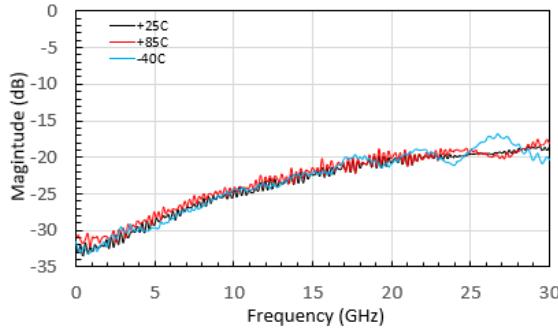


**Input IP3, Insertion Loss and Attenuation States**

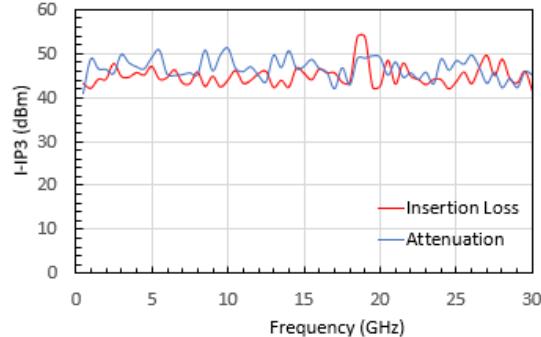

## Recommended Mounting & Wire-Bonding

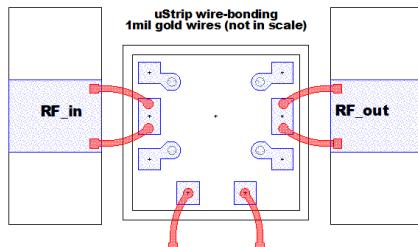

(a) Recommended Microstrip wire bonding

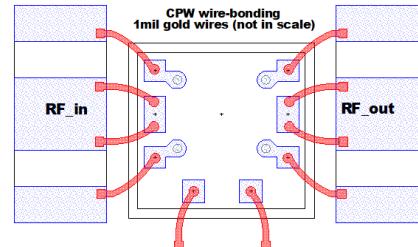

(b) Recommended CPW wire bonding

The DIE should be directly attached to the RF/DC ground plane; either with solder (AuSn) or a thin application of conductive epoxy. Avoid overflows.


The  $50\ \Omega$  microstrip, or  $50\ \Omega$  CPW transmission lines should be brought up as close as possible to the die in order to minimize the connecting wire bonds inductances.

A typical spacing between die and microstrip substrate should be kept between 75 - 125  $\mu\text{m}$  for best RF behavior. All bonds should be kept as short as possible. Use minimum ultrasonic energy for reliable wire bonds.

Two bond wires are recommended for the RF ports as shown above. Simultaneously, it is recommended to have the height of the die at the same height of the transmission's line substrate. Do not exceed a substrate height of 10 mils for the transmission lines used. A pedestal may be needed to lift the chip to the level of the  $50\ \Omega$  T-Line.

If CPW transmission lines are used, make sure that the ground planes of the CPW structure are wire bonded to the ground pads (G-S-G) on the DIE as shown above.

## DIE Outline<sup>5,6,7</sup>

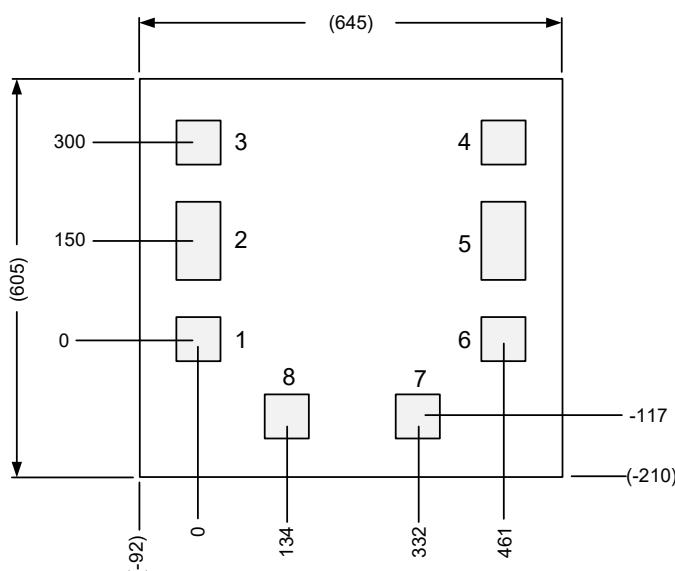

### Bond Pad Size ( $\mu\text{m}$ )

Pad #	X ( $\mu\text{m}$ )	Y ( $\mu\text{m}$ )	Pad Label
1,3,4,6	67	67	Ground
2	67	117	RF Input
5	67	117	RF Output
7	70	70	Control Voltage 2
8	70	70	Control Voltage 1

5. Unless otherwise specified, all dimensions are in  $\mu\text{m}$  with a tolerance of  $\pm 5\ \mu\text{m}$ .

6. Die thickness is  $100 \pm 10\ \mu\text{m}$ .

7. Die size reflects cut dimensions. Die size is reduced by  $25\ \mu\text{m}$  each dimension.

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.