

FEATURES

MitySOM-A5E Mini Development Board

MitySOM-A5E Mini System on Module

- Agilex™ 5 SoC FPGA E-Series from Altera®: 23mm x 23mm package, with transceivers
- FPGA fabric up to 656 KLE
- Dual-core Cortex-A55 + Dual-core Cortex-A76


Additional Hardware Included

- USB 2.0 console Cable
- 1 Ethernet Cable
- AC to DC 12V Adapter

Single 12V Power Input

Digital Interfaces

- DisplayPort supporting 8K video at 60Hz
- USB-C port supporting USB 3.1 Gen 1
- 10/100/1000 Mb Ethernet Interface
- SFP+ supporting up to 16Gb/s
- Micro-USB 2.0 Console Interface
- Micro-SD Card Socket
- PCIe Gen 4.0 x4 socket
- 1 22-pin 4-lane MIPI camera interface
- Dual 46-pin expansion headers

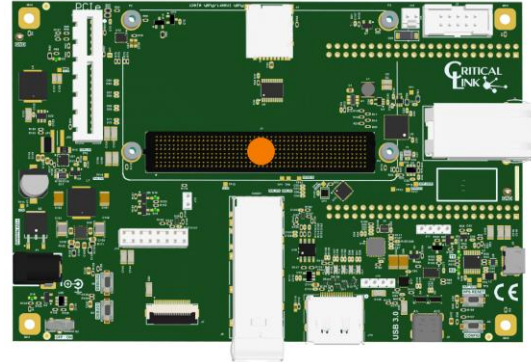

Software and Documentation

- Linux Kernel
- uBoot
- Development Board Schematics
- Development Board Gerber Files
- Development Board BOM

Applications

- Robotics
- Image Processing
- IoT 4.0 edge computing
- Infrastructure and application acceleration
- Artificial intelligence (AI)
- 8K video processing
- Medical Equipment & Imaging
- Automated Test & Measurement
- Embedded Instrumentation
- Retail Automation
- Smart City / Infrastructure
- Broadcast & Pro-AV
- Radar & Defense
- FPGA Prototyping

DESCRIPTION

The MitySOM-A5E Mini Development Board is an interface-rich developer tool, designed to help developers get started developing with Critical Link's MitySOM-A5E, which features the powerful Agilex 5 System On Chip (SoC) FPGA E-Series from Altera, on-board power supplies and memory subsystems. The Agilex 5E SoC is comprised of a dual-core Cortex-A55 processor, dual-core Cortex-A76 processor, and up to 656KLE of FPGA fabric.

The MitySOM-A5E Mini Development kit comes complete with all the connectivity needed in any application well suited for the MitySOM-A5E Mini, including DisplayPort, USB 3.1 Gen 1, Gigabit Ethernet, SFP+ (supporting up to 10 Gb Ethernet), one x4 lane MIPI CSI camera inputs, and PCIe 4.0. Additionally, the development kit is equipped with a Micro-USB 2.0 console interface, Micro-SD card storage, and a dual 46-pin expansion interface providing support for additional I/O signals.

The on-board DisplayPort supports DisplayPort 1.4 for a total bandwidth of 32.4Gbps with 32 audio channels and 8K video at 60Hz with 10-bit color resolution.

A block diagram of the MitySOM-A5E Mini Development Board is illustrated in Figure 1 below. All available processor interface pins are used directly by the MitySOM-A5E. Control of the onboard interface hardware and connected Expansion IO cards require proper configuration of the Agilex 5E. While not required, it is strongly recommended that the Agilex 5E software development kit and supplied API be used to manage these interfaces.

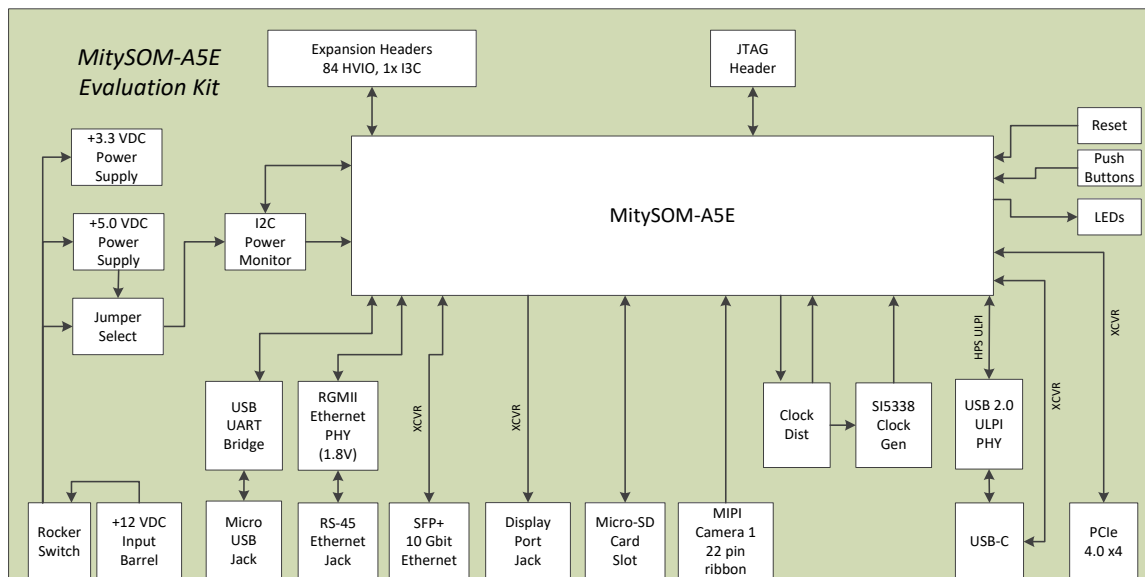


Figure 1: MitySOM-A5E Mini Development Kit Block Diagram

ADDITIONAL DETAILS ABOUT THE ALTERA AGILEX 5, AVAILABLE PERIPHERALS, AND THEIR FEATURES ARE PROVIDED IN THE DATASHEET ON THE ALTERA WEBSITE:

<https://www.intel.com/content/www/us/en/products/details/fpga/agilex/5.html>

TABLE OF CONTENTS

FEATURE DESCRIPTIONS	4
RS-232 / USB BRIDGE CONSOLE PORT	4
USB-C 3.1 GEN 1 INTERFACE DESCRIPTION	4
μSD CARD INTERFACE DESCRIPTION	4
GIGABIT ETHERNET INTERFACE DESCRIPTION	4
MIPI CAMERA INTERFACE DESCRIPTION	4
DISPLAY PORT INTERFACE DESCRIPTION	4
SFP+ INTERFACE DESCRIPTION	5
4 LANE PCIe INTERFACE	5
JTAG INTERFACE DESCRIPTION	5
CONTROL PUSHBUTTONS	5
ABSOLUTE MAXIMUM RATINGS	6
OPERATING CONDITIONS	6
ELECTRICAL CHARACTERISTICS	6
ELECTRICAL INTERFACE DESCRIPTIONS	7
INPUT POWER – P1	7
MULTIMEDIA CARD (μSD) INTERFACE – J4	7
USB 3.1 GEN 1 TYPE-C – J9	8
USB TYPE-C DRP PORT CONTROLLER – U15	8
USB 2.0 ULPI TRANSCEIVER – U16	9
DISPLAY PORT INTERFACE – J10	10
PCIe INTERFACE – J8	10
SFP+ INTERFACE – J6	12
CAMERA MIPI INTERFACE – J7	13
10/100/1000 ETHERNET INTERFACE – J2	13
JTAG INTERFACE – J3	14
FAN HEADER INTERFACE – J15	14
IO EXPANSION HEADER – P8, P9, J11, J13, J14	14
DEBUG BUTTONS AND LEDS	17
INCLUDED COMPONENTS	18
MECHANICAL INTERFACE DESCRIPTION	19
MAIN BOARD INTERFACE / MOUNTING	19
REVISION HISTORY	19

FEATURE DESCRIPTIONS

RS-232 / USB Bridge Console Port

The MitySOM-A5E Mini Development Board includes a FT230XS UART to USB bridge chip interfacing to the Agilex 5E SoC HPS (Hard Processor System consisting of the dual Cortex-A76 and dual Cortex-A55 processors). With a single micro-USB connection, the console port may be monitored using a standard terminal emulation program.

USB-C 3.1 Gen 1 Interface Description

A USB-C 3.1 Gen 1 is connected to the USB1 interface of the Agilex 5E SoC HPS. The interface is through a USB-C connector, J9. The port supports dual-role operation. Linux drivers are available.

μSD Card Interface Description

The Micro Secure Digital (μSD) connector, J4, supports SD Standard v6.1. It is compatible with standard (SD), SDHC (up to 32GB), SDXC (Up to 2TB), and SDUC (up to 128 TB) cards. By default, the MitySOM-A5E boots the linux kernel and mounts a root filesystem from this interface.

The MitySOM-A5E Mini development kit includes a μSD flash card. The μSD flash is typically used to store the following types of data:

- Bootloaders
- ARM Linux embedded root file-system
- Runtime ARM software
- Runtime application data (non-volatile storage)

U-Boot configuration information and Linux drivers are available on Critical Link's Support site, https://support.criticallink.com/redmine/projects/mitysom_a5/wiki

Gigabit Ethernet Interface Description

The on-board Ethernet interface features a network PHY capable of running at 10/100/1000 Mbit including link auto-negotiation and MII/MDIO capability. An industry-standard RJ-45 connector is provided (J2) for networking. This Ethernet interface may be used to perform remote code download via U-Boot and FLASH upgrades to the MitySOM-A5E module.

MIPI Camera Interface Description

The MitySOM-A5E Mini Development Board provides a 22-position flat flex cable interface, J7, to the Agilex 5E SoC HPS, MIPI CSI v1.3 compliant devices supporting a data lane at up to 2.5Gbps.

Display Port Interface Description

The MitySOM-A5E Mini Development Board provides a standard display port interface, J10, for external monitor connection. The on-board DisplayPort supports DisplayPort 1.4 for a total bandwidth of 32.4Gbps with 32 audio channels and 8K video at 60Hz with 10-bit color resolution.

SFP+ Interface Description

The Small Form Pluggable interface, J6, supports high data speeds of up to 16 Gbps per data lane.

4 Lane PCIe Interface

The MitySOM-A5E Mini Development Board supports PCIe 4.0 on connector J8 and is capable of data rates up to 32 Gbps.

JTAG Interface Description

A 10-pin 0.1" pitch header, J3, is available onboard for programming and debugging the Agilex 5E SoC HPS as well as the programmable logic with a compatible JTAG Emulator.

Control Pushbuttons

Two debounced normally open, contact to ground, momentary pushbuttons are included to signal the Agilex 5E SoC HPS interrupt HPS_COLD_nRESET (button S1), as well as nCONFIG (button S2). Additionally, two debug buttons are connected to HVIO_6D_17 and HVIO_6D_18 (buttons S4 and S5, respectively).

ABSOLUTE MAXIMUM RATINGS

If Military/Aerospace specified cards are required, please contact the Critical Link Sales Office or unit Distributors for availability and specifications.

Maximum Supply Voltage 12 V
Storage Temperature Range -45 to 85C

OPERATING CONDITIONS

Ambient -40 to 85C
Temperature Range
Humidity 0 to 95%
Non-condensing

ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Conditions	Typical	Limit	Units
Maximum Power Supply Output					
I_{Max}	12V Supply (AC Adapter) ¹ all components			3.0	A
I_{Max}	12V Supply ² for external components			1.0	A
I_{Max}	3.3V Supply ² for external components			1.0	A
Power Dissipation					
V_S	Supply Voltage		12.0±5%		V
I_S	Supply Current ³		1.0		A

Notes:

1. An alternative higher amperage AC/DC 12V adapter should be considered when using PCIe cards drawing more than 10 Watts (TBC).
2. The maximum current supplied to external components should be limited to the specified maximum for both the 12V and 3.3V supplies.
3. Expansion card not attached, 100% Cortex-A55 and Cortex-A76 utilization, USB, and Dual Ethernet are enabled and active.

ELECTRICAL INTERFACE DESCRIPTIONS

Input Power – P1

The MitySOM-A5E Mini Development Board power interface, P1, requires a single +12Volt power supply. P1 uses a generic barrel connector. Switch S3 is the main power switch and can disable power to the board without having to disconnect P1.

MultiMedia Card (μSD) Interface – J4

The MitySOM-A5E Mini Development Board provides standard Micro-Secure Digital (μSD) card slot for the physical interface. The slot is supplied with 3.3V for use with standard SD. The pins of the μSD slot are connected to the HPS GPIO pins of the MitySOM-A5E, which allow for multiplexed interfacing.

Table 1: J4 Micro SD Card Connector

J4 Pin	J4 Signal	SoM Interface Signal	J1 Pin
1	DAT2	SDMMC D2	C32
2	CD/DAT3	SDMMC D3	D35
3	CMD	SDMMC CMD	D33
4	VDD	+3.3V	-
5	CLK	SDMMC CLK	E36
6	VSS	GND	-
7	DAT0	SDMMC D0	D37
8	DAT1	SDMMC D1	C37
9	Switch (B)	GND	-
10	Switch(A)	SDCARD_PRSENT (pulled to +1.8V, active low)	E35

USB 3.1 Gen 1 Type-C – J9

The MitySBC-A5E Mini Development Board features a USB-C port J9. This interface is a USB 3.1 Gen 1 interface and supports up to 5Gbps throughput speeds and is backward compatible with USB 2.x USB-C devices. The port can supply a maximum of 1.5A of current at +5V and an overcurrent detection circuit monitors the output power. The pinout for J9 is included in Table 2.

Table 2 USB Type-C Connector Pin Out, J9

J9 Pin	J9 Signal	U15 Port Controller or U16 PHY Connection
A1	GND	-
A2	TX1 P	U15 – Pin 14
A3	TX1 N	U15 – Pin 15
A4	VBUS	+5V Supply U15 – Pin 5 U16 – Pin 22
A5	CC1	U15 – Pin 2
A6	USB1 DATA P	U16 – Pin 18
A7	USB1 DATA N	U16 – Pin 19
A8	NC	-
A9	VBUS	+5V Supply U15 – Pin 5 U16 – Pin 22
A10	RX2 N	U15 – Pin 20
A11	RX2 P	U15 – Pin 21
A12	GND	-
B1	GND	-
B2	TX2 P	U15 – Pin 19
B3	TX2 N	U15 – Pin 18
B4	VBUS	+5V Supply U15 – Pin 5 U16 – Pin 22
B5	CC2	U15 – Pin 1
B6	USB1 DATA P	U16 – Pin 18
B7	USB1 DATA N	U16 – Pin 19
B8	NC	-
B9	VBUS	+5V Supply U15 – Pin 5 U16 – Pin 22
B10	RX1 N	U15 – Pin 17
B11	RX1 P	U15 – Pin 16
B12	GND	-

USB Type-C DRP Port Controller – U15

The DRP port controller (MPN: HD3SS3220IRNHR) manages mode configuration, the detection of a USB device, cable orientation detection, role detection and the required power supply for the connected device. All of these can be communicated back to the FPGA via the signals listed below.

Table 3: DRP Port Controller Signals

FPGA Side Signal	J1 Pin	FPGA Pin
USB1_SSTX_N	B38	AC72
USB1_SSTX_P	B39	AC75
I3C1_SDA	F36	E80
I3C1_SCL	D34	F74
USBC_ID_3V3	C18	BV76
USB1_SSRX_N	B46	Y79
USB1_SSRX_P	B47	Y81
USBC_INT_3V3	D19	BR60
USBC_FAULT_N	D20	BU57
USBC_OR_3V3	D21	BU59
USB1_MuxEnable_3V3	D18	BN60

USB 2.0 ULPI Transceiver – U16

The ULPI transceiver (MPN: USB3320C-EZK) provides support for the USB 2.0 data path on the Type-C connector.

Table 4: ULPI Transceiver Signals

FPGA Sided Signal	J1 Pin	FPGA Pin
USB1_DATA0	C33	K70
USB1_DATA1	D38	A76
USB1_DATA2	E33	B73
USB1_DATA3	D31	K60
USB1_DATA4	E38	A73
USB1_DATA5	F32	F62
USB1_DATA6	F33	B71
USB1_DATA7	E39	A71
USB1_DIR	F37	B76
USB1_NXT	D32	H70
USB1_STP	E37	B78
USB1_CLK	E34	D74

Display Port Interface – J10

The MitySOM-A5E Mini Development Board provides a 20-pin standard display port connector, J10. Supporting display port 1.4, the Agilex 5E can output up to a resolution of 8K at 60Hz.

Table 5: J10 Connector Pin Assignments

J10 Pin	Signal	Type	Standard	J1 Pin	FPGA Pin
1	DispPort Tx0_+	O	HCSL	H37	BB75
2	Shield	Power			-
3	DispPort Tx0_-	O	HCSL	H36	BB72
4	DispPort Tx1_+	O	HCSL	H41	AY75
5	Shield	Power			-
6	DispPort Tx1_-	O	HCSL	H40	AY72
7	DispPort Tx2_+	O	HCSL	H45	AV75
8	Shield	Power			-
9	DispPort Tx2_-	O	HCSL	H44	AV72
10	DispPort Tx3_+	O	HCSL	H49	AT75
11	Shield	Power			-
12	DispPort Tx3_-	O	HCSL	H48	AT72
13	TX_CONFIG1_3V3	I		C25	BV65
14	Reserved	-			-
15	AUX_CH_+	IO	LVDS	C24	BV63
16	Shield	Power			-
17	AUX_CH_-	IO	LVDS	C23	BV61
18	TX_HPD_3V3	I		C26	BU68
19	GND	Power			-
20	+3.3V	Power			-

PCIe Interface – J8

The MitySOM-A5E Mini Development Board provides a standard x4 PCIe Host Slot, J8. The interface will support up to PCIe Gen 4 speeds.

Table 6 J8 Connector Pin Assignments

J8	Signal	Type	Standard	J1 Pin	FPGA Pin	Notes
A1	GND	Power				
B1	+12V	Power				
A2	+12V	Power				
B2	+12V	Power				
A3	+12V	Power				
B3	+12V	Power				
A4	GND	Power				
B4	GND	Power				
A5	JTAG_TCK	O				Pulled to GND via 2.2K resistor
B5	PCIE I2C1_SCL_3V3	IO	LVC MOS/OD	B28	BR74	
A6	JTAG_TDI	O				N/C
B6	PCIE I2C1_SDA_3V3	IO	LVC MOS/OD	B29	BL78	
A7	JTAG_TDO	I				N/C
B7	GND	Power				
A8	JTAG_TMS	O				N/C
B8	+3.3V	Power				
A9	+3.3V	Power				
B9	JTAG_TRSTn	O				Pulled to +3.3V via 10K resistor
A10	+3.3V	Power				
B10	+3.3VAUX	Power				
A11	PCIE_PERST_SJn_3V3	O	LVC MOS/OD			Pulled to +3.3V via 10K resistor
B11	PCIE_WAKEn_3V3	O	LVC MOS/OD	B30	BN78	Pulled to +3.3V via 10K resistor
A12	GND	Power				
B12	RSVD1					N/C
A13	PCIE_CLK0_P	O	HCSL			Connected to U12
B13	GND	Power				
A14	PCIE_CLK0_N	O	HCSL			Connected to U12
B14	PET0_P	O	HCSL	H14	BA9	
A15	GND	Power				
B15	PET0_N	O	HCSL	H15	BA13	
A16	PCIE_RX_0_P	I	HCSL	F10	BB1	
B16	GND	Power				
A17	PCIE_RX_0_N	I	HCSL	F11	BB3	
B17	PCIE1_X1_PRSNT2n_3V3		LVC MOS/OD	B31	BR78	
A18	GND	Power				
B18	GND	Power				
A19	RSVD2					N/C
B19	PET1_P	O	HCSL	H10	AW9	
A20	GND	Power				
B20	PET1_N	O	HCSL	H11	AW13	
A21	PCIE_RX_1_P	I	HCSL	G08	AY1	
B21	GND	Power				
A22	PCIE_RX1_N	I	HCSL	G09	AY3	
B22	GND	Power				
A23	GND	Power				
B23	PET2_P	O	HCSL	H06	AU9	
A24	GND	Power				
B24	PET2_N	O	HCSL	H07	AU13	
A25	PCIE_RX_2_P	I	HCSL	F06	AV1	
B25	GND	Power				
A26	PCIE_RX_2_N	I	HCSL	F07	AV3	
B26	GND	Power				
A27	GND	Power				
B27	PET3_P	O	HCSL	H02	AR9	
A28	GND	Power				
B28	PET3_N	O	HCSL	H03	AR13	
A29	PCIE_RX_3_P	I	HCSL	G04	AT1	
B29	GND	Power				
A30	PCIE_RX_3_N	I	HCSL	G05	AT3	
B30	RSVD3					N/C

J8	Signal	Type	Standard	J1 Pin	FPGA Pin	Notes
A31	GND	Power				
B31	PCIE1_X4_PRSENT2n_3V3	O	LVC MOS/OD	C19	BU73	Connected to +3.3V via 10K pullup
A32	RSVD4					N/C
B32	GND	Power				

Note: The PCIe HCSL reference clock is generated by U12 on the development board, and is on pins G16 (GXBR_REFCLK_P) and G17 (GXBR_REFCLK_P) of J1.

SFP+ Interface – J6

The MitySOM-A5E Mini Development Board provides a standard enhanced Small Form-factor Pluggable (SFP+) interface on J6.

Table 7 J6 Connector Pin Assignments

J6	Signal	Type	Standard	J1 Pin	FPGA Pin	Notes
1	GND	Power				
2	SFP TX FLT 3V3	I	LVC MOS	A25	BP81	4.7K pullup to +3.3V
3	SFP TX DIS 3V3	O	LVC MOS	A26	BM80	4.7K pullup to +3.3V
4	SFP SDA 3V3	IO	LVC MOS	A27	BP80	4.7K pullup to +3.3V
5	SFP SCL 3V3	IO	LVC MOS	A28	BU80	4.7K pullup to +3.3V
6	SFP MOD0 PRSNT N 3V3	I	LVC MOS	A29	BD81	4.7K pullup to +3.3V
7	SFP RS0 3V3	O	LVC MOS	A30	BU78	4.7K pullup to +3.3V
8	SFP LOS 3V3	I	LVC MOS	B26	BF78	4.7K pullup to +3.3V
9	GND	Power				
10	GND	Power				
11	GND	Power				
12	SFP RX -	I	HSSI / SFI	A49	P81	
13	SFP RX +	I	HSSI / SFI	A48	P79	
14	GND	Power				
15	+3.3V	Power				
16	+3.3V	Power				
17	GND	Power				
18	SFP TX +	O	HSSI / SFI	B47	Y81	
19	SFP TX -	O	HSSI / SFI	B46	Y79	
20	GND	Power				

Camera MIPI Interface – J7

The MitySOM-A5E Mini Development Board provides a 22-pin 0.5 mm pitch flat flex connector, J7, to interface with the Agilex 5E.

Table 8: Camera Mipi Connector Pin Assignments (J7)

J11 Pin	Signal	Type	Standard	J1 Pin	FPGA Pin	Notes
1	+3.3V	Power	-			Max 500 mA
2	CAM1 SDA 3V3	I/O	LVC MOS/OD	B25	BH74	
3	CAM1 SCL 3V3	I/O	LVC MOS/OD	B24	BF74	
4	GND	Power	-			
5	CAM1 IO2 3V3	I/O	LVC MOS	B23	BE69	
6	CAM1 IO1 3V3	I/O	LVC MOS	B22	BJ69	
7	GND	Power	-			
8	CAM1 CSI RX3 P	I	DPHY RX	A17	P27	
9	CAM1 CSI RX3 N	I	DPHY RX	A18	P25	
10	GND	Power	-			
11	CAM1 CSI RX2 P	I	DPHY RX	B15	V30	
12	CAM1 CSI RX2 N	I	DPHY RX	B16	V27	
13	GND	Power	-			
14	CAM1 CSI RXCLK P	I	DPHY RX	A14	P33	
15	CAM1 CSI RXCLK N	I	DPHY RX	A15	V33	
16	GND	Power	-			
17	CAM1 CSI RX1 P	I	DPHY RX	B13	V35	
18	CAM1 CSI RX1 N	I	DPHY RX	B12	P35	
19	GND	Power	-			
20	CAM1 CSI RX0 P	I	DPHY RX	A12	V41	
21	CAM1 CSI RX0 N	I	DPHY RX	A11	P39	
22	GND	Power	-			

10/100/1000 Ethernet Interface – J2

The MitySOM-A5E Mini Development Board provides an RJ-45 connection for a Gigabit 10/100/1000 Ethernet connection. This connection follows standard TIA/EIA-568B pin-out. By default, the Ethernet PHY will auto-negotiate with its link partner. The J2 connector corresponds to EMAC1 on the Agilex 5E.

Table 9: EMAC1 Signal Connections

Signal	Type	J1 Pin	FPGA Pin
EMAC1 RXD0	I	E42	B65
EMAC1 RXD1	I	D39	K62
EMAC1 RXD2	I	D42	B61
EMAC1 RXD3	I	D45	A61
EMAC1 RX CLK	I	E47	A51
EMAC1 RX CTL	I	F41	K67
EMAC1 TXD0	O	E46	B57
EMAC1 TXD1	O	E41	F70
EMAC1 TXD2	O	D44	A65
EMAC1 TXD3	O	F40	H62
EMAC1 TX CLK	O	D43	B68
EMAC1 TX CTL	O	E44	A63
I2C EMAC1 SDA	I/O	E48	A49
I2C EMAC1 SCL	O	D41	F67

JTAG Interface – J3

Table 10 lists the connections to the JTAG interface connector. The connector is intended to support standard Altera USB-Blaster II type JTAG pods.

Table 10 J3 JTAG Pin Assignments

Pin	Schematic Signal	J1 Pin	Type	Standard
1	TCK	H29	I	1.8 V LVCMOS
2	GND	-	Power	-
3	TDO	H30	O	1.8 V LVCMOS
4	+1.8V	-	Power	-
5	TMS	H31	I	1.8 V LVCMOS
6	N/C	-	-	-
7	N/C	-	-	-
8	N/C	-	-	-
9	TDI	H32	I	1.8 V LVCMOS
10	GND	-	Power	-

Fan Header Interface – J15

This header interfaces with the Agilex 5E processor cooling fan. Table 11 lists the connections to the fan header interface. Note: The fan is driven using an active high signal from the SOM pin D47 (FPGA pin B47)

Table 11 J15 Fan Header Pin Assignments

Pin	Schematic Signal	J1 Pin	Type	Standard	Notes
1	+5V	-	Power	-	
2	GND	-	Power	-	Open drain fan enable

IO Expansion Header –P8, P9, J11, J13, J14

The P8 and P9 IO expansion headers provide additional GPIO outputs that can interface with external devices. P8 and P9 are electrically and mechanically compatible with the [BeagleBone® Cape connector](#), but may be used for other board designs as required. The J14 header provides additional GPIO as well as a connection to the I3C bus that is connected to the Agilex 5E. J11 and J13 provide access to the I2C1 bus and the I3C0 bus, respectively.

Table 12 P9 IO Expansion Header Pin Assignments

Pin	Schematic Signal	J1 Pin	Type	Standard	Notes
1	GND	-	Power	-	
2	GND	-	Power	-	
3	+3.3V	-	Power	-	
4	+3.3V	-	Power	-	
5	N/C	-	-	-	
6	N/C	-	-	-	
7	+5.0V	-	Power	-	
8	+5.0V	-	Power	-	
9	HVIO_6D_1	C13	I/O	3.3V CMOS	
10	HVIO_6C_5	E14	I/O	3.3V CMOS	
11	HVIO_6D_2	F14	I/O	3.3V CMOS	
12	HVIO_6C_6	F18	I/O	3.3V CMOS	
13	HVIO_6D_3	C10	I/O	3.3V CMOS	
14	HVIO_6C_7	E17	I/O	3.3V CMOS	
15	HVIO_6D_4	D11	I/O	3.3V CMOS	
16	HVIO_6C_8	E15	I/O	3.3V CMOS	

Pin	Schematic Signal	J1 Pin	Type	Standard	Notes
17	HVIO 6C 20	F19	I/O	3.3V CMOS	
18	HVIO 6C 9	C14	I/O	3.3V CMOS	
19	HVIO 6C 19	E20	I/O	3.3V CMOS	
20	HVIO 6C 10	C11	I/O	3.3V CMOS	
21	HVIO 6D 5	E13	I/O	3.3V CMOS	
22	HVIO 6C 11	D12	I/O	3.3V CMOS	
23	HVIO 6D 6	F13	I/O	3.3V CMOS	
24	HVIO 6C 12	C12	I/O	3.3V CMOS	
25	HVIO 6D 7	D09	I/O	3.3V CMOS	
26	HVIO 6C 13	F17	I/O	3.3V CMOS	
27	HVIO 6D 8	E12	I/O	3.3V CMOS	
28	HVIO 6C 14	D13	I/O	3.3V CMOS	
29	HVIO 6D 9	C08	I/O	3.3V CMOS	
30	HVIO 6C 15	F15	I/O	3.3V CMOS	
31	HVIO 6D 10	C09	I/O	3.3V CMOS	
32	+1.8V	-	Power		
33	HVIO 6D 11	E09	I/O	3.3V CMOS	
34	GND	-	Power		
35	HVIO 6D 12	E05	I/O	3.3V CMOS	
36	HVIO 6C 16	E19	I/O	3.3V CMOS	
37	HVIO 6D 13	E08	I/O	3.3V CMOS	
38	HVIO 6C 17	E18	I/O	3.3V CMOS	
39	HVIO 6D 14	C07	I/O	3.3V CMOS	
40	HVIO 6C 18	E16	I/O	3.3V CMOS	
41	HVIO 6D 15	D07	I/O	3.3V CMOS	
42	HVIO 6D 16	E04	I/O	3.3V CMOS	
43	GND	-	Power	-	
44	GND	-	Power	-	
45	GND	-	Power	-	
46	GND	-	Power	-	

Table 13 P8 IO Expansion Header Pin Assignments

Pin	Schematic Signal	J1 Pin	Type	Standard	Notes
1	GND	-	Power	-	
2	GND	-	Power	-	
3	HVIO 6A 1	F30	I/O	3.3V CMOS	
4	HVIO 6A 3	E30	I/O	3.3V CMOS	
5	HVIO 6A 2	F28	I/O	3.3V CMOS	
6	HVIO 6A 4	F29	I/O	3.3V CMOS	
7	HVIO 6A 13	E22	I/O	3.3V CMOS	
8	HVIO 6C 1	C05	I/O	3.3V CMOS	
9	HVIO 6A 14	E25	I/O	3.3V CMOS	
10	HVIO 6C 2	D14	I/O	3.3V CMOS	
11	HVIO 6A 15	F25	I/O	3.3V CMOS	
12	HVIO 6C 3	D10	I/O	3.3V CMOS	
13	HVIO 6A 16	F21	I/O	3.3V CMOS	
14	HVIO 6C 4	F16	I/O	3.3V CMOS	
15	HVIO 6A 17	F22	I/O	3.3V CMOS	
16	HVIO 6A 19	F23	I/O	3.3V CMOS	
17	HVIO 6A 18	E23	I/O	3.3V CMOS	
18	HVIO 6A 20	E26	I/O	3.3V CMOS	
19	HVIO 6A 5	E31	I/O	3.3V CMOS	
20	HVIO 6A 9	E28	I/O	3.3V CMOS	
21	HVIO 6A 6	E27	I/O	3.3V CMOS	
22	HVIO 6A 10	E24	I/O	3.3V CMOS	
23	HVIO 5A 18	B27	I/O	3.3V CMOS	

Pin	Schematic Signal	J1 Pin	Type	Standard	Notes
24	HVIO 6A 11	F27	I/O	3.3V CMOS	
25	HVIO 6A 8	F26	I/O	3.3V CMOS	
26	HVIO 6A 12	F24	I/O	3.3V CMOS	
27	HVIO 6B 1	G20	I/O	3.3V CMOS	
28	HVIO 6B 11	G26	I/O	3.3V CMOS	
29	HVIO 6B 2	H18	I/O	3.3V CMOS	
30	HVIO 6B 12	H22	I/O	3.3V CMOS	
31	HVIO 6B 3	G21	I/O	3.3V CMOS	
32	HVIO 6B 13	H23	I/O	3.3V CMOS	
33	HVIO 6B 4	G22	I/O	3.3V CMOS	
34	HVIO 6B 14	H25	I/O	3.3V CMOS	
35	HVIO 6B 5	G23	I/O	3.3V CMOS	
36	HVIO 6B 15	H26	I/O	3.3V CMOS	
37	HVIO 6B 6	H19	I/O	3.3V CMOS	
38	HVIO 6B 16	H24	I/O	3.3V CMOS	
39	HVIO 6B 7	G24	I/O	3.3V CMOS	
40	HVIO 6B 17	G28	I/O	3.3V CMOS	
41	HVIO 6B 8	H20	I/O	3.3V CMOS	
42	HVIO 6B 18	G27	I/O	3.3V CMOS	
43	HVIO 6B 9	G25	I/O	3.3V CMOS	
44	HVIO 6B 19	G29	I/O	3.3V CMOS	
45	HVIO 6B 10	H21	I/O	3.3V CMOS	
46	HVIO 6B 20	H27	I/O	3.3V CMOS	

Table 14 J14 IO Expansion Header Pin Assignments

Pin	Schematic Signal	J1 Pin	Type	Standard	Notes
1	+3.3V	-	Power	-	
2	+3.3V	-	Power	-	
3	HVIO 5B 15	C27	I/O	3.3V CMOS	
4	HVIO 5B 10	D26	I/O	3.3V CMOS	
5	HVIO 5B 2	D22	I/O	3.3V CMOS	
6	HVIO 5B 12	D27	I/O	3.3V CMOS	
7	HVIO 5B 5	D23	I/O	3.3V CMOS	
8	N/C	-	-	-	
9	HVIO 5B 6	D24	I/O	3.3V CMOS	
10	I3C0 SDA 3V3	D46	I/O	3.3V CMOS	Signal passes through a level translator
11	HVIO 5B 11	D25	I/O	3.3V CMOS	
12	I3C0 SCL 3V3	C40	O	3.3V CMOS	Signal passes through a level translator
13	N/C	-	-	-	
14	N/C	-	-	-	
15	GND	-	Power	-	
16	GND	-	Power	-	

Table 15 J11 IO Expansion Header Pin Assignments

Pin	Schematic Signal	J1 Pin	Type	Standard	Notes
1	+1.8V	-	Power	-	
2	I2C1 SCL	A59	I/O	1.8V LVCMOS	
3	I2C1 SDA	B59	I/O	1.8V LVCMOS	
4	GND	-	Power		

Table 16 J13 IO Expansion Header Pin Assignments

Pin	Schematic Signal	J1 Pin	Type	Standard	Notes
1	+1.8V	-	Power	-	
2	I3C0_SDA	D46	I/O	1.8V LVCMOS	
3	I3C0_SCL	C40	I/O	1.8V LVCMOS	
4	GND	-	Power		

Debug Buttons and LEDS

The MitySOM-A5E Mini Development Board includes 2 momentary contact pushbuttons that may be used for user applications and debug. Each button output to the SOM is pulled up to 3.3V and a button press will ground the signal. There are also 2 LEDs that can be driven by the SOM FPGA IO. The FPGA controls are active high to enable the LED.

Table 17 Pushbutton and debug LED pin assignments

Description	Net Name	J1 Pin	Type	Standard	Notes
DEBUG1 Pushbutton / S4	HVIO_6D_17	C06	I	3.3V LVCMOS	Active low when pressed.
DEBUG2 Pushbutton / S5	HVIO_6D_18	D05	I	3.3V LVCMOS	Active low when pressed.
Debug LED 1 / D18	HVIO_6D_20	D06	O	3.3V LVCMOS	Active High to enable LED.
Debug LED 2 / D19	HVIO_6D_19	D08	O	3.3V LVCMOS	Active High to enable LED.

INCLUDED COMPONENTS

The following table lists the components that are included with a MitySOM-A5E Mini Development Kit. See Table 19 for specific ordering information.

Table 18 Included Items

Description	Interface Port	Qty. Included
MitySOM-A5E Mini Development Board	N/A	Qty. 1
MitySOM-A5E Mini Module	J1	Qty. 1
12V 7.5A AC to DC Supply	P1	Qty. 1
Ethernet cable – 7 foot	J2	Qty. 1
USB-A to MicroUSB cable	J5	Qty. 1
Fan +5V with adhesive tape and heat sink	J15	Qty. 1
MicroSD Card	J4	Qty. 1

MitySOM-A5E Development Kit ORDERING INFORMATION

The following table lists the standard MitySOM-A5E Mini Development Kit configurations. For shipping status, availability, and lead time of these or other configurations please contact Critical Link at info@criticallink.com.

Table 19 Standard Development Kit Model Numbers

Dev Kit P/N	Module Included	XCVR	Max A76 Speed	FPGA Size	RAM Size	On-board Flash	SOM Operating Temp
80-001853	A5ED-B16-1X2-MRI	Yes	800 MHz	138 KLE	2GB	32MB	-40°C to +85°C

MECHANICAL INTERFACE DESCRIPTION

Main Board Interface / Mounting

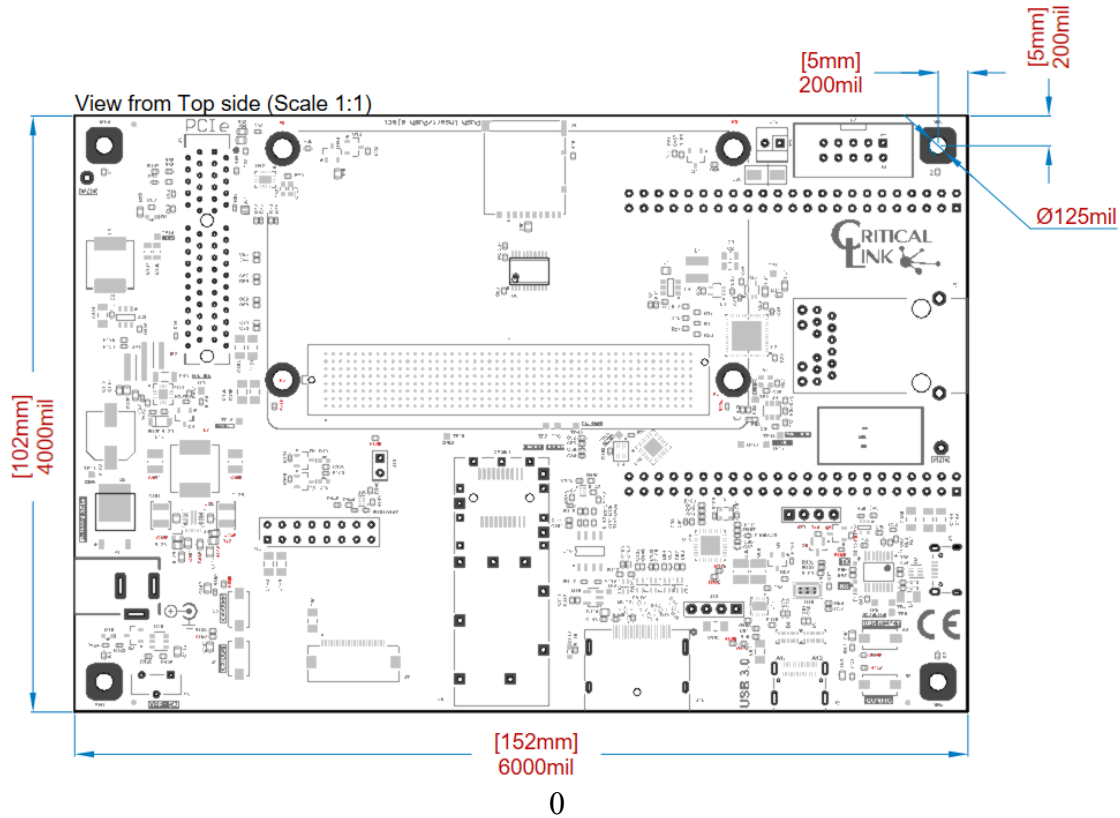


Figure 2: MitySOM-A5E Mini Development Kit Outline and Mounting Hole Locations (Top View)

REVISION HISTORY

Date	Rev	Change Description
29-MAR-2024	1A	Initial revision.
09-AUG-2024	1B	Correct included module PN and updated Table 14
26-SEP-2024	1C	Updates for -2 / Production version of MitySOM (SEAF/SEAM connector, devkit model configuration).
14 Mar 2025	1D	Use MitySOM-A5 Mini terminology.
09 July 2025	1E	Update part numbers for the development kit and included SOM