



# Datasheet



**Passive L1/L2 GNSS Antenna**

**Part No:**  
**HP2258.A**

**Description**

Passive L1/L2 GNSS Antenna  
25mm Single Feed Stacked Patch

**Features:**

Pin Passive Patch Antenna

Bands Covered:

- GPS L1/L2,
- GLONASS G1/G2
- BeiDou B1
- Galileo E1

Dimensions: 25x25x8mm

Pin and Adhesive Mount

RoHS & Reach Compliant

1. Introduction	2
2. Specifications	3
3. Mechanical Drawing	5
4. Antenna Integration Guide	6
5. Packaging	12
6. Antenna Characteristics	13
7. Radiation Patterns	16

---

## Changelog

22

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Ireland & USA  
ISO 9001:2015  
Certified



Taiwan  
ISO 9001:2015  
Certified



046  
IATF16949  
QUALITY MANAGEMENT SYSTEMS



## 1. Introduction



The Taoglas Accura HP2258.A, is a compact multi-band L1/L2 GNSS, high-performance directional antenna for high precision GPS and BeiDou accuracy and fast positioning. It utilizes a 25\*25\*8mm advanced wide-band dual stacked ceramic patch antenna with optimized gain for GPS L1/L2, Galileo, GLONASS and BeiDou bands.

### Typical Applications Include:

- Wearables
- Transportation
- Navigation
- Security
- Autonomous Vehicles
- Precision Agriculture


The HP2258.A has been tuned and tested on a 70 x 70 mm ground plane and exhibits excellent radiation patterns. The HP2258.A has been optimized to cover the bands required for the next generation of L1/L2 GNSS receivers that are currently on the market.

The HP2258.A has a compact size of 25x25x8mm allows it to be used in areas where larger patches won't fit, this makes it an excellent option for compact navigation devices.

Patch antennas can be specifically tuned to customer-specific device environments, subject to NRE and MOQ. Contact your regional Taoglas customer support team to request these services or additional support to integrate and test this antenna's performance in your device.

## 2. Specifications


GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	■	□		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	■	□		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	□	□	□	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	□	□	□
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	■	□	□	
IRNSS (Regional)	L5 1176.45 MHz				
	□				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	□	■	■	□

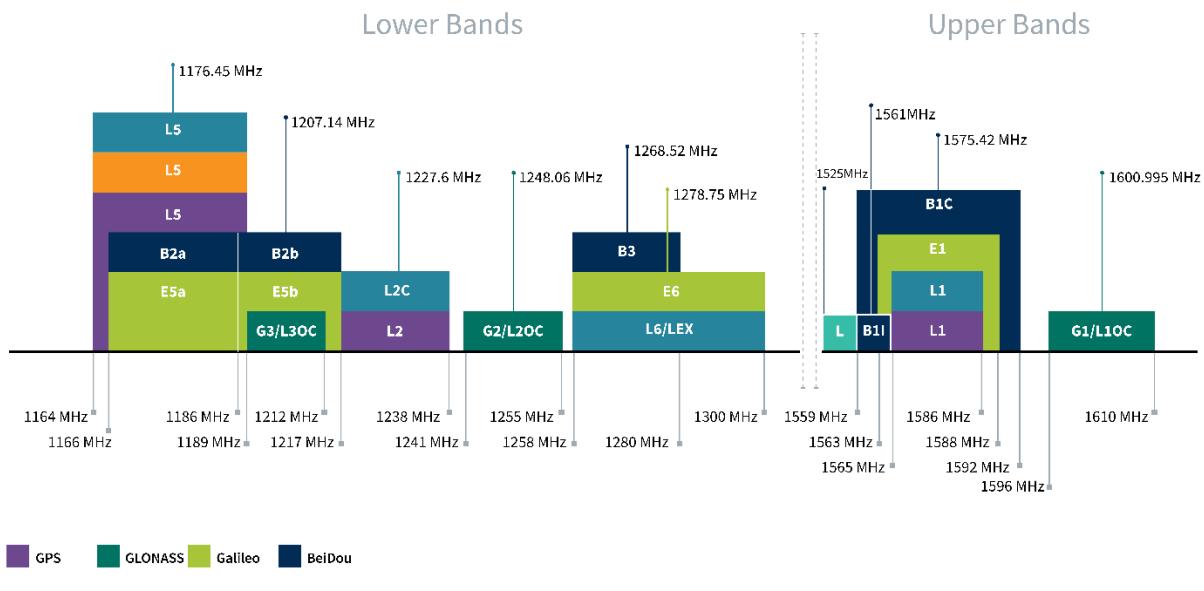

GNSS Electrical					
Frequency (MHz)	GPS_L2	GLONASS_G2	BeiDou_B1	GPS_L1	GLONASS_G1
	1217-1237	1241-1258	1559-1563	1563-1587	1569-1610
Efficiency (%)					
70x70 GND	47.9	49.6	44.5	56.5	56.2
Average Gain (dB)					
70x70 GND	-3.20	-3.04	-3.52	-2.48	-2.51
Peak Gain (dBi)					
70x70 GND	3.08	3.08	1.40	2.56	3.44
Impedance	50 Ω				
Polarization	RHCP				
Radiation Pattern	Directional				
*Tested on 70x70 mm ground plane					

Mechanical	
Dimensions	25*25*8mm
Weight	18g
Material	Ceramic
Connector	Pin & Adhesive Mount
Environmental	
Temperature Range	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH


### 3. Mechanical Drawing

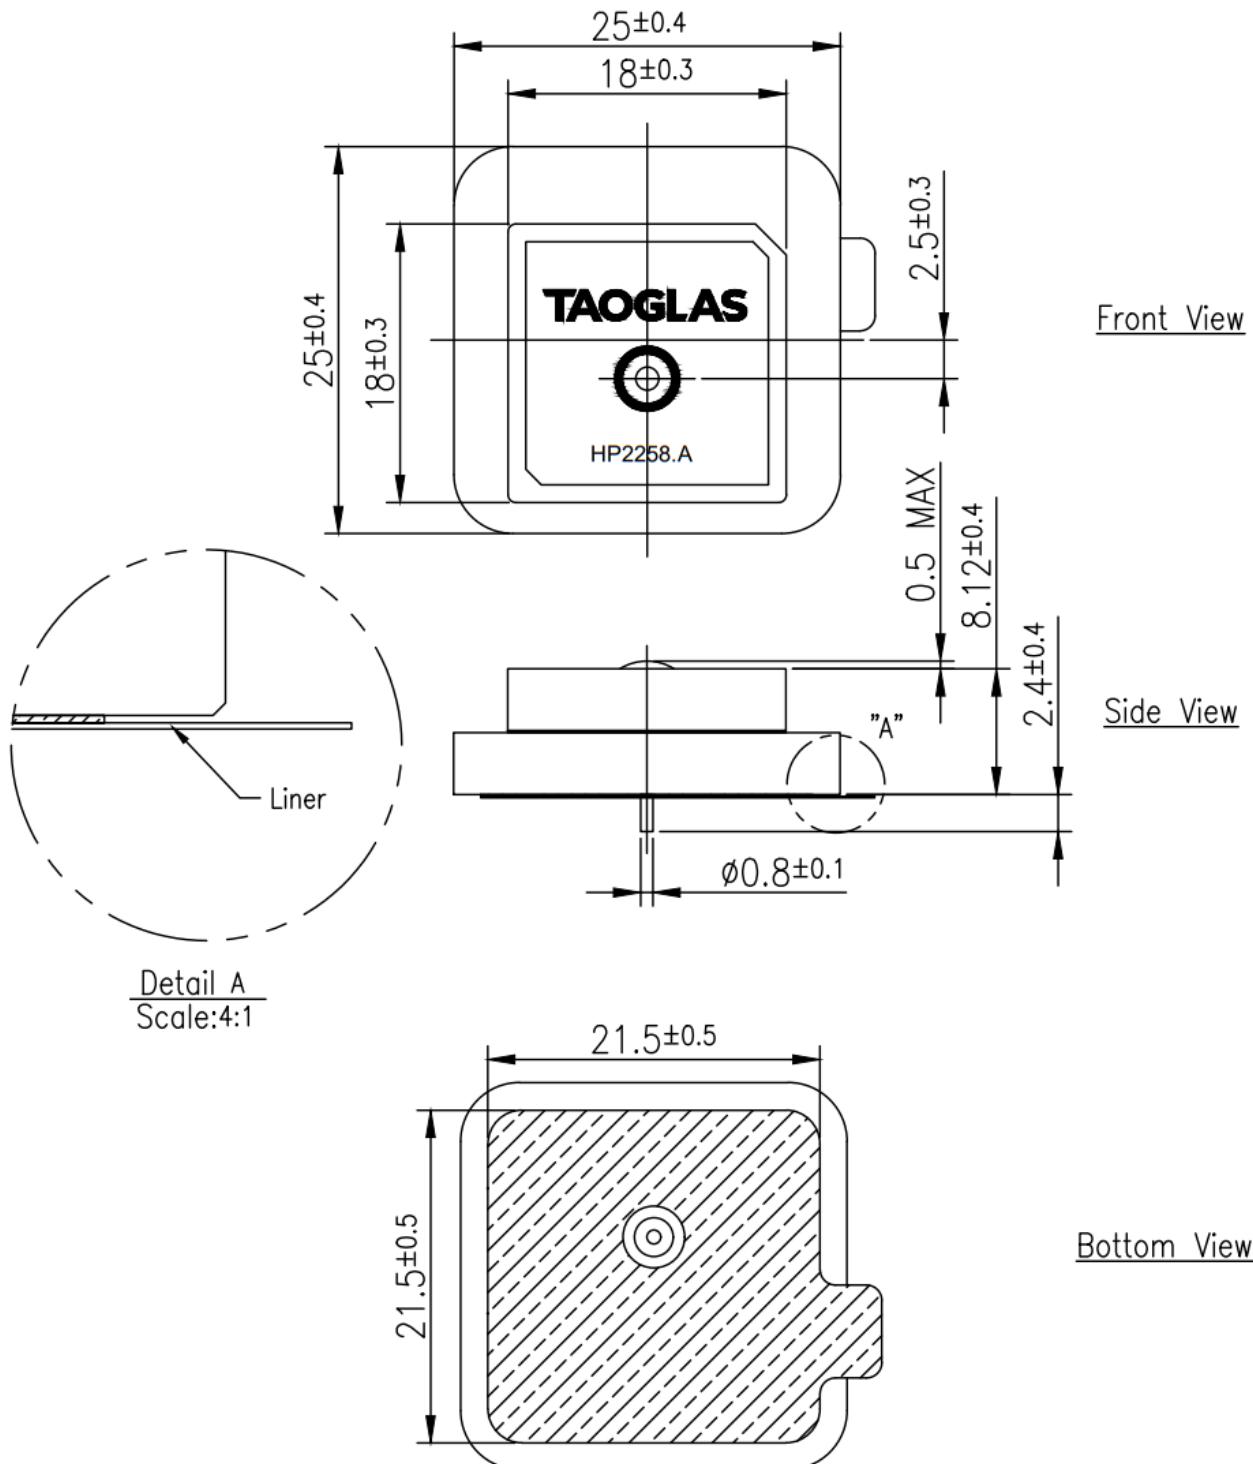

	Name	Material	Finish	QTY
1	Patch(18*18*4)	Ceramic	Clear	1
2	Patch(25*25*4)	Ceramic	Clear	1

## 4. Antenna Integration Guide


The following is an example on how to integrate the HP2258.A into a design. The HP2258.A has one pin which is used for the RF Feed. Taoglas recommends using a minimum of 70x70mm ground plane to ensure optimal performance.

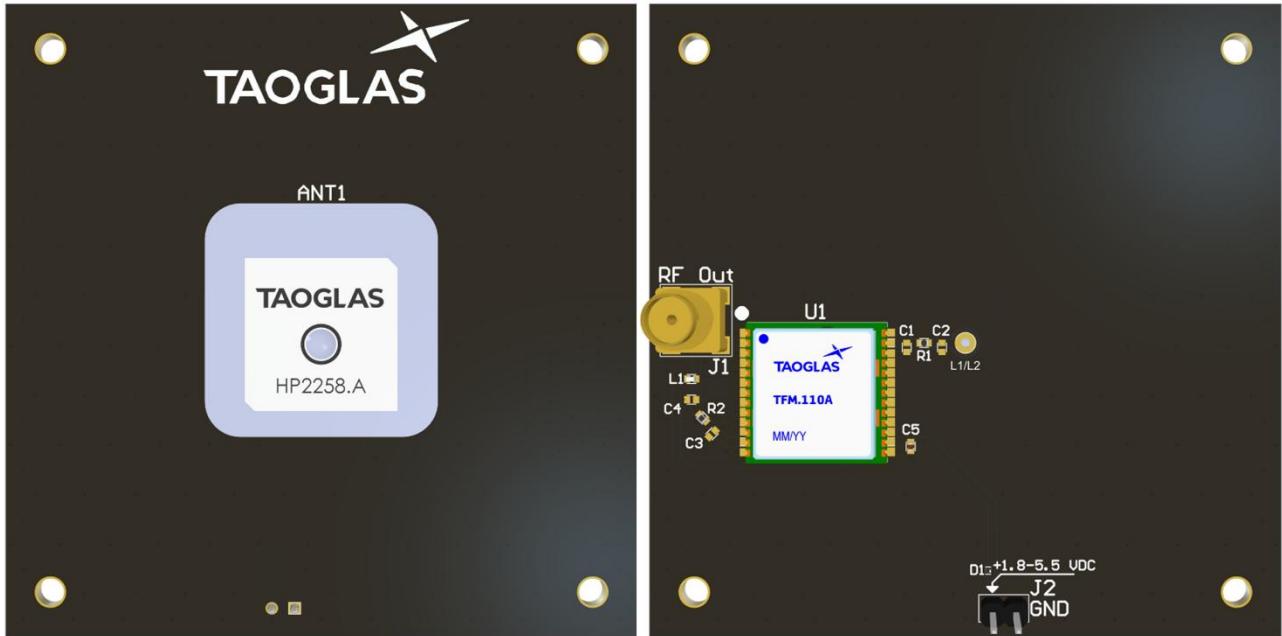

Top view of an example 70x70mm PCB Reference Design.

Please find the Integration files in Altium, 2D formats and the 3D model for the HP2258.A here:  
<https://www.taoglas.com/product/compact-multi-band-l1-l2-gnss-patch-antenna-25x25mm/>

## 4.1 Schematic Symbol and Pin Definitions

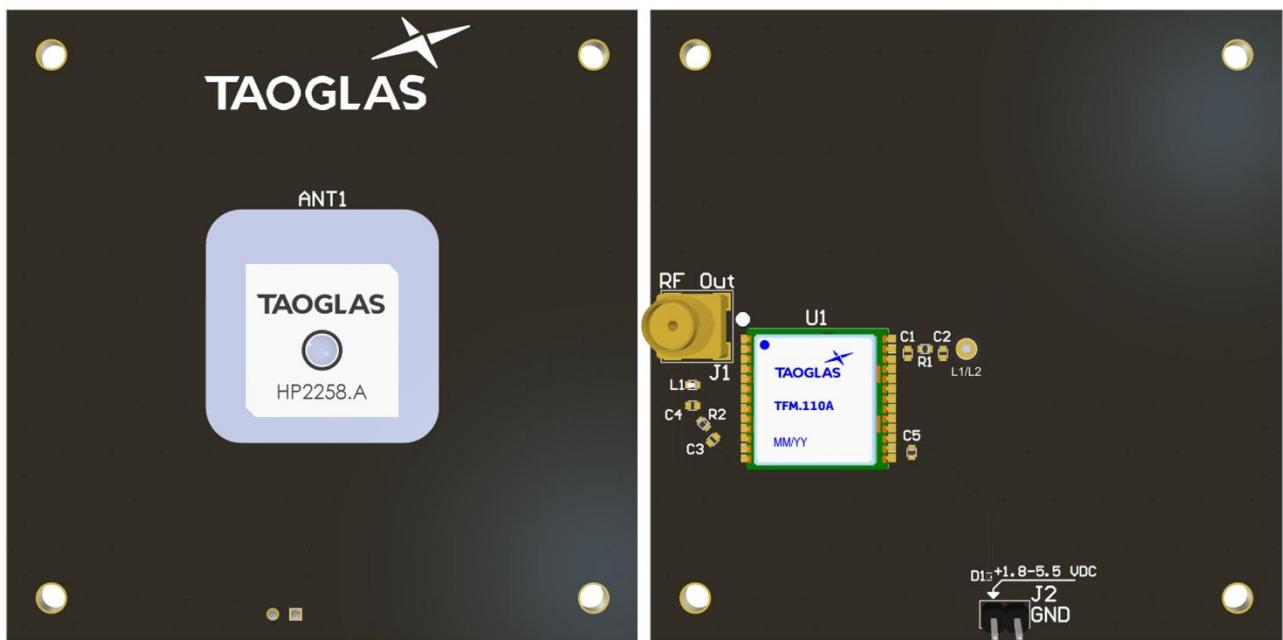


Top and Bottom view of an example 70x70mm PCB Reference Design.

The circuit symbol for a HP2258.A is shown below. The antenna has 1 pin as indicated below.


Pin	Description
1	RF Feed

TAOGLAS\_HP2258.A


ANT1



## 4.2 Antenna Footprint

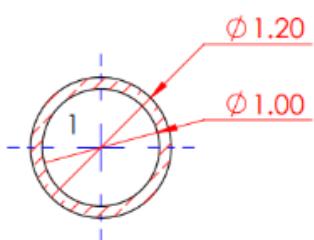


TOP

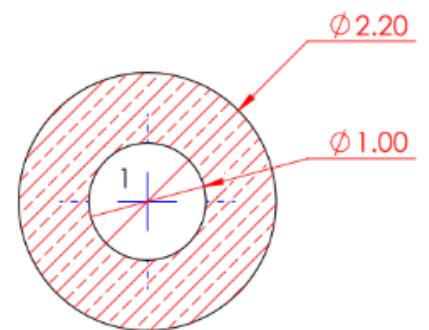


BOTTOM

### 4.3 Copper Clearance

The footprint and clearance on the PCB must comply with the antenna's specification. The PCB layout shown in the diagrams below demonstrates the HP2258. A clearance area for Pin 1 (RF Feed Pad). The bottom copper keep out area only applies to the bottom layer and the top copper keep out area applies to all other layers. There should be a  $\phi 3$ mm copper clearance around the antenna pins on the top side of the PCB with a  $\phi 3.5$ mm copper clearance around the antenna pins on the bottom side.

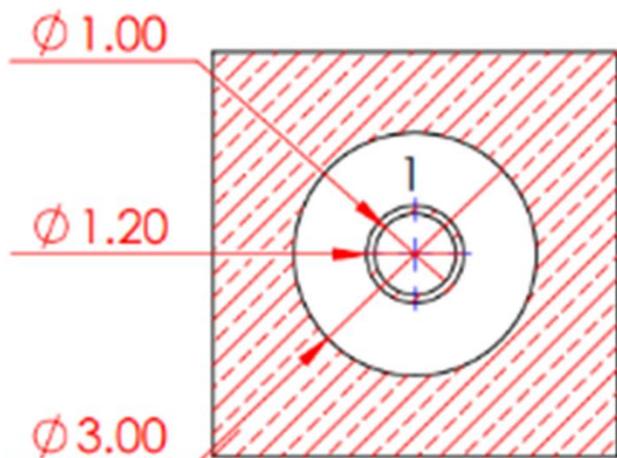


TOP

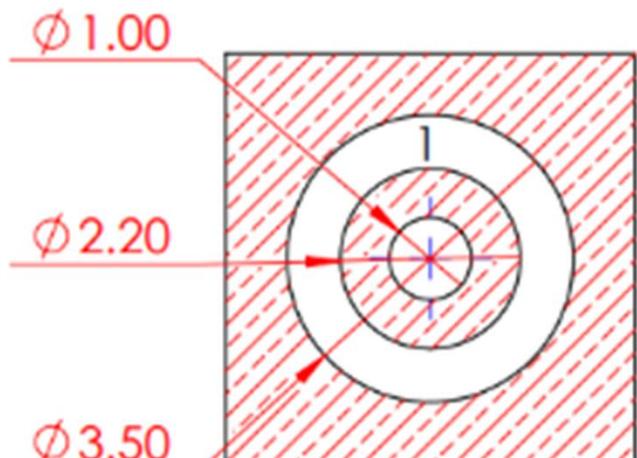

BOTTOM

## 4.4 Antenna Integration


The HP2258.A should be placed in the centre of the PCB to take advantage of the ground plane. The RF traces must maintain a 50 Ohm transmission line. Ground vias should be placed around the copper clearance area and the transmission line. Note that depending on the design application, tuning may be required for optimal performance. This may be achieved using a 'pi' matching network or custom tuning of the patch antenna.

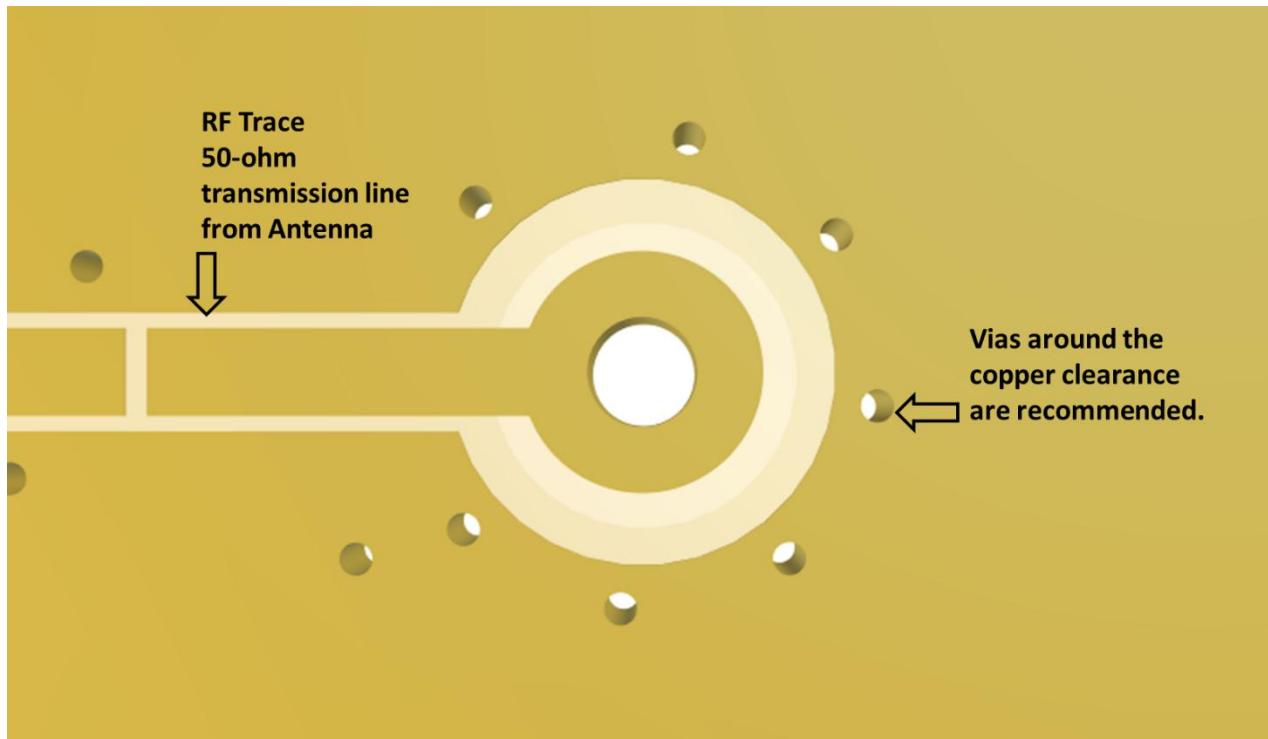


Bottom view of the PCB Reference Design, showing transmission lines and integration notes.

## 4.5 Final Integration

The bottom side image shown below highlights the antenna transmission line. Taoglas recommends using a minimum of 70x70mm ground plane to ensure optimal performance.

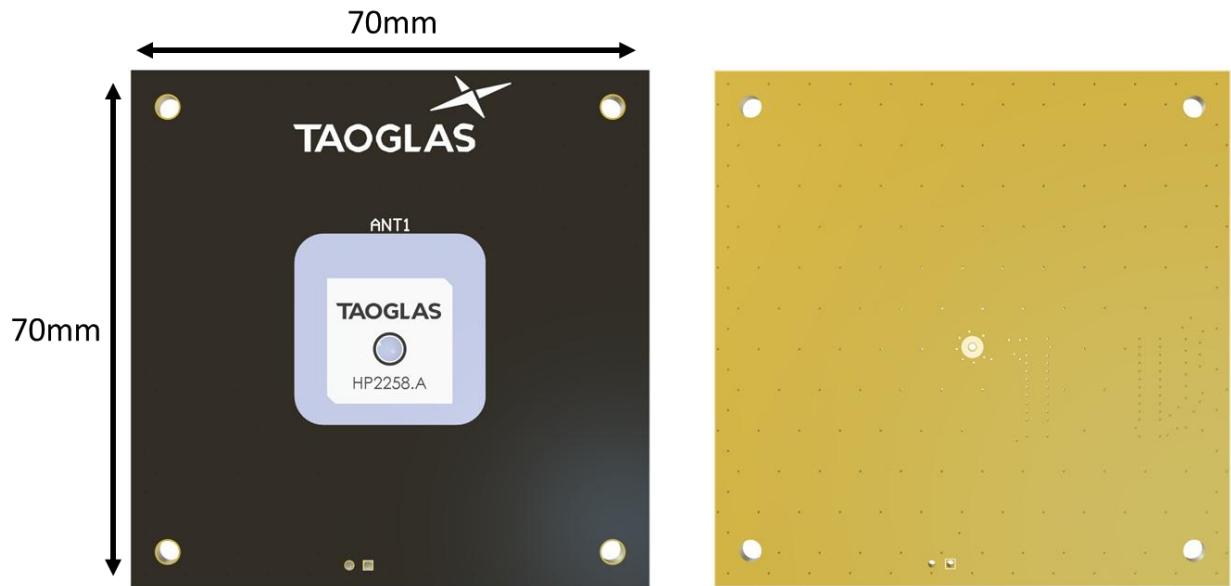


Top Side (70x70mm example PCB Reference Design)

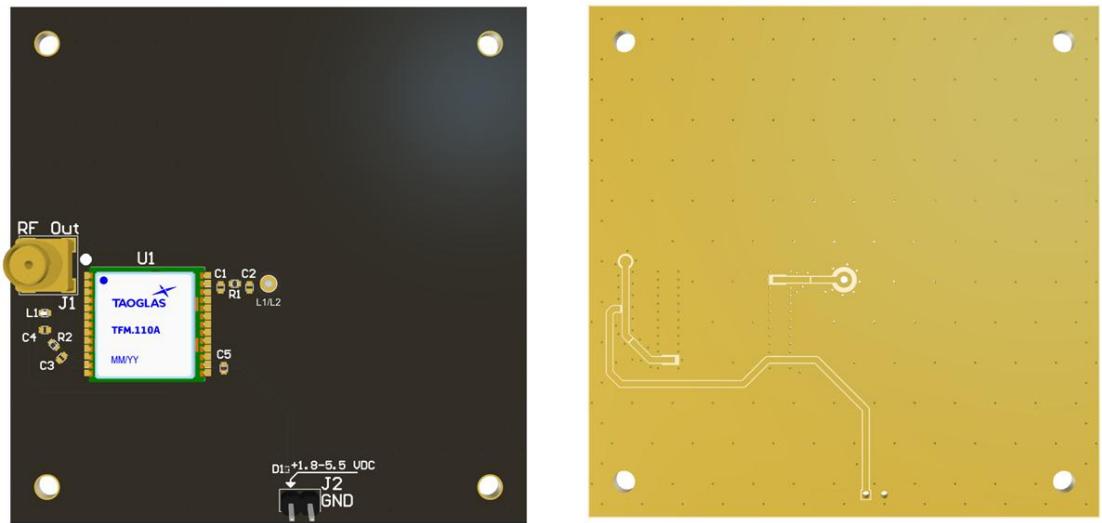


Bottom Side

## 5. Packaging


24pcs HP2258.A per Tray

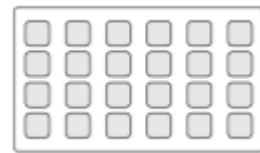

96pcs HP2258.A per Inner Carton  
Dimensions: 263\*154\*96 mm

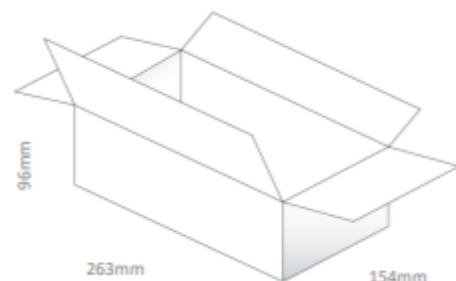


384pcs HP2258.A per Outer Carton Dimensions:  
327\*280\*218 mm

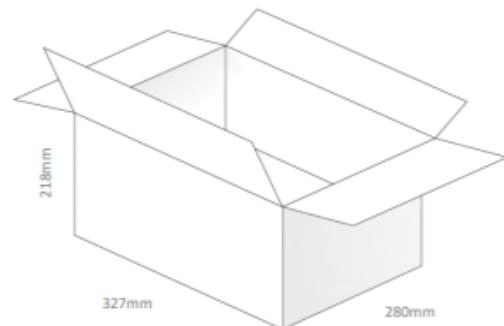


## 6. Antenna Characteristics


### 6.1 Return Loss

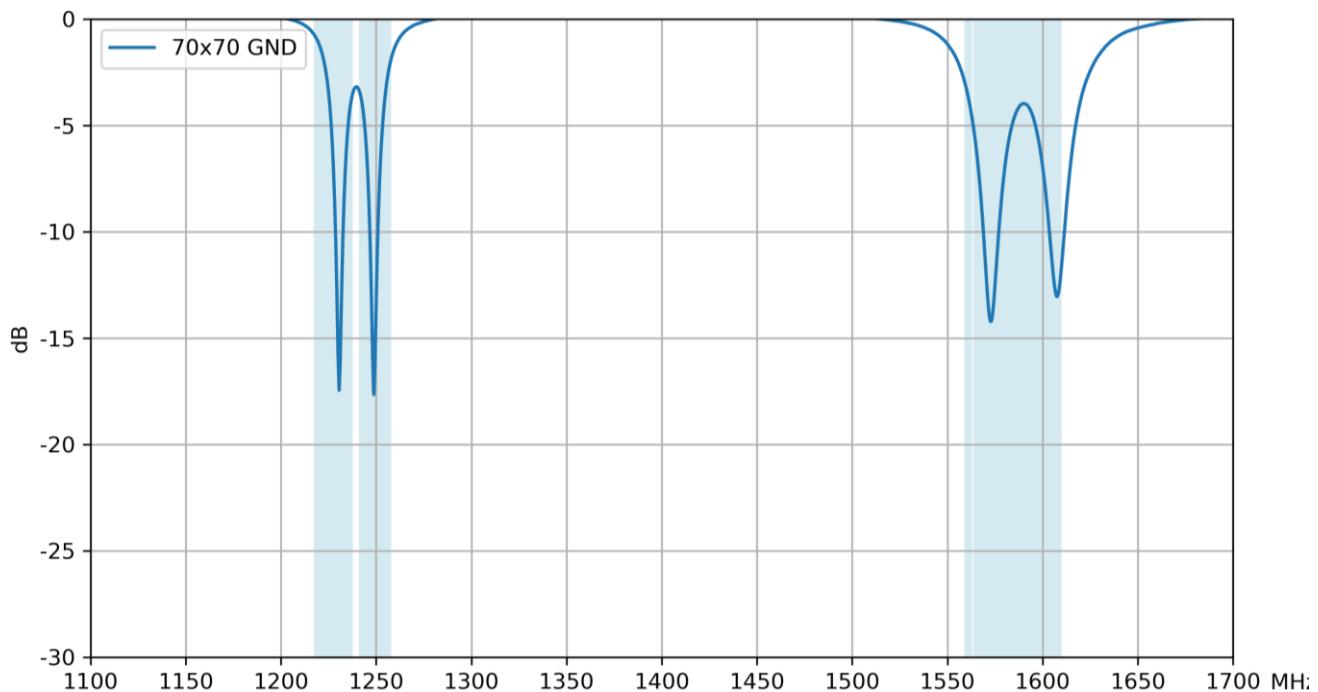


### 6.2 VSWR

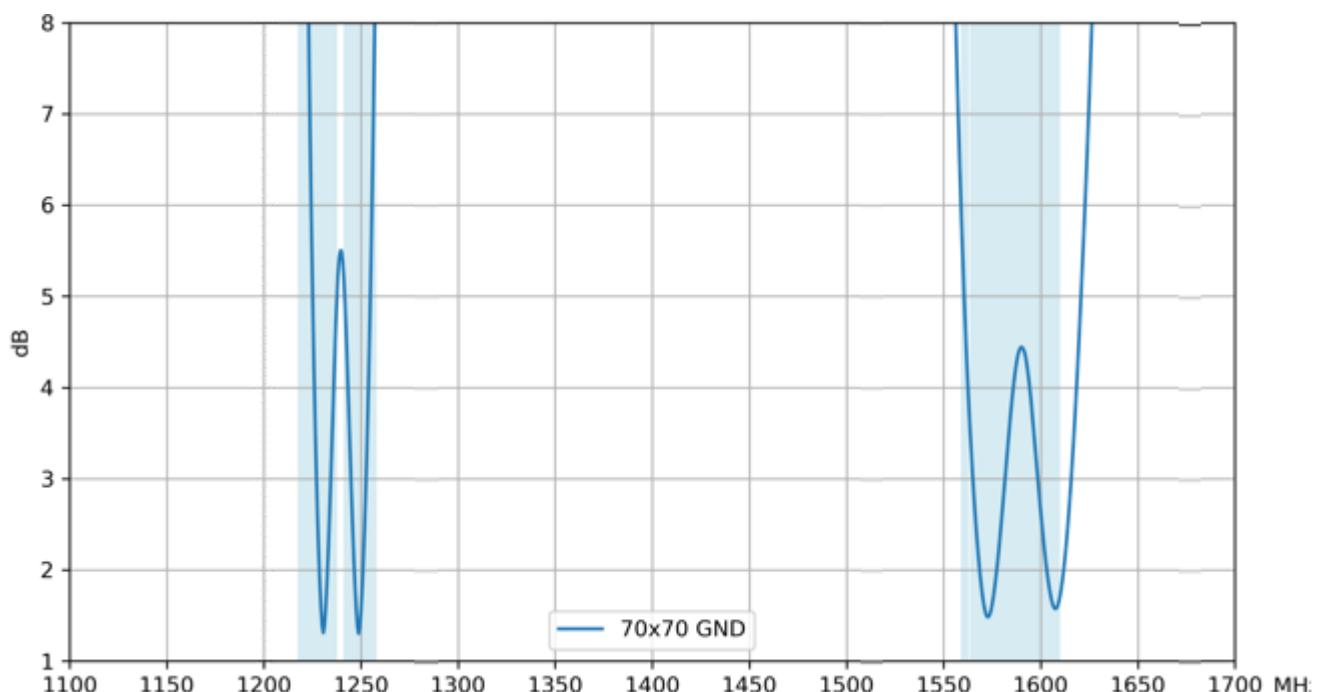


### 6.3 Efficiency

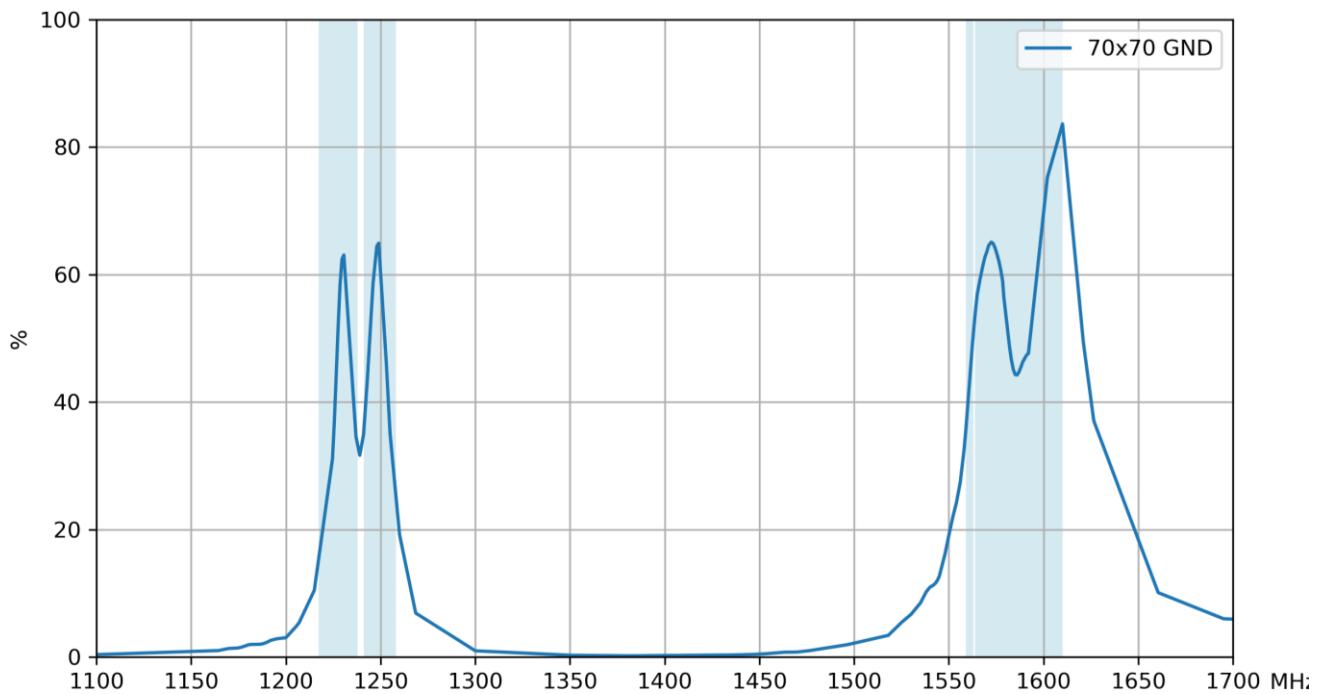

### 6.4 Average Gain


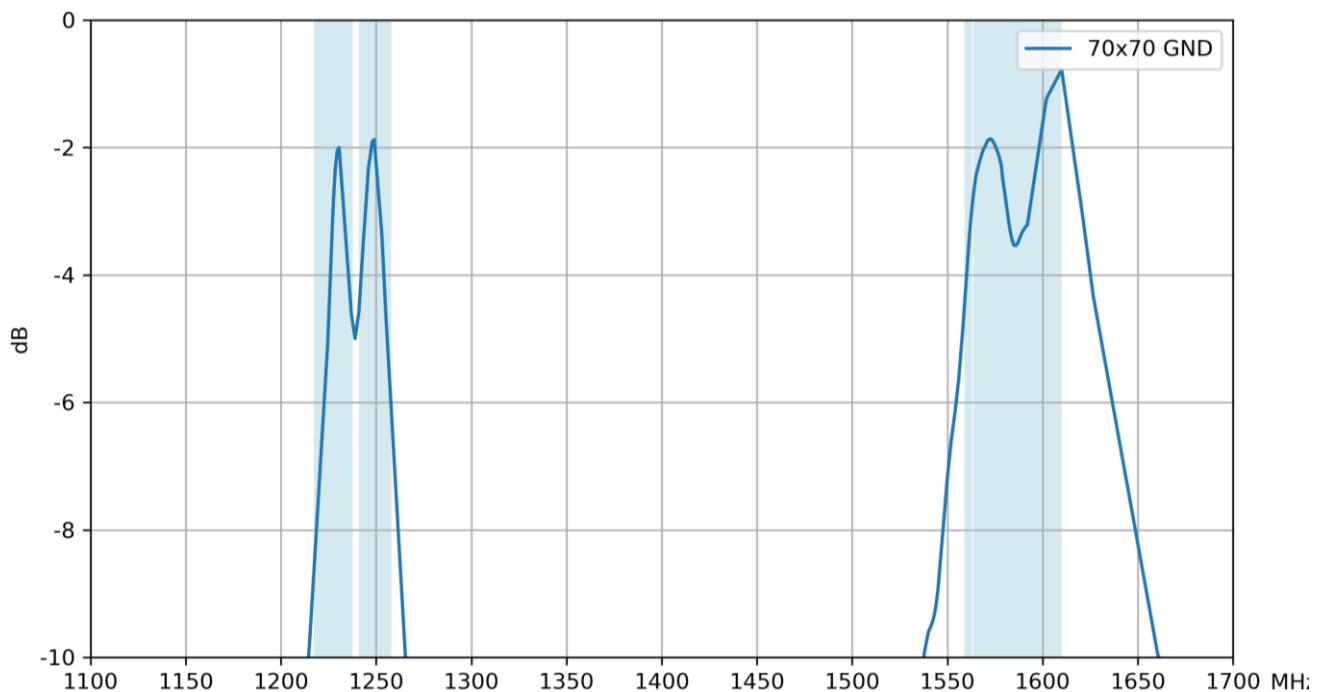


## 6.5 Peak Gain

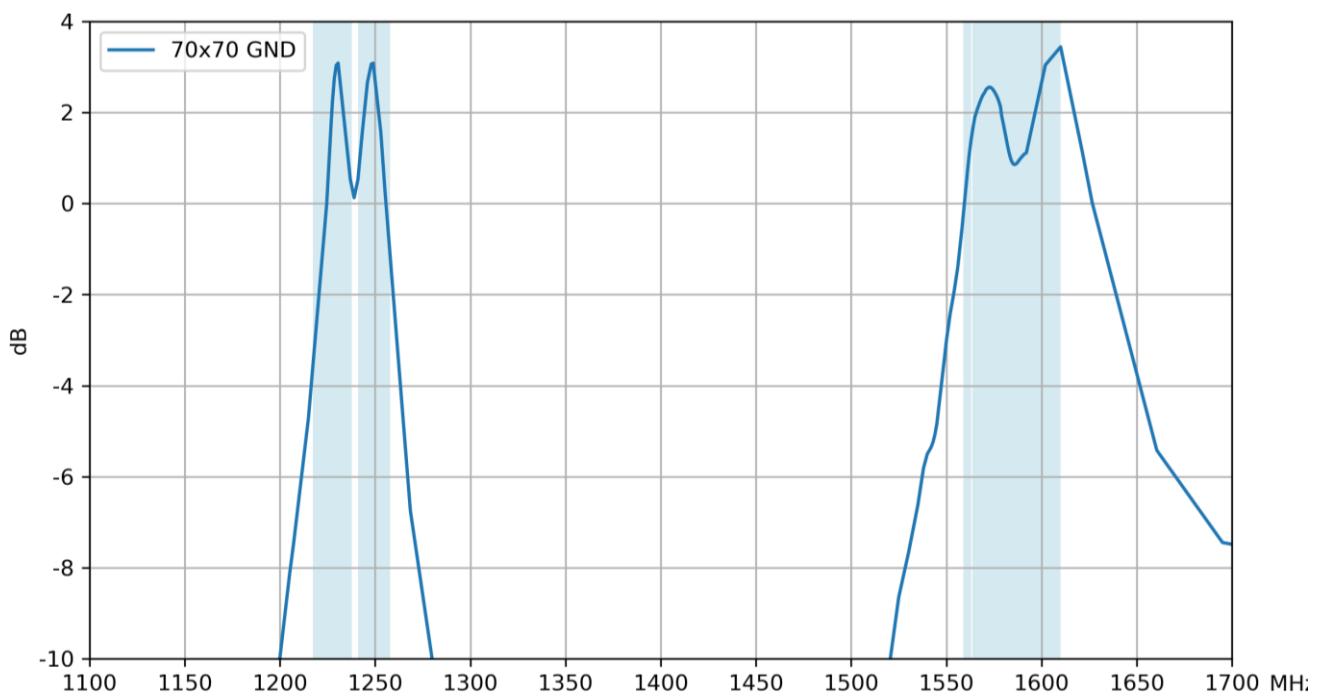



## 7. Radiation Patterns

### 7.1 Test Setup

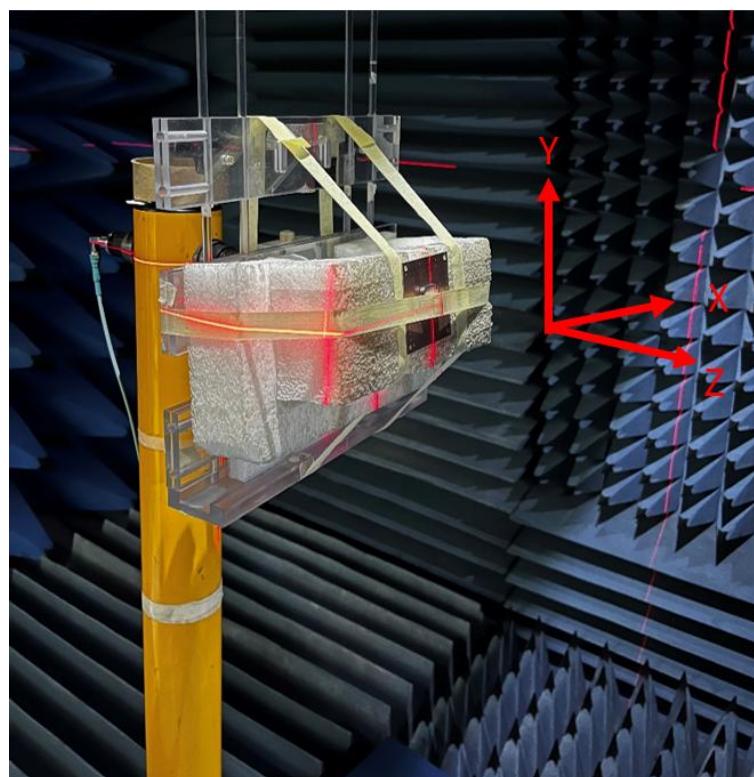
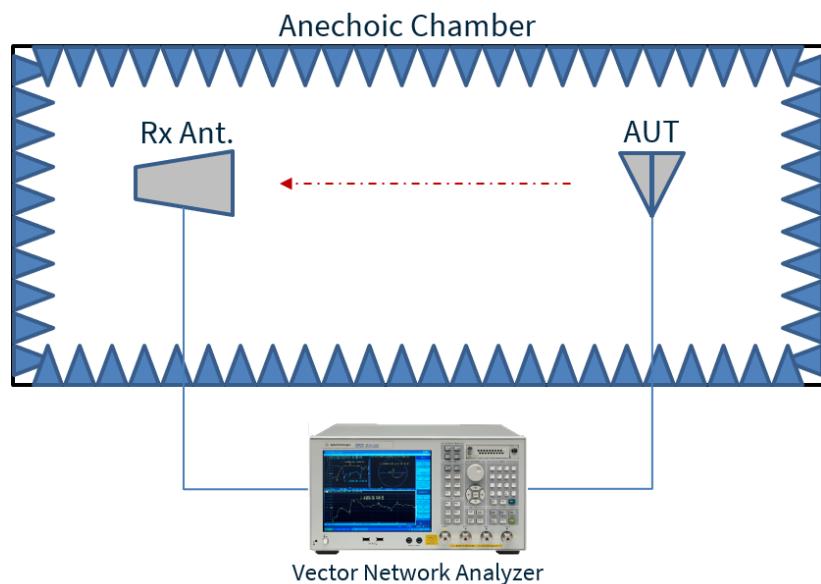


Chamber Test Set-up



## 7.2 Patterns at 1227 MHz

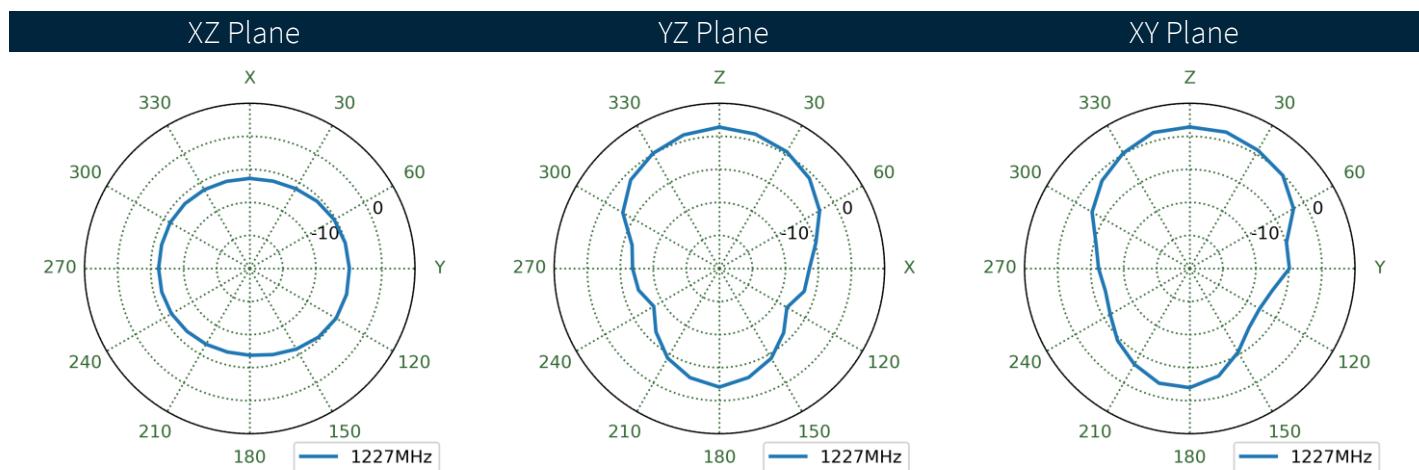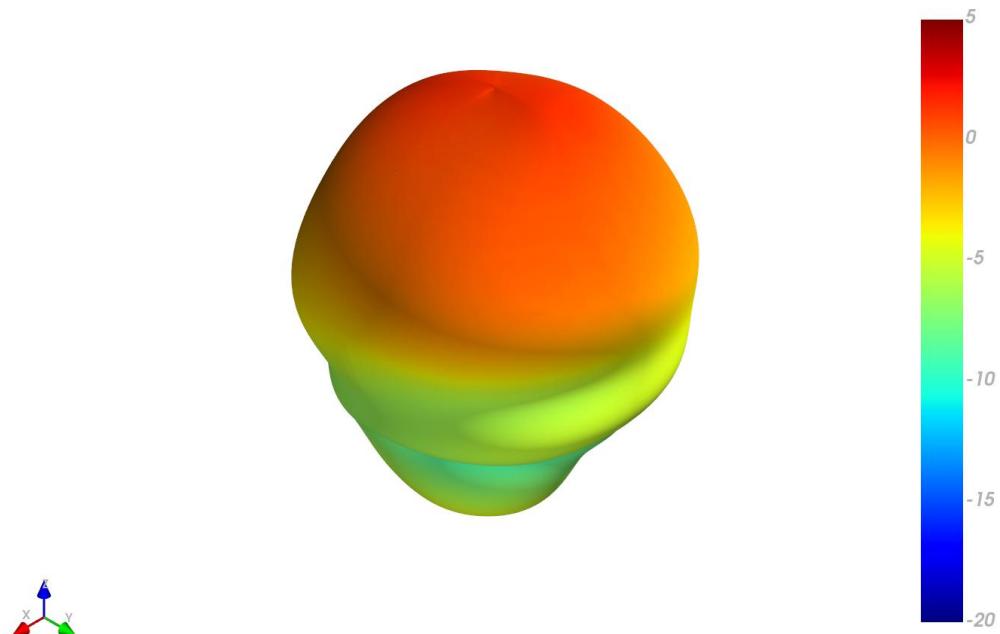



### 7.3 Patterns at 1248 MHz

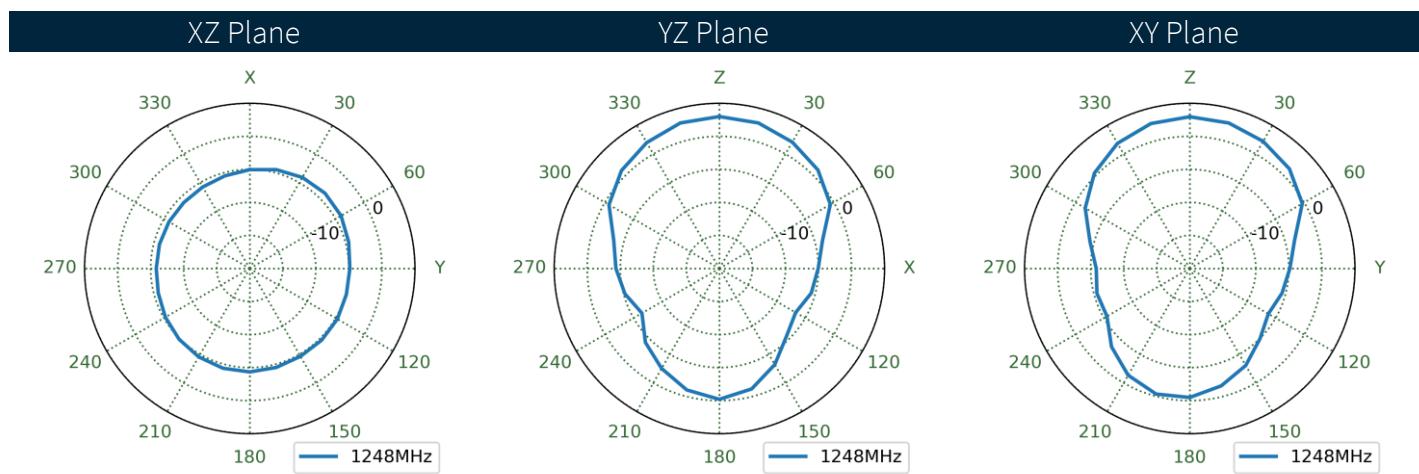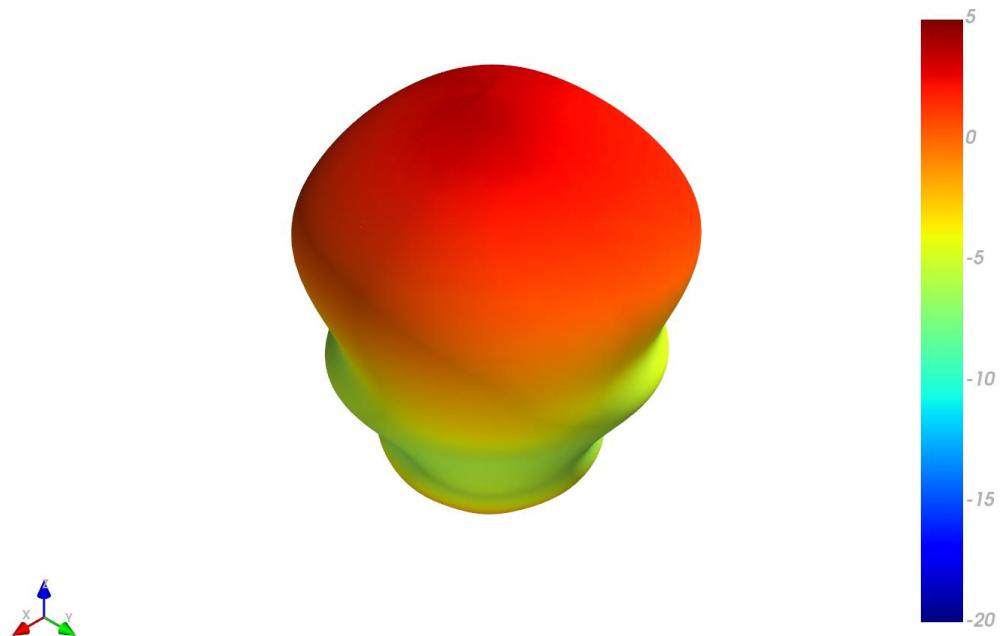



## 7.4 Patterns at 1561 MHz

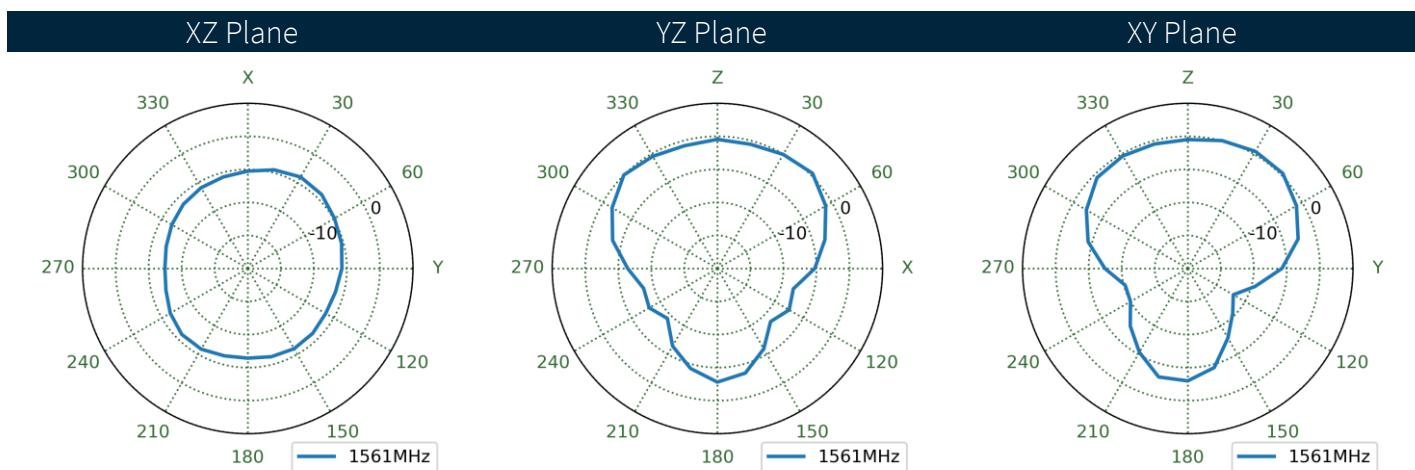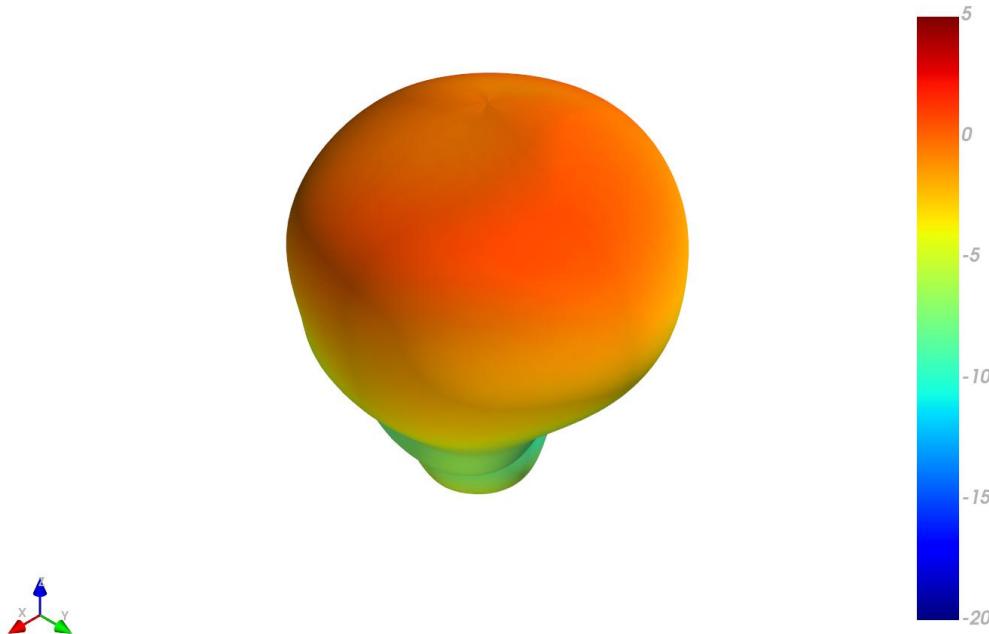

## 7.5 Patterns at 1575 MHz

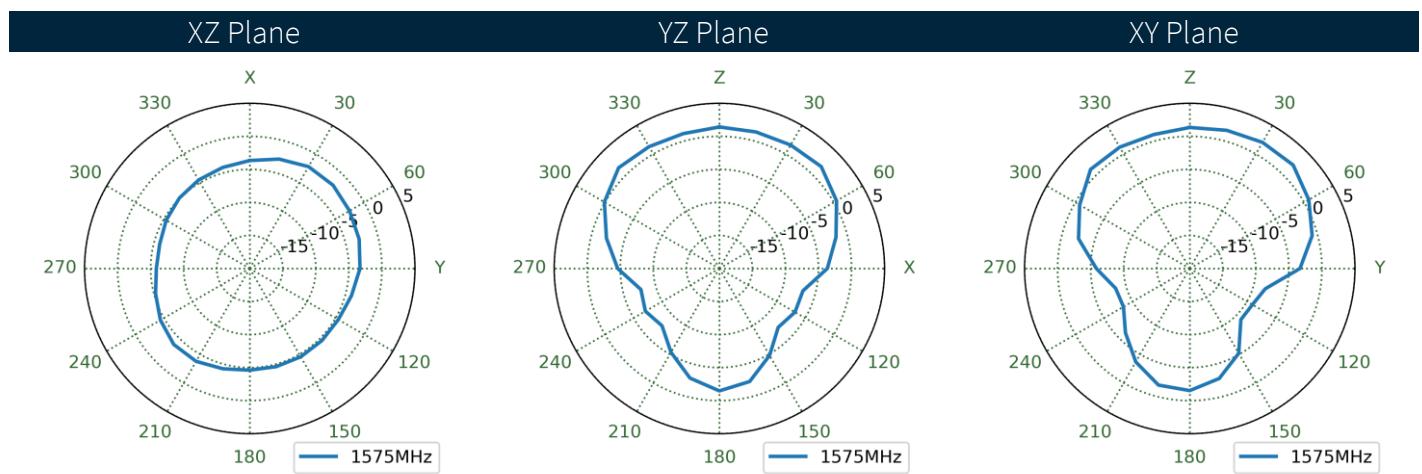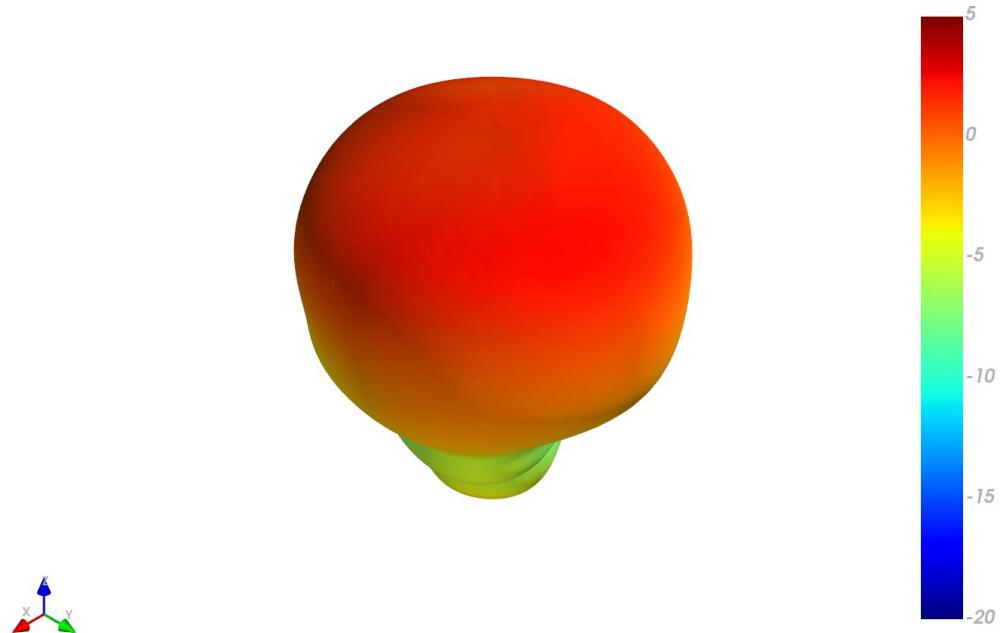

## 7.6 Patterns at 1602 MHz

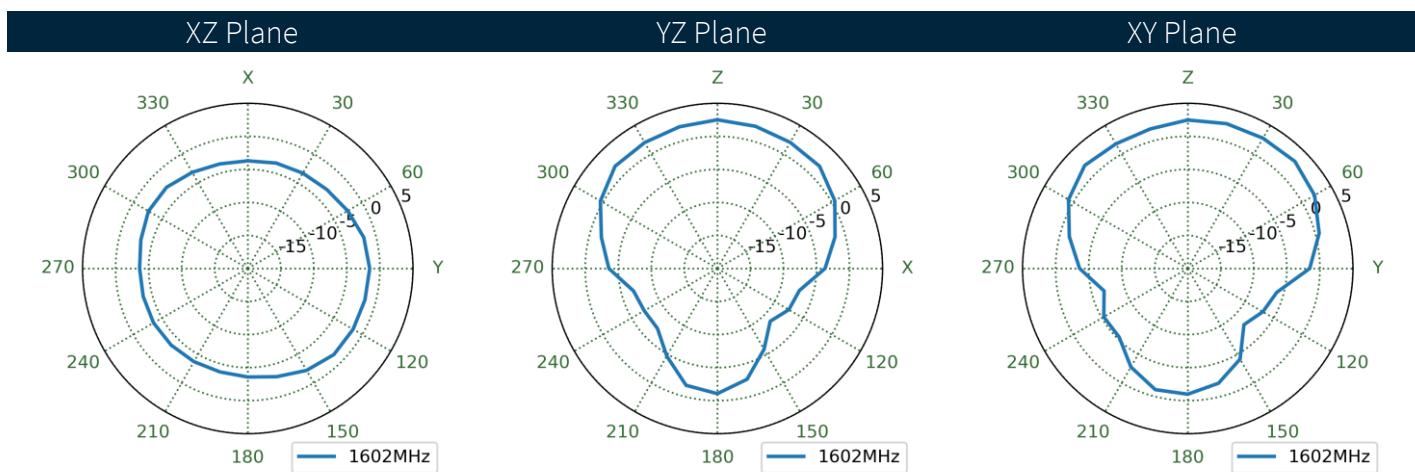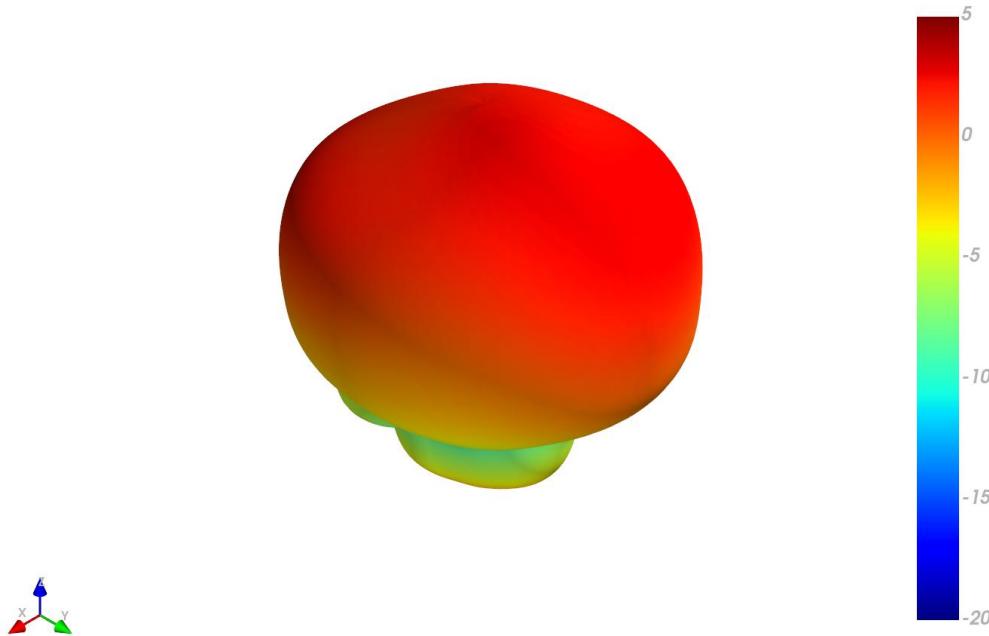

## Changelog for the datasheet

## SPE-23-8-248 – HP2258.A

## Revision: B (Current Version)

Date:	2025-07-02
Changes:	Added Antenna Integration Guide
Changes Made by:	Gary West

## Previous Revisions

## Revision: A (Original First Release)

Date:	2023-09-12
Notes:	Initial Release
Author:	Cesar Sousa



**TAOGLAS**<sup>®</sup>

[www.taoglas.com](http://www.taoglas.com)

