

DATA SHEET

INDUCTOR

Chip Inductors

BSCY Series

RoHS compliant & Halogen Free



SMD Multilayer Ferrite Chip Inductors - BSCY Series

BSCY Series



The SMD multi-layered ferrite chip inductors provide a cost-effective solution for densely packed PC board designs. BSCY series comes in 3 sizes and is suitable for low frequency applications.


Features

- RoHS compliant
- High mounting density of compact circuit due to crosstalk elimination that results from a closed magnetic flux in a ferrite material
- Suitable for flow and re-flow soldering
- Available in 3 sizes


Applications

- Personal computers, HDDs, other various electronic devices
- Any portable device where compact size and high mounting densities are required

Product Identification

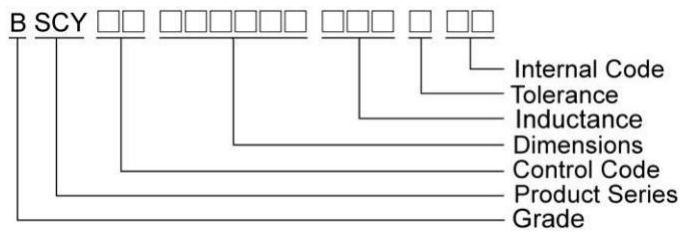


Shape and Dimensions

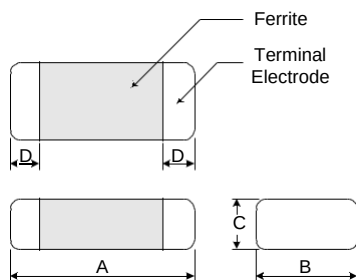

Dimensions in mm

TYPE	A	B	C	D
BSCY00160808	1.6±0.2	0.80±0.2	0.80±0.2	0.3±0.2
BSCY00201209	2.0±0.2	1.25±0.2	0.90±0.2	0.5±0.3
BSCY00201212	2.0±0.2	1.25±0.2	1.25±0.2	0.5±0.3

Recommended Pattern

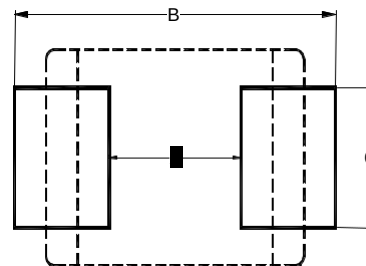

Dimensions in mm

TYPE	A	B	C
BSCL00160808	0.7 ~ 0.8	1.8 ~ 2.0	0.6 ~ 0.8
BSCL00201209	1.0 ~ 1.2	2.6 ~ 4.0	1.0 ~ 1.4
BSCL00201212	1.0 ~ 1.2	2.6 ~ 4.0	1.0 ~ 1.2

SMD Multilayer Ferrite Chip Inductors – BSCY Series


Electrical Characteristics

Part Number	Inductance (μ H)	Tolerance ($\pm$ %)	Test Frequency (MHz)	RDC (Ω) Max	Rated Current (mA) Max
BSCY001608082R2  CP	2.2	30/20	1	0.20	1000
BSCY001608084R7  CP	4.7	30/20	1	0.25	800
BSCY00160808100  CP	10	30/20	1	0.90	90

Note: When ordering, please specify tolerance code. Tolerance : M= $\pm$ 20% , T= $\pm$ 30%

- Operating temperature range - 40°C ~ 105°C(Including self - temperature rise)
- Rated Current : Applied the current to coils, the temperature rise shall not be more than 30°C
- Measure Equipment :
L & Q : HP4291A
SRF : Agilent HP8753D/Agilent E4991A
RDC : HP4338B or CHEN HWA 502

Test Instruments : Agilent E4991A Impedance / Material Analyzer

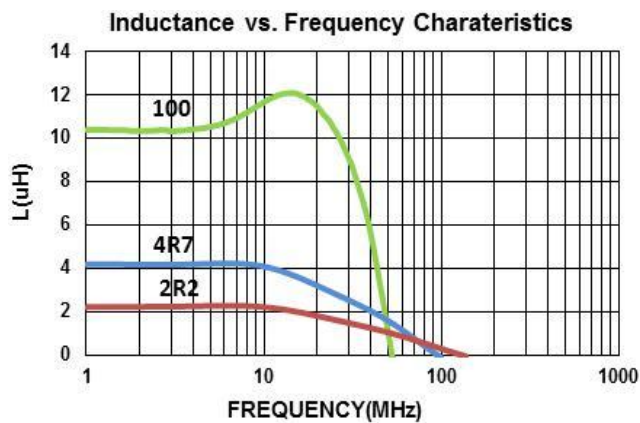

SMD Multilayer Ferrite Chip Inductors – BSCY Series


Electrical Characteristics

Part Number	Inductance (μ H)	Tolerance ($\pm$ %)	Test Frequency (MHz)	RDC (Ω) Max	Rated Current (mA) Max
BSCY002012092R2 □ CP	2.2	30/20	1	0.10	2000
BSCY002012094R7 □ CP	4.7	30/20	1	0.30	900

Note: When ordering, please specify tolerance code. Tolerance : M= $\pm$ 20% , T= $\pm$ 30%

- Operating temperature range - 40°C ~ 105°C(Including self - temperature rise)
- Rated Current : Applied the current to coils, the temperature rise shall not be more than 30°C
- Measure Equipment :
L & Q : HP4291A
SRF : Agilent HP8753D/Agilent E4991A
RDC : HP4338B or CHEN HWA 502

Test Instruments : Agilent E4991A Impedance / Material Analyzer

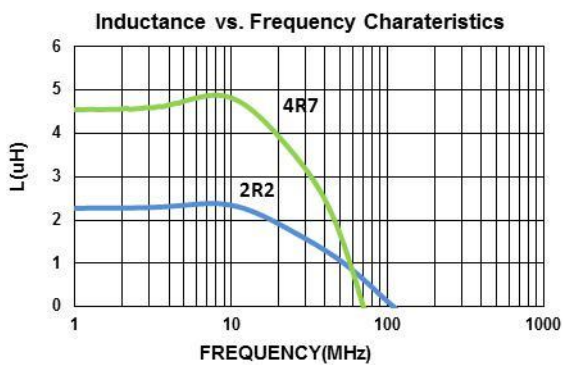

SMD Multilayer Ferrite Chip Inductors – BSCY Series


Electrical Characteristics

Part Number	Inductance (μH)	Tolerance ($\pm\%$)	Test Frequency (MHz)	RDC (Ω) Max	Rated Current (mA) Max
BSCY00201212100  CP	10	30/20	1	0.50	400

Note: When ordering, please specify tolerance code. Tolerance : M= $\pm 20\%$, T= $\pm 30\%$

- Operating temperature range - $40^{\circ}\text{C} \sim 105^{\circ}\text{C}$ (Including self - temperature rise)
- Rated Current : Applied the current to coils, the temperature rise shall not be more than 30°C
- Measure Equipment :
 - L & Q : HP4291A
 - SRF : Agilent HP8753D/Agilent E4991A
 - RDC : HP4338B or CHEN HWA 502


Test Instruments : Agilent E4991A Impedance / Material Analyzer

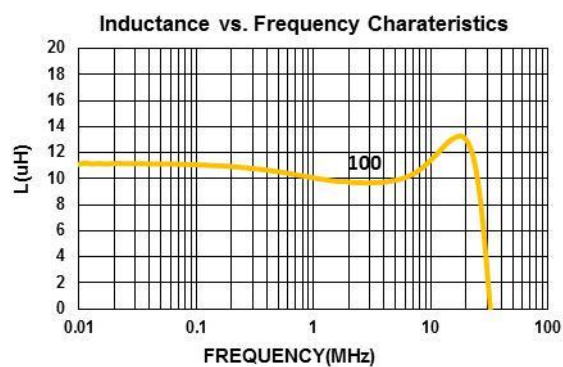


SMD Multilayer Ferrite Chip Inductors - BSCY Series

Packaging Specifications


Tape Dimensions

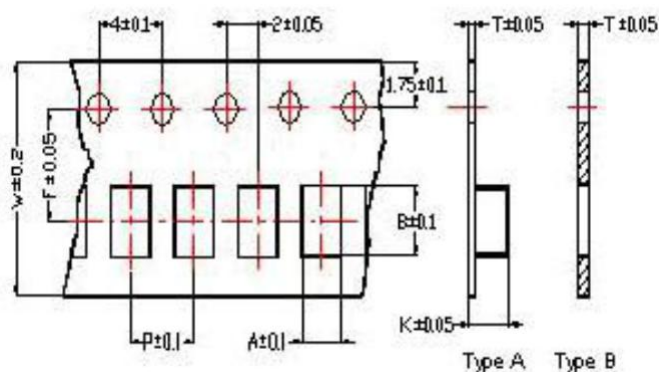

Tape Material

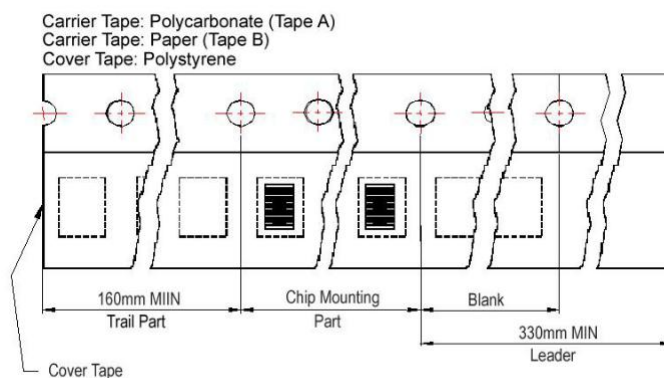

Reel Dimensions

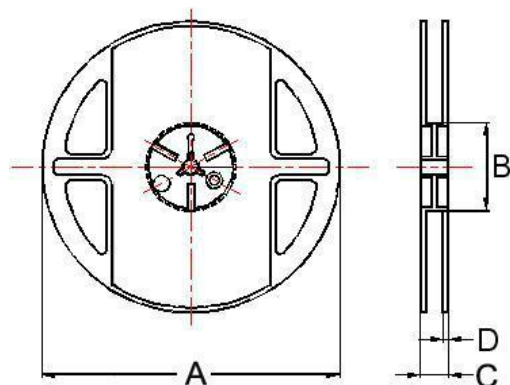

Dimensions in mm

TYPE	Tape Dimensions								Reel Dimensions				Quantity PCS / Reel
	A	B	T	W	P	F	K	Tape	A	B	C	D	
BSCY00160808	1.05	1.85	0.95	8.0	4.0	3.5	-	B	178	60	12	1.5	4000
BSCY00201209	1.50	2.30	0.97	8.0	4.0	3.5	-	B	178	60	12	1.5	4000
BSCY00201212	1.35	2.25	0.22	8.0	4.0	3.5	1.35	A	178	60	12	1.5	3000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[BSCY002012091R0TCP](#) [BSCY002012092R2TCP](#) [BSCY00201212100MCP](#) [BSCY00160808100MCP](#)
[BSCY002012094R7MCP](#) [BSCY001608082R2TCP](#) [BSCY002012091R0MCP](#) [BSCY00160808100TCP](#)
[BSCY002012094R7TCP](#) [BSCY00201212100TCP](#) [BSCY002012092R2MCP](#) [BSCY001608082R2MCP](#)
[BSCY001608084R7TCP](#) [BSCY001608084R7MCP](#)