

Features

Regulated Converter

- 160W baseplate-cooled, fan-less operation
- 230W peak power or forced air rating
- Universal AC input range (80~264VAC)
- Standby power consumption <0.5W
- Wide operating temperature range (-40°C to +80°C)
- Household, ITE and medically 2MOPP certified
- Operating altitude up to 5000m

Description

The RACM230-G Series is designed to support up to 160 watts continuous output power without fan cooling. The compact 4"x2" baseplate design enables direct heat dissipation through metal housings in the application. Up to 230 watts are available to drive dynamic loads for several seconds of peak power or with forced air for even longer time frames. A smart fan output is on board as standard. A wide input range of 80 to 264VAC, up to 5000m operating altitude, 4kVAC isolation and international safety agency certifications make the series worldwide compliant for medical 2 MOPP, household and industrial ITE applications.

RECOM
AC/DC Converter

RACM230-G

230 Watt
4" x 2"




**Open Frame or
Enclosed
Single Output**



ANSI/AAMI ES60601-1 (ed 3.1) ("OF" version)
CSA/CAN 22.2 60601-1-14 (ed 3.1) certified
IEC/EN60601-1 (ed 3.1) ("OF" version) certified
IEC/EN62368-1 certified
EN60335-1 certified
EN62233 certified
IEC/EN61558-1 certified
IEC/EN61558-2-16 certified
EN55032 compliant
EN55035 compliant
CB Report

Model Numbering

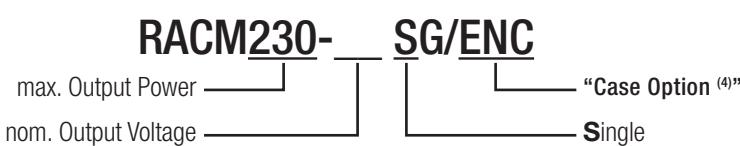

Notes:

Note4: without suffix standard open frame
add suffix "/ENC" for enclosed version (MOQ may apply for this model)

Ordering Examples:

RACM230-24SG 24Vout Single open frame
RACM230-48SG/ENC 24Vout Single enclosed

Specifications (measured @ $T_a = 25^\circ\text{C}$, 230VAC rated load unless otherwise stated)


BASIC CHARACTERISTICS					
Parameter	Condition		Min.	Typ.	Max.
Nom. Input Voltage			100VAC		240VAC
Input Voltage Range ⁽⁵⁾			80VAC 120VDC	230VAC	264VAC 370VDC
Input Current	115VAC 230VAC				3A 1.1A
Inrush Current	115VAC 230VAC				40A 60A
No load Power Consumption				300mW	500mW
Input Frequency Range	AC input		47Hz	50Hz	63Hz
ErP Lot 6 Standby Mode Conformity (Output Load Capability)	Input Power= 1W				300mW
Output Voltage Adjustability ⁽⁶⁾	12Vout 24Vout 36Vout 48Vout 54Vout		11.4VDC 22.8VDC 34.2VDC 45.6VDC 51.3VDC		12.6VDC 25.2VDC 37.8VDC 50.4VDC 56.0VDC
Minimum Load			0%		
Power Factor	115VAC 230VAC		0.98 0.95	0.99 0.97	
Start-up Time	115/230VAC			0.5s	
Rise Time				10ms	
Hold-up Time	115/230VAC	230W 200W 160W 130W		8ms 10ms 16ms 25ms	
Output Ripple and Noise ⁽⁷⁾	20MHz BW @ $+25^\circ\text{C}$				1% of Vout nom. max.

Notes:


- Note5: The products were submitted for safety files at nominal AC-input operation. For DC-input make sure that sufficient fuses are used
- Note6: By trimming up, decrease output current to avoid exceeding rated output power. By trimming down, do not exceed maximum continuous output current. If enclosed version is used, please remove cover, to use trim function.
- Note7: Measurements are made with a 12" twisted pair-wire terminated with a $0.1\mu\text{F}$ and $10\mu\text{F}$ parallel capacitor

Efficiency vs. Load

24V to 54V models

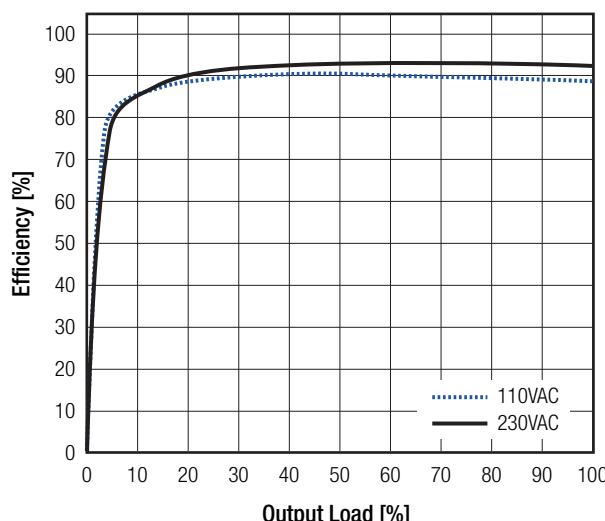

12V model

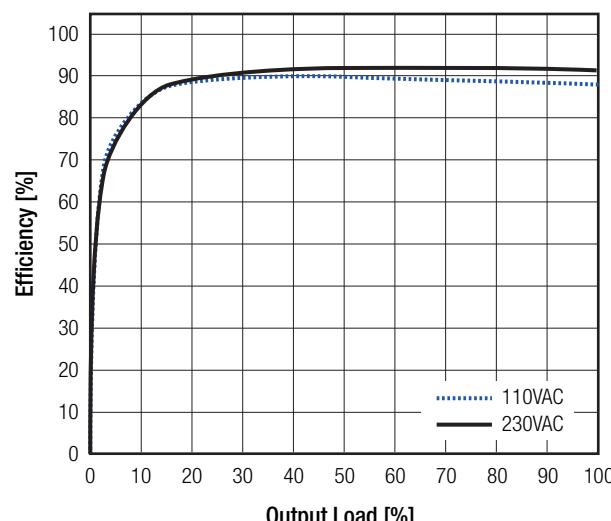

continued on next page

Specifications (measured @ Ta= 25°C, rated input, rated load unless otherwise stated)

REGULATIONS				
Parameter	Condition		Value	
Output Accuracy			±1.0% typ.	
Line Regulation	low line to high line, full load		±0.5% typ.	
Load Regulation ⁽⁸⁾	10% to 100% load		0.5% typ.	
Notes: Note8: Operation below 10% load will not harm the converter, but specifications may not be met				

FAN OUTPUT					
Parameter	Condition		Min.	Typ.	Max.
Output Current	@50°C	continuous			500mA
Output Voltage				12VDC	
Ambient Temperature		full load			50°C
Short Circuit Protection (SCP)					none
Over Current Protection (OCP)					none



PROTECTIONS				
Parameter	Type		Value	
Internal Input Fuse ⁽⁹⁾	line and neutral		2x T6.3A, slow blow type	
Short Circuit Protection (SCP)			hiccup mode, auto recovery	
Over Voltage Protection (OVP)			105% - 150%, latch off mode	
Over Load Protection (OLP)			105% - 200% (150% typ.); hiccup mode auto recovery	
Over Voltage Category (OVC)			OVCII	
Isolation Voltage (safety certified) ⁽¹⁰⁾	I/P to O/P	1 minute	4kVAC	
Isolation Resistance			10MΩ min.	
Insulation Grade			reinforced	
Leakage Current			0.3mA max.	
Means of Protection	250VAC working voltage		2MOPP	
Notes: Note9: Refer to local safety regulations if input over-current protection is also required. Recommended fuse: slow blow type Note10: For repeat Hi-Pot testing, reduce the time and/or the test voltage				

ENVIRONMENTAL						
Parameter	Condition		Value			
Operating Temperature Range	refer to derating graphs		-40°C to +80°C			
Temperature Coefficient			±0.05%/K			
Operating Altitude ⁽¹¹⁾			5000m			
Operating Humidity	non-condensing		5% - 90% RH max.			
Pollution Degree			PD2			
MTBF	according to MIL-HDBK-217F, G.B.	+25°C (forced air cooling) +50°C (forced air cooling)	200 x 10 ³ hours 60 x 10 ³ hours			
Notes: Note11: Recognized by safety agency for safe operation up to 5000m. High altitude operation may impact the performance and lifetime. Please contact RECOM tech support for advice.						
continued on next page						

Specifications (measured @ $T_a = 25^\circ\text{C}$, rated input, rated load unless otherwise stated)



Derating Graph ⁽¹²⁾

(@ 2.5m/s airflow + conduction cooling)

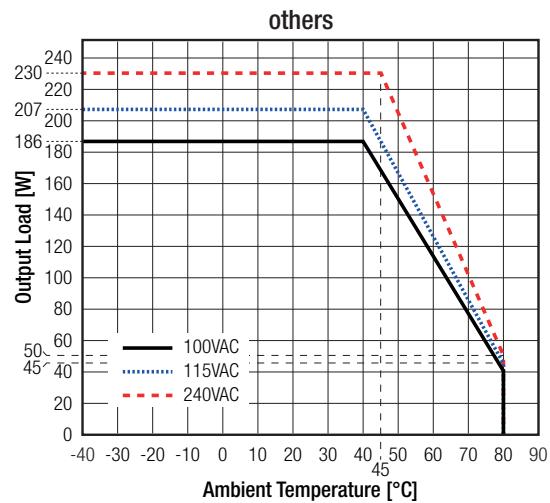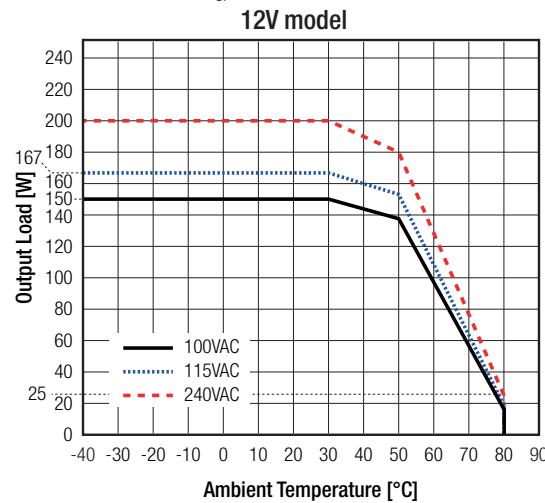



Derating Graph ⁽¹²⁾

(@ natural convection + conduction cooling)

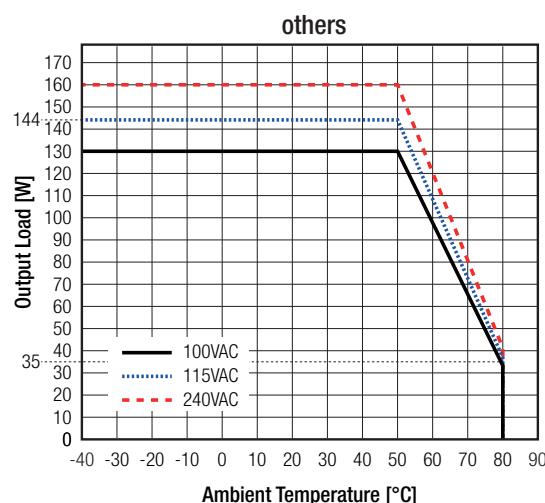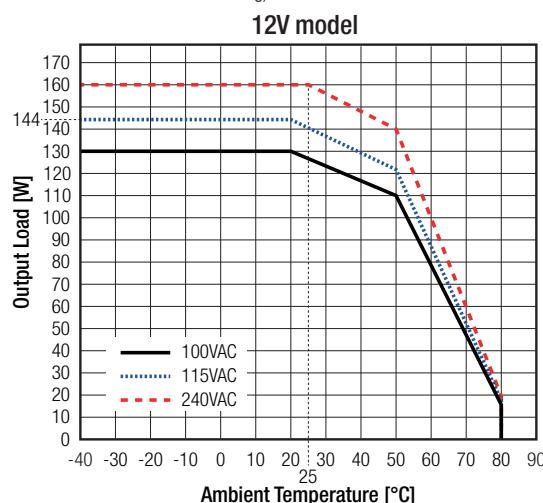

Derating Graph ⁽¹²⁾

(@ natural convection)

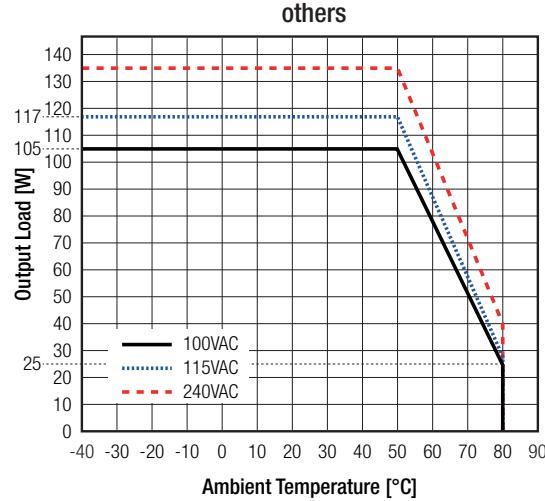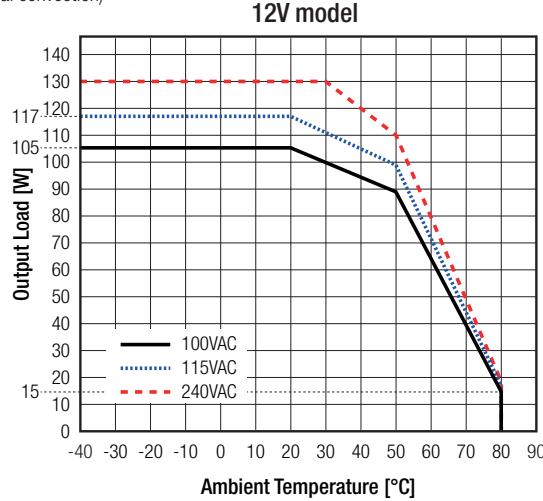

Convection Cooling:

<0.1m/s = still air

0.1 - 0.2m/s = natural convection

Conduction Cooling:

ground plane ref.: 2mm alloy; size A4

Notes:

Note12: For operation to as low as 80VAC a further derating of -10% is recommended

Specifications (measured @ $T_a = 25^\circ\text{C}$, rated input, rated load unless otherwise stated)

Peak Load Capability

Calculation

P_{nom} = nom. output power [W]
 P_p = peak output power ($\leq 230\text{W}$) [W]
 P_r = recovery output power [W]
 t_1 = peak time set (10s max.) [s]
 t_2 = recovery time (min. 4 x t_1) [s]
 k = safety factor 1.7 []

$$P_r = \frac{P_{\text{nom}} \times (t_1 + t_2) - (P_p \times t_1)}{t_2 \times k}$$

Practical Example (RACM230-12SG):

Take the RACM230-12SG at 230VAC input Voltage and full load at $T_{\text{AMB}} = 25^\circ\text{C}$ (160W) with conduction cooling.


$P_{\text{nom.}}$ = refer to derating graphs (160W)

$P_p = 230\text{W}$

$t_1 = 1\text{s}$

$t_2 = 40\text{s}$

$k = 1.7$

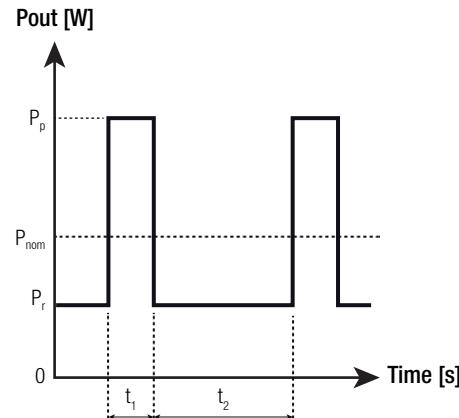

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report Number	Standard
Audio/video, information and communication technology equipment - Safety requirements	SA1903063L01001	IEC62368-1:2014 2nd Edition
Audio/video, information and communication technology equipment - Safety requirements (LVD)		EN62368-1:2014 + A11:2017
Audio/video, information and communication technology equipment - Safety requirements (CB)	211-700882-000	IEC62368-1:2014, 2nd Edition
Audio/video, information and communication technology equipment - Safety requirements	SA1903063L01001	EN62368-1:2014 + A11:2017
Household and similar electrical appliances - Safety - Part 1: General requirements		EN60335-1:2012 + A13:2017
Measurement methods for electromagnetic fields of household appliances and similar apparatus with regard to human exposure	SA0903063L02001	EN62233:2008
Medical Electric Equipment, General Requirements for Safety and Essential Performance	E314885 ("OF" Version)	ANSI/AAMI ES60601-1:2005 + A2:2010/ (R)2012 CAN/CSA-C22.2 No. 6060-1:14, 3rd Edition
Medical Electric Equipment, General Requirements for Safety and Essential Performance (CB)	E314885	IEC60601-1:2005, 3rd Edition + AM1:2012
Medical Electric Equipment, General Requirements for Safety and Essential Performance		EN60601-1:2006 + A1:2013
Safety of power transformers, power supplies, reactors and similar products - Part 1: General requirements and tests	211-700883-000	IEC61558-1:2005, 2nd Edition + A1:2009 EN61558-1:2005 + A1:2009
Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1100 V - Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units (CB)	211-700883-000	IEC61558-2-16:2009, 1st Edition + A1:2013
Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1100 V - Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units (LVD)	211-700883-000	EN61558-2-16:2009 + A1:2013
RoHS2		RoHS 2011/65/EU + AM2015/863

continued on next page


Specifications (measured @ Ta= 25°C, rated input, rated load unless otherwise stated)

SAFETY AND CERTIFICATIONS		
Certificate Type (Safety)	Report Number	Standard
Audio/video, information and communication technology equipment - Safety requirements	SA1903063L01001	IEC62368-1:2014 2nd Edition
Audio/video, information and communication technology equipment - Safety requirements (LVD)		EN62368-1:2014 + A11:2017
Audio/video, information and communication technology equipment - Safety requirements (CB)	211-700882-000	IEC62368-1:2014, 2nd Edition
Audio/video, information and communication technology equipment - Safety requirements	SA1903063L01001	EN62368-1:2014 + A11:2017
Household and similar electrical appliances - Safety - Part 1: General requirements	SA0903063L02001	EN60335-1:2012 + A13:2017
Measurement methods for electromagnetic fields of household appliances and similar apparatus with regard to human exposure		EN62233:2008
Medical Electric Equipment, General Requirements for Safety and Essential Performance	E314885 ("OF" Version)	ANSI/AAMI ES60601-1:2005 + A2:2010/(R)2012 CAN/CSA-C22.2 No. 6060-1:14, 3rd Edition
Medical Electric Equipment, General Requirements for Safety and Essential Performance (CB)	E314885	IEC60601-1:2005, 3rd Edition + AM1:2012
Medical Electric Equipment, General Requirements for Safety and Essential Performance		EN60601-1:2006 + A1:2013
Safety of power transformers, power supplies, reactors and similar products - Part 1: General requirements and tests	211-700883-000	IEC61558-1:2005, 2nd Edition + A1:2009 EN61558-1:2005 + A1:2009
Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1100 V - Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units (CB)	211-700883-000	IEC61558-2-16:2009, 1st Edition + A1:2013
Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1100 V - Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units (LVD)	211-700883-000	EN61558-2-16:2009 + A1:2013
RoHS2		RoHS 2011/65/EU + AM2015/863
EMC Compliance		
Condition	Standard / Criterion	
Electromagnetic compatibility of multimedia equipment - Emission requirements	without external filter	EN55032:2015, Class B
Electromagnetic compatibility of multimedia equipment - Immunity requirements		EN55035:2017
Information technology equipment - Immunity characteristics - Limits and methods of measurement		EN55024:2010 + A1:2015
ESD Electrostatic discharge immunity test	Air: $\pm 8\text{kV}$; Contact $\pm 4\text{kV}$	IEC61000-4-2:2008, Criteria A EN61000-4-2:2009, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	3V/m (80-1000, 1800MHz, 2600MHz, 3500MHz, 5000MHz)	IEC/EN61000-4-3:2006+A2:2010, Criteria A
Fast Transient and Burst Immunity	AC Power Port: L, N $\pm 1\text{kV}$	IEC/EN61000-4-4:2012, Criteria A
Surge Immunity	AC Power Port: L-N $\pm 1\text{kV}$	IEC/EN61000-4-5:2014, Criteria B
Immunity to conducted disturbances, induced by radio-frequency fields	AC Power Port: 3V (0.15-10MHz) 3V to 1V (10-30MHz) 1V (30-80MHz)	IEC61000-4-6:2013. Criteria A EN61000-4-6:2014, Criteria A
Power Magnetic Field Immunity	50Hz/60Hz, 1A/m	IEC61000-4-8:2009, Criteria A EN61000-4-8:2010, Criteria A
Voltage Dips and Interruptions	Voltage Dips 100% at 50/60Hz	IEC/EN61000-4-11:2004, Criteria A
	Voltage Dips 30% at 50Hz	IEC/EN61000-4-11:2004, Criteria A
	Voltage Dips 30% at 60Hz	IEC/EN61000-4-11:2004, Criteria B
	Voltage Interruptions > 95% at 50Hz	IEC/EN61000-4-11:2004, Criteria C
	Voltage Interruptions > 95% at 60Hz	IEC/EN61000-4-11:2004, Criteria B
Limits of Harmonic Current Emissions		EN61000-3-2:2014
Limits of Voltage Fluctuations & Flicker		EN61000-3-3:2013

Specifications (measured @ $T_a = 25^\circ\text{C}$, rated input, rated load unless otherwise stated)

DIMENSION AND PHYSICAL CHARACTERISTICS		
Parameter	Type	Value
Material	PCB baseplate / case ("/ENC")	FR4, (UL94 V-0) aluminum
Dimension (LxWxH)	open frame version enclosed version	101.6 x 50.8 x 32.0mm 105.0 x 62.0 x 35.0mm
Weight	open frame version enclosed version	220g typ. 290g typ.

Dimension Drawing Open Frame (mm)

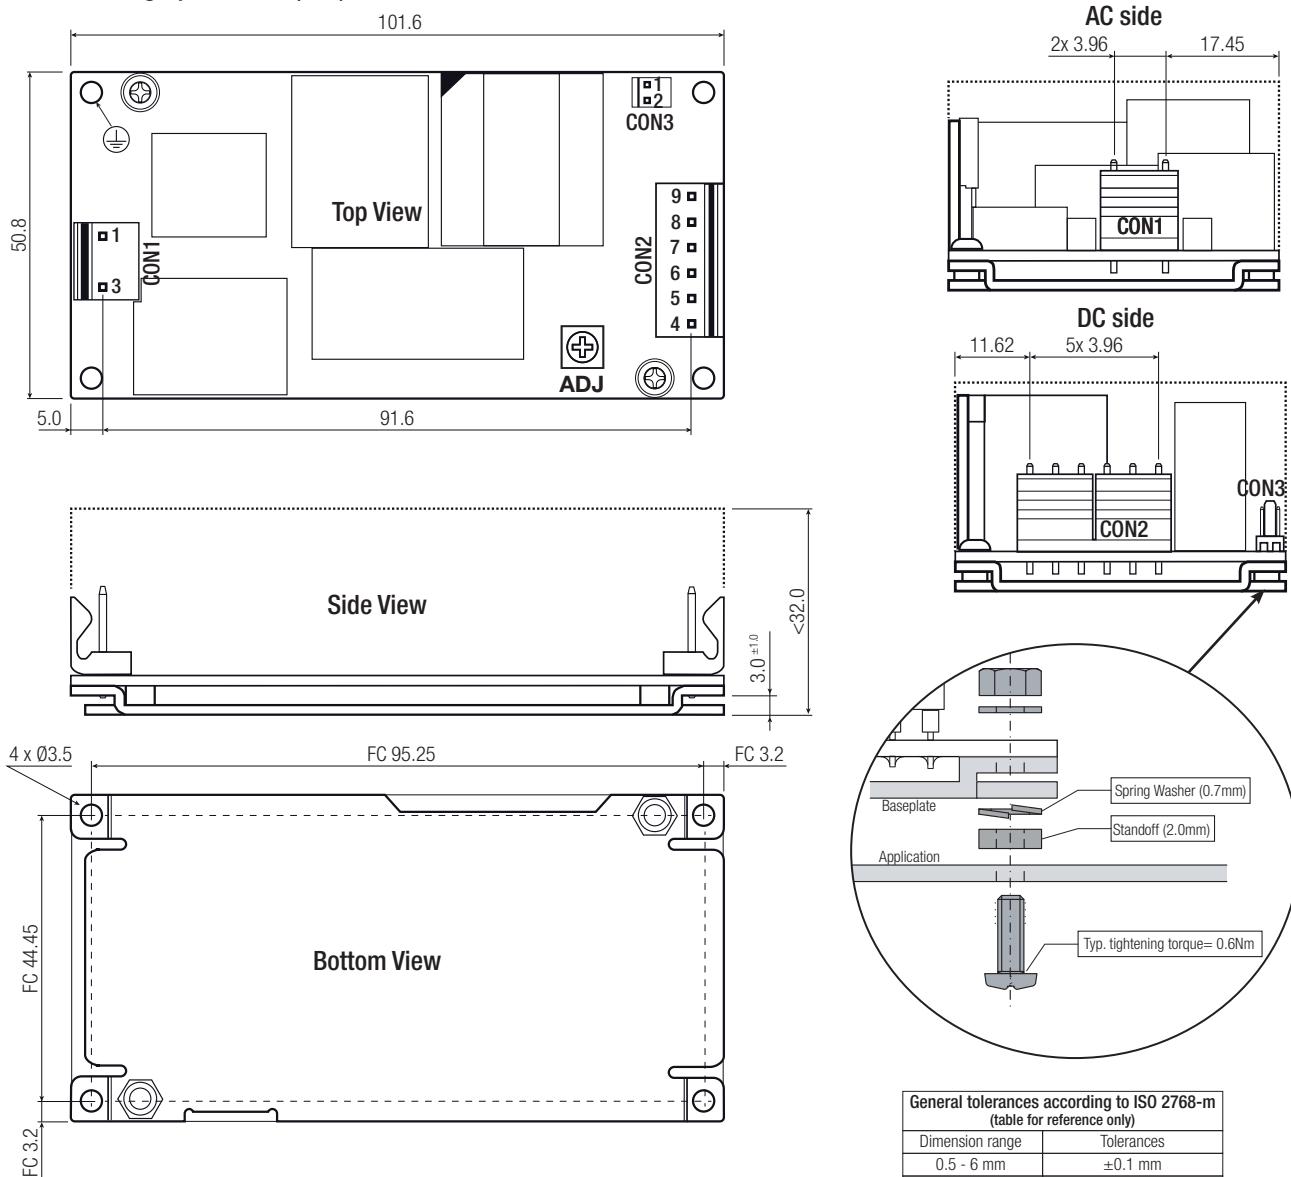

General tolerances according to ISO 2768-m (table for reference only)	
Dimension range	Tolerances
0.5 - 6 mm	±0.1 mm
6 - 30 mm	±0.2 mm
30 - 120 mm	±0.3 mm
120 - 400 mm	±0.5 mm

Compatible Connector (valid for open frame and enclosed version)

AC Input (CON1)			DC Output Connector (CON2)			FAN Connector (CON3)		
#	Function	Connector	#	Function	Connector	#	Function	Connector
1	AC/N	Molex 09-50-3031	7,8,9	+Vout	Molex 09-50-1061	1	-FAN	Molex 22-01-1022
3	AC/L	or similar	4,5,6	-Vout	or similar	2	+FAN	or similar




Maximum tightening torque for mounting without standoffs: 0.3Nm

FC= fixing centers


continued on next page

Specifications (measured @ $T_a = 25^\circ\text{C}$, rated input, rated load unless otherwise stated)


Dimension Drawing Enclosed Version (mm)

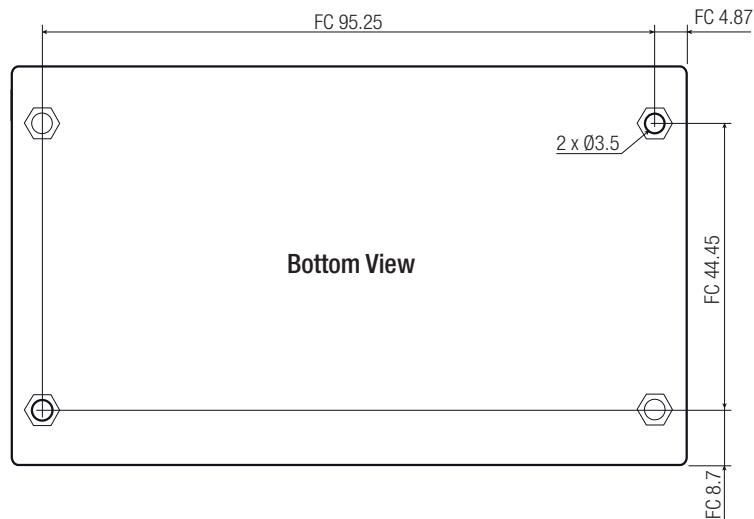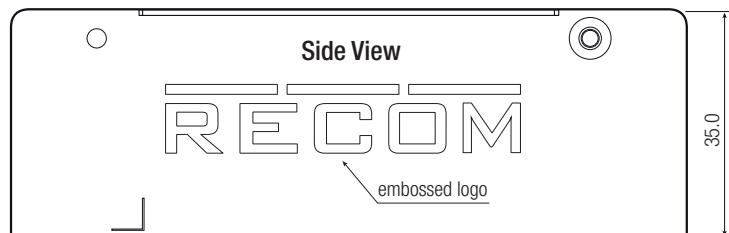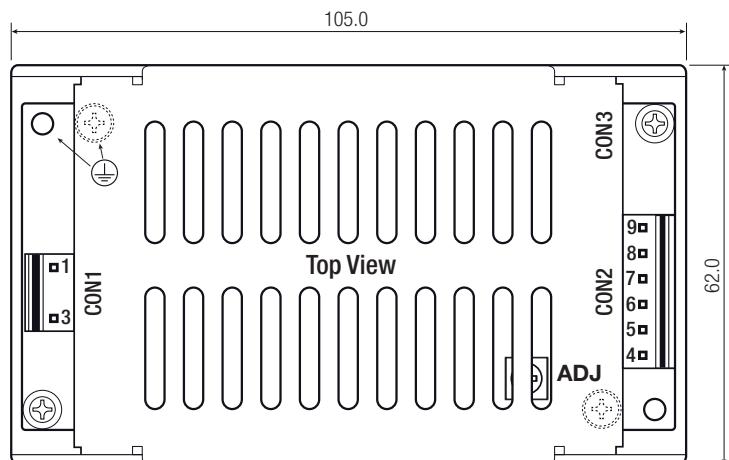

AC side

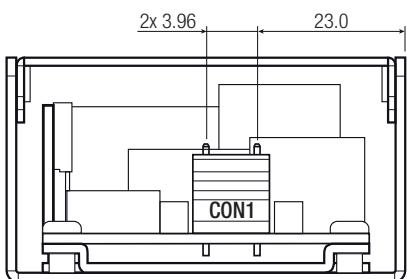

DC side

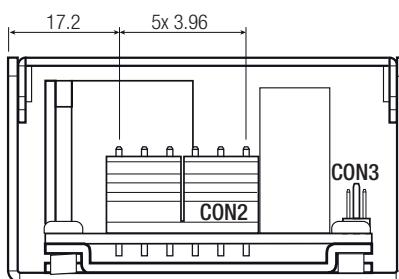

Notes:

Note13: Please remove cover, to use trim function


Maximum tightening torque for mounting: 0.6Nm
FC= fixing centers

General tolerances according to ISO 2768-m (table for reference only)	
Dimension range	Tolerances
0.5 - 6 mm	±0.1 mm
6 - 30 mm	±0.2 mm
30 - 120 mm	±0.3 mm
120 - 400 mm	±0.5 mm

Specifications (measured @ $T_a = 25^\circ\text{C}$, rated input, rated load unless otherwise stated)

INSTALLATION AND APPLICATION

Mounting

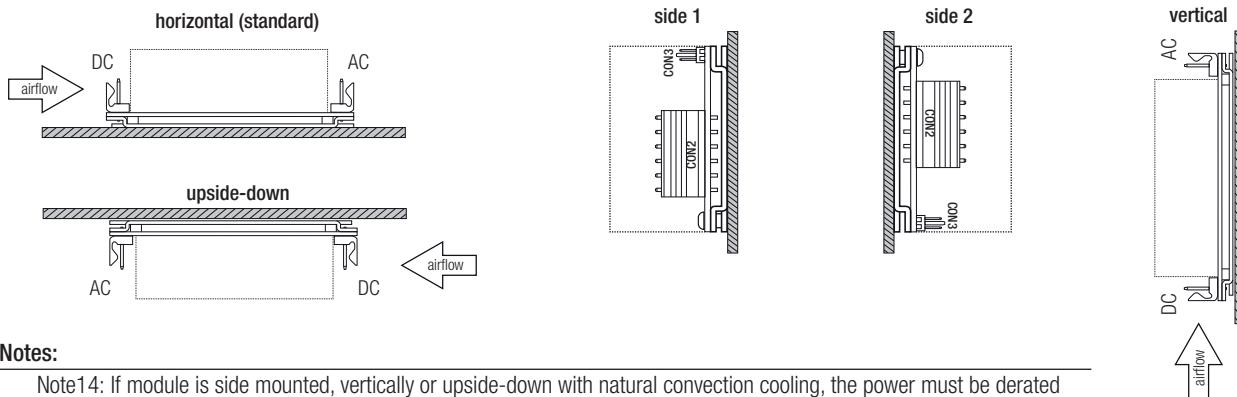


Notes:

Note 14: If module is side mounted, vertically or upside-down with natural convection cooling, the power must be derated down to 85% for the RACM230-12SG, for the other models 90%.

For convection cooling, ensure sufficient distance to adjacent components!

Device should be fan cooled from DC side.

Block Diagram

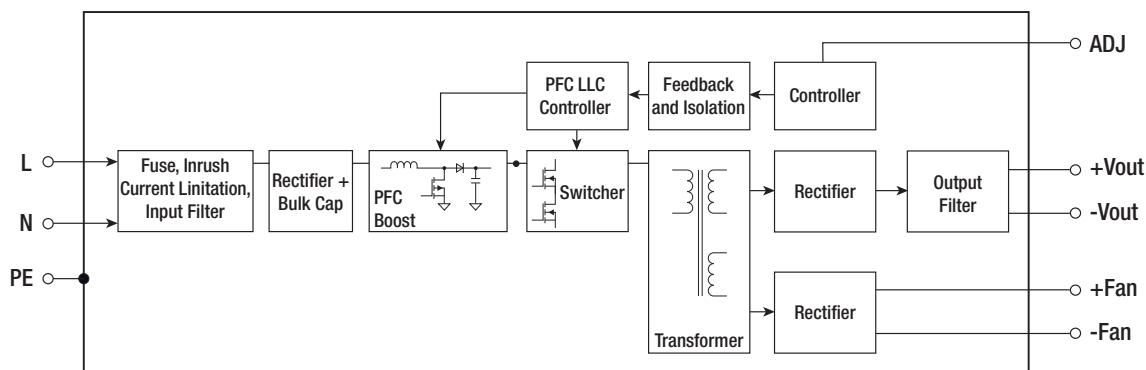

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	cardboard box	128.0 x 71.0 x 44.0mm
Packaging Quantity		1pcs
Storage Temperature Range		-55°C to +100°C
Storage Humidity	non-condensing	5% - 90% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[RACM230-12SG](#) [RACM230-36SG](#) [RACM230-48SG](#) [RACM230-24SG](#) [RACM230-36SG/ENC](#) [RACM230-48SG/ENC](#)
[RACM230-54SG](#) [RACM230-54SG/ENC](#) [RACM230-12SG/ENC](#) [RACM230-24SG/ENC](#)