

Features

Regulated Converter

- Reinforced insulation for 250VAC working voltage
- Clearance and creepage distance: 8mm
- 5kVAC I/P to O/P 2MOPP isolation
- 2µA patient leakage current
- Industry standard pinout
- 2:1 and 4:1 wide input range


Description

The REM3 series of medical grade regulated DC/DC converters features reinforced 5kVAC/1 minute isolation with low 2µA leakage and are 60601-1 3rd Ed. certified for 250VAC continuous working. The compact DIP24 package offers tightly regulated single and dual outputs, even under no-load conditions. The outputs are short circuit and overload protected. The converters are available in two different pinning options and optionally with an external control pin for standby consumption as low as 12.5mW. The converters are fully certified to CB, IEC/EN and ANSI/AAMI standards and carry the UL mark.

Selection Guide

Part Number	nom. Input Voltage ⁽¹⁾ [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. [%]	Max. Capacitive Load [µF]
REM3-xx3.3S/ ^(3,4)	5 / 12 / 24 / 48	3.3	1000	81 / 82 / 82 / 81	1050
REM3-xx05S/ ^(3,4)	5 / 12 / 24 / 48	5	600	84.5 / 84.5 / 84.5 / 84	780
REM3-xx12S/ ^(3,4)	5 / 12 / 24 / 48	12	250	85.5 / 87 / 87 / 87	130
REM3-xx15S/ ^(3,4)	5 / 12 / 24 / 48	15	200	87.5 / 87 / 87 / 86.5	100
REM3-xx24S/ ^(3,4)	5 / 12 / 24 / 48	24	125	85.5 / 87 / 87 / 86.5	39
REM3-xx05D/ ^(3,4)	5 / 12 / 24 / 48	±5	±300	83 / 83.5 / 83 / 83	±430
REM3-xx12D/ ^(3,4)	5 / 12 / 24 / 48	±12	±125	86 / 87.5 / 86 / 86	±75
REM3-xx15D/ ^(3,4)	5 / 12 / 24 / 48	±15	±100	86 / 86.5 / 86 / 86	±56
REM3-xx3.3SW/ ^(3,4)	24 / 48	3.3	1000	82 / 81	1050
REM3-xx05SW/ ^(3,4)	24 / 48	5	600	84.5 / 84	750
REM3-xx12SW/ ^(3,4)	24 / 48	12	250	87 / 87	130
REM3-xx15SW/ ^(3,4)	24 / 48	15	200	87 / 86.5	100
REM3-xx24SW/ ^(3,4)	24 / 48	24	125	87 / 86.5	39
REM3-xx05DW/ ^(3,4)	24 / 48	±5	±300	83 / 83	±430
REM3-xx12DW/ ^(3,4)	24 / 48	±12	±125	87 / 86	±75
REM3-xx15DW/ ^(3,4)	24 / 48	±15	±100	86 / 86	±56

Model Numbering

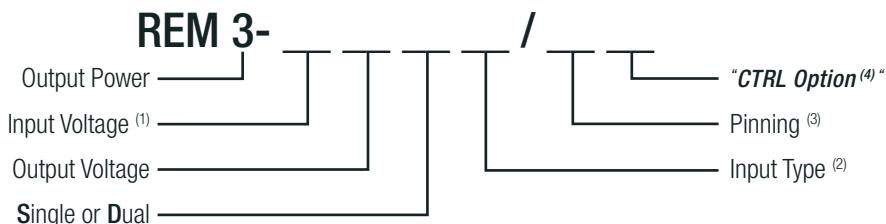

Notes:

Note1: for 4:1 Input Voltage Type add "W", see Note 2.

2:1	nom. Vin	4:1 "W"	nom. Vin
xx= 4.5-9 Vin	= "05"	xx= 9-36Vin	= "24"
xx= 9-18Vin	= "12"	xx= 18-75Vin	= "48"
xx= 18-36Vin	= "24"		
xx= 36-75Vin	= "48"		

Note2: Blank for Standard 2:1 Input Voltage Range; "W" suffix for 4:1 Input Voltage Range

Note3: "A" suffix for A pinning; "C" suffix for C pinning, for more details refer to Package Style and Pinning

Note4: "CTRL" suffix for control pin option, for A pinning only, for C pinning not available

Examples:

REM3-0512D/A	= 2:1 Input, 4.5-9Vin, ±12Vout, pinout „A“, without control pin
REM3-1215S/C	= 2:1 Input, 9-18Vin, 15Vout, pinout „C“, without control pin
REM3-4815SW/A/CTRL	= 4:1 Input, 36-75Vin, 15Vout, pinout „A“ with control pin
REM3-243.3SW/C	= 4:1 Input, 9-36Vin, 3.3Vout, pinout „C“, without control pin

REM3

3 Watt

2:1 & 4:1

DIP24

Single and Dual Output



IEC/EN60601-1 certified

CSA/CAN C22.2 60601-01 certified


ANSI/AAMI ES60601-1 certified

EN55011 certified

Specifications (measured @ $T_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

BASIC CHARACTERISTICS					
Parameter	Condition		Min.	Typ.	Max.
Absolute Maximum Input Voltage (3sec max.)	2:1 input	5Vin nom.			16VDC
		12Vin nom.			25VDC
	4:1 input	24Vin nom.			50VDC
		48Vin nom.			100VDC
Under Voltage Lockout	2:1 input	24Vin nom.			50VDC
		48Vin nom.			100VDC
	4:1 input	5Vin nom.	4VDC		4.5VDC
		12Vin nom.	8VDC		9VDC
Start-up Time	constant resistive load, Power up or Remote ON/OFF	24Vin nom.	16VDC		18VDC
		48Vin nom.	33VDC		36VDC
		24Vin nom.	8VDC		9VDC
		48Vin nom.	16VDC		18VDC
Remote ON/OFF (referenced to -Vin Pin)	DC-DC ON DC-DC OFF		Open or 0-1.2VDC 2.2-12VDC		
Current of CTRL Pin			-0.5mA		1mA
Remote OFF Input Current				2.5mA	
Internal Operating Frequency			135kHz	150kHz	165kHz
Output Ripple and Noise (20MHz BW limited)	10µF/25V X7R MLCC for 3.3, 5Vout 10µF/25V X7R MLCC for 12, 15Vout 4.7µF/50V X7R MLCC for 24Vout			30mVp-p 40mVp-p 50mVp-p	

Efficiency vs. Load

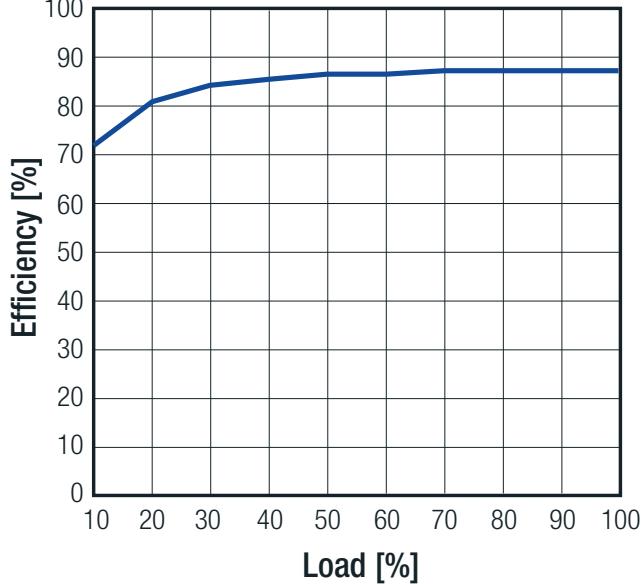

REGULATIONS

Parameter	Condition	Type	Value
Output Accuracy			±1.0%
Line Regulation	low line to high line	Single	±0.2%
		Dual	±0.5%
Load Regulation	no load to full load	Single	0.2%
		Dual	1.0%
Cross Regulation	asymmetrical load 25% / Full Load	only Dual Output	±5.0%
Transient Response	25% load step change		250µs

Specifications (measured @ Ta= 25°C, nominal input voltage, full load and after warm-up)

PROTECTIONS			
Parameter	Condition	Type	Value
Short Circuit Protection (SCP)			continuous, auto-recovery
Over Load Protection (OLP)	% of I _{out} rated		Hiccup mode, 150% typ.
Output Over Voltage Protection (OVP)		Single 3.3V _{out}	3.7VDC min. / 5VDC max.
		5V _{out}	5.6VDC min. / 7VDC max.
		12V _{out}	13.5VDC min. / 16VDC max.
		15V _{out}	18.3VDC min. / 22VDC max.
		24V _{out}	29.1VDC min. / 34.5VDC max.
		Dual 5V _{out}	5.6VDC min. / 7VDC max.
		12V _{out}	13.5VDC min. / 18.2VDC max.
		15V _{out}	17VDC min. / 22VDC max.
Isolation Voltage	I/P to O/P working voltage		5kVAC / 1 minute 250VAC / continuous
Isolation Capacitance			12pF typ. / 17pF max.
Leakage Current	240VAC, 60Hz		2µA
Insulation Grade			reinforced
Means of Protection			2MOPP
Medical Device Classification			built-in power supply
Internal Clearance and Creepage	I/P to O/P		≥8mm
External Clearance and Creepage	I/P to O/P	"C" Pinning "A" Pinning	>19.72mm >14.64mm

Notes:

Note5: This Power module is not internally fused. A input line fuse must be always used.

Recommended Fuse:

2:1 Input Voltage	Fuse (slow blow)
5V	T1.25A
12V	T0.63A
24V	T0.315A
48V	T0.315A

4:1 Input Voltage	Fuse (slow blow)
24V	T0.63A
48V	T0.315A

ENVIRONMENTAL			
Parameter	Condition		Value
Maximum Case Temperature Range			-40°C to +105°C
Maximum Ambient Temperature Range			see " <i>Thermal Calculation</i> " below
Temperature Coefficient			0.02%/K typ.
Thermal Impedance	natural convection 0.1m/s		18K/W
Operating Altitude			5000m
Operating Humidity	non-condensing		5% - 95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C	6444 x 10 ³ hours
Thermal Shock			according to MIL-STD-810F standard
Vibration			according to MIL-STD-810F standard

continued on next page

Specifications (measured @ Ta= 25°C, nominal input voltage, full load and after warm-up)
Thermal Calculation

$$\eta_{\text{set}} = \eta_{\text{full load}} \times f_{\eta}$$

$$P_{\text{diss}} = \left[\frac{P_{\text{out set}}}{\eta_{\text{set}}} \right] - P_{\text{out set}}$$


$$T_{\text{over}} = R_{\text{th}} \times P_{\text{diss}}$$

$$T_{\text{amb}} = T_{\text{case}} - T_{\text{over}}$$

T_{case}	= baseplate temperature	[°C]
T_{over}	= temperature losses	[°C]
T_{amb}	= ambient temperature	[°C]
$P_{\text{out nom.}}$	= nom. output power	[W]
$P_{\text{out set}}$	= output power set	[W]
P_{diss}	= internal losses	[W]
R_{th}	= thermal impedance	[K/W]
η_{set}	= efficiency set	[%]
$\eta_{\text{full load}}$	= efficiency @ full load	[%]
f_{η}	= efficiency factor	[]

Efficiency Crosstable (%) @ full Load

		Input Voltage					
		5	12	24	48	24W	48W
Output Voltage	3.3S	81	82	82	81	82	81
	05S	84.5	84.5	84.5	84	84.5	84
	12S	85.5	87	87	87	87	87
	15S	87.5	87	87	86.5	87	86.5
	24S	85.5	87	87	86.5	87	86.5
	05D	83	83.5	83	83	83	83
	12D	86	87.5	86	86	87	86
	15D	86	86.5	86	86	86	86

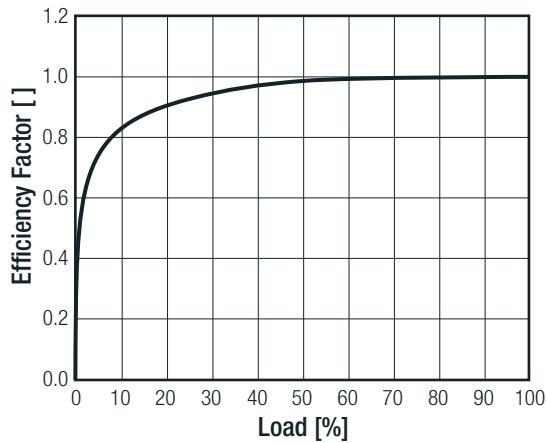Efficiency Factor vs. Load

Practical Example:

Take the REM3-1212D with 12V Input Voltage, 50% load.

What is the maximum ambient operating temperature?

$$T_{\text{case}} = 105^{\circ}\text{C}$$

$$\eta_{\text{set}} = 87.5 \times 0.98 = 85.75\%$$

$$P_{\text{out nom.}} = 3\text{W}$$

$$P_{\text{out set}} = 3 \times 0.5 = 1.5\text{W}$$

$$P_{\text{diss}} = \left[\frac{1.5}{0.856} \right] - 1.5 = 0.25\text{W}$$

$$R_{\text{th}} = 18\text{K/W}$$

$$\eta_{\text{full load}} = 87.5\% \text{ (Crosstable)}$$

$$f_{\eta} = 0.98 \text{ (Graph)}$$

$$T_{\text{over}} = 18 \times 0.25 = +4.5^{\circ}\text{C}$$

$$T_{\text{amb}} = 105 - 4.5 = +100.5^{\circ}\text{C}$$

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
Medical Electric Equipment, General Requirements for Safety and Essential Performance	E314885-A6-CB-1	CAN/CSA-C22.2 No. 60601-1:08 ANSI/AAMI ES60601-1:2005
Medical Electric Equipment, General Requirements for Safety and Essential Performance (CB Scheme)	E314885-A6-CB-1	IEC60601-1:2005 + C2:2007 3rd Edition EN60601-1:2006
EAC	RU-AT.49.09571	TP TC 004/2011 TP TC 004/2011
RoHS2+		RoHS-2011/65/EU + AM-2015/863

continued on next page

Specifications (measured @ Ta= 25°C, nominal input voltage, full load and after warm-up)


Certificate Type (Others)	Conditions	Standard / Criterion
Medical electrical equipment - Part 1-2: General requirements for basic safety and essential performance - Collateral standard: Electromagnetic compatibility - Requirements and tests		EN60601-1-2:2015
Industrial, scientific and medical equipment - Radio frequency disturbance characteristics - Limits and methods of measurement ⁽⁷⁾		EN55011:2009 + A1:2010 Class A & B
ESD Electrostatic discharge immunity test	Air ±15kV; Contact ±8kV	EN61000-4-2:2008
Radiated, radio-frequency, electromagnetic field immunity test	10V/m (80-2500MHz) 27V/m (385MHz) 28V/m (450MHz)	EN61000-4-3:2006 + A2:2010
Fast Transient and Burst Immunity ⁽⁶⁾	DC Port: ±2kV	EN61000-4-4:2012
Surge Immunity ⁽⁶⁾	DC Port: ±2kV	EN61000-4-5:2005
Immunity to conducted disturbances, induced by radio-frequency fields	6Vr.m.s	EN61000-4-6:2013
Power Frequency Magnetic Field	30A/m	EN61000-4-8:2009

Notes:

Note6: An external input filter capacitor is required if the model has to meet EN61000-4-4 or/and EN61000-4-5

<u>Recommended components:</u>	5Vin	aluminium capacitor (Nippon Chemi-con KY series, 1000µF/25V) and a reverse diode (Vishay V10P45) to connect in parallel
	12Vin, 24Vin	aluminium capacitor (Nippon Chemi-con KY series, 470µF/50V)
	48Vin	aluminium capacitor (Nippon Chemi-con KY series, 330µF/100V)

Note7: The whole REM3 series can meet EMI Class A with no external filter. And Class B only with external components

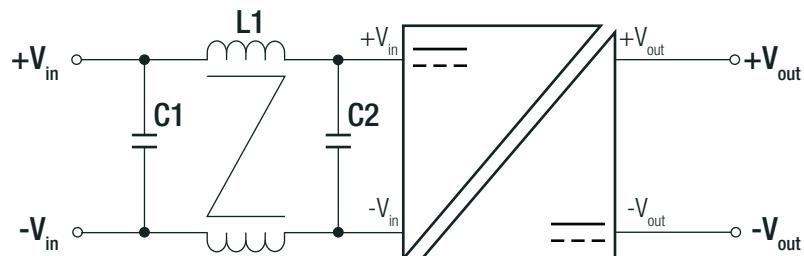EMC Filter Suggestion for Class B ⁽⁸⁾


MODEL	C1 ⁽⁸⁾	C2 ⁽⁸⁾	L1 ⁽⁸⁾
REM3-05xxS_D	22µF/16V MLCC	22µF/16V MLCC	137µH CMC
REM3-12xxS_D REM3-24xxS_D(W)	4.7µF/50V MLCC	4.7µF/50V MLCC	277µH CMC
REM3-48xxS_D(W)	2.2µF/100V MLCC	1µF/100V MLCC	175µH CMC

Notes:

Note8: The component values can be adapted according to customer's application

DIMENSION and PHYSICAL CHARACTERISTICS




Parameter	Type	Value
Material	case PCB potting	non-conductive black plastic (UL94-V2) FR4 (UL94-V1) silicone (UL94-V0)
Dimension (LxWxH)		31.80 x 20.30 x 10.40mm
Weight		14g

continued on next page

Specifications (measured @ $T_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Dimension Drawing (mm)

“A” Pinning (Standard)

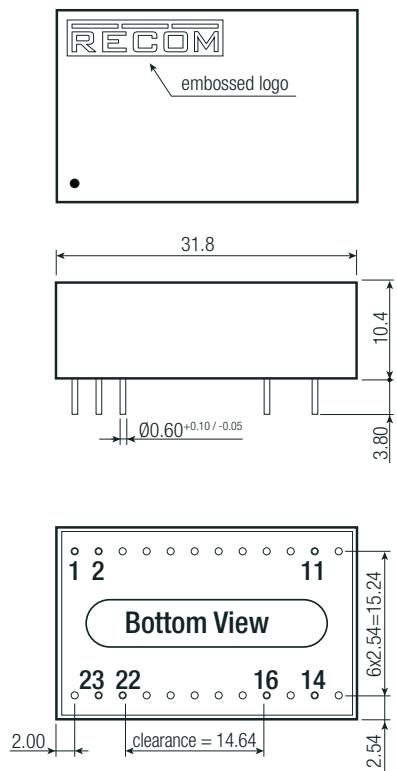

Pin Connections


Pin #	Single	Dual
1	CTRL*	CTRL*
2	-Vin	-Vin
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Com
22	+Vin	+Vin
23	+Vin	+Vin

* If the CTRL option is not chosen, Pin 1 will be absent



NC= not connected

Tolerance: $xx.x= \pm 0.5\text{mm}$

$xx.xx= \pm 0.25\text{mm}$

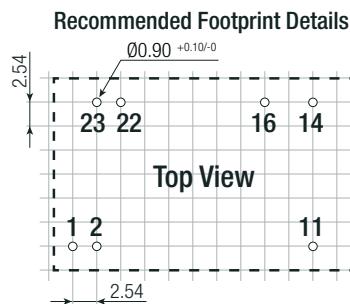


“C” Pinning

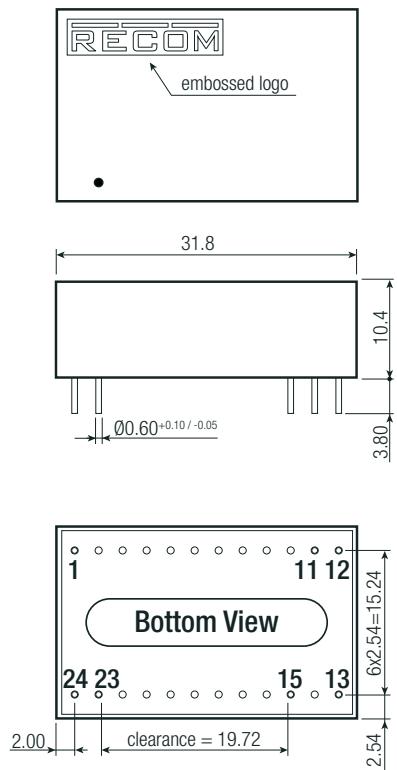

Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
11	No Pin	Com
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin	-Vin
24	-Vin	-Vin

Tolerance: $xx.x= \pm 0.5\text{mm}$
 $xx.xx= \pm 0.25\text{mm}$

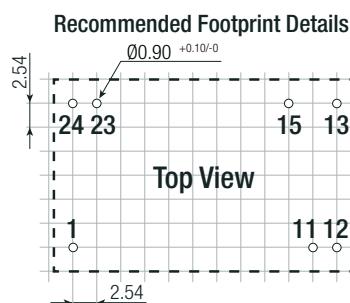

Specifications (measured @ $T_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

PACKAGING INFORMATION		
Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	255 x 21.8 x 16.5mm
Packaging Quantity		7pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity	non-condensing	5% to 95% RH max.

Tube Dimension Drawing (mm)

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[REM3-1212S/C](#) [REM3-2415DW/C](#) [REM3-4812S/A/CTRL](#) [REM3-4812SW/A/CTRL](#) [REM3-4812SW/A](#) [REM3-2415SW/C](#) [REM3-4815D/A](#) [REM3-4824SW/A](#) [REM3-4812DW/A/CTRL](#) [REM3-2415SW/A/CTRL](#) [REM3-4815D/C](#) [REM3-2412SW/A/CTRL](#) [REM3-2424SW/C](#) [REM3-4815DW/A](#) [REM3-1212S/A/CTRL](#) [REM3-0512S/A/CTRL](#) [REM3-4805S/A/CTRL](#) [REM3-4805S/C](#) [REM3-4812D/A/CTRL](#) [REM3-0515D/A/CTRL](#) [REM3-2415D/C](#) [REM3-243.3SW/C](#) [REM3-1205D/C](#) [REM3-0512D/C](#) [REM3-2415S/C](#) [REM3-2415S/A](#) [REM3-2412S/A](#) [REM3-1215S/A](#) [REM3-1224S/A](#) [REM3-0505D/C](#) [REM3-4805SW/A/CTRL](#) [REM3-2412DW/C](#) [REM3-2415DW/A/CTRL](#) [REM3-243.3S/C](#) [REM3-1205S/A](#) [REM3-1212S/A](#) [REM3-2405D/A](#) [REM3-2415D/A](#) [REM3-2405DW/A](#) [REM3-2412DW/A/CTRL](#) [REM3-0505S/A/CTRL](#) [REM3-4812D/C](#) [REM3-053.3S/C](#) [REM3-123.3S/A](#) [REM3-1205S/C](#) [REM3-2415S/A/CTRL](#) [REM3-0524S/A](#) [REM3-4805DW/A/CTRL](#) [REM3-483.3S/C](#) [REM3-1215S/C](#) [REM3-2405D/C](#) [REM3-2415D/A/CTRL](#) [REM3-483.3SW/A/CTRL](#) [REM3-4805SW/A](#) [REM3-0505S/A](#) [REM3-0512S/A](#) [REM3-2424S/A/CTRL](#) [REM3-4812S/A](#) [REM3-1212D/A](#) [REM3-1212D/A/CTRL](#) [REM3-4805SW/C](#) [REM3-2412SW/A](#) [REM3-2415DW/A](#) [REM3-0515S/A/CTRL](#) [REM3-2424SW/A](#) [REM3-123.3S/A/CTRL](#) [REM3-4815D/A/CTRL](#) [REM3-4805DW/C](#) [REM3-2415SW/A](#) [REM3-0524S/C](#) [REM3-4812D/A](#) [REM3-2412D/A](#) [REM3-4805D/A](#) [REM3-243.3SW/A](#) [REM3-4805S/A](#) [REM3-1224S/C](#) [REM3-1205D/A](#) [REM3-1215D/C](#) [REM3-2405S/C](#) [REM3-4812S/C](#) [REM3-2405DW/C](#) [REM3-2412DW/A](#) [REM3-4812DW/A](#) [REM3-4824S/A](#) [REM3-2412S/A/CTRL](#) [REM3-2412S/C](#) [REM3-1215S/A/CTRL](#) [REM3-4815DW/C](#) [REM3-4815S/A](#) [REM3-053.3S/A](#) [REM3-2424S/C](#) [REM3-4824S/C](#) [REM3-1215D/A](#) [REM3-483.3SW/A](#) [REM3-4815DW/A/CTRL](#) [REM3-053.3S/A/CTRL](#) [REM3-483.3S/A](#) [REM3-0515S/A](#) [REM3-4815S/A/CTRL](#) [REM3-0512D/A](#)