


Flyback Transformer

For Analog Devices ADP1031
Isolated Micropower
Management Unit

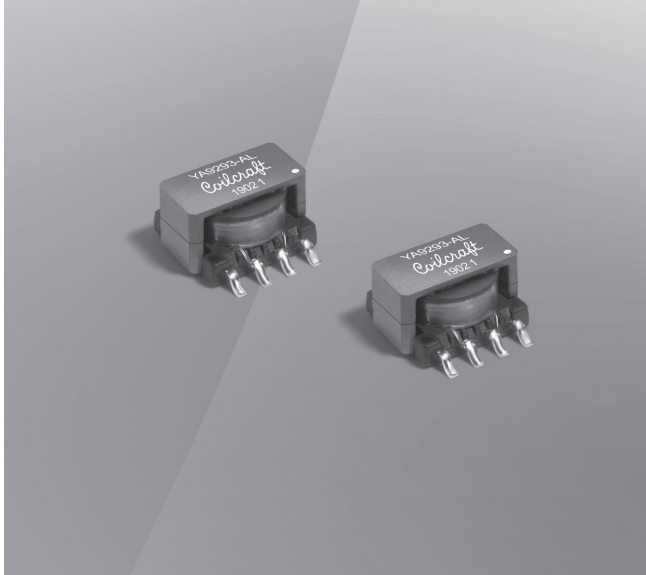

- Developed to use with isolated flyback DC-DC regulator in the Analog Devices ADP1031.
- 2250 Vrms, one minute isolation from primary to secondary
- AEC-Q200 Grade 1 qualified (–40°C to +125°C ambient)

Core material Ferrite

Terminations RoHS tin-silver-copper (95.5/3.8/0.7) over tin over nickel over phos bronze.

Weight 0.99 g

Ambient temperature –40°C to +125°C

Maximum part temperature +165°C

Storage temperature Component: –40°C to +165°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332





Packaging 600 per reel, 13" reel Plastic tape: 24 mm wide, 0.37 mm thick, 16 mm pocket spacing, 6.11 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	Input voltage (V)	Inductance ² ±20% (μH)	Leakage inductance ³ max (μH)	DCR max (Ohms)		Turns ratio pri:sec	Isolation ⁴ (Vrms)	Isat ⁵ (A)	Output
				pri	sec				
YA9293-ALD	4.5 – 60	300	1.62	1.2	0.785	1 : 1	2250	0.25	24 V, 20 mA

- Packaging:** D = 13" machine ready reel. EIA-481 embossed plastic tape.
 - Inductance is for the primary, measured on an Agilent/HP 4284 at 250 kHz, 0.1 Vrms, 0 Adc.
 - Leakage inductance is for the primary with secondary winding shorted together.
 - Isolation (hipot) measured between windings for one minute.
 - DC current that causes an inductance drop of 20% (typ) from its value without current
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Schematic

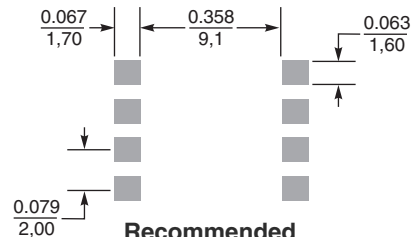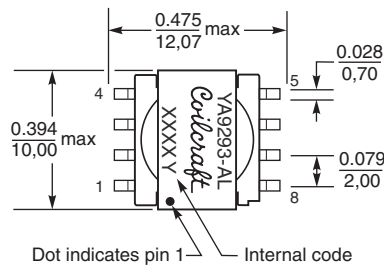

Recommended Land Pattern

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1542 Revised 02/08/19

© Coilcraft Inc. 2019

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Coilcraft:](#)

[YA9293-ALD](#)