

Ultra-Low Power, Bidirectional I²C Isolator with Extended VDD, Idle-Bus Hot-Swap and Low VOL

ADuM1252

General Description

The ADuM1252 offers two bidirectional, open-drain channels for applications, such as I²C, that require data to be transmitted in both directions on the same line. To prevent latch-up action, side 1 outputs comprise special buffers that regulate the logic-low voltage at 0.64V, and the input logic-low threshold is at least 50mV lower than the output logic-low voltage. Side 2 features conventional buffers that do not regulate logic-low output voltage.

The ADuM1252 features independent 1.71V to 5.5V supplies on both side 1 and side 2 of the isolator. The device operates up to 2MHz. The ultra-low standby current of 21 μ A per side is ideal for battery-operated systems.


The ADuM1252 provides a disturbance-free bus connection for hot-plug connections on side 2 by first precharging the bus pins and then monitoring the bus state for either an idle bus or detection of a I²C stop condition before connecting side 1 and side 2.

The ADuM1252 is available in both an 8-pin narrow- and wide-body SOIC package, and in an 8-pin MSOP package. The device is rated for operation at ambient temperatures of -40°C to +125°C.

Key Applications

- Isolated I²C/SMBus Interface
- Battery Management Systems
- Power Over Ethernet (PoE)
- Motor Control Systems

Simplified Application Diagram

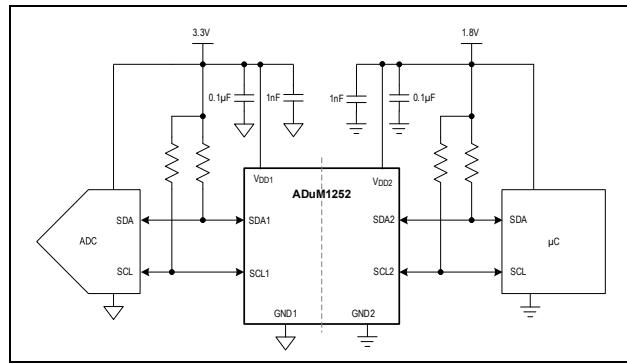

Benefits and Features

- Low VOL(MAX) for Greater I²C Device Compatibility
 - Side 1: 0.69V
 - Side 2: 0.4V
- Ultra-Low Power Consumption for Longer Battery Life
 - 142 μ A (typ) per Channel at 400kHz
- Wide Independent V_{DD1}/V_{DD2} Supply Range Supports More Logic Voltage Levels and Allows Level Shifting
 - 1.71V to 5.5V for Both Sides
- Enhanced Hot-Swappable Side 2 I/O
 - Initial Side 2 Connection Occurs at Bus Idle or Stop States to Prevent Data Corruption
- Bidirectional I²C Data Transfer up to 2MHz SCL
- Bidirectional SCL for Advanced Bus Topologies
 - Supports Clock Stretching and Multiple Controllers Across Isolation Barrier
- Strong Current Sinking Enables Lower RPULL-UP Values for Faster Bus Speeds
 - Side 1: 5mA
 - Side 2: 50mA
- Robust Galvanic Isolation of Digital Signals
 - Continuously Withstands (V_{IOWM})
 - 8-MSOP: 300 V_{RMS}
 - 8-Narrow SOIC: 445 V_{RMS}
 - 8-Wide SOIC: 848 V_{RMS}
 - Withstands \pm 10kV Surge per IEC 61000-4-5
 - Creepage and Clearance
 - 8-MSOP: 3mm
 - 8-Narrow SOIC: 4mm
 - 8-Wide SOIC: 8mm
- Safety and Regulatory Approvals (Pending)
 - IEC60747-17 (Pending)
 - Reinforced V_{IORM} Narrow SOIC: 630V_{PEAK}
 - Reinforced V_{IORM} Wide SOIC: 1200V_{PEAK}
 - UL 1577 (Pending)
 - 8-Narrow SOIC: 3000V_{RMS} for 1min
 - 8-Wide SOIC: 5000 V_{RMS} for 1min
 - IEC/EN/CSA 62368-1 (Pending)
 - IEC/EN/CSA 61010-1 (Pending)
 - CAN/CSA-C22.2 No. 14-18 (Pending)

[Ordering Information](#) appears at end of data sheet.

Absolute Maximum Ratings

| | | | |
|--------------------------------------|----------------|---|-----------------|
| V _{DD1} to GND1..... | -0.3V to +6.0V | 8 MSOP (Derate 3.09mW/°C above +70°C)..... | +247mW |
| V _{DD2} to GND2 | -0.3V to +6.0V | 8 NSOIC (Derate 5.49mW/°C above +70°C)..... | +440mW |
| SDA1, SCL1 to GND1..... | -0.3V to +6.0V | 8 WSOIC (Derate 5.88mW/°C above +70°C)..... | +471mW |
| SDA2, SCL2 to GND2..... | -0.3V to +6.0V | | |
| Short-Circuit Continuous Current | | Temperature | |
| SDA1, SCL1 to V _{DD1} | 20mA | Operating Temperature Range..... | -40°C to +125°C |
| SDA2, SCL2 to V _{DD2} | 100mA | Junction Temperature..... | +150°C |
| Continuous Power Dissipation | | Storage Temperature | -65°C to +150°C |
| | | Lead Temperature (Soldering, 10s) | +300°C |
| | | Soldering Temperature (reflow)..... | +260°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Package Information**8 MSOP**

| | |
|---|-------------------------|
| Outline Number | 21-0036 |
| Land Pattern Number | 90-0092 |
| Junction-to-Ambient Thermal Resistance (θ_{JA}) | 324°C/W |
| Junction-to-Case Top Thermal Resistance ($\theta_{JC(TOP)}$) | 72°C/W |
| Junction-to-Board Thermal Resistance (θ_{JB}) | 153.5°C/W |
| Junction-to-Case Top Thermal Characterization Parameter (ψ_{JT}) | 4°C/W |
| Junction-to-Board Thermal Characterization Parameter (ψ_{JB}) | 152°C/W |
| Moisture Sensitivity Level | 3 |

8 Narrow SOIC

| | |
|---|-------------------------|
| Outline Number | 21-0041 |
| Land Pattern Number | 90-0096 |
| Junction-to-Ambient Thermal Resistance (θ_{JA}) | 182°C/W |
| Junction-to-Case Top Thermal Resistance ($\theta_{JC(TOP)}$) | 50°C/W |
| Junction-to-Board Thermal Resistance (θ_{JB}) | 63.6°C/W |
| Junction-to-Case Top Thermal Characterization Parameter (ψ_{JT}) | 8°C/W |
| Junction-to-Board Thermal Characterization Parameter (ψ_{JB}) | 60°C/W |
| Moisture Sensitivity Level | 3 |

8 Wide SOIC

| | |
|---|---------------------------|
| Outline Number | 21-100415 |
| Land Pattern Number | 90-100146 |
| Junction-to-Ambient Thermal Resistance (θ_{JA}) | 170°C/W |
| Junction-to-Case Top Thermal Resistance ($\theta_{JC(TOP)}$) | 64°C/W |
| Junction-to-Board Thermal Resistance (θ_{JB}) | 60.9°C/W |
| Junction-to-Case Top Thermal Characterization Parameter (ψ_{JT}) | 12°C/W |

| | |
|--|--------|
| Junction-to-Board Thermal Characterization Parameter (ψ_{JB}) | 62°C/W |
| Moisture Sensitivity Level | 3 |

For the latest package outline information and land patterns (footprints), go to www.analog.com/en/design-center/packaging-quality-symbols-footprints/package-index.html. Note that a “+”, “#”, or “-” in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.analog.com/en/technical-articles/thermal-characterization-of-ic-packages.

Electrical Characteristics

($V_{DD1} - V_{GND1} = +1.71V$ to $+5.5V$, $V_{DD2} - V_{GND2} = +1.71V$ to $+5.5V$, $C_L = 20pF$, $T_A = -40^{\circ}C$ to $+125^{\circ}C$, unless otherwise noted ([Note 1](#), [Note 2](#)). Typical values are at $V_{DD1} - V_{GND1} = 3.3V$, $V_{DD2} - V_{GND2} = 3.3V$, $T_A = +25^{\circ}C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS | |
|---|-------------------|---------------------------------|--------------------------------|------|------|---------|---|
| POWER SUPPLY | | | | | | | |
| Supply Voltage | V_{DD1} | Relative to GND1 | 1.71 | 5.5 | 5.5 | V | |
| | V_{DD2} | Relative to GND2 | 1.71 | 5.5 | 5.5 | | |
| Undervoltage-Lockout Threshold Side | $V_{UVLO_}$ | $V_{DD_}$ rising | 1.48 | 1.6 | 1.65 | V | |
| Undervoltage-Lockout Threshold Hysteresis | V_{UVLO_HYST} | (Note 5) | | 30 | | mV | |
| SUPPLY CURRENT (Note 2 , Note 3) | | | | | | | |
| Supply Current—Side 1 | I_{DD1} | $V_{DD1} = V_{DD2} = 1.8V - 5V$ | SDA1/SCL1 = V_{DD1} | 20 | 34 | μA | |
| | | | SDA1/SCL1 = 400kHz square wave | 200 | 250 | | |
| | | | SDA1/SCL1 = 1MHz square wave | 270 | 340 | | |
| Supply Current—Side 2 | I_{DD2} | $V_{DD1} = V_{DD2} = 1.8V - 5V$ | SDA2/SCL2 = V_{DD2} | 21 | 35 | μA | |
| | | | SDA2/SCL2 = GND2 | 49 | 70 | | |
| | | | SDA2/SCL2 = 400kHz square wave | 84 | 110 | | |
| | | | SDA2/SCL2 = 1MHz square wave | 146 | 180 | | |
| LOGIC INPUTS AND OUTPUTS | | | | | | | |
| Input High Voltage, SDA1/SCL1 | V_{IH1} | Relative to GND1 | 0.52 | 0.56 | 0.62 | V | |
| Input Low Voltage, SDA1/SCL1 | V_{IL1} | Relative to GND1 | 0.47 | 0.51 | 0.56 | V | |
| Input Hysteresis, Side 1 | V_{HYS1} | $V_{IH1} - V_{IL1}$ | (Note 5) | 50 | | mV | |
| Output Low Voltage, SDA1/SCL1 | V_{OL1} | Relative to GND1 | I = 0.1mA - 5mA sink | 0.59 | 0.64 | 0.69 | V |
| Low-level Output Voltage to High-Level Input Voltage Threshold Difference, Side 1 | $\Delta V_{O/IT}$ | SDA1/SCL1, $V_{OL} - V_{IH}$ | (Note 4) | 45 | | mV | |

($V_{DD1} - V_{GND1} = +1.71V$ to $+5.5V$, $V_{DD2} - V_{GND2} = +1.71V$ to $+5.5V$, $C_L = 20pF$, $T_A = -40^\circ C$ to $+125^\circ C$, unless otherwise noted ([Note 1](#), [Note 2](#)). Typical values are at $V_{DD1} - V_{GND1} = 3.3V$, $V_{DD2} - V_{GND2} = 3.3V$, $T_A = +25^\circ C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--|-----------------|--|--|-----------------------|-----------------------|-----|---------|
| Input High Voltage, Side 2 | V_{IH2} | SDA2/SCL2 to GND2 | | $0.52 \times V_{DD2}$ | $0.45 \times V_{DD2}$ | | V |
| Input Low Voltage, Side 2 | V_{IL2} | SDA2/SCL2 to GND2 | | $0.38 \times V_{DD2}$ | $0.3 \times V_{DD2}$ | | V |
| Input Hysteresis, Side 2 | V_{HYS2} | $V_{IH2} - V_{IL2}$ | | | $0.07 \times V_{DD2}$ | | V |
| Output Low Voltage, Side 2 | V_{OL2} | SDA2/SCL2 to GND2 | I = 50mA sink | | 0.4 | | V |
| Static Output Loading | $I_{SDA1/SCL1}$ | Side 1 | | 0.1 | 5 | | mA |
| | $I_{SDA2/SCL2}$ | Side 2 | | 0.1 | 50 | | |
| Leakage Current | I_L | Device unpowered | SDA1/SCL1 = 5.5V, VDD1 = 0V | -10 | +10 | | μA |
| | | | SDA2/SCL2 = 5.5V, VDD2 = 0V | -10 | +10 | | |
| | | Device powered | SDA1 = SCL1 = VDD1 = 5.5V | -10 | +10 | | |
| | | Device powered and not in precharge | SDA2 = SCL2 = VDD2 = 5.5V | -10 | +10 | | |
| Input Capacitance | C_{IN} | f = 1MHz | (Note 5) | | 5 | | pF |
| ESD Protection (Note 5) | | | | | | | |
| ESD | | Human Body Model | V_{DD1} to same side pins, V_{DD2} to same side pins | | ± 8 | | kV |
| | | | SDA1/SCL1 to GND1 | | ± 17 | | |
| | | | SDA2/SCL2 to GND2 | | ± 17 | | |
| | | IEC 61000-4-2 contact discharge | SDA1/SCL1 to GND1 unpowered | | ± 8 | | |
| | | | SDA2/SCL2 to GND2 unpowered | | ± 8 | | |
| | | IEC 61000-4-2 contact discharge (GND2 to GND1) | 8 Wide SOIC | | ± 5 | | |
| | | | 8 Narrow SOIC | | ± 5 | | |
| | | | 8 MSOP | | ± 4 | | |

Dynamic Characteristics

($V_{DD1} - V_{GND1} = 1.71V$ to $5.5V$, $V_{DD2} - V_{GND2} = 1.71V$ to $5.5V$, $C_L = 20pF$, $T_A = -40^\circ C$ to $+125^\circ C$, unless otherwise noted. ([Note 5](#)) Typical values are at $V_{DD1} - V_{GND1} = 3.3V$, $V_{DD2} - V_{GND2} = 3.3V$, $T_A = +25^\circ C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--------------------------------|------------|--|--|-----|------|------|-------------|
| Common-Mode Transient Immunity | $CMTI$ | (Note 6) | | 200 | | | kV/ μs |
| Maximum Data Rate | DR_{MAX} | | | 2 | | | MHz |
| Fall Time | t_{F1} | $SDA1/SCL1 = 0.7 \times V_{DD1}$ to $0.3 \times V_{DD1}$ | $4.5V \leq V_{DD1} \leq 5.5V$, $C_{L1} = 40pF$, $R_1 = 1.6k\Omega$ | 8.8 | 20.3 | 36.1 | ns |
| | | | $3.0V \leq V_{DD1} \leq 3.6V$, $C_{L1} = 40pF$, $R_1 = 1k\Omega$ | 6.1 | 13.7 | 24.1 | |

(V_{DD1} - V_{GND1} = 1.71V to 5.5V, V_{DD2} - V_{GND2} = 1.71V to 5.5V, C_L = 20pF, T_A = -40°C to +125°C, unless otherwise noted. ([Note 5](#))
Typical values are at V_{DD1} - V_{GND1} = 3.3V, V_{DD2} - V_{GND2} = 3.3V, T_A = +25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS | |
|-------------------|--------------------|---|--|------|------|-------|----|
| t _{F2} | | 2.25V ≤ V _{DD1} ≤ 2.75V, C _{L1} = 40pF, R ₁ = 810Ω | 4.6 | 10.4 | 18.5 | | |
| | | SDA1/SCL1 = 0.7 × V _{DD1} to 0.75V | 1.71V ≤ V _{DD1} ≤ 1.89V, C _{L1} = 40pF, R ₁ = 470Ω | 2.4 | 4.7 | 11.5 | |
| | | SDA1/SCL1 = 0.9 × V _{DD1} to 0.9V | 4.5V ≤ V _{DD1} ≤ 5.5V, C _{L1} = 40pF, R ₁ = 1.6kΩ | 15.4 | 34.7 | 64.7 | |
| | | | 3.0V ≤ V _{DD1} ≤ 3.6V, C _{L1} = 40pF, R ₁ = 1kΩ | 9.1 | 19.7 | 35.9 | |
| | | | 2.25V ≤ V _{DD1} ≤ 2.75V, C _{L1} = 40pF, R ₁ = 810Ω | 6.0 | 12.2 | 23.3 | |
| | | | 1.71V ≤ V _{DD1} ≤ 1.89V, C _{L1} = 40pF, R ₁ = 470Ω | 3.8 | 6.5 | 11.1 | |
| | | SDA2/SCL2 = 0.7 × V _{DD2} to 0.3 × V _{DD2} | 4.5V ≤ V _{DD2} ≤ 5.5V, C _{L2} = 400pF, R ₂ = 180Ω | 11.8 | 18.6 | 30.0 | |
| | | | 3.0V ≤ V _{DD2} ≤ 3.6V, C _{L2} = 400pF, R ₂ = 120Ω | 9.0 | 13.8 | 21.0 | |
| | | | 2.25V ≤ V _{DD2} ≤ 2.75V, C _{L2} = 400pF, R ₂ = 91Ω | 7.6 | 11.6 | 17.0 | |
| | | | 1.71V ≤ V _{DD2} ≤ 1.89V, C _{L2} = 400pF, R ₂ = 81Ω | 6.5 | 9.5 | 13.4 | |
| | | SDA2/SCL2 = 0.9 × V _{DD2} to 0.4V | 4.5V ≤ V _{DD2} ≤ 5.5V, C _{L2} = 400pF, R ₂ = 180Ω | 25.7 | 41.0 | 63.0 | |
| | | | 3.0V ≤ V _{DD2} ≤ 3.6V, C _{L2} = 400pF, R ₂ = 120Ω | 19.0 | 29.0 | 44.4 | |
| | | | 2.25V ≤ V _{DD2} ≤ 2.75V, C _{L2} = 400pF, R ₂ = 91Ω | 15.5 | 24.0 | 36.3 | |
| | | | 1.71V ≤ V _{DD2} ≤ 1.89V, C _{L2} = 400pF, R ₂ = 81Ω | 12.4 | 18.0 | 26.1 | |
| Propagation Delay | t _{PLH12} | SDA1/SCL1 = 0.66V to SDA2/SCL2 = 0.7 × V _{DD2} | 4.5V ≤ V _{DD} ≤ 5.5V, C _{L1} = 20pF, R ₁ = 1.6kΩ, C _{L2} = 20pF, R ₂ = 180Ω | | 37.6 | 50.0 | ns |
| | | | 3.0V ≤ V _{DD} ≤ 3.6V, C _{L1} = 20pF, R ₁ = 1kΩ, C _{L2} = 20pF, R ₂ = 120Ω | | 35.9 | 48.0 | |

(V_{DD1} - V_{GND1} = 1.71V to 5.5V, V_{DD2} - V_{GND2} = 1.71V to 5.5V, C_L = 20pF, T_A = -40°C to +125°C, unless otherwise noted. ([Note 5](#))
Typical values are at V_{DD1} - V_{GND1} = 3.3V, V_{DD2} - V_{GND2} = 3.3V, T_A = +25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--------------------|--|--|-----|------|-------|-------|
| t _{PHL12} | SDA1/SCL1 = 0.425V to SDA2/SCL2 = 0.3 x V _{DD2} | 2.25V ≤ V _{DD} ≤ 2.75V, C _{L1} = 20pF, R ₁ = 810Ω, C _{L2} = 20pF, R ₂ = 91Ω | | 35.2 | 47.0 | |
| | | 1.71V ≤ V _{DD} ≤ 1.89V, C _{L1} = 20pF, R ₁ = 470Ω, C _{L2} = 20pF, R ₂ = 81Ω | | 36.5 | 51.6 | |
| | | 4.5V ≤ V _{DD} ≤ 5.5V, C _{L1} = 20pF, R ₁ = 1.6kΩ, C _{L2} = 20pF, R ₂ = 180Ω | | 93.7 | 133.3 | |
| | | 3.0V ≤ V _{DD1} ≤ 3.6V, C _{L1} = 20pF, R ₁ = 1kΩ, C _{L2} = 20pF, R ₂ = 120Ω | | 84.2 | 116.4 | |
| | | 2.25V ≤ V _{DD} ≤ 2.75V, C _{L1} = 10pF, R ₁ = 810Ω, C _{L2} = 20pF, R ₂ = 91Ω | | 78.8 | 107.3 | |
| | | 1.71V ≤ V _{DD} ≤ 1.89V, C _{L1} = 20pF, R ₁ = 470Ω, C _{L2} = 20pF, R ₂ = 81Ω | | 75.6 | 100.1 | |
| | SDA2/SCL2 = 0.5 x V _{DD2} to SDA1/SCL1 = 0.7 x V _{DD1} | 4.5V ≤ V _{DD} ≤ 5.5V, C _{L1} = 20pF, R ₁ = 1.6kΩ, C _{L2} = 20pF, R ₂ = 180Ω | | 86.7 | 95.8 | |
| | | 3.0V ≤ V _{DD} ≤ 3.6V, C _{L1} = 20pF, R ₁ = 1kΩ, C _{L2} = 20pF, R ₂ = 120Ω | | 67.3 | 76.3 | |
| | | 2.25V ≤ V _{DD} ≤ 2.75V, C _{L1} = 20pF, R ₁ = 810Ω, C _{L2} = 20pF, R ₂ = 91Ω | | 61.0 | 70.1 | |
| | | 1.71V ≤ V _{DD} ≤ 1.89V, C _{L1} = 20pF, R ₁ = 470Ω, C _{L2} = 20pF, R ₂ = 81Ω | | 41.3 | 53.0 | |
| | | 4.5V ≤ V _{DD} ≤ 5.5V, C _{L1} = 20pF, R ₁ = 1.6kΩ, C _{L2} = 20pF, R ₂ = 180Ω | | 82.6 | 128.4 | |
| t _{PHL21} | SDA2/SCL2 = 0.3 x V _{DD2} to SDA1/SCL1 = 0.3 x V _{DD1} | 3.0V ≤ V _{DD} ≤ 3.6V, C _{L1} = 20pF, R ₁ = 1kΩ, C _{L2} = 20pF, R ₂ = 120Ω | | 69.9 | 101.0 | |
| | | 2.25V ≤ V _{DD} ≤ 2.75V, C _{L1} = 20pF, | | 65.1 | 88.9 | |

(V_{DD1} - V_{GND1} = 1.71V to 5.5V, V_{DD2} - V_{GND2} = 1.71V to 5.5V, C_L = 20pF, T_A = -40°C to +125°C, unless otherwise noted. ([Note 5](#))
Typical values are at V_{DD1} - V_{GND1} = 3.3V, V_{DD2} - V_{GND2} = 3.3V, T_A = +25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|-------------------------|---|---|------------------------|-------|-------|
| | | R ₁ = 810Ω, C _{L2} = 20pF, R ₂ = 91Ω | | | | |
| | | SDA2/SCL2 = 0.3 x V _{DD2} to SDA1/SCL1 = 0.75V | 1.71V ≤ V _{DD} ≤ 1.89V, C _{L1} = 20pF, R ₁ = 470Ω, C _{L2} = 20pF, R ₂ = 81Ω | 59.3 | 79.7 | |
| Pulse-Width Distortion | PWD ₁₂ | t _{PLH12} - t _{PHL12} | 4.5V ≤ V _{DD} ≤ 5.5V | 56.1 | 94.2 | ns |
| | | | 3.0V ≤ V _{DD} ≤ 3.6V | 48.3 | 79.0 | |
| | | | 2.25V ≤ V _{DD} ≤ 2.75V | 43.6 | 70.6 | |
| | | | 1.71V ≤ V _{DD} ≤ 1.89V | 39.1 | 59.8 | |
| | PWD ₂₁ | t _{PLH21} - t _{PHL21} | 4.5V ≤ V _{DD} ≤ 5.5V | 5.9 | 50.7 | |
| | | | 3.0V ≤ V _{DD} ≤ 3.6V | 12.6 | 43.1 | |
| | | | 2.25V ≤ V _{DD} ≤ 2.75V | 14.1 | 37.6 | |
| | | | 1.71V ≤ V _{DD} ≤ 1.89V | 18.0 | 35.1 | |
| Round-Trip Propagation Delay on Side 1 | t _{LOOP1} | SDA1/SCL1 = 0.425V to SDA1/SCL1 = 0.3 x V _{DD1} | 4.5V ≤ V _{DD} ≤ 5.5V, C _{L1} = 40pF, R ₁ = 1.6kΩ, C _{L2} = 400pF, R ₂ = 180Ω | 142.2 | 163.2 | ns |
| | | | 3.0V ≤ V _{DD} ≤ 3.6V, C _{L1} = 40pF, R ₁ = 1kΩ, C _{L2} = 400pF, R ₂ = 120Ω | 114.1 | 133.5 | |
| | | | 2.25V ≤ V _{DD} ≤ 2.75V, C _{L1} = 40pF, R ₁ = 810Ω, C _{L2} = 400pF, R ₂ = 91Ω | 101.3 | 122.8 | |
| | | | 1.71V ≤ V _{DD} ≤ 1.89V, C _{L1} = 40pF, R ₁ = 470Ω, C _{L2} = 400pF, R ₂ = 81Ω | 100.5 | 128.4 | |
| Side 1 Time from UVLO to Active State | t _{ACT} | V _{DD1} rising, V _{DD2} powered up for more than t _{HS_EN} and SDA ₁ /SCL ₁ high | | 1.1 | 1.7 | ms |
| Input Power Loss to Output High-Z | t _{Hi-Z} | Opposite V _{DD} falling below V _{UVLO} | | | 0.4 | ms |
| HOT SWAP/BUS STUCK TIMER, SIDE 2 | | | | | | |
| Precharge Voltage | V _{PRECHG} | SDA2/SCL2 open, V _{DD2} > 0.6V | At power-up | 0.3 x V _{DD2} | | V |
| Precharge Thevenin Equivalent Impedance | R _{PRECHG} | SDA2/SCL2 open, V _{DD2} > 0.6V | At power-up | 140 | | kΩ |
| Precharge Glitch Filter on SDA2/SCL2 | t _{PRE_GLITCH} | V _{DD2} rising above V _{UVLO} | At power-up | 220 | | ns |
| Hot-Swap Detection Enable Time | t _{HS_EN} | At power-up | | 102 | | ms |
| SDA2/SCL2 Idle Detection Time | t _{IDLE} | After t _{HS_EN} | At power-up | 75 | | μs |

($V_{DD1} - V_{GND1} = 1.71V$ to $5.5V$, $V_{DD2} - V_{GND2} = 1.71V$ to $5.5V$, $C_L = 20\text{pF}$, $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$, unless otherwise noted. ([Note 5](#))
Typical values are at $V_{DD1} - V_{GND1} = 3.3V$, $V_{DD2} - V_{GND2} = 3.3V$, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|-------------------|-------------|-------------------------|-----|-----|-----|-------|
| Bus Stuck Timeout | t_{STUCK} | Either SDA1 or SCL1 low | | 102 | | ms |

Note 1: All devices are 100% production tested at $T_A = +25^\circ\text{C}$. Specifications over temperature are guaranteed by design.

Note 2: All currents into the device are positive. All currents out of the device are negative. All voltages are referenced to their respective ground (GND1 or GND2), unless otherwise noted.

Note 3: The supply current does not include any current entering the SDA_ /SCL_ pins. Current is after successful hot-swap connection. $R_1 = R_2 = 1\text{k}\Omega$, $C_{L1} = C_{L2} = 10\text{pF}$.

Note 4: This is the minimum difference between the output logic-low level and the input logic threshold. This ensures that there is no possibility of the part latching up the bus to which it is connected.

Note 5: Not production tested. Guaranteed by design.

Note 6: CMTI is the maximum sustainable common-mode voltage slew rate while maintaining operation. CMTI applies to both rising and falling common-mode voltage edges. Tested with the transient generator connected between GND1 and GND2 ($V_{CM} = 1000\text{V}$).

Timing Diagrams

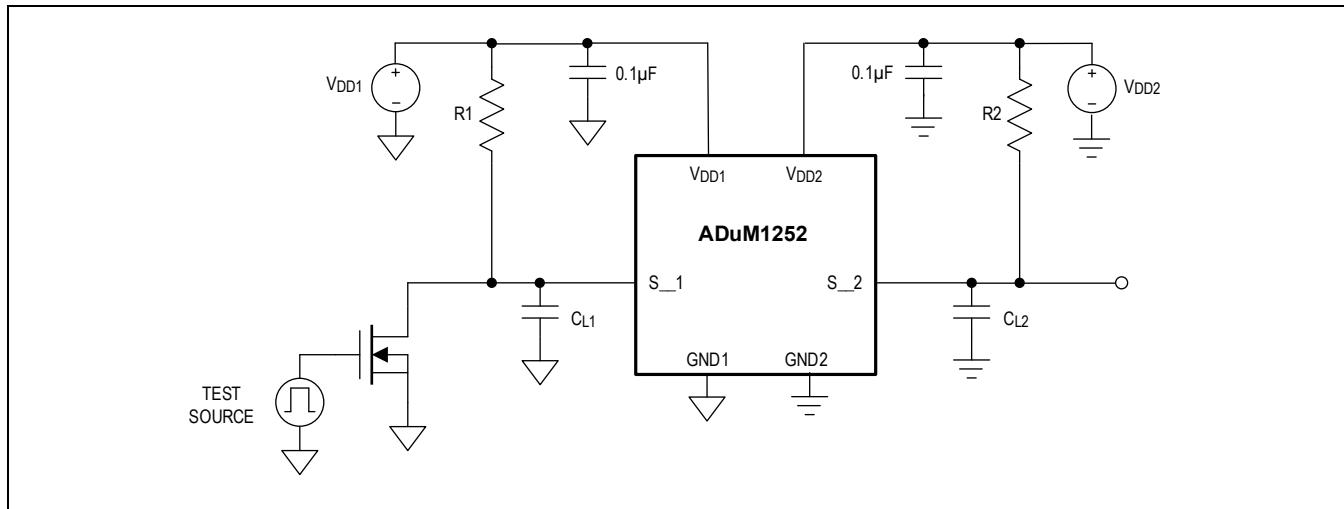


Figure 1. Timing Test Diagram

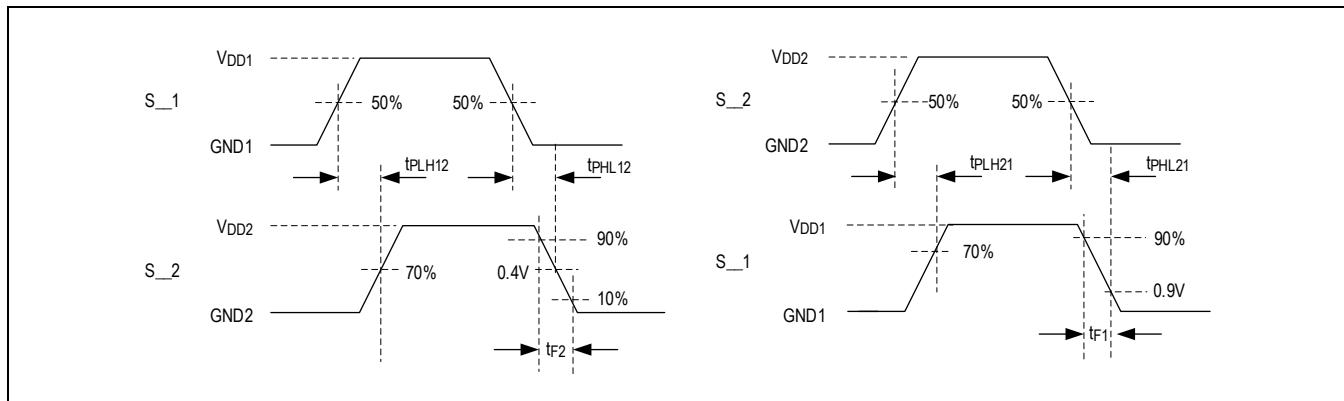


Figure 2. Timing Parameter Definition

Safety Limits

Damage to the IC can result in a low-resistance path to ground or to the supply and, without current limiting, the ADuM1252 can dissipate excessive amounts of power. Excessive power dissipation can damage the die and result in damage to the isolation barrier, potentially causing downstream issues. The safety limits for the ADuM1252 are listed in the package specific [Isolation Characteristics](#) table.

The maximum safety temperature (T_S) for the device is the $+150^\circ\text{C}$ maximum junction temperature specified in the [Absolute Maximum Ratings](#). See the [Thermal Considerations](#) section for details on determining the junction temperature.

[Figure 3](#) and [Figure 4](#) show the thermal derating curves for safety limiting the power and the current for the device in the 8-lead Narrow SOIC (21-0041) package when mounted on the JEDEC 2S2P test card. Ensure that the junction temperature does not exceed $+150^\circ\text{C}$.

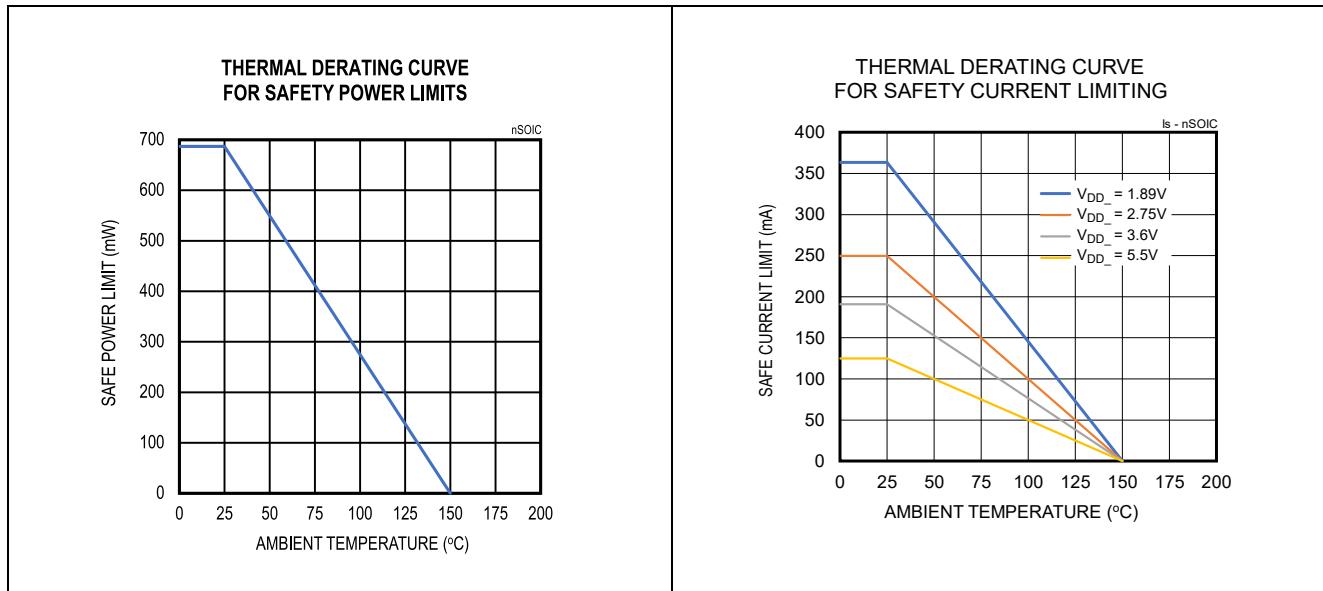


Figure 3. Thermal Derating Curve for 8-Lead Narrow SOIC Package

Figure 4. Thermal Derating Curve for Safety Current Limiting for 8-Lead Narrow SOIC Package

[Figure 5](#) and [Figure 6](#) show the thermal derating curves for safety limiting the power and the current of the device in the 8-lead Wide SOIC (21-100415) package when mounted on the JEDEC 2S2P test card. Ensure that the junction temperature does not exceed 150°C.

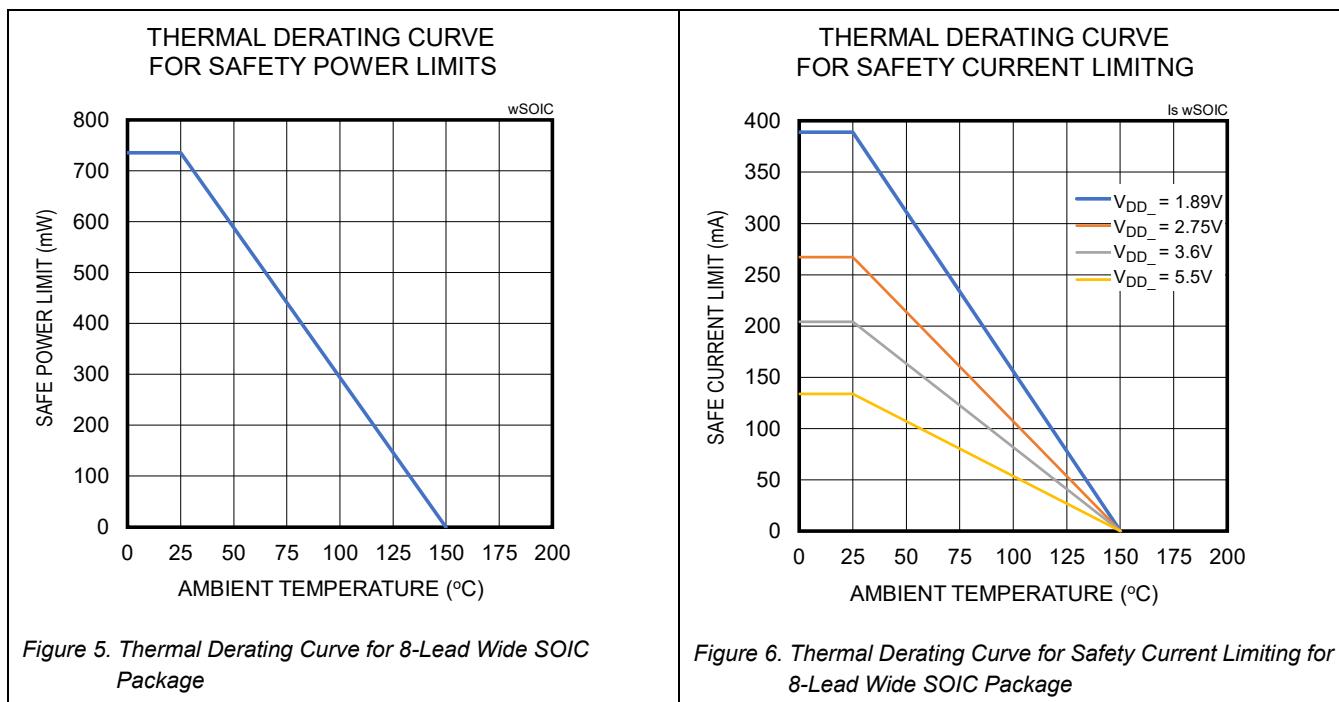


Figure 5. Thermal Derating Curve for 8-Lead Wide SOIC Package

Figure 6. Thermal Derating Curve for Safety Current Limiting for 8-Lead Wide SOIC Package

Isolation Characteristics**8-Lead MSOP (21-0036) Isolation Characteristics**

| PARAMETER | SYMBOL | CONDITIONS | VALUE | UNITS |
|--|-------------------|--|------------------|------------------|
| VOLTAGE (Note 2) | | | | |
| Maximum Working Isolation Voltage | V _{IOWM} | Continuous RMS voltage (Note 1) | 300 | V _{RMS} |
| Maximum Withstanding Isolation Voltage | V _{ISO} | f _{TEST} = 60Hz, duration = 60s (Note 1, Note 2) | 2500 | V _{RMS} |
| PACKAGE CHARACTERISTICS | | | | |
| External Clearance | CLR | Measured from input terminals to output terminals, shortest distance through air | 3 | mm |
| External Creepage | CPG | Measured from input terminals to output terminals, shortest distance along body | 3 | mm |
| Internal Clearance | DTI | Distance through insulation | 21 | μm |
| Comparative Tracking Index | CTI | | > 400 | V |
| Material Group | | Material group (IEC 60112) | II | — |
| Resistance (Input to Output) | R _{IO} | V _{IO} = 500V, T _A = +25°C (Note 3) | 10 ¹² | Ω |
| | | V _{IO} = 500V, +100°C ≤ T _A ≤ +125°C (Note 3) | 10 ¹¹ | Ω |
| Capacitance (Input to Output) | C _{IO} | f _{TEST} = 1MHz (Note 3) | 1.5 | pF |

Note 1: V_{ISO} and V_{IOWM} are defined by the IEC 60747-17 standard.

Note 2: Insulation voltage guaranteed by design, not tested in production. Insulation is similar in structure to devices that are tested to 5 kV rms in production.

Note 3: Device is measured as a 2-terminal device with Pin 1 through Pin 4 connected and Pin 5 through Pin 8 connected.

8-Lead Narrow SOIC (21-0041) Isolation Characteristics

| PARAMETER | SYMBOL | CONDITIONS | VALUE | UNITS |
|---|-------------------|--|-----------|-------------------|
| CLASSIFICATIONS | | | | |
| Overvoltage Category per IEC60664-1 | | For rated mains voltage ≤ 150V _{RMS} | I to IV | — |
| | | For rated mains voltage ≤ 300V _{RMS} | I to III | — |
| Climatic Classification | | | 40/125/21 | — |
| Pollution Degree | | Per DIN VDE V 0110 (refer to Table 1 of the DIN VDE standard) | 2 | — |
| VOLTAGE | | | | |
| Maximum Working Isolation Voltage | V _{IOWM} | Continuous RMS voltage (Note 1) | 445 | V _{RMS} |
| Maximum Repetitive Isolation Voltage | V _{IORM} | (Note 1) | 630 | V _{PEAK} |
| Maximum Transient Isolation Voltage | V _{IOTM} | t = 1s (Note 1) | 4242 | V _{PEAK} |
| Maximum Withstanding Isolation Voltage | V _{ISO} | f _{TEST} = 60Hz, duration = 60s (Note 1, Note 2) | 3000 | V _{RMS} |
| Maximum Surge Isolation Voltage, Reinforced | V _{IOSM} | Test method per IEC 60065, V _{TEST} = 1.6 × V _{IOSM} = 10000V _{PEAK} (Note 1, Note 4) | 6250 | V _{PEAK} |
| Maximum Impulse Voltage | V _{IMP} | Tested in air, 1.2μs/50μs waveform per IEC 62368-1 | 6000 | V _{PEAK} |
| Input to Output Test Voltage | V _{PR} | | 1182 | V _{PEAK} |
| Apparent Charge | q _{pd} | Method B1, V _{PR} = 1.875 × V _{IORM} , t = 1s | 5 | pC |
| PACKAGE CHARACTERISTICS | | | | |
| External Clearance | CLR | Measured from input terminals to output terminals, shortest distance through air | 4 | mm |
| External Creepage | CPG | Measured from input terminals to output terminals, shortest distance along body | 4 | mm |
| Internal Clearance | DTI | Distance through insulation | 21 | μm |

| PARAMETER | SYMBOL | CONDITIONS | VALUE | UNITS |
|------------------------------------|-----------------|---|------------------|-------|
| Comparative Tracking Index | CTI | | > 600 | V |
| Material Group | | Material group (IEC 60112) | I | — |
| Resistance (Input to Output) | R _{IO} | V _{IO} = 500V, T _A = +25°C (Note 3) | 10 ¹² | Ω |
| | | V _{IO} = 500V, +100°C ≤ T _A ≤ +125°C (Note 3) | 10 ¹¹ | Ω |
| Capacitance (Input to Output) | C _{IO} | V _{IO} = 500V, T _S = +150°C (Note 3) | 10 ⁹ | Ω |
| | | f _{TEST} = 1MHz (Note 3) | 1.5 | pF |
| SAFETY LIMITING VALUES | | | | |
| Maximum Ambient Safety Temperature | T _S | | 150 | °C |
| Maximum Input Power Dissipation | P _{SI} | θ _{JA} = 182°C/W, T _J = +150°C, T _A = +25°C | 687 | mW |
| Maximum Output Current | I _{SO} | θ _{JA} = 182°C/W, T _J = +150°C, T _A = +25°C, V _{DD} = 5.5V | 124 | mA |
| | | θ _{JA} = 182°C/W, T _J = +150°C, T _A = +25°C, V _{DD} = 3.6V | 190 | mA |
| | | θ _{JA} = 182°C/W, T _J = +150°C, T _A = +25°C, V _{DD} = 2.75V | 249 | mA |
| | | θ _{JA} = 182°C/W, T _J = +150°C, T _A = +25°C, V _{DD} = 1.89V | 363 | mA |

Note 1: V_{ISO}, V_{IOTM}, V_{IOWM}, V_{IORM} and V_{IOSM} are defined by the IEC 60747-17 standard.

Note 2: Product is qualified at V_{ISO} for 60s and 100% production tested at 120% of V_{ISO} for 1s.

Note 3: Device is measured as a 2-terminal device with Pin 1 through Pin 4 connected and Pin 5 through Pin 8 connected.

Note 4: Devices are immersed in oil during surge characterization.

8-Lead Wide SOIC (21-100415) Isolation Characteristics

| PARAMETER | SYMBOL | CONDITIONS | VALUE | UNITS |
|---|-------------------|---|-----------|-------------------|
| CLASSIFICATIONS | | | | |
| Overvoltage Category per IEC60664-1 | | For rated mains voltage ≤ 150 V _{RMS} | I to IV | — |
| | | For rated mains voltage ≤ 300 V _{RMS} | I to IV | — |
| | | For rated mains voltage ≤ 600 V _{RMS} | I to IV | — |
| Climatic Classification | | | 40/125/21 | — |
| Pollution Degree | | Per DIN VDE V 0110 (refer to Table 1 of the DIN VDE standard) | 2 | — |
| VOLTAGE | | | | |
| Maximum Working Isolation Voltage | V _{IOWM} | Continuous RMS voltage (Note 1) | 848 | V _{RMS} |
| Maximum Repetitive Isolation Voltage | V _{IORM} | (Note 1) | 1200 | V _{PEAK} |
| Maximum Transient Isolation Voltage | V _{IO} | t = 1s (Note 1) | 7070 | V _{PEAK} |
| Maximum Withstanding Isolation Voltage | V _{ISO} | f _{TEST} = 60Hz, duration = 60s (Note 1 , Note 2) | 5000 | V _{RMS} |
| Maximum Surge Isolation Voltage, Reinforced | V _{IOSM} | Test method per IEC 60065, V _{TEST} = 1.6 x V _{IOSM} = 10000V _{PEAK} (Note 1 , Note 4) | 6250 | V _{PEAK} |
| Maximum Impulse Voltage | V _{IMP} | Tested in air, 1.2μs/50μs waveform per IEC 62368-1 | 8000 | V _{PEAK} |
| Input to Output Test Voltage | V _{PR} | | 2250 | V _{PEAK} |
| Apparent Charge | q _{pd} | Method B1, V _{PR} = 1.875 x V _{IORM} , t = 1s | 5 | pC |
| PACKAGE CHARACTERISTICS | | | | |
| External Clearance | CLR | Measured from input terminals to output terminals, shortest distance through air | 8 | mm |

| PARAMETER | SYMBOL | CONDITIONS | VALUE | UNITS |
|------------------------------------|-----------------|---|------------------|-------|
| External Creepage | CPG | Measured from input terminals to output terminals, shortest distance along body | 8 | mm |
| Internal Clearance | DTI | Distance through insulation | 21 | µm |
| Comparative Tracking Index | CTI | | > 600 | V |
| Material Group | | Material group (IEC 60112) | I | — |
| Resistance (Input to Output) | R _{IO} | V _{IO} = 500V, T _A = +25°C (Note 3) | 10 ¹² | Ω |
| | | V _{IO} = 500V, +100°C ≤ T _A ≤ +125°C (Note 3) | 10 ¹¹ | Ω |
| Capacitance (Input to Output) | C _{IO} | V _{IO} = 500V, T _S = +150°C (Note 3) | 10 ⁹ | Ω |
| SAFETY LIMITING VALUES | | | | |
| Maximum Ambient Safety Temperature | T _S | | 150 | °C |
| Maximum Input Power Dissipation | P _{SI} | θ _{JA} = 170°C/W, T _J = +150°C, T _A = +25°C | 735 | mW |
| Maximum Output Current | I _{SO} | θ _{JA} = 170°C/W, T _J = +150°C, T _A = +25°C, V _{DD} = 5.5V | 133 | mA |
| | | θ _{JA} = 170°C/W, T _J = +150°C, T _A = +25°C, V _{DD} = 3.6V | 204 | mA |
| | | θ _{JA} = 170°C/W, T _J = +150°C, T _A = +25°C, V _{DD} = 2.75V | 267 | mA |
| | | θ _{JA} = 170°C/W, T _J = +150°C, T _A = +25°C, V _{DD} = 1.89V | 388 | mA |

Note 1: V_{ISO}, V_{IO}TM, V_{IO}WM, V_{IO}RM and V_{IO}SM are defined by the IEC 60747-17 standard.

Note 2: Product is qualified at V_{ISO} for 60s and 100% production tested at 120% of V_{ISO} for 1s.

Note 3: Device is measured as a 2-terminal device with Pin 1 through Pin 4 connected and Pin 5 through Pin 8 connected.

Note 4: Devices are immersed in oil during surge characterization.

Regulatory Information

The ADuM1252 has been approved by the organizations listed below. Certifications are available at [Safety and Regulatory Certifications for Digital Isolation](#).

8-Lead Narrow SOIC (21-0041) Package Certifications

| REGULATORY AGENCY | STANDARD CERTIFICATION/APPROVAL | FILE |
|-------------------|--|-----------|
| UL | UL 1577 component recognition program (Note 1): Single/basic 3000V _{RMS} isolation voltage. | (Pending) |
| CSA | CSA No 14-18 (Note 2 and Note 3): CSA 62368-1:19, IEC 62368-1:2018 Ed. 3 and EN62368-1:2020+A11:2020: Basic insulation at 400V _{RMS} . CSA 61010-1-12+A1 and IEC 61010-1 3rd Ed.: Basic insulation at 300V _{RMS} from mains, 400V _{RMS} from secondary circuit. | (Pending) |
| VDE | IEC 60747-17 (Note 4): Reinforced insulation, maximum transient isolation voltage 4242V _{PK} , maximum repetitive peak isolation voltage 630V _{PK} . | (Pending) |
| CQC | GB 4943.1-2022: Basic insulation at 400V _{RMS} (565V _{PEAK}) maximum working voltage, tropical climate, altitude < 5000m | (Pending) |

| | | |
|---------|--|-----------|
| TUV Sud | IEC 62368-1:2018 Ed. 3 and EN62368-1:2020+A11:2020: Basic insulation at 400VRMS | (Pending) |
|---------|--|-----------|

Note 1: In accordance with UL 1577, each ADuM1252ASA+ is proof tested by applying an insulation test voltage $\geq 3600\text{VRMS}$ for 1 second (current leakage detection limit = $5\mu\text{A}$).

Note 2: Working voltages are quoted for material group III case material in pollution degree 2. ADuM1252ASA+ case material has been evaluated by CSA as material group I.

Note 3: The creepage and clearance distances have been evaluated for altitudes $< 2000\text{m}$, material group III, in pollution degree 2 and overvoltage category II, except where specified above.

Note 4: In accordance with IEC 60747-17, each ADuM1252 is proof tested by applying an insulation test voltage $\geq 1182\text{V}$ peak for 1s (partial discharge detection limit = 5 pC). This coupler is suitable for “safe electrical insulation” only within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.

8-Lead Wide SOIC (21-00415) Package Certifications

| REGULATORY AGENCY | STANDARD CERTIFICATION/APPROVAL | FILE |
|-------------------|--|-----------|
| UL | UL 1577 component recognition program (Note 1): Single/basic 5000VRMS isolation voltage. | (Pending) |
| CSA | CSA No 14-18 (Note 2 and Note 3): CSA 62368-1:19, IEC 62368-1:2018 Ed. 3 and EN62368-1:2020+A11:2020: Basic insulation at 800VRMS. CSA 61010-1-12+A1 and IEC 61010-1 3rd Ed.: Basic insulation at 600VRMS from mains, 800VRMS from secondary circuit | (Pending) |
| VDE | IEC 60747-17 (Note 4): Reinforced insulation, maximum transient isolation voltage 7070V _{PK} , maximum repetitive peak isolation voltage 1200V _{PK} . | (Pending) |
| CQC | GB 4943.1-2022: Basic insulation at 800VRMS (1131V _{PEAK}) maximum working voltage, tropical climate, altitude $< 5000\text{m}$ | (Pending) |
| TUV Sud | IEC 62368-1:2018 Ed. 3 and EN62368-1:2020+A11:2020: Basic insulation at 800VRMS | (Pending) |

Note 1: In accordance with UL 1577, each ADuM1252AWA+ is proof tested by applying an insulation test voltage $\geq 6000\text{VRMS}$ for 1 second (current leakage detection limit = $5\mu\text{A}$).

Note 2: Working voltages are quoted for material group III case material in pollution degree 2. ADuM1252AWA+ case material has been evaluated by CSA as material group I.


Note 3: The creepage and clearance distances have been evaluated for altitudes $< 2000\text{m}$, material group III, in pollution degree 2 and overvoltage category II, except where specified above.

Note 4: In accordance with IEC 60747-17, each ADuM1252 is proof tested by applying an insulation test voltage $\geq 2250\text{V}$ peak for 1s (partial discharge detection limit = 5 pC). This coupler is suitable for “safe electrical insulation” only within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.


Typical Operating Characteristics

(Typical values are at $V_{DD1} = V_{DD2} = 3.3V$, GND1 = GND2, $T_A = +25^\circ C$, unless otherwise noted. $C_L = 20pF$, $R_{PULLUP} = 1k\Omega$ and $1nF$, $100nF$ and $1\mu F$ decoupling capacitors are on V_{DD1} and V_{DD2} . All tests were performed using the ADuM1252SEVKIT#.)


SIDE 1 SUPPLY CURRENT
vs. DATA RATE

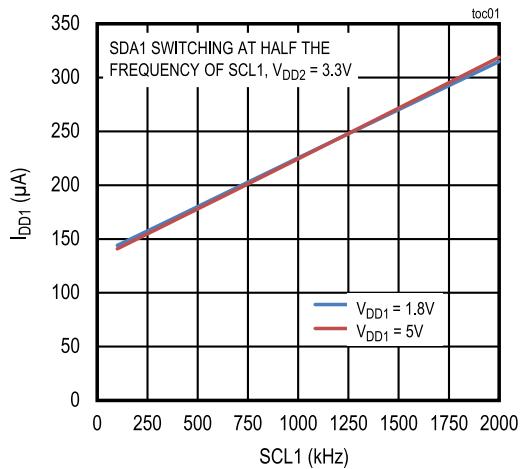


SIDE 2 SUPPLY CURRENT
vs. DATA RATE




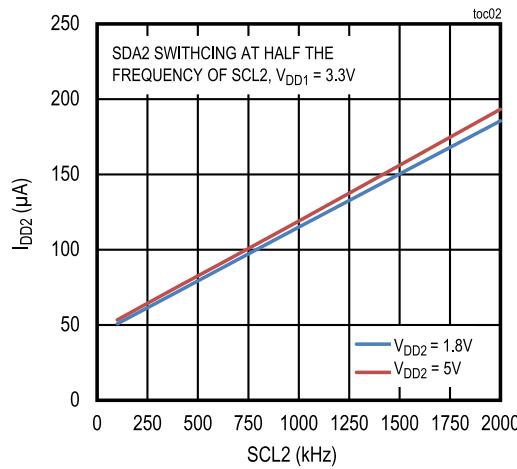


PROPAGATION DELAY t_{PLH12}
vs. TEMPERATURE


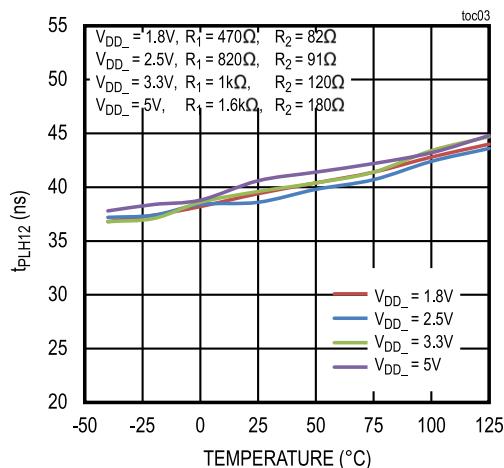


PROPAGATION DELAY t_{PLH21}
vs. TEMPERATURE

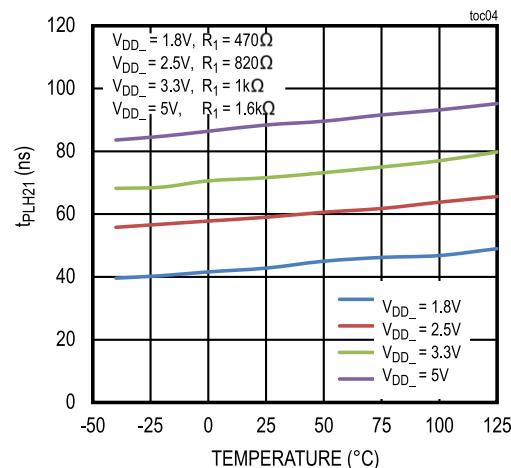


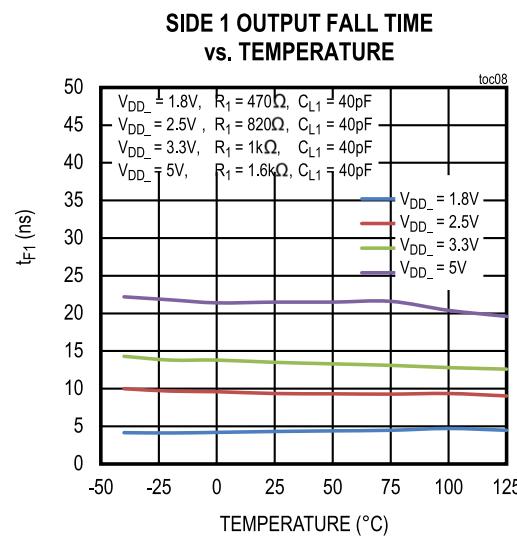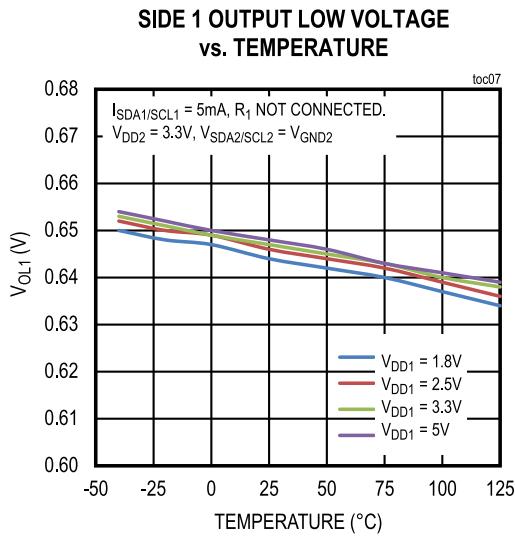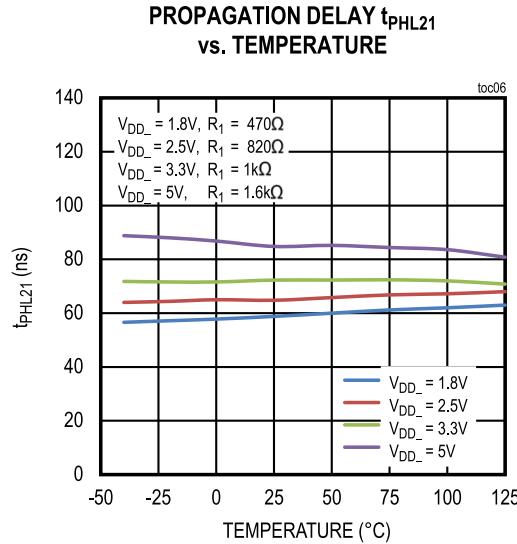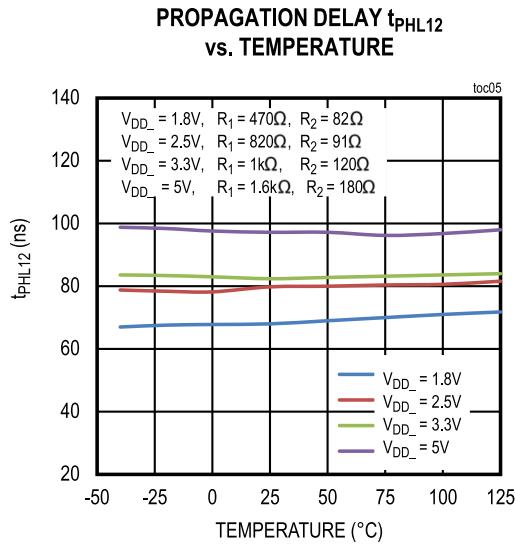

t_{F1} MEASURED FROM:
 $V_{DD_1} = 1.8V: 0.7V_{DD1} \text{ TO } 0.75V$
 $V_{DD_1} = 2.5V, 3.3V, \text{ OR } 5V: 0.7V_{DD1} \text{ TO } 0.3V_{DD1}$

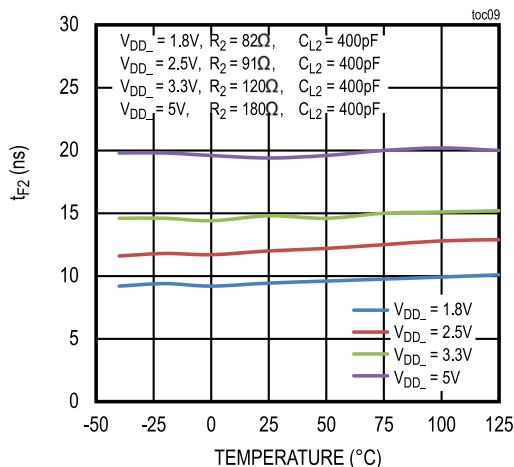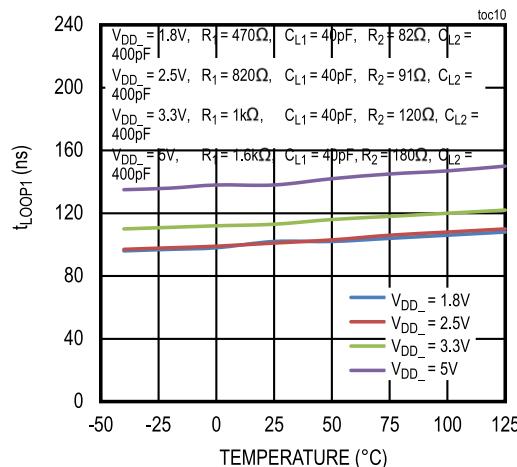SIDE 2 OUTPUT FALL TIME
vs. TEMPERATURE t_{LOOP1} vs. TEMPERATURE t_{F2} MEASURED FROM: 0.7V_{DD2} TO 0.3V_{DD2}


Pin Configuration

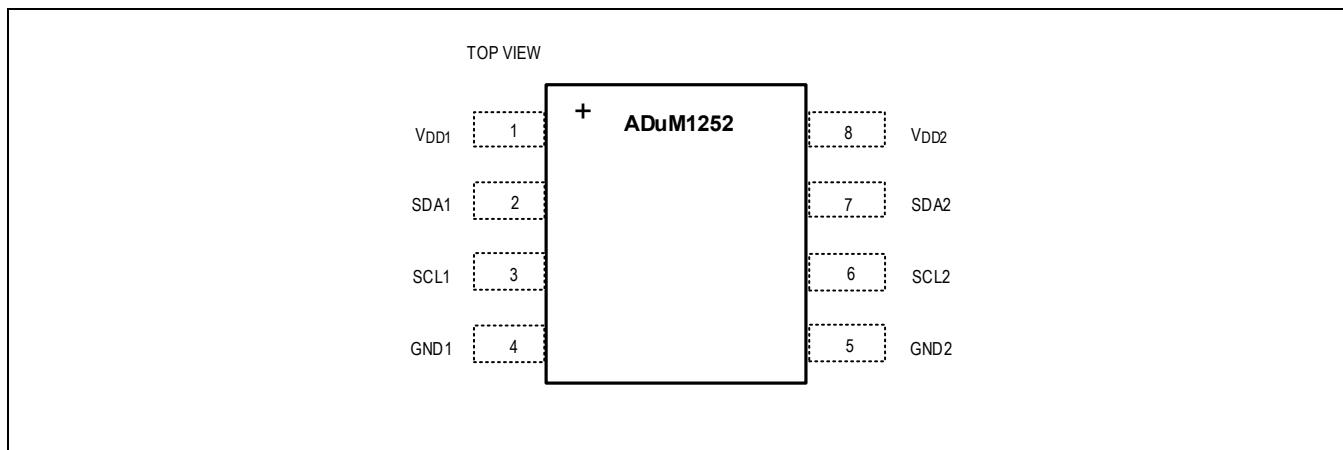

Pin Description

| PIN | NAME | FUNCTION |
|-----|-----------|---|
| 1 | V_{DD1} | Supply Voltage Side 1. Bypass V_{DD1} with a 1nF and a 0.1 μ F ceramic capacitor as close as possible to the pin. |
| 2 | SDA1 | Serial Data Input/Output on Side 1. SDA1 is translated to/from SDA2 and is an open-drain output. |
| 3 | SCL1 | Serial Clock Input/Output on Side 1. SCL1 is translated to/from SCL2 and is an open-drain output. |
| 4 | GND1 | Ground Reference for Side 1 |
| 5 | GND2 | Ground Reference for Side 2 |
| 6 | SCL2 | Serial Clock Input/Output on Side 2. SCL2 is translated to/from SCL1 and is an open-drain output. |
| 7 | SDA2 | Serial Data Input/Output on Side 2. SDA2 is translated to/from SDA1 and is an open-drain output. |
| 8 | V_{DD2} | Supply Voltage Side 2. Bypass V_{DD2} with a 1nF and a 0.1 μ F ceramic capacitor as close as possible to the pin. |

Functional Diagram

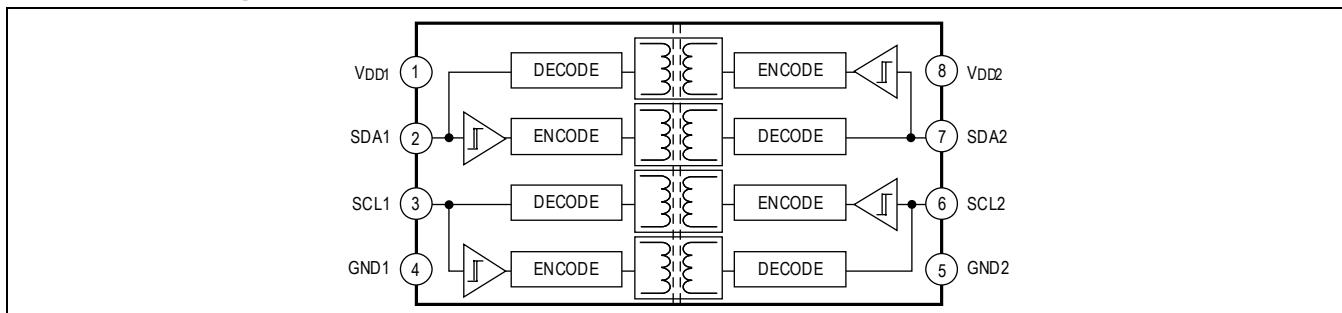

Detailed Description

The ADuM1252 is a two-channel I²C isolator utilizing Analog Devices, Inc. proprietary process technology. The device transfers digital signals between circuits with different power domains at ambient temperatures up to +125°C.

The device offers two bidirectional open-drain channels for applications, such as I²C, that require data to be transmitted in both directions on the same line. The bidirectional clock channel allows for applications with multiple I²C controllers located on both sides of the isolation barrier and/or clock stretching by a I²C target device regardless of its location relative to the isolation barrier and controller.

The device features independent 1.71V to 5.5V supplies on each side of the isolator. The device operates with SCL frequencies up to 2MHz. The wide temperature range and high isolation voltage make the device ideal for use in harsh industrial environments.

Digital Isolation

The ADuM1252 provides reinforced galvanic isolation for digital signals that are transmitted between two ground domains.

In the 8-pin MSOP package (21-0036), the ADuM1252 withstands voltage differences of up to 2.5kVRMS for up to 60 seconds and up to 424VPEAK of continuous isolation.

In the 8-pin narrow SOIC package (21-0041), the ADuM1252 withstands voltage differences of up to 3kVRMS for up to 60 seconds and up to 630VPEAK of continuous isolation.

In the 8-pin wide SOIC package (21-100415), the ADuM1252 withstands voltage differences of up to 5kVRMS for up to 60 seconds and up to 1200VPEAK of continuous isolation.

Bidirectional Channels

The ADuM1252 device features two bidirectional channels that have open-drain outputs.

The bidirectional channels do not require a direction control input. A logic-low on one side causes the corresponding pin on the other side to be pulled low while avoiding data latching within the device due to the coordination of the side 1 output logic-low voltage (V_{OL1}) and input logic-low threshold (V_{IL1}). The side 1 outputs utilize special buffers that regulate V_{OL1} to approximately 0.64V while keeping V_{IL1} at least 50mV lower than V_{OL1} . This difference prevents an output logic-low on side 1 from being accepted as an input low and subsequently transmitted to side 2, thus, preventing a latching action. SDA2 and SCL2 are conventional outputs that do not regulate the logic-low output voltage.

Due to their special nature, the side 1 SDA/SCL pins of different ADuM1252 devices cannot be connected together. This restriction also includes pins on other devices which employ similar buffers or rise-time accelerators. The side 2 pins do not have this restriction. Therefore, the side 2 pins of the ADuM1252 can be connected to each other or to any other bidirectional buffer or level translator's pin, including the side 1 pins of the ADuM1252.

The ADuM1252's outputs are all open-drain and require pull-up resistors to their respective supplies to generate the logic-high output voltage. The output low voltages are guaranteed for sink currents of up to 50mA for side 2 and 5mA for side 1 (see the [Electrical Characteristics](#) table).

The ADuM1252's bidirectional SCL channel supports I²C clock stretching.

Startup and Undervoltage Lockout

The V_{DD1} and V_{DD2} supplies are both internally monitored for undervoltage conditions. Undervoltage events can occur during power-up, power-down, or during normal operation due to a sagging supply voltage. When an undervoltage condition is detected on either supply, all outputs go to their default states regardless of the state of the inputs as seen in [Table 1](#).

Table 1. Output Behavior During Undervoltage Condition

| V _{DD1} | V _{DD2} | INPUT | V _{OUT1} | V _{OUT2} |
|------------------|------------------|------------|-------------------|-------------------|
| Powered | Powered | High | High-Z | High-Z |
| Powered | Powered | Low | Low | Low |
| Undervoltage | Powered | Don't care | High-Z | High-Z |
| Powered | Undervoltage | Don't care | High-Z | High-Z |

Level Shifting

The wide supply voltage range of both V_{DD1} and V_{DD2} allows the ADuM1252 to be used for level translation in addition to isolation. V_{DD1} and V_{DD2} can be independently set to any voltage from 1.71V to 5.5V. The supply voltage sets the logic level on the corresponding side of the isolator.

Hot Swap

The ADuM1252 includes special precharge circuitry on SDA2/SCL2 to prevent loading on the I²C bus lines while the supply is either unpowered or in the process of being powered on. When the supply is below the UVLO threshold, the ADuM1252 bus lines do not load the bus to avoid disrupting or corrupting an active I²C bus. If the isolator is plugged into a live backplane using a staggered connector, where the supply and ground make connection first followed by the bus lines, the SDA2 and SCL2 lines are precharged to V_{DD2}/3 to minimize the current required to charge the parasitic capacitance of the device. Once the device is fully powered on, the device I/O pins become active. However, the connection between side 1 and side 2 does not occur until after the side 2 bus either detects an I²C stop condition or the bus has been idle for 125μs. See [Figure 7](#).

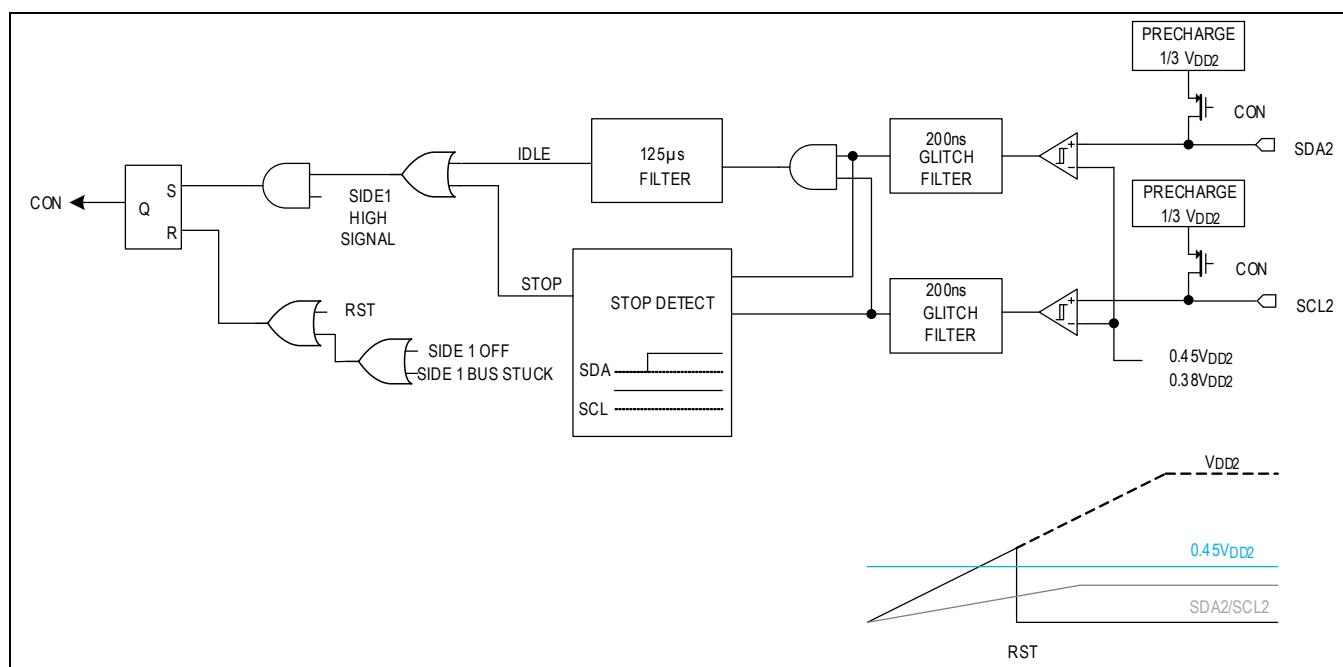


Figure 7. Bus Connection Logic

Bus Connection

The ADuM1252 connects the side 1 bus to the side 2 bus when both busses are idle or when side 1 is high and an I²C stop condition has been detected on side 2. If a stuck bus condition is detected on side 1, then the ADuM1252 disconnects the two busses to allow the external system to attempt a recovery.

Applications Information

Power-Supply Sequencing

The ADuM1252 does not require special power-supply sequencing. The logic levels are set independently on either side by V_{DD1} and V_{DD2}. Each supply can be present over the entire specified range regardless of the level or presence of the other supply.

Power-Supply Decoupling

To reduce ripple and the chance of introducing data errors especially if large common-mode transients are expected in the application, bypass V_{DD1} and V_{DD2} with 100nF and 1nF low-ESR ceramic capacitors to GND1 and GND2, respectively. Place the bypass capacitors as close to the power-supply input pins as possible.

Thermal Considerations

Thermal performance is directly linked to printed circuit board (PCB) design and operating environment. Pay careful attention to the PCB thermal design.

Thermal parameter values are specified in the [Package Information](#) section. θ_{JA} and θ_{JB} are mainly used to compare the thermal performance of the package of the device with other semiconductor packages when all test conditions listed are similar. Ψ_{JT} or Ψ_{JT} can be used to estimate the junction temperature when an accurate thermal measurement of the board temperature is available. The temperature measurement must be near the device under test (DUT) or directly on the package top surface, operating in the system environment.

θ_{JA} can be used for a first-order approximation to calculate the junction temperature in the system environment. The power dissipation (P_D), junction-to-ambient thermal impedance (θ_{JA}), and ambient temperature (T_A) determine the junction temperature (T_J) according to the expression:

$$T_J = T_A + (P_D \times \theta_{JA})$$

A more accurate estimate of the junction temperature can be found using Ψ_{JT}. Measure the device package temperature (T_{PACKAGE}) in the center of the package using an IR camera or thermocouple and then use the following expression:


$$T_J = T_{PACKAGE} + \Psi_{JT} \times P_D$$

Layout Considerations

The PCB designer should follow some critical recommendations to get the best performance from the design.

- Keep the input/output traces as short as possible. To keep signal paths low inductance, avoid using vias.
- Have a solid ground plane underneath the high-speed signal layer.
- Keep the area underneath the ADuM1252 free from ground and signal planes. Any galvanic or metallic connection between side 1 and side 2 defeats the isolation.

Typical Application Circuit

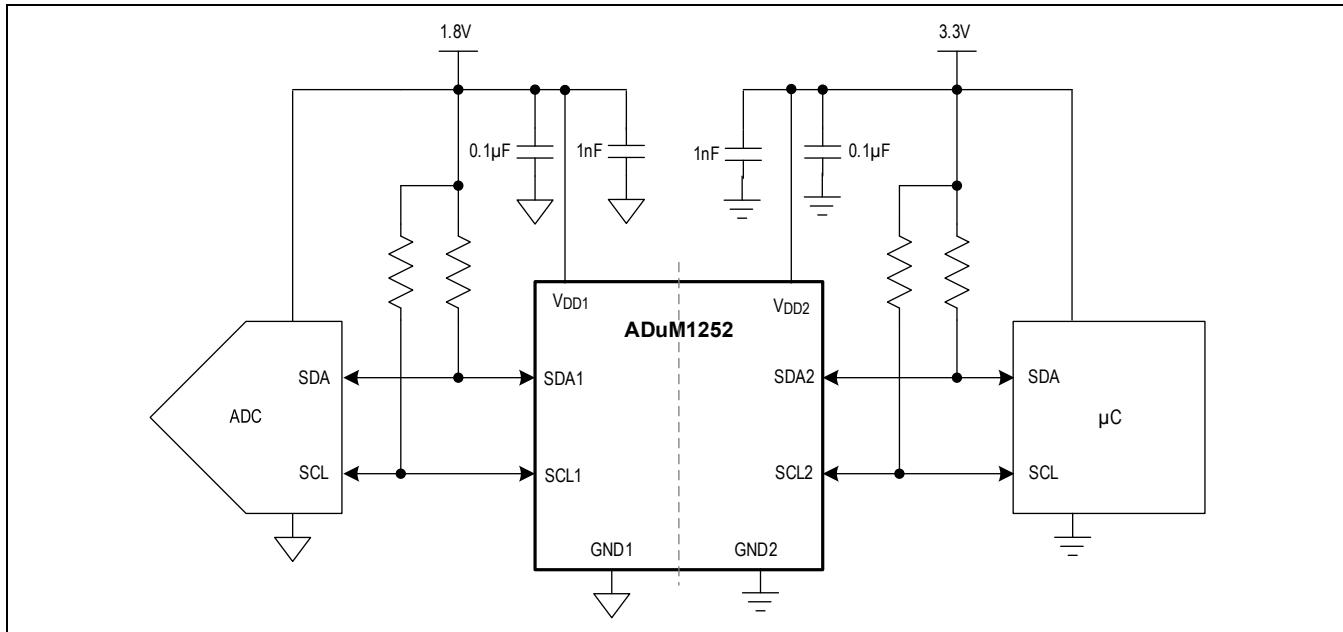

Ordering Information

| PART NUMBER | TEMP RANGE | PIN-PACKAGE |
|---------------------|-----------------|---------------|
| ADuM1252AUA+ | -40°C to +125°C | 8 MSOP |
| ADuM1252AUA+T | -40°C to +125°C | 8 MSOP |
| ADuM1252ASA+ | -40°C to +125°C | 8 Narrow SOIC |
| ADuM1252ASA+T | -40°C to +125°C | 8 Narrow SOIC |
| ADuM1252AWA+ | -40°C to +125°C | 8 Wide SOIC |
| ADuM1252AWA+T | -40°C to +125°C | 8 Wide SOIC |

+ Denotes a lead (Pb)-free/RoHS-compliant package.

T = Tape and reel.

Chip Information

PROCESS: BiCMOS

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|---|---------------|
| 0 | 10/23 | Initial release | — |
| 1 | 4/24 | Added MSOP and Wide SOIC packages, updated Change Narrow SOIC safety limit current VDD from 5.6V to 5.5V, moved ESD characteristics to Electrical Characteristics table, updated which parameters are guaranteed by design, removed statement that asterisk (*) marking branded on the component designates DIN IEC60747-17 approval, and added statement on safe electrical isolation to Package Certifications table Note 4 | 1-14, 18, 21 |



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[ADUM1252ASA+](#) [ADUM1252ASA+T](#) [ADUM1252AUA+](#) [ADUM1252AWA+](#) [ADUM1252AWA+T](#) [ADUM1252AUA+T](#)