

- I/O isolation 5000 VAC (reinforced)
- Wide 1.5:1 input voltage range
- Operating temperature range
-40 to +80 °C without derating
- Certification according to IEC/EN/ES 60601-1 edition 3.2 for 2xMOPP and IEC/EN/UL 62368-1
- Short circuit protection
- Regulated outputs
- Low leakage current < 2 µA
- Efficiency up to 84 %
- Operation up to 5000 m altitude
- 5-year product warranty



ES 60601-1 IEC 60601-1
UL 62368-1 IEC 62368-1

The TRV 2M is a series of 2 Watt DC/DC converters in a compact SIP-9 package with reinforced isolation of 5000 VAC for medical and industrial applications. The series offers a 1.5:1 input voltage range with a nominal input ranging between 5 and 24 VDC. With a continuous short circuit protection and a low leakage current of less than 2 µA, this converter is especially suited to protect any connected interfaces or applied parts to patients. Featuring almost fully regulated outputs this series provides great level of regulation without affecting the cost efficiency. It is an ideal solution for applications where an unregulated DC/DC converter would not meet your regulation requirements but cost still is a critical factor. With an operating temperature range from -40 to +80°C without derating and certifications acc. IEC/EN/ES 60601-1 ed. 3.2 for 2xMOPP and IEC/EN/UL 62368-1 this series is suitable for many different applications where a medical isolation system and short circuit protection is needed.

Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
TRV 2-0510M	4.5 - 7 VDC (5 VDC nom.)	3.3 VDC	600 mA			78 %
TRV 2-0511M		5 VDC	400 mA			81 %
TRV 2-0512M		12 VDC	167 mA			83 %
TRV 2-0513M		15 VDC	134 mA			83 %
TRV 2-0521M		+5 VDC	200 mA	-5 VDC	200 mA	82 %
TRV 2-0522M		+12 VDC	83 mA	-12 VDC	83 mA	83 %
TRV 2-0523M		+15 VDC	67 mA	-15 VDC	67 mA	81 %
TRV 2-1210M	9.6 - 14.4 VDC (12 VDC nom.)	3.3 VDC	600 mA			79 %
TRV 2-1211M		5 VDC	400 mA			81 %
TRV 2-1212M		12 VDC	167 mA			84 %
TRV 2-1213M		15 VDC	134 mA			83 %
TRV 2-1221M		+5 VDC	200 mA	-5 VDC	200 mA	81 %
TRV 2-1222M		+12 VDC	83 mA	-12 VDC	83 mA	83 %
TRV 2-1223M		+15 VDC	67 mA	-15 VDC	67 mA	82 %
TRV 2-1510M	12 - 18 VDC (15 VDC nom.)	3.3 VDC	600 mA			79 %
TRV 2-1511M		5 VDC	400 mA			81 %
TRV 2-1512M		12 VDC	167 mA			84 %
TRV 2-1513M		15 VDC	134 mA			83 %
TRV 2-1521M		+5 VDC	200 mA	-5 VDC	200 mA	81 %
TRV 2-1522M		+12 VDC	83 mA	-12 VDC	83 mA	83 %
TRV 2-1523M		+15 VDC	67 mA	-15 VDC	67 mA	80 %
TRV 2-2410M	19.2 - 28.8 VDC (24 VDC nom.)	3.3 VDC	600 mA			78 %
TRV 2-2411M		5 VDC	400 mA			80 %
TRV 2-2412M		12 VDC	167 mA			82 %
TRV 2-2413M		15 VDC	134 mA			82 %
TRV 2-2421M		+5 VDC	200 mA	-5 VDC	200 mA	81 %
TRV 2-2422M		+12 VDC	83 mA	-12 VDC	83 mA	81 %
TRV 2-2423M		+15 VDC	67 mA	-15 VDC	67 mA	80 %

Note - 5 Vin model: If the input is switched electromechanically, use an external 100 μ F/25 V E/C. to reduce voltage transient.
 - Other models: If the input is switched electromechanically, use an external 47 μ F/100 V E/C. to reduce voltage transient.

Input Specifications

Input Current	- At no load	5 Vin models: 5 mA typ. (3.3 Vout model) 5 mA typ. (5 Vout model) 20 mA typ. (12 Vout model) 20 mA typ. (15 Vout model) 5 mA typ. (5 / -5 Vout model) 20 mA typ. (12 / -12 Vout model) 25 mA typ. (15 / -15 Vout model) 12 Vin models: 4 mA typ. (3.3 Vout model) 4 mA typ. (5 Vout model) 10 mA typ. (12 Vout model) 10 mA typ. (15 Vout model) 4 mA typ. (5 / -5 Vout model) 10 mA typ. (12 / -12 Vout model) 10 mA typ. (15 / -15 Vout model) 15 Vin models: 4 mA typ. (3.3 Vout model) 4 mA typ. (5 Vout model) 8 mA typ. (12 Vout model) 8 mA typ. (15 Vout model) 4 mA typ. (5 / -5 Vout model) 8 mA typ. (12 / -12 Vout model) 8 mA typ. (15 / -15 Vout model) 24 Vin models: 3 mA typ. (3.3 Vout model) 3 mA typ. (5 Vout model) 6 mA typ. (12 Vout model) 6 mA typ. (15 Vout model) 3 mA typ. (5 / -5 Vout model) 6 mA typ. (12 / -12 Vout model) 6 mA typ. (15 / -15 Vout model)
	- At full load	5 Vin models: 510 mA typ. 12 Vin models: 210 mA typ. 15 Vin models: 170 mA typ. 24 Vin models: 105 mA typ.
Surge Voltage		5 Vin models: 15 VDC max. (1 s max.) 12 Vin models: 25 VDC max. (1 s max.) 15 Vin models: 25 VDC max. (1 s max.) 24 Vin models: 35 VDC max. (1 s max.)
Recommended Input Fuse		5 Vin models: 1'000 mA (slow blow) 12 Vin models: 500 mA (slow blow) 15 Vin models: 500 mA (slow blow) 24 Vin models: 315 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Capacitor

Output Specifications

Voltage Set Accuracy	$\pm 3\%$ max. (60% load: 3.3, 5, ± 5 Vout models) $\pm 3\%$ max. (90% load: other models)
----------------------	---

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Regulation (Unregulated)	- Input Variation (Vmin - Vmax)	single output models:	2% max.
		dual output models:	2% max.
	- Load Variation	See application note:	www.tracopower.com/overview/trv2m
	- Voltage Balance (symmetrical load)	dual output models:	4% max.
	- Cross Regulation (25% / 100% asym. load)	dual output models:	4% max.
Ripple and Noise (20 MHz Bandwidth)	- single output	3.3 Vout models:	100 mVp-p typ.
		5 Vout models:	100 mVp-p typ.
		12 Vout models:	125 mVp-p typ.
		15 Vout models:	125 mVp-p typ.
	- dual output	5 / -5 Vout models:	100 / 100 mVp-p typ.
		12 / -12 Vout models:	125 / 125 mVp-p typ.
		15 / -15 Vout models:	125 / 125 mVp-p typ.
Capacitive Load	- single output	3.3 Vout models:	2'000 µF max.
		5 Vout models:	820 µF max.
		12 Vout models:	470 µF max.
		15 Vout models:	470 µF max.
	- dual output	5 / -5 Vout models:	470 / 470 µF max.
		12 / -12 Vout models:	220 / 220 µF max.
		15 / -15 Vout models:	220 / 220 µF max.
Minimum Load			Not required
Temperature Coefficient			±0.03 %/K max.
Start-up Time			20 ms max.
Short Circuit Protection			Continuous, Automatic recovery

Safety Specifications

Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Medical Equipment	EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1 2 x MOPP (Means Of Patient Protection)
	- Certification Documents	www.tracopower.com/overview/trv2m
Pollution Degree		PD 2
Over Voltage Category		OVC II (not mains connected)

EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 60601-1-2 edition 4 (Medical Devices) EN 55011 class A (with external filter) EN 55011 class B (with external filter) EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55011 class A (with external filter) EN 55011 class B (with external filter) EN 55032 class A (with external filter) EN 55032 class B (with external filter)
External filter proposal:		www.tracopower.com/overview/trv2m

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMS (Immunity)	EN 60601-1-2 edition 4 (Medical Devices) EN 55024 (IT Equipment) EN 55035 (Multimedia)
- Electrostatic Discharge	Air: EN 61000-4-2, ± 15 kV, perf. criteria A
- RF Electromagnetic Field	Contact: EN 61000-4-2, ± 8 kV, perf. criteria A
- EFT (Burst) / Surge	EN 61000-4-3, 10 V/m, perf. criteria A
	EN 61000-4-4, ± 2 kV, perf. criteria A
	EN 61000-4-5, ± 2 kV, perf. criteria A
- Conducted RF Disturbances	External filter proposal: www.tracopower.com/overview/trv2m
- PF Magnetic Field	Continuous: EN 61000-4-6, 10 Vrms, perf. criteria A
	EN 61000-4-8, 100 A/m, perf. criteria A
	1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications		
Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +95°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	Depending on model
	See application note: www.tracopower.com/overview/trv2m	
Cooling System		Natural convection (20 LFM)
Altitude During Operation		5'000 m max.
Regulator Topology		Flyback Converter
Switching Frequency		180 - 400 kHz (PFM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		250 VAC
Isolation Test Voltage	- Input to Output, 60 s	5'000 VAC
	- Input to Output, 1 s	7'000 VDC
Creepage	- Input to Output	8 mm min.
Clearance	- Input to Output	8 mm min.
Isolation Resistance	- Input to Output, 500 VDC	10'000 M Ω min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	10 pF typ. 20 pF max.
Leakage Current	- Touch Current	2 μ A max. (264 VAC, 60 Hz)
Reliability	- Calculated MTBF	10'410'000 h (MIL-HDBK-217F, ground benign)
Washing Process		According to Cleaning Guideline www.tracopower.com/info/cleaning.pdf
Environment	- Vibration	MIL-STD-810F 7.6 g, 3 axis, 60 min, 20-2000 Hz
	- Mechanical Shock	MIL-STD-810F 50 g, 3 axis, 11 ms
	- Thermal Shock	MIL-STD-810F -55°C to +125°C, 72 cycles, 30 min each
Housing Material		Non-conductive Plastic (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Tinned Copper
Pin Foundation Plating		Nickel (2 - 3 μ m)
Pin Surface Plating		Tin (3 - 5 μ m), matte
Housing Type		Plastic Case
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)
Footprint Type		SIP9
Soldering Profile		Lead-Free Wave Soldering 260°C / 6 s max.
Weight		4.8 g

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

www.tracopower.com/info/reach-declaration.pdf

- RoHS Declaration

REACH SVHC list compliant

REACH Annex XVII compliant

www.tracopower.com/info/rohs-declaration.pdf

Exemptions: 7(a), 7(c)-I

(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).)

- SCIP Reference Number

2dda669e-cfb2-4463-b721-ad8acc4e0fbd

Additional Information

Supporting Documents

www.tracopower.com/overview/trv2m


Frequently Asked Questions

www.tracopower.com/glossary-faq

Glossary

www.tracopower.com/info/glossary.pdf

Outline Dimensions

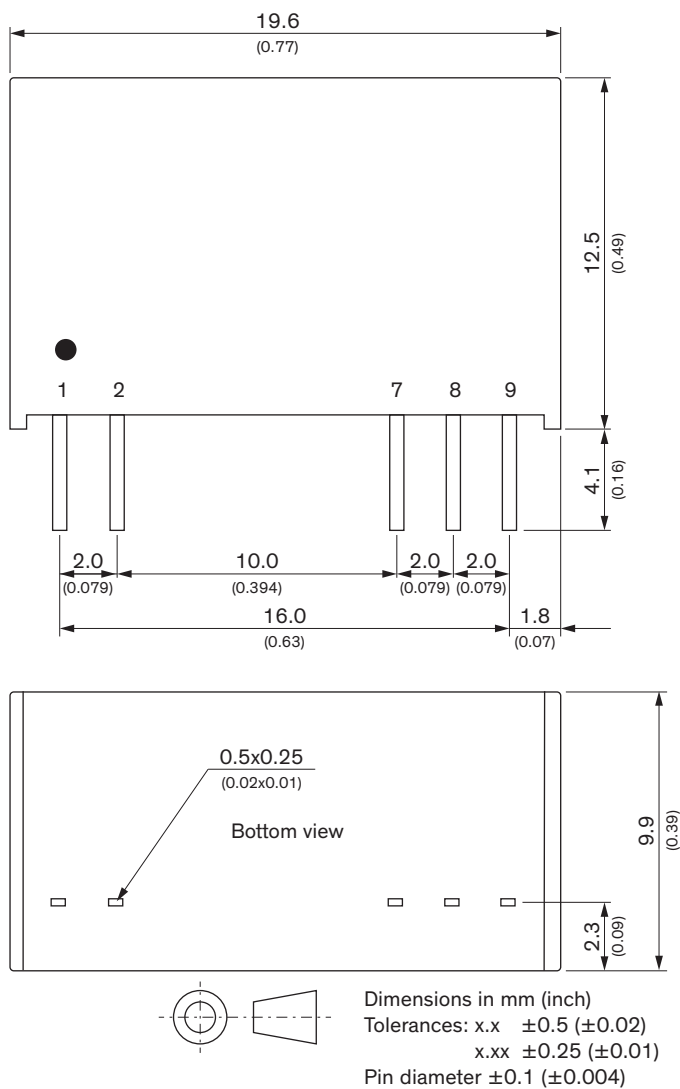

Pinout

Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
7	-Vout	-Vout
8	No pin	Common
9	+Vout	+Vout

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TRACO Power:](#)

[TRV 2-0510M](#) [TRV 2-0511M](#) [TRV 2-0512M](#) [TRV 2-0513M](#) [TRV 2-0521M](#) [TRV 2-0522M](#) [TRV 2-0523M](#) [TRV 2-1210M](#) [TRV 2-1211M](#) [TRV 2-1212M](#) [TRV 2-1213M](#) [TRV 2-1221M](#) [TRV 2-1222M](#) [TRV 2-1223M](#) [TRV 2-1510M](#) [TRV 2-1511M](#) [TRV 2-1512M](#) [TRV 2-1513M](#) [TRV 2-1521M](#) [TRV 2-1522M](#) [TRV 2-1523M](#) [TRV 2-2410M](#) [TRV 2-2411M](#) [TRV 2-2412M](#) [TRV 2-2413M](#) [TRV 2-2421M](#) [TRV 2-2422M](#) [TRV 2-2423M](#)