



---

# ABSOLUTE PRESSURE SENSOR WSEN-PADS USER MANUAL

---

2511020213301

VERSION 1.0

JUNE 18, 2019

## Revision history

Manual version	Notes	Date
0.1	<ul style="list-style-type: none"><li>Initial release of the manual</li></ul>	April 2019
1.0	<ul style="list-style-type: none"><li>Updated section 10: Interrupt functionality</li><li>Updated section 12: Register description</li></ul>	June 2019

## Abbreviations

Abbreviation	Description
ASIC	Application Specific Integrated Circuit
BDU	Block Data Update
DRDY	Data ready
ESD	Electrostatic Discharge
FIFO	First-In First-Out
HBM	Human Body Model
I <sup>2</sup> C	Inter Integrated Circuit
LGA	Land Grid Array
MEMS	Micro-Electro Mechanical System
MSB	Most Significant Bit
NVM	Non Volatile Memory
ODR	Output Data Rate
PCB	Printed Circuit Board
LSB	Least Significant Bit

# Contents

<b>1</b>	<b>Introduction</b>	<b>7</b>
1.1	Application . . . . .	7
1.2	Key features . . . . .	7
1.3	Ordering information . . . . .	7
1.4	Block diagram . . . . .	8
1.5	Operational functionality . . . . .	8
1.5.1	MEMS Cell . . . . .	8
1.5.2	ASIC . . . . .	8
1.5.3	Calibration . . . . .	8
1.5.4	Digital filtering . . . . .	9
1.5.5	FIFO memory . . . . .	9
1.6	Filtering chain and data path . . . . .	9
<b>2</b>	<b>Sensor specifications</b>	<b>10</b>
2.1	General information . . . . .	10
2.2	Absolute maximum ratings . . . . .	10
2.3	Pressure sensor specification . . . . .	11
2.4	Temperature sensor specification . . . . .	11
2.5	Electrical specifications . . . . .	12
<b>3</b>	<b>Pinning information</b>	<b>13</b>
3.1	Pin configuration . . . . .	13
3.2	Pin description . . . . .	13
<b>4</b>	<b>Digital interface</b>	<b>14</b>
4.1	General characteristics . . . . .	14
4.2	SDA and SCL logic levels . . . . .	15
4.3	Communication phase . . . . .	15
4.3.1	Idle state . . . . .	15
4.3.2	START(S) and STOP(P) condition . . . . .	15
4.3.3	Data validity . . . . .	16
4.3.4	Byte format . . . . .	16
4.3.5	Acknowledge(ACK) and No-Acknowledge(NACK) . . . . .	16
4.3.6	Slave address for the sensor . . . . .	17
4.3.7	Read/Write operation . . . . .	18
4.4	I <sup>2</sup> C timing parameters . . . . .	20
<b>5</b>	<b>Application circuit</b>	<b>21</b>
<b>6</b>	<b>Quick start guide</b>	<b>23</b>
6.1	Power-up sequence . . . . .	23
6.2	Communication with host controller . . . . .	24
6.3	Reboot . . . . .	24
6.4	Software reset . . . . .	24
6.5	Sensor operation: single conversion mode . . . . .	26
6.6	Sensor operation: continuous mode . . . . .	27
6.7	Power-off sequence . . . . .	28

<b>7 Modes of operation</b>	<b>29</b>
7.1 Power-down mode . . . . .	30
7.2 Single conversion mode . . . . .	31
7.3 Continuous mode . . . . .	32
7.4 Additional configurations . . . . .	33
7.4.1 Low-power or low-noise configuration . . . . .	33
7.4.2 Enabling additional low-pass filter . . . . .	34
<b>8 Reading output data</b>	<b>35</b>
8.1 Reading pressure values . . . . .	35
8.2 Reading temperature values . . . . .	36
8.3 Status register for reading the data . . . . .	37
<b>9 FIFO buffer</b>	<b>38</b>
9.1 Bypass mode . . . . .	40
9.2 FIFO mode . . . . .	41
9.3 Continuous mode . . . . .	42
9.4 Bypass-to-FIFO mode . . . . .	43
9.5 Bypass-to-continuous mode . . . . .	44
9.6 Continuous-to-FIFO mode . . . . .	45
9.7 FIFO status monitoring and control . . . . .	46
9.7.1 User-defined FIFO threshold . . . . .	47
9.7.2 Reading data from FIFO buffer . . . . .	47
<b>10 Interrupt functionality</b>	<b>48</b>
10.1 Interrupt generation on pressure data-ready . . . . .	48
10.2 Interrupt generation based on pressure threshold . . . . .	49
10.2.1 Interrupt latching . . . . .	51
10.3 FIFO status based interrupt events . . . . .	52
10.4 Routing interrupt events to the <i>INT</i> pin . . . . .	52
<b>11 Register map</b>	<b>54</b>
<b>12 Register description</b>	<b>55</b>
12.1 INT_CFG (0x0B) . . . . .	55
12.2 THR_P_L (0x0C) . . . . .	57
12.3 THR_P_H (0x0D) . . . . .	57
12.4 INTERFACE_CTRL (0x0E) . . . . .	58
12.5 DEVICE_ID (0x0F) . . . . .	58
12.6 CTRL_1 (0x10) . . . . .	59
12.7 CTRL_2 (0x11) . . . . .	60
12.8 CTRL_3 (0x12) . . . . .	61
12.9 FIFO_CTRL (0x13) . . . . .	62
12.10 FIFO_WTM (0x14) . . . . .	63
12.11 REF_P_L (0x15) . . . . .	63
12.12 REF_P_H (0x16) . . . . .	63
12.13 OPC_L (0x18) . . . . .	64
12.14 OPC_H (0x19) . . . . .	64
12.15 INT_SOURCE (0x24) . . . . .	65
12.16 FIFO_STATUS_1 (0x25) . . . . .	65

12.17	FIFO_STATUS_2 (0x26) . . . . .	66
12.18	STATUS (0x27) . . . . .	66
12.19	DATA_P_XL (0x28) . . . . .	67
12.20	DATA_P_L (0x29) . . . . .	67
12.21	DATA_P_H (0x2A) . . . . .	68
12.22	DATA_T_L (0x2B) . . . . .	68
12.23	DATA_T_H (0x2C) . . . . .	68
12.24	FIFO_DATA_P_XL (0x78) . . . . .	69
12.25	FIFO_DATA_P_L (0x79) . . . . .	69
12.26	FIFO_DATA_P_H (0x7A) . . . . .	69
12.27	FIFO_DATA_T_L (0x7B) . . . . .	70
12.28	FIFO_DATA_T_H (0x7A) . . . . .	70
<b>13</b>	<b>Physical dimensions</b>	<b>71</b>
13.1	Sensor drawing . . . . .	71
13.2	Footprint . . . . .	72
<b>14</b>	<b>Manufacturing information</b>	<b>73</b>
14.1	Moisture sensitivity level . . . . .	73
14.2	Soldering . . . . .	73
14.2.1	Reflow soldering . . . . .	73
14.2.2	Cleaning and washing . . . . .	75
14.2.3	Potting and coating . . . . .	75
14.2.4	Storage conditions . . . . .	75
14.2.5	Handling . . . . .	75
<b>15</b>	<b>Important notes</b>	<b>77</b>
15.1	General customer responsibility . . . . .	77
15.2	Customer responsibility related to specific, in particular safety-relevant applications . . . . .	77
15.3	Best care and attention . . . . .	77
15.4	Customer support for product specifications . . . . .	77
15.5	Product improvements . . . . .	78
15.6	Product life cycle . . . . .	78
15.7	Property rights . . . . .	78
15.8	General terms and conditions . . . . .	78
<b>16</b>	<b>Legal notice</b>	<b>79</b>
16.1	Exclusion of liability . . . . .	79
16.2	Suitability in customer applications . . . . .	79
16.3	Usage restriction . . . . .	79
<b>17</b>	<b>License agreement for Würth Elektronik eiSos GmbH &amp; Co. KG sensor product software and source code</b>	<b>81</b>
17.1	Limited license . . . . .	81
17.2	Usage and obligations . . . . .	81
17.3	Ownership . . . . .	82
17.4	Disclaimer of warranty . . . . .	82
17.5	Limitation of liability . . . . .	82
17.6	Applicable law and jurisdiction . . . . .	83


17.7	Severability clause	83
17.8	Miscellaneous	83

# 1 Introduction

This device is a MEMS based piezo-resistive absolute pressure sensor. The sensor comprises of a pressure sensing cell and an analog and digital signal processing unit. The integrated ASIC with digital I<sup>2</sup>C interface provides a digital signal to the host controller. The sensor has an embedded temperature sensor. A 128 level embedded FIFO buffer is available to store the pressure and temperature data. The sensor comes in fully molded leadless land grid array package (LGA) having a form factor of 2.0 x 2.0 x 0.8 mm.

## 1.1 Application

- Altimeters and barometers
- Weather stations
- GPS navigation enhancement
- Indoor navigation
- White goods
- Wearable devices

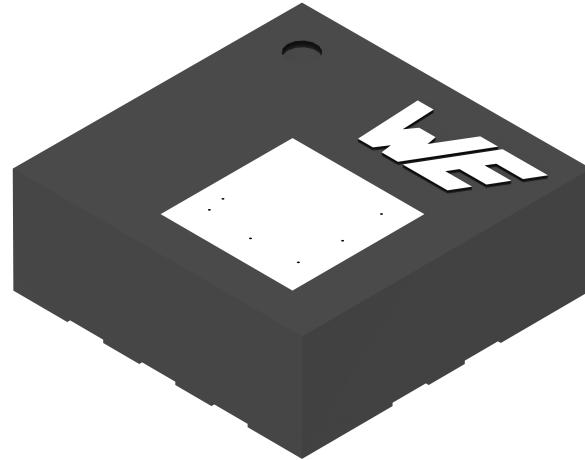

## 1.2 Key features

- Absolute pressure range: 26 to 126 kPa
- Output data rate: 1 Hz to 200 Hz
- Integrated temperature sensor
- Pressure data: 24-bits and temperature data: 16-bits
- Low current consumption: 4 µA
- Digital interface: I<sup>2</sup>C
- Embedded FIFO buffer: 128 levels
- Interrupt pin functionality: data-ready, pressure threshold

## 1.3 Ordering information

WE order code	Temperature range	Dimensions	Description
2511020213301	-40 °C to +85 °C	2.0 x 2.0 x 0.8 mm	Tape & reel packaging

Table 1: Ordering information

## 1.4 Block diagram

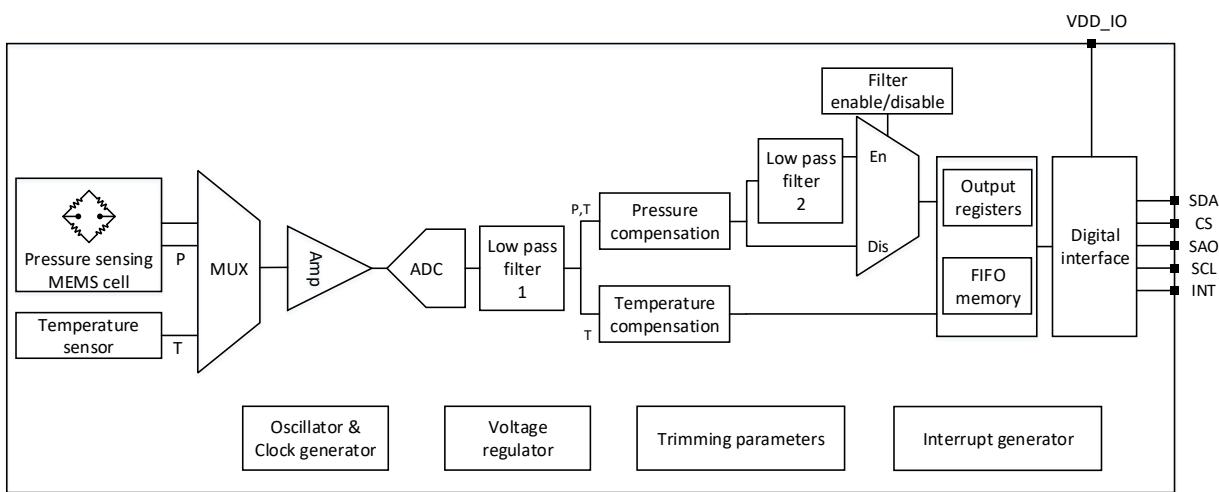


Figure 1: Block diagram

## 1.5 Operational functionality

### 1.5.1 MEMS Cell

The MEMS cell is the primary pressure sensing element. It contains piezo-resistors embedded on a suspended silicon membrane. The piezo-resistors are connected in a Wheatstone bridge configuration. When pressure is applied, the membrane is deflected and the bridge resistance changes. This change leads to a change of the Wheatstone output voltage proportional to the applied pressure. This analog signal is fed to the ASIC.

### 1.5.2 ASIC

The ASIC comprises of low-noise amplifier, analog-to-digital converter and other signal conditioning blocks that converts an uncompensated analog voltage equivalent to a 24-bit digital pressure value.

The ASIC embeds a high-resolution temperature sensor which is used for internal compensation of the pressure signal. The temperature information can also be read as a 16-bit digital value.

### 1.5.3 Calibration

The sensor is factory calibrated for both pressure and temperature measurements. The trimming parameters are stored on-chip in the non volatile memory (NVM). Every-time the sensor is powered on, these trimming parameters are copied from the NVM to the registers. In normal use, no further calibration is required from the user.

### 1.5.4 Digital filtering

The sensor has on-chip signal conditioning and embeds two digital low pass filters. The first filter LPF1 is applied to both pressure and temperature data. The second filter LPF2 can be optionally applied only to the pressure data. User can turn on or off this filter, depending on his requirements.

### 1.5.5 FIFO memory

The sensor has embedded FIFO buffer that can store up to 128 levels of pressure and temperature data. This can save host controller power, since the controller doesn't have to poll for data continuously.

## 1.6 Filtering chain and data path

Figure 2 shows detailed information about the functionality of the sensor. The sensor can be operated in various operating modes and filter setting which determines the pressure and temperature data path.

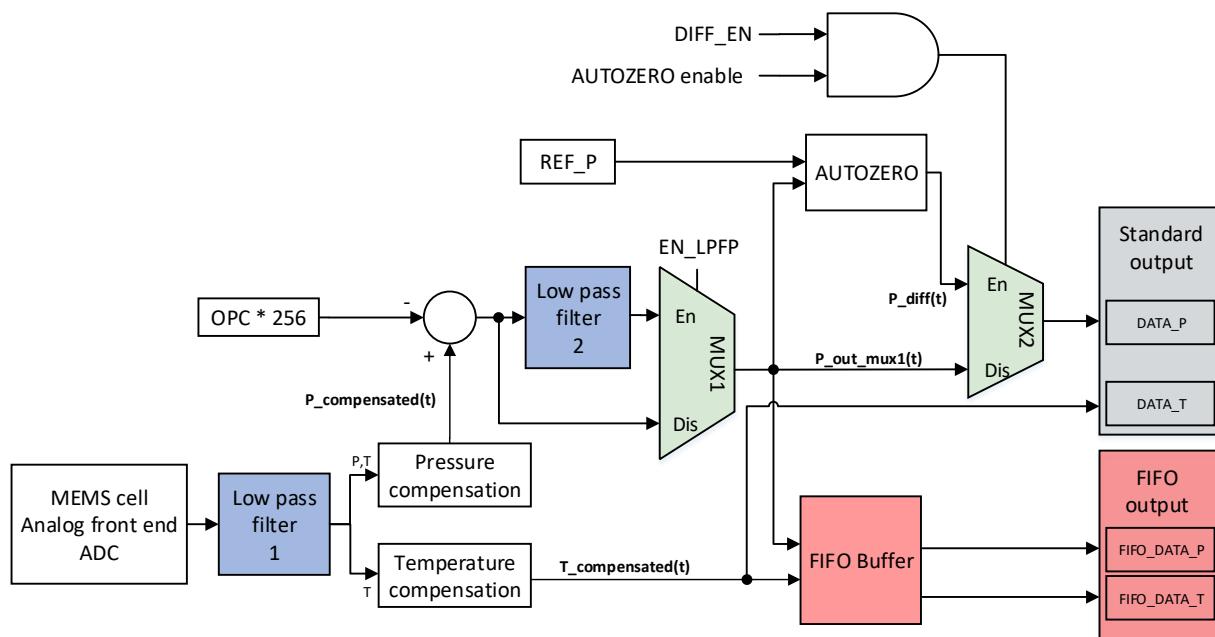


Figure 2: Filtering chain and data path

## 2 Sensor specifications

### 2.1 General information

Parameter	Value
Operating temperature	-40 up to +85 °C
Storage conditions	< 40 °C; < 90% RH
Communication interface	I <sup>2</sup> C
Moisture sensitivity level (MSL)	3
Electrostatic discharge protection (HBM)	2.5 kV

Table 2: General information

### 2.2 Absolute maximum ratings

Absolute maximum ratings are the limits, the device can be exposed to without causing permanent damage. Exposure to absolute maximum conditions for extended periods may affect device reliability.

Parameter	Symbol	Value		Unit
		Min	Max	
Input voltage $V_{DD}$ pin	$V_{DD\_MAX}$	-0.3	4.8	V
Input voltage $V_{DD\_IO}$ pin	$V_{DD\_IO\_MAX}$	-0.3	4.8	V
Input voltage $SDA$ , $SCL$ , $CS$ & $SAO$ pins	$V_{IN\_MAX}$	-0.3	$V_{DD}+0.3$	V
Overpressure	$P_{OVER}$		2	Mpa

Table 3: Absolute maximum ratings



Supply voltage on any pin should never exceed 4.8 V.



The device is susceptible to be damaged by electrostatic discharge (ESD). Always use proper ESD precautions when handling. Improper handling of the device can cause performance degradation or permanent damage.

## 2.3 Pressure sensor specification

Unless otherwise stated, all the specified values were measured under the following conditions:  $T=25^\circ\text{C}$ ,  $V_{\text{DD}}=3.3\text{ V}$ .

Parameter	Symbol	Test conditions	Value			Unit
			Min	Typ	Max	
Measurement range	$P_{\text{RANGE}}$		26		126	kPa
Absolute accuracy <sup>1</sup>	$P_{\text{ACC\_ABS}}$	$T= -20 \text{ to } 80^\circ\text{C}$		$\pm 100$		Pa
Relative accuracy <sup>2</sup>	$P_{\text{ACC\_REL}}$	$P= 80 \text{ to } 110 \text{ kPa}$ $T= 25^\circ\text{C}$		$\pm 2.5$		Pa
Resolution	$\text{RES}_P$			24		bit
Sensitivity	$\text{SEN}_P$			1/40960		kPa/digit
Output data rate	ODR		1		200	Hz
Noise (RMS) <sup>3</sup>	$P_{\text{NOISE}}$	Low pass filter enabled		0.75		Pa RMS
Offset change over temperature	$P_{\text{TCO}}$	$P= 66 \text{ to } 116 \text{ kPa}$ $T= -20 \text{ to } 65^\circ\text{C}$		$\pm 65$		Pa/ $^\circ\text{C}$
Long term drift	$P_{\text{DRIFT}}$			$\pm 33$		Pa/Year

Table 4: Pressure sensor specifications

1. Absolute accuracy includes the soldering drift effects.
2. Typical value is defined based on characterization data with 2kPa interval.
3. Pressure noise RMS is measured in a controlled environment.

## 2.4 Temperature sensor specification

Parameter	Symbol	Test conditions	Value			Unit
			Min	Typ	Max	
Measurement range	$T_{\text{RANGE}}$		-40		+85	$^\circ\text{C}$
Absolute accuracy	$T_{\text{ACC\_ABS}}$	$T= 0 \text{ to } 80^\circ\text{C}$		$\pm 1.5$		$^\circ\text{C}$
Resolution	$\text{RES}_T$			16		bit
Sensitivity	$\text{SEN}_T$			0.01		$^\circ\text{C}/\text{digit}$

Table 5: Temperature sensor specifications

## 2.5 Electrical specifications

Unless otherwise stated, all the specified values were measured under the following conditions: T=25°C, V<sub>DD</sub>=3.3V.

Parameter	Symbol	Test conditions	Value			Unit
			Min	Typ	Max	
Operating supply voltage	V <sub>DD</sub>		1.7	3.3	3.6	V
Supply voltage for I/O pins	V <sub>DD_IO</sub>		1.7		V <sub>DD</sub> +0.1	V
Current consumption in low power mode	I <sub>DD_LP</sub>	ODR= 1Hz		4		µA
Current consumption in low noise mode	I <sub>DD_LN</sub>	ODR= 1Hz		12		µA
Current consumption in power down mode	I <sub>DD_PD</sub>			0.9		µA
Digital input voltage - high-level	V <sub>IH</sub>		0.8*V <sub>DD_IO</sub>			V
Digital input voltage - low-level	V <sub>IL</sub>				0.2*V <sub>DD_IO</sub>	V
Digital output voltage - high-level	V <sub>OH</sub>		V <sub>DD_IO</sub> -0.2			V
Digital output voltage - low-level	V <sub>OL</sub>				0.2	V

Table 6: Electrical specifications

### 3 Pinning information

#### 3.1 Pin configuration

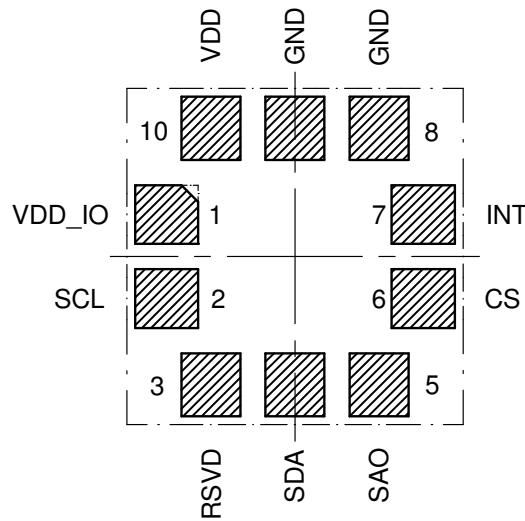


Figure 3: Pin specifications (top view)

#### 3.2 Pin description

Pin No.	Name	Function	I/O	Comments
1	<i>VDD_IO</i>	Positive supply voltage for I/O pins	Supply	
2	<i>SCL</i>	I <sup>2</sup> C serial clock	Input	Internal pull-up disconnected by default
3	<i>RSVD</i>	Reserved	Input	Connect to ground
4	<i>SDA</i>	I <sup>2</sup> C serial data	Input/Output	Internal pull-up disconnected by default
5	<i>SAO</i>	I <sup>2</sup> C device address selection	Input	High: device address LSB is 1 Low: device address LSB is 0
6	<i>CS</i>	I <sup>2</sup> C enable/disable	Input	High: I <sup>2</sup> C enable
7	<i>INT</i>	Interrupt	Output	Do not connect if not used
8	<i>GND</i>	Negative supply voltage	Supply	
9	<i>GND</i>	Negative supply voltage	Supply	
10	<i>VDD</i>	Positive supply voltage	Supply	

Table 7: Pin description

## 4 Digital interface

The sensor supports standard I<sup>2</sup>C (Inter-IC) bus protocol. Further information about the I<sup>2</sup>C interface can be found at <https://www.nxp.com/docs/en/user-guide/UM10204.pdf>. I<sup>2</sup>C is a serial 8-bit protocol with two-wire interface that supports communication between different ICs, for example, between microcontrollers and other peripheral devices.

### 4.1 General characteristics

A serial data line (*SDA*) and a serial clock line (*SCL*) are required for the communication between the devices connected via I<sup>2</sup>C bus. Both *SDA* and *SCL* lines are bidirectional. The output stages of devices connected to the bus must have an open-drain or open-collector. Hence, the *SDA* and *SCL* lines are connected to a positive supply voltage via pull-up resistors. In I<sup>2</sup>C protocol, the communication is realized through master-slave principle. A master device generates the clock pulse, a start command and a stop command for the data transfer. Each connected device on the bus is addressable via a unique address. Master and slave can act as a transmitter or a receiver depending upon whether the data needs to be sent or received.



This sensor behaves like a slave device on the I<sup>2</sup>C bus

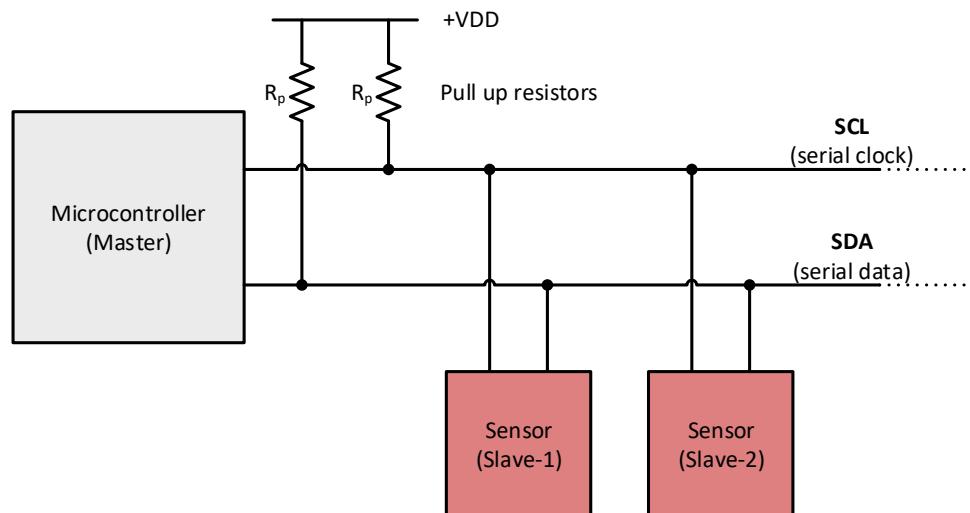


Figure 4: Master-slave concept

## 4.2 SDA and SCL logic levels

The positive supply voltage to which *SDA* and *SCL* lines are pulled up (through pull-up resistors), in turn determines the high level input for the slave devices. The sensor has separate supply voltage  $V_{DD\_IO}$  for the *SDA* and *SCL* lines. The logic high '1' and logic low '0' levels for the *SDA* and *SCL* lines then depend on the  $V_{DD\_IO}$ . Input reference levels for this sensor are set as  $0.8 * V_{DD\_IO}$  (for logic high) and  $0.2 * V_{DD\_IO}$  (for logic low). Explained in the figure 5.

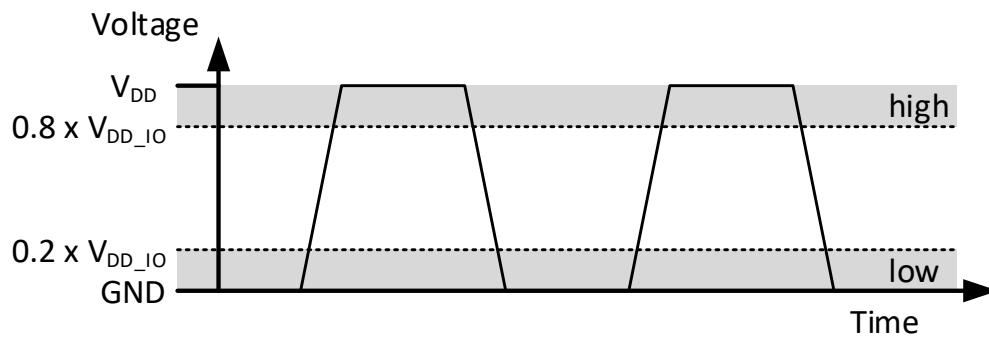


Figure 5: *SDA* and *SCL* logic levels

## 4.3 Communication phase

### 4.3.1 Idle state

During the idle state, the bus is free and both *SDA* and *SCL* lines are in logic high '1' state.

### 4.3.2 START(S) and STOP(P) condition

Data transfer on the bus starts with a START command, which is generated by the master. A start condition is defined as a high-to-low transition on the *SDA* line while the *SCL* line is held high. The bus is considered busy after the start condition.

Data transfer on the bus is terminated with a STOP command, which is also generated by the master. A low-to-high transition on the *SDA* line, while the *SCL* line being high is defined as a STOP condition. After the stop condition, the bus is again considered free and is in idle state. Figure 6 shows the I<sup>2</sup>C bus START and STOP conditions.

Master can also send a REPEATED START (SR) command instead of STOP command. REPEATED START condition is the same as the START condition.

### 4.3.3 Data validity

After the start condition, one data bit is transferred with each clock pulse. The transmitted data is only valid when the *SDA* line data is stable (high or low) during the high period of the clock pulse. High or low state of the data line can only change when clock pulse is in low state.

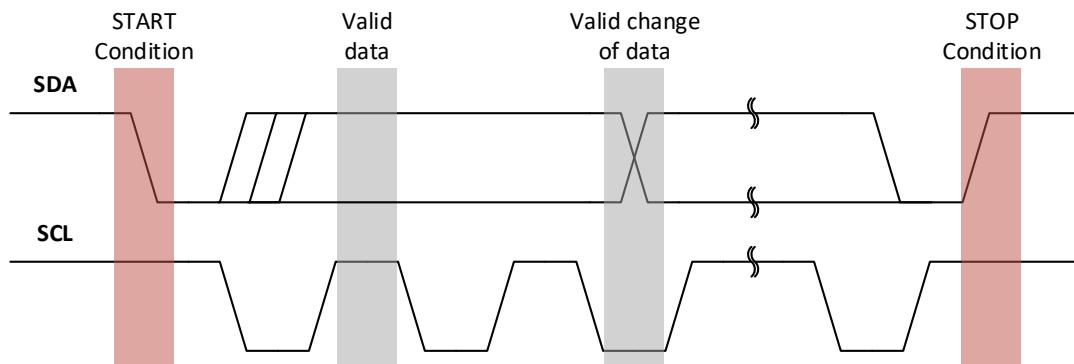


Figure 6: Data validity, START and STOP condition

### 4.3.4 Byte format

Data transmission on the *SDA* line is always done in bytes, with each byte being 8-bits long. Data is transferred with the most significant bit (MSB) followed by other bits.

If the slave cannot receive or transmit another complete byte of data, it can force the master into a wait state by holding *SCL* low. Data transfer continues when the slave is ready which is indicated by releasing the *SCL* line.

### 4.3.5 Acknowledge(ACK) and No-Acknowledge(NACK)

Each byte sent on the data line must be followed by an Acknowledge bit. The receiver (master or slave) generates an Acknowledge signal to indicate that the data byte was received successfully and another data byte could be sent.

After one byte is transmitted, the master generates an additional Acknowledge clock pulse to continue the data transfer. The transmitter releases the *SDA* line during this clock pulse so that the receiver can pull the *SDA* line to low state in such a way that the *SDA* line remains stable low during the entire high period of the clock pulse. This is considered as an Acknowledge signal.

In case the receiver does not want to receive any further byte, it does not pull down the *SDA* line and it remains in stable high state during the entire clock pulse. This is considered as a No-Acknowledge signal and the master can generate either a stop condition to terminate the data transfer or a repeated start condition to initiate a new data transfer.

#### 4.3.6 Slave address for the sensor

The slave address is transmitted after the start condition. Each device on the I<sup>2</sup>C bus has a unique address. Master selects the slave by sending corresponding address after the start condition. A slave address is 7 bits long followed by a Read/Write bit.

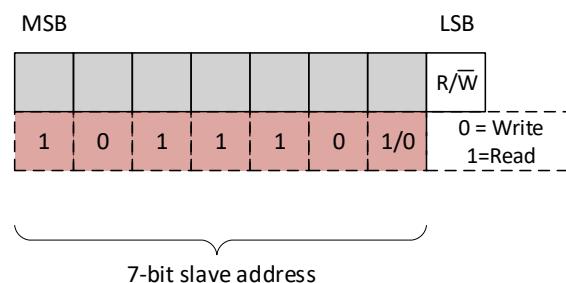


Figure 7: Slave address format

The 7-bit slave address for this sensor is 101110xb. LSB of the 7-bit slave address can be modified with the SAO pin. When SAO is connected to positive supply voltage, the LSB is '1', making 7-bit slave address 1011101b (0x5D). If SAO is connected to ground, the LSB is '0', making 7-bit address 1011100b (0x5C).

The R/W bit determines the data direction. A '0' indicates a write operation (transmission from master to slave) and a '1' indicates a read operation (data request from slave).

Slave address[6:1]	Slave address[0]	7-bit slave address	R/W	Slave address + R/W
101110	SAO=0	1011100b (0x5C)	0	10111000b (0xB8)
101110			1	10111001b (0xB9)
101110	SAO=1	1011101b (0x5D)	0	10111010b (0xBA)
101110			1	10111011b (0xBB)

Table 8: Slave address and Read/Write commands

#### 4.3.7 Read/Write operation

Once the slave-address and data direction bit is sent, the slave acknowledges the master. The next byte sent by the master must be a register-address of the sensor. This indicates the address of the register where data needs to be written to or read from.

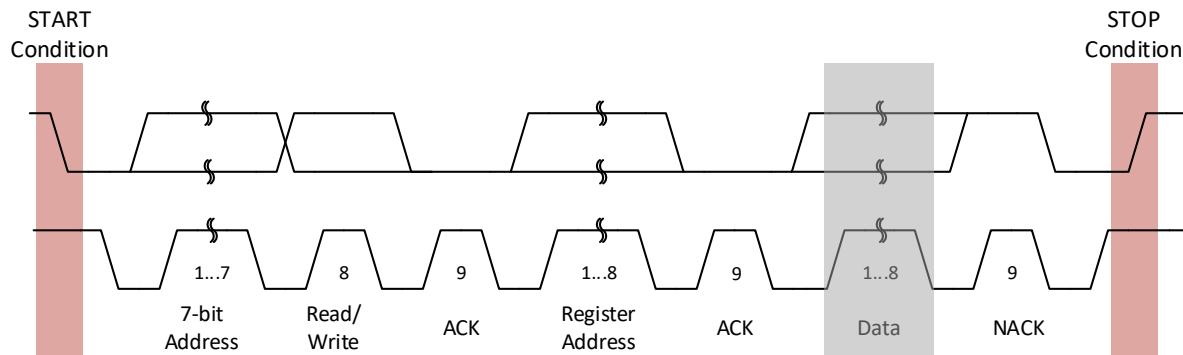


Figure 8: Complete data transfer

After receiving the register address, the slave sends an Acknowledgement (ACK). If the master is still writing to the slave (R/W bit = 0), it will transmit the data to slave in the same direction. If the master wants to read from the addressed register (R/W bit = 1), a repeated start (SR) condition must be sent to the slave. Master acknowledges the slave after receiving each data byte. If the master no longer wants to receive further data from the slave, it would send No-Acknowledge (NACK). Afterwards, Master can send a STOP condition to terminate the data transfer. Figure 9 shows the writing and reading procedures between the master and the slave device (sensor).



7-bit slave address of this device is 101110xb. LSB of the 7-bit slave address depends on the *SAO* pin


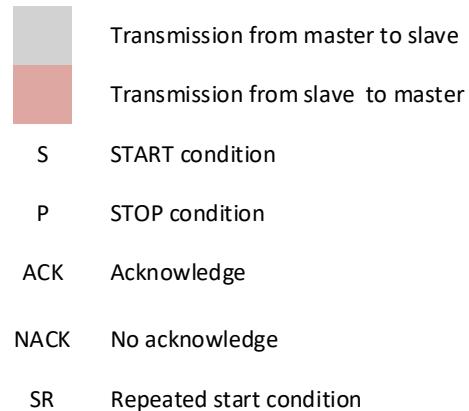

**a) I<sup>2</sup>C write: Master writing data to slave****b) I<sup>2</sup>C read: Master reading multiple data bytes from slave**

Figure 9: Write and read operations with the device

## 4.4 I<sup>2</sup>C timing parameters

Parameter	Symbol	Standard mode		Fast mode		Unit
		Min	Max	Min	Max	
SCL clock frequency	f <sub>SCL</sub>	0	100	0	400	kHz
LOW period for SCL clock	t <sub>LOW_SCL</sub>	4.7		1.3		µs
HIGH period for SCL clock	t <sub>HIGH_SCL</sub>	4.0		0.6		µs
Hold time for START condition	t <sub>HD_S</sub>	4		0.6		µs
Setup time for (repeated) START condition	f <sub>SCL</sub>	4.7		0.6	400	µs
SDA setup time	t <sub>SU_SDA</sub>	250		100		ns
SDA data hold time	t <sub>HD_SDA</sub>	0	3.45	0	0.9	µs
Setup time for STOP condition	t <sub>SU_P</sub>	4		0.6		µs
Bus free time between STOP and START condition	t <sub>BUF</sub>	4.7		1.3		µs

Table 9: I<sup>2</sup>C timing parameters

## 5 Application circuit

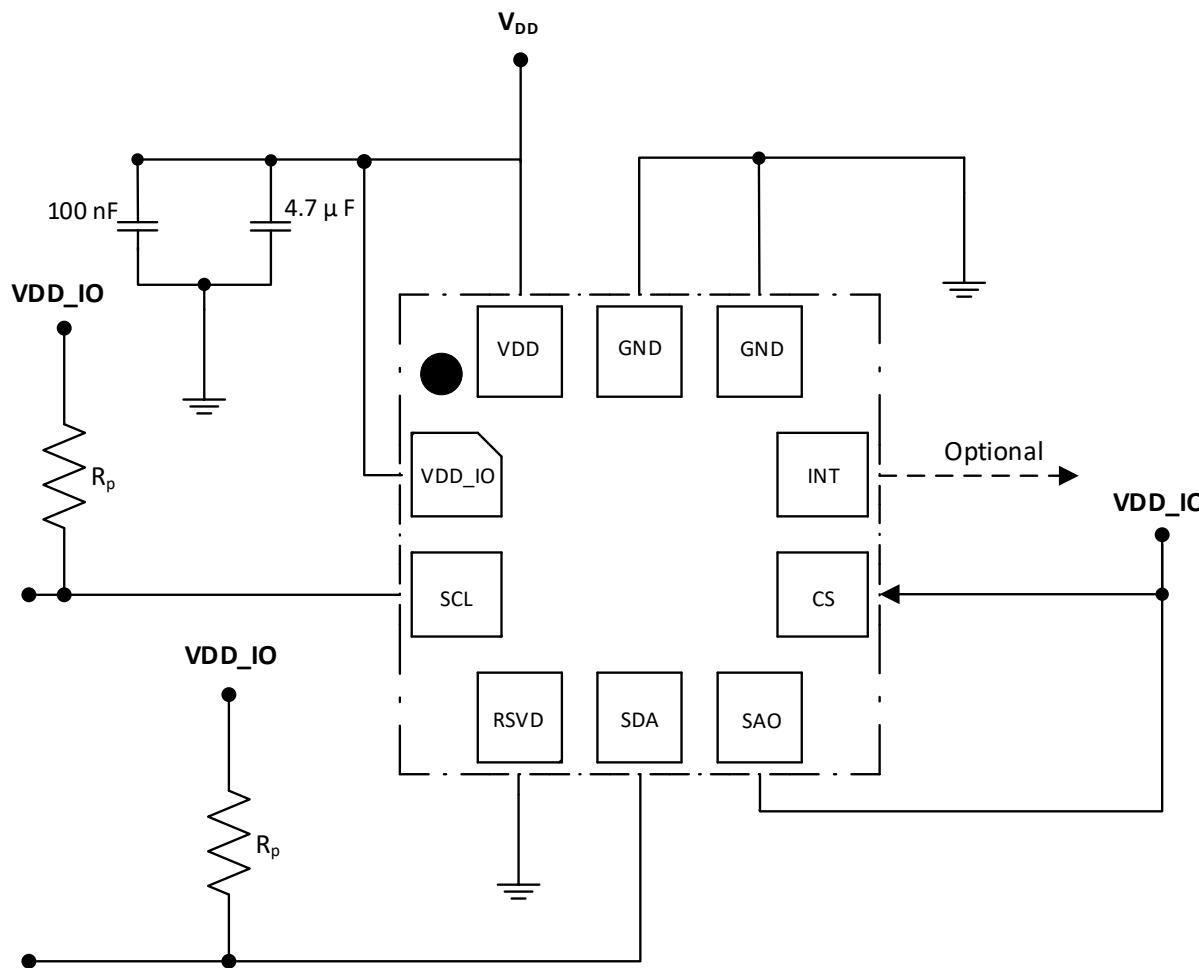


Figure 10: Application circuit with I<sup>2</sup>C interface (top view)

The sensor has two separate supply pins:  $VDD$  and  $VDD\_IO$ .  $VDD$  pin is the central supply pin for the MEMS cell and internal circuits.  $VDD\_IO$  provides the supply to the digital interface.



$VDD\_IO$  voltage level must be equal to or lower than  $V_{DD}+0.1$  V.

In order to prevent ripple from the power supply, a decoupling capacitor of 10 nF must be placed as close to the  $VDD$  pad of the sensor as possible. An optional decoupling capacitor (4.7  $\mu$ F) could be placed as shown in the figure 10. If  $VDD\_IO$  is not connected to the  $VDD$  line, a separate decoupling capacitor of 10nF should be added on the  $VDD\_IO$  line.

Figure 10 shows a typical application circuit for I<sup>2</sup>C communication. For proper I<sup>2</sup>C functionality, the *CS* pin must be connected to *VDD*. Least significant bit of the 7-bit slave address can be modified based on the status of the *SAO* pin. In order to optimize the power consumption, it is recommended to connect *SAO* pin to *VDD* (*SAO* = 1) if only one sensor is used on the I<sup>2</sup>C line. This sets the 7 bit slave address as 0x5D (1011101b). *SCL* and *SDA* must be connected to *VDD<sub>IO</sub>* through the pull-up resistors. Proper value of the pull-up resistors must be chosen depending on the I<sup>2</sup>C bus speed and load.

Pins *SDA* and *SCL* have internal pull up resistors. By default they are disabled and can be enabled through bits *SDA\_PU\_EN* and *SAO\_PU\_EN* in *INTERFACE\_CTRL* register (0x0E). Value of the internal pull up varies between 30kΩ-50kΩ, depending on *VDD<sub>IO</sub>*.

Sensor communication with the master controller remains active even if *VDD* is disconnected while *VDD<sub>IO</sub>* is maintained. However, in this situation, the internal measurement cycle is turned off.

## 6 Quick start guide

### 6.1 Power-up sequence

The sensor is powered up when supply voltage is applied to  $VDD$  and  $VDD\_IO$  pins. During the power up sequence, it is recommended to keep the I<sup>2</sup>C interface pins in the high impedance state from the host controller side.

During the power up sequence of the sensor, the sensor performs a boot process. During this process, trimming parameters and calibration coefficients are loaded to the internal registers from the embedded non-volatile memory. The booting process lasts for a maximum of 4.5 milliseconds. During this period, the internal registers are not accessible to read or write the data. However, the status of the boot procedure can be checked by reading the BOOT bit in the *INT\_SOURCE* register (0x24). This bit is set to '1' during the boot procedure and automatically goes back to '0' once it has ended. At the end of the power-up sequence the sensor automatically enters into power-down mode and is ready for data measurements.

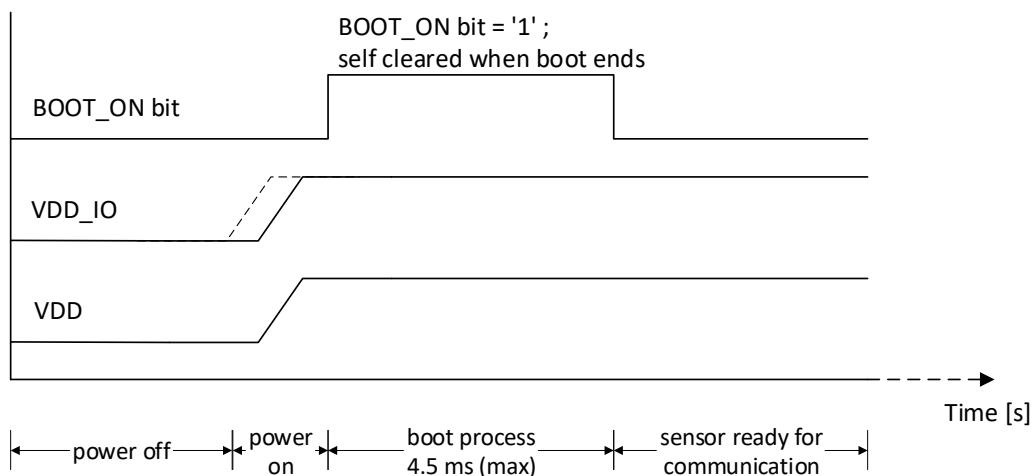


Figure 11: Power-up sequence

## 6.2 Communication with host controller

Communication with the host controller via I<sup>2</sup>C interface can be checked by reading the *DEVICE\_ID* register (0x0F). Device ID for this sensor is 0xB3.

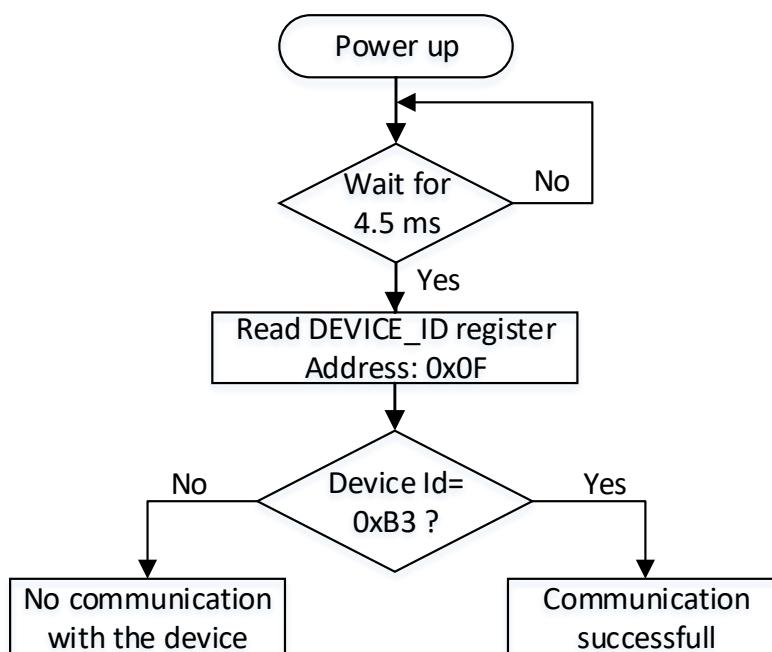


Figure 12: Communication check with host controller

## 6.3 Reboot

Reboot procedure can be also performed by the user in case the trimming parameters are somehow modified during operations. The Reboot procedure restores the correct values and resets the offset calibration registers *OPC\_L* (0x18) and *OPC\_H* (0x19) to '0'

When the *BOOT* bit in the *CTRL\_2* register (0x11) is set to '1', the trimming parameters are copied to the corresponding internal registers and are used to calibrate the device. At the end of the reboot process the *BOOT* bit is self cleared to '0'.

Status of the reboot procedure can be checked by the *BOOT\_ON* bit as mentioned in the section 6.1

## 6.4 Software reset

To set the internal registers to the default values, software reset can be performed. It is done by setting the *SWRESET* bit in the *CTRL\_2* register (0x11) to '1'. Following registers are reset to their default values during the software reset.

- *INTERRUPT\_CFG* (0x0B)

- *THR\_P\_L* (0x0C)
- *THR\_P\_H* (0x0C)
- *INTERFACE\_CTRL* (0x0E)
- *CTRL\_1* (0x10)
- *CTRL\_2* (0x11)
- *CTRL\_3* (0x12)
- *FIFO\_CTRL* (0x13)
- *FIFO\_WTM* (0x14)
- *INT\_SOURCE* (0x24)
- *FIFO\_STATUS1* (0x25)
- *FIFO\_STATUS1* (0x26)
- *STATUS* (0x27)

The software reset procedure lasts for a maximum of 50  $\mu$ s. At the end of the software reset, the SWRESET bit in *CTRL\_2* register (0x11) is automatically set back to '0'.

The reboot and software reset procedure must not be executed simultaneously. Both processes can be executed serially as shown in Figure 13

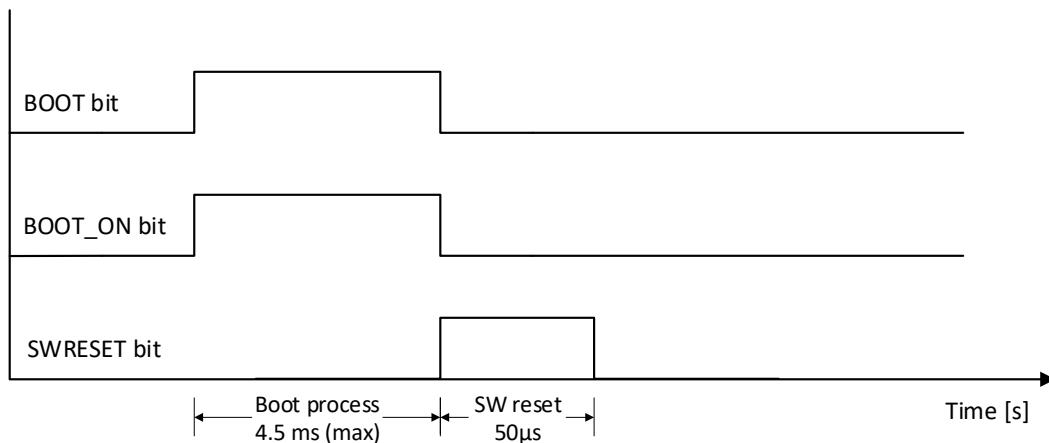


Figure 13: Reboot and software reset sequence



Do not set **BOOT** and **SWRESET** bits to '1' at the same time.

## 6.5 Sensor operation: single conversion mode

Flow chart shows sensor operation in the single conversion mode.

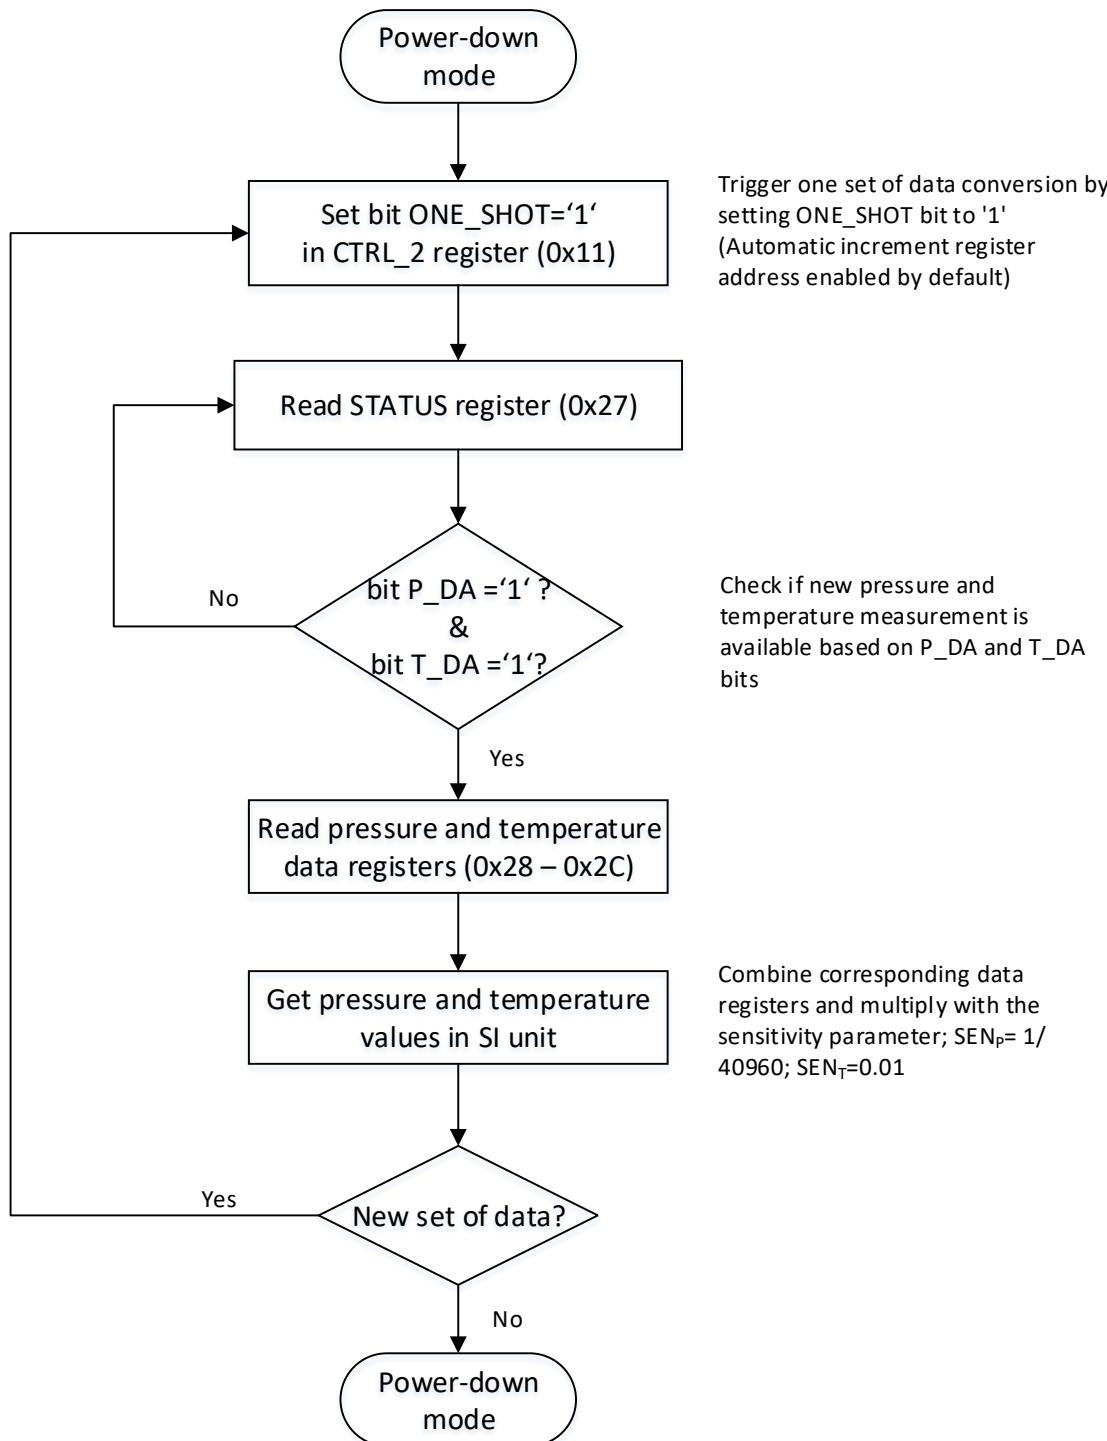


Figure 14: Sensor operation: single-conversion mode

## 6.6 Sensor operation: continuous mode

Flow chart shows sensor operation in continuous mode with 50Hz ODR and low-noise configuration enabled.

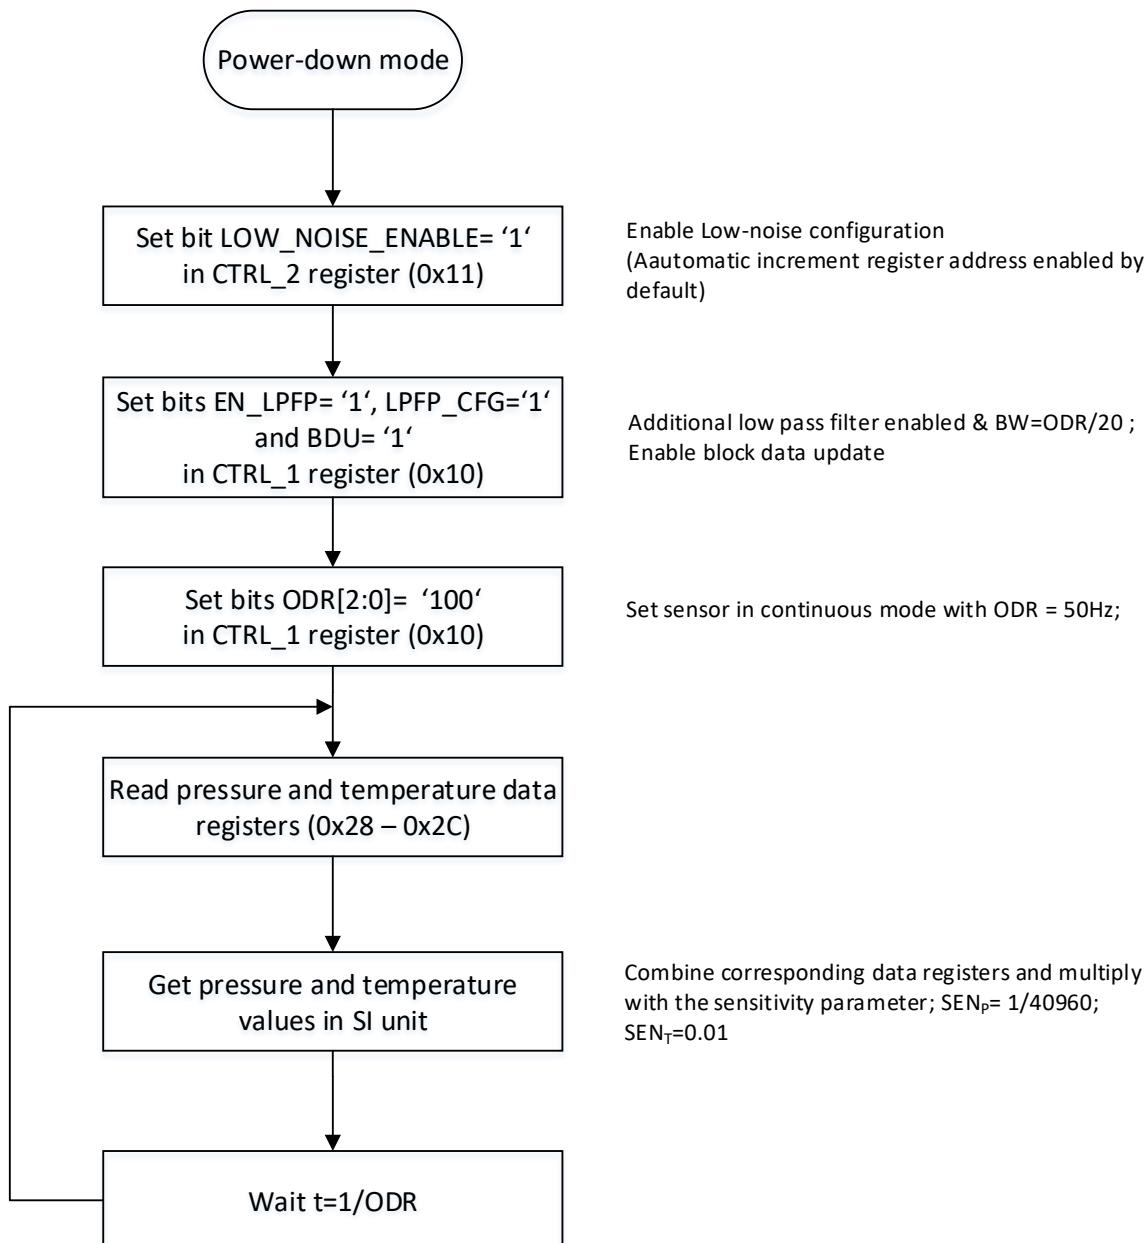


Figure 15: Sensor operation: continuous mode

## 6.7 Power-off sequence

VDD rise/fall time for the sensor varies between 10  $\mu$ s and 100 ms. For proper device power off, it is recommended to drive the *VDD* pin to *GND* or less than 0.2 V and keep it stable at this level for at least 10 ms.

This procedure is also necessary to guarantee the next power-on and boot procedure to be successful.

## 7 Modes of operation

The sensor can be configured to be used in the following 3 different modes.

1. Power-down mode
2. Single conversion mode
3. Continuous mode

Additionally, the device can be operated in either low-power or low-noise configuration. Transition to/from one of the operating modes and configurations can be executed by writing to specific registers.

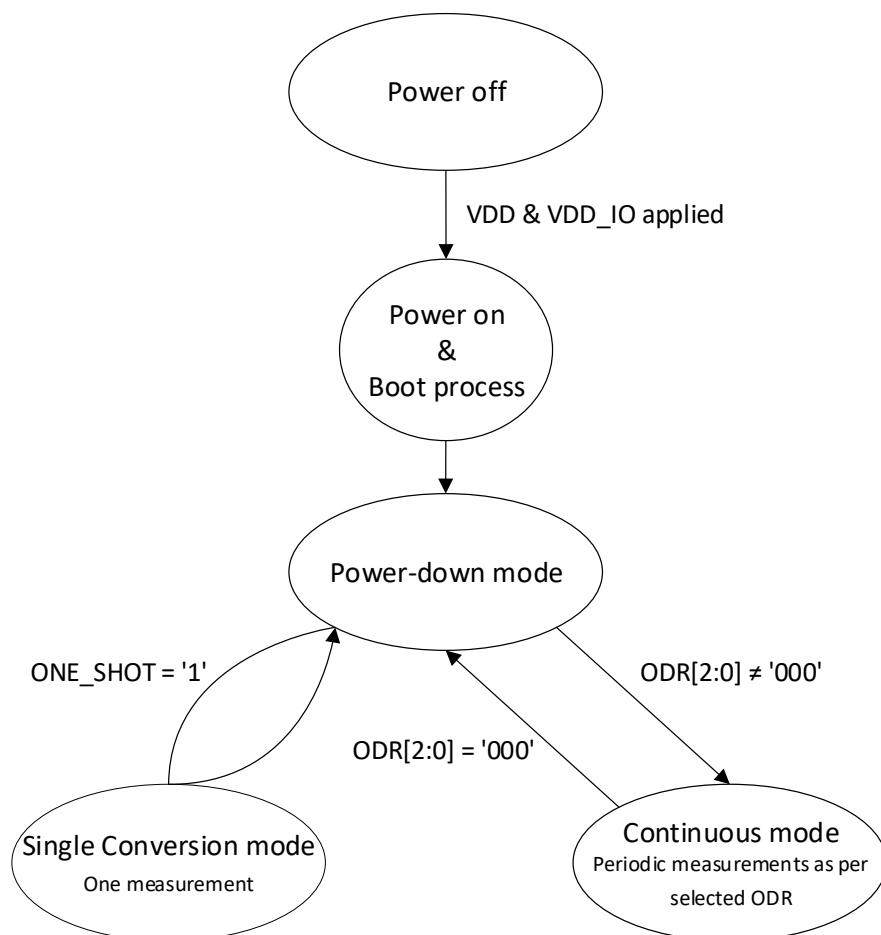


Figure 16: Operating modes

## 7.1 Power-down mode

The power-down mode can be configured by setting the ODR[2:0] bits of *CTRL\_1* register (0x10) to '000'.

In power-down mode the digital chain that samples the pressure and temperature values is turned off. No new measurement is performed during this mode. Hence, the data registers containing pressure and temperature values are not updated. The data registers contain the last sampled pressure and temperature data before going into power-down mode. Current consumption is at the minimum during this mode.

However, serial communication with the host controller via I<sup>2</sup>C bus is still possible. This allows the user to configure the device by accessing the configuration/control registers. Data of the control registers remains unaffected when the sensor is configured to power-down mode from another mode.



Sensor is in power-down mode by default after the power-up sequence.

## 7.2 Single conversion mode

In this mode single measurement of pressure and temperature is performed according to the request of the host controller. This mode can be activated only when the sensor is in the power-down mode. When ONE\_SHOT bit of *CTRL\_2* register (0x11) is set to '1', the digital chain is turned on, data conversion starts and a single measurement of pressure and temperature is acquired. This measurement data is written in the respective pressure and temperature data registers. Afterwards, the digital chain is turned off again and the sensor enters the power-down mode. The ONE\_SHOT bit of *CTRL\_2* register (0x11) automatically returns to '0' (default value). The data registers are not updated until another data acquisition is requested by the host controller. This mode is useful when the application demands reduced power consumption.

During this mode the output data rate (ODR) of new measurement depends on the new measurement request from the host controller (frequency at which the ONE\_SHOT bit is set to '1').

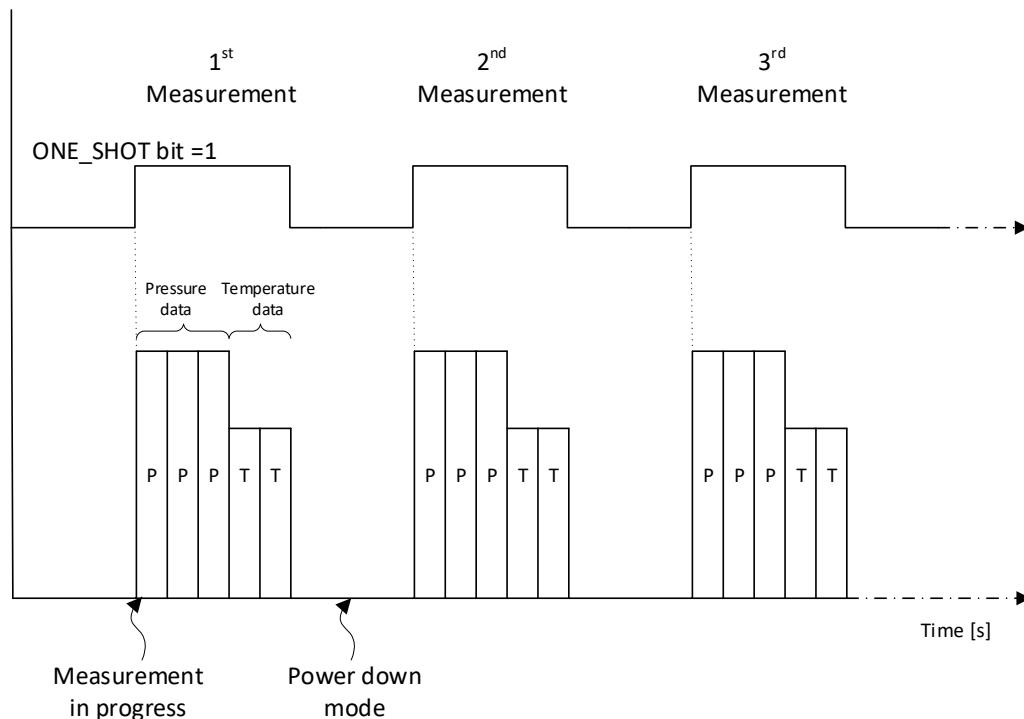


Figure 17: Single conversion mode

Figure 10 shows typical data conversion time in low-power and low-noise configuration.

Configuration	Conversion time [ms]
Low-power	4.7
Low-noise	13.2

Table 10: Data conversion time

### 7.3 Continuous mode

The sensor is configured in the continuous mode when the ODR[2:0] bits of CTR\_1 register (0x10) are set to a value other than '000'. The continuous mode constantly samples new pressure and temperature measurements and writes the data to the corresponding data registers. The measurement rate is defined by the user selectable output data rate (ODR) which can be set by ODR[2:0] bits of *CTRL\_1* register. Selectable ODR and corresponding register settings are shown in the table 11

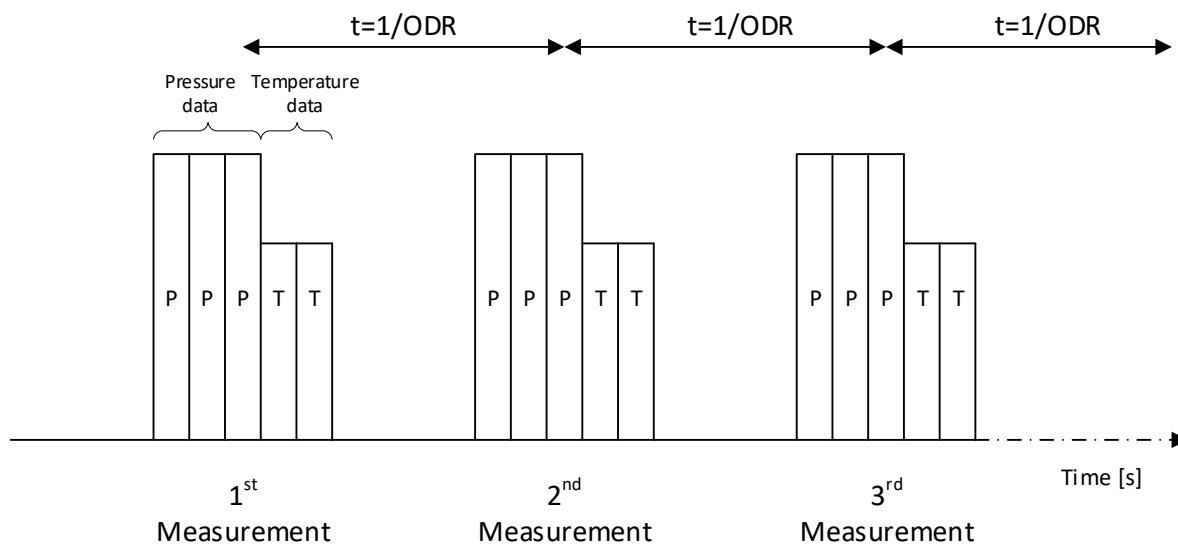


Figure 18: Continuous mode

ODR[2:0]	Output data rate [Hz]
000	Power-down mode / One-shot mode
001	1
010	10
011	25
100	50
101	75
110	100
111	200

Table 11: Output data rate selection

## 7.4 Additional configurations

During continuous mode and single conversion mode, additional configurations can be selected. These include enabling the additional low pass filter; selecting either low-power or low-noise configuration.

### 7.4.1 Low-power or low-noise configuration

In the low-power configuration, the device is configured to minimize the current consumption. In the low-noise configuration, the device is configured to reduce the noise. During the continuous mode and single conversion mode, either one of these configurations can be selected as shown in Table 12. By default the sensor operates in the low-power configuration.

Address	Register	Bit	Bit value	Configuration
0x11	<i>CTRL_2</i>	LOW_NOISE_EN	0	Low-power (default)
0x11	<i>CTRL_2</i>	LOW_NOISE_EN	1	Low-noise

Table 12: Low-power/low-noise configuration



To ensure the proper behaviour of the device, LOW\_NOISE\_EN bit must be changed only when it is in the power-down mode.

Table 13 shows typical conversion time and maximum allowable ODR in each operating mode.

Configuration	Typical data conversion time [ms]	Maximum ODR [Hz]	
		Single conversion mode	Continuous mode
Low-power	4.7	200	200
Low-noise	13.2	50	75

Table 13: Typical conversion time and maximum ODR



Low-noise configuration is not available at ODR 100 Hz or 200Hz. If ODR is set to 100Hz or 200Hz, LOW\_NOISE\_EN bit must be set to '0'.

### 7.4.2 Enabling additional low-pass filter

The sensor embeds two digital low-pass filters. First low-pass filter LPF1 is always applied to the pressure and temperature data. The second low-pass filter LPF2 can be optionally enabled and applied to the pressure data. This configuration is available for both continuous mode and single conversion mode.

The second low-pass filter LPF2 can be enabled by setting the EN\_LPFP bit in the *CTRL\_1* register (0x10) to '1'. Further, overall device bandwidth can also be configured by changing LPFP\_CFG bit of the *CTRL\_1* (0x10) register. LPF2 is applied only to the pressure data.

EN_LPFP	LPFP_CFG	LPF2 status	Device Bandwidth	Samples to be discarded
0	x	Disabled/reset filter	ODR/2	0
1	0	Enabled	ODR/9	2
1	1	Enabled	ODR/20	2

Table 14: Additional low-pass filter setting

When EN\_LPF bit in the *CTRL\_1* (0x10) is changed from '1' to '0', the filter is reset. The filter is also reset when the ODR or device bandwidth is changed. Table 14 indicates the number of samples to be discarded when the filter is enabled or reset. The output data is not considered meaningful before the filter reaches the settling condition.

## 8 Reading output data

Once the device is configured in one of the operating modes, pressure and temperature values are sampled and stored in the respective data registers, available for the user to read.



It is recommended to read the data registers starting from the lower address to the higher address.

### 8.1 Reading pressure values

Pressure values are stored in the three data registers: *DATA\_P\_XL*, *DATA\_P\_L* and *DATA\_P\_H*. Each register contains 8-bits data. The complete pressure data is represented as a 24-bit signed 2's complement word. This can be obtained by concatenating the three 8-bit pressure data registers: *DATA\_P\_H*, *DATA\_P\_L* & *DATA\_P\_XL*, with *DATA\_P\_H* being most significant byte and *DATA\_P\_XL* being least significant byte.

After calculating the 24-bit digital pressure value, it must be multiplied with the sensitivity parameter,  $SEN_P$  (see table 4) in order to obtain the corresponding pressure in SI unit (Pa).

Step 1: Reading raw data from the three pressure data registers

1. *DATA\_P\_XL* (0x28)
2. *DATA\_P\_L* (0x29)
3. *DATA\_P\_H* (0x2A)

Step 2: Concatenating pressure data registers to obtain complete 24-bit pressure value

$$P_{24\text{bit}} = DATA\_P\_H \& DATA\_P\_L \& DATA\_P\_XL$$

Step 3: Obtaining pressure value in SI unit (Pa) by multiplying with sensitivity parameter

$$\text{Pressure [Pa]} = P_{24\text{bit}} \text{ [digit]} \times \frac{1}{40960} \text{ [Pa/digit]}$$

#### Example:

If values obtained from pressure data registers are:

$$DATA\_P\_XL = 0x00$$

$$DATA\_P\_L = 0x54$$

$$DATA\_P\_H = 0x3F$$

Concatenating these 3 registers (0x3F5400) to obtain 24-bit signed decimal value and multiplying with the sensitivity parameter

$$P_{24\text{bit}} \text{ [digit]} = 4150272 \text{ [digit]}$$

$$P[\text{kPa}] = 4150272 \text{ [digit]} * 1/40960 \text{ [kPa/digit]} = 101.325 \text{ kPa}$$

## 8.2 Reading temperature values

Temperature values are stored in the two data registers: *DATA\_T\_L* and *DATA\_P\_H*. Each register contains 8-bits data. The complete temperature data is a 16-bit signed 2's complement word. This can be obtained by concatenating the two 8-bit temperature data registers: *DATA\_T\_H* & *DATA\_P\_L*, with *DATA\_T\_H* being most significant byte and *DATA\_T\_L* being least significant byte.

After calculating the 16-bit digital temperature value, it must be multiplied with the sensitivity parameter,  $SEN_T$  (see table 5) in order to obtain the corresponding temperature in SI unit ( $^{\circ}\text{C}$ ).

Step 1: Reading raw data from the two temperature data registers

1. *DATA\_T\_L* (0x2B)
2. *DATA\_T\_H* (0x2C)

Step 2: Concatenating the temperature data registers to obtain complete 16-bit temperature value

$$T_{16\text{bit}} = DATA_T_H \& DATA_T_L$$

Step 3: Obtaining temperature value in SI unit [ $^{\circ}\text{C}$ ] by multiplying with sensitivity parameter

$$\text{Temperature } [^{\circ}\text{C}] = T_{16\text{bit}} \text{ [digit]} \times 0.01 \text{ [}^{\circ}\text{C/digit]}$$

### Example:

If values obtained from temperature data registers are:

$$\begin{aligned} DATA_T_L &= 0x42 \\ DATA_T_H &= 0x0E \end{aligned}$$

Concatenating these 2 registers (0x0E42) to obtain 16-bit signed decimal value and multiplying with sensitivity parameter

$$T_{16\text{bit}} \text{ [digit]} = 3650 \text{ [digit]}$$

$$T [^{\circ}\text{C}] = 3650 \text{ [digit]} \times 0.01 \text{ [}^{\circ}\text{C/digit]} = 36.50 \text{ }^{\circ}\text{C}$$

### 8.3 Status register for reading the data

The sensor has a *STATUS* register (0x27) that can be used to check when a new set of pressure or temperature data is available in the corresponding data register.

*P\_DA* bit is set to '1' whenever a new sample is available in the pressure data registers. *P\_DA* bit is self cleared and set back to '0' when the corresponding pressure data (most significant byte, *DATA\_P\_H*) has been read.

Same way, *T\_DA* bit is set to '1' whenever a new set of data is available in the temperature data registers. *T\_DA* bit is self cleared and set back to '0' when the corresponding temperature data (Most significant byte, *DATA\_T\_H*) has been read.

Bits *P\_OR* and *T\_OR* of the *STATUS* register (0x27) are overrun flags for pressure and temperature data respectively. Whenever a previous pressure or temperature sample in the data register is overwritten without being read by the user, *P\_OR* and *T\_OR* bits are set to '1', indicating that previous value has been lost. *P\_OR* and *T\_OR* bit will be set to '1' in case a new pressure or temperature data is measured while the corresponding *x\_DA* bit is still '1'. They are automatically set to '0' when all data from the corresponding data registers have been read and no new measurement is generated in the meantime.

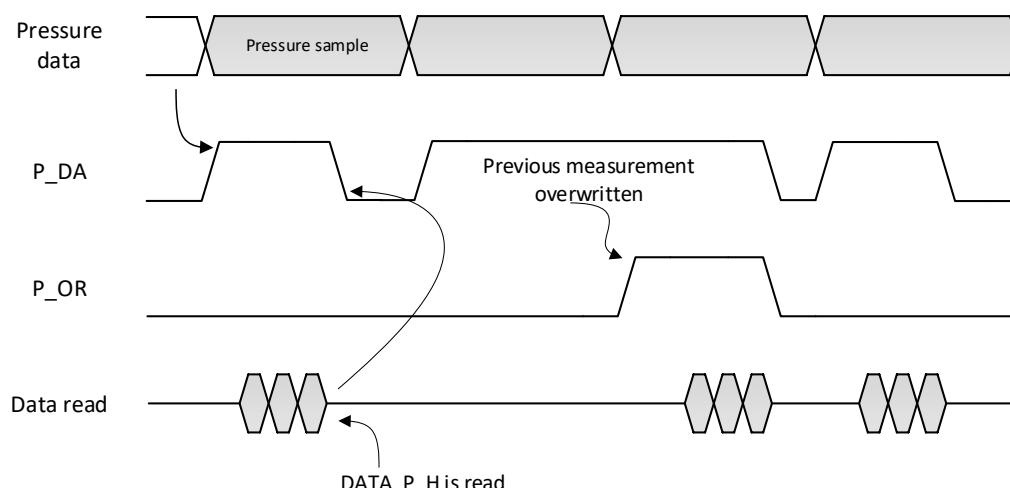


Figure 19: Reading pressure data using *STATUS* register

Since, pressure and temperature data are synchronously generated, *P\_DA* and *T\_DA* synchronously rises to '1' (unless one of the bit is already one). However, they would not synchronously reset to '0' as it depends on when the corresponding data is read.



Reading the data registers (pressure and temperature) before the 1/ODR time period allows acquisition of all data and resetting *P\_DA* and *T\_DA* before the overrun flags are set.

## 9 FIFO buffer

The sensor has an embedded first-in, first-out (FIFO) buffer that can store up to 128 sets of pressure and temperature data. Each data set consists of 5 bytes of data (3 bytes pressure and 2 bytes temperature). This allows considerable power saving of the system because the host controller does not have to continuously poll for new data from the sensor. The host controller can be notified via the *INT* pin when it is required to read the data from FIFO buffer. FIFO events can be used to generate interrupt via *INT* pin.

FIFO can be operated in six different user selectable modes.

- Bypass mode
- FIFO mode
- Continuous mode
- Bypass-to-FIFO mode
- Bypass-to-continuous mode
- Continuous-to-FIFO mode

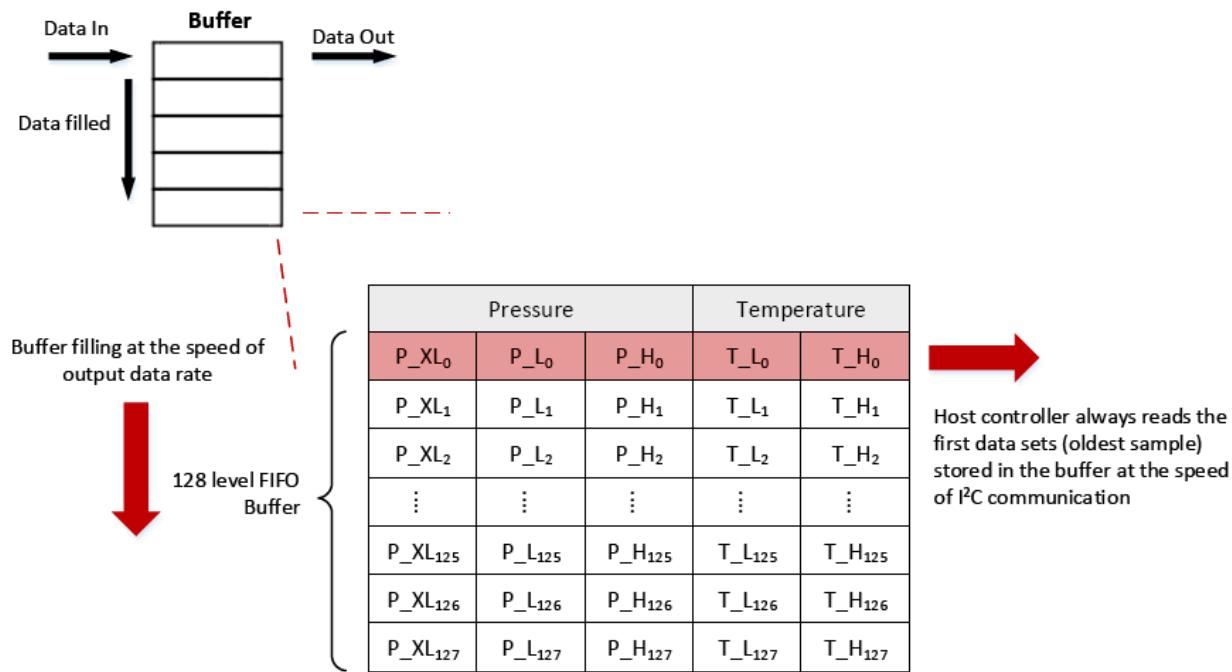


Figure 20: First-In-First-Out buffer

FIFO behaves as a circular buffer. The buffer is filled with new data set (pressure and temperature) in the first available empty slot. Once the buffer is full, FIFO either stops filling the new data sets or the oldest data set is replaced by the new data sets.

When FIFO is enabled, pressure and temperature data is sent to the FIFO buffer at the selected ODR in the *CTRL\_1* register. The host controller can read the data stored in FIFO buffer. The oldest data set is always read first. FIFO modes can be configured from *FIFO\_CTRL* register. (0x13).

FIFO_CTRL [2:0]			FIFO Mode
TRIG_MODE	F_MODE[1]	F_MODE[0]	
x	0	0	Bypass mode
0	0	1	FIFO mode
0	1	x	Continuous mode
1	0	1	Bypass-to-FIFO mode
1	1	0	Bypass-to-Continuous mode
1	1	1	Continuous-to-FIFO mode

Table 15: FIFO mode settings

## 9.1 Bypass mode

FIFO buffer is not in operation in the bypass mode. By default the FIFO buffer is in bypass mode and FIFO remains empty. Each new data set is directly available in the respective data (DATA\_P\_x, DATA\_T\_x) registers (See Figure 21)

The device can be configured in the bypass mode by writing '000' or '100' to register FIFO\_CTRL[2:0].



Enabling bypass mode clears the FIFO buffer and must be used while switching between other FIFO modes.

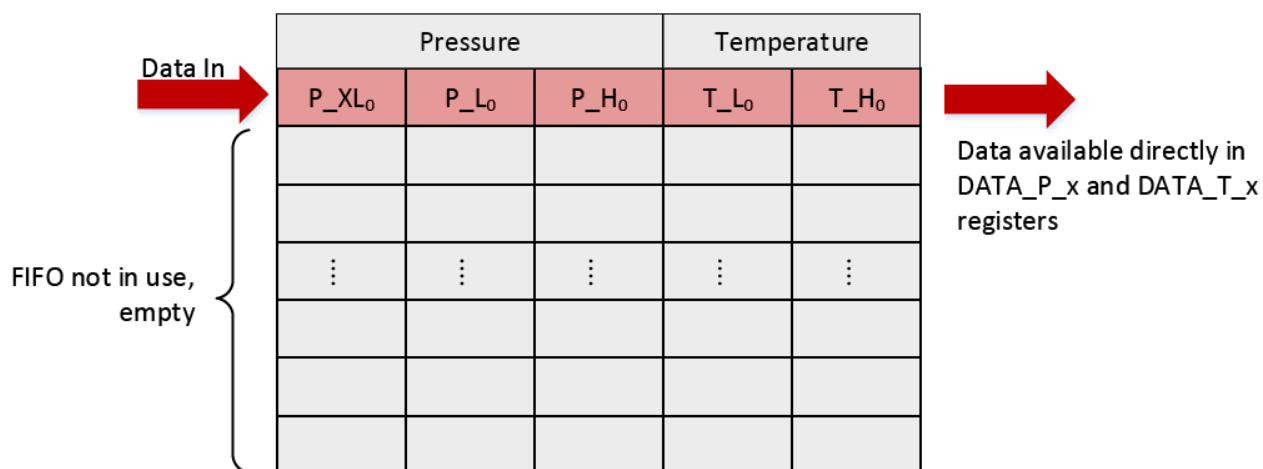


Figure 21: Bypass mode

## 9.2 FIFO mode

This mode is enabled by settings bits [2:0] of *FIFO\_CTRL* (0x13) to '001'.

In this mode, each data set (pressure and temperature) is stored in the FIFO buffer at selected ODR. The FIFO buffer keeps filling until it is full or reaches the user-defined FIFO threshold (see section 9.7.1).

FSS[7:0] bits in *FIFO\_STATUS\_1* register (0x25) shows the number of data sets stored in FIFO buffer. This register is updated every 1/ODR period.

Once the FIFO is full, bit *FIFO\_FULL\_IA* or *FIFO\_WTM\_IA* (if user defined FIFO threshold level is enabled) in the *FIFO\_STATUS\_2* register (0x26) will be set to '1', and buffer stops storing new data sets. At this point data in the FIFO buffer will remain unchanged and further measured data sets will be lost. Data stored in FIFO buffer can be read from five *FIFO\_DATA\_x\_x* registers(0x78-0x7C). See section (see section 9.7.2)

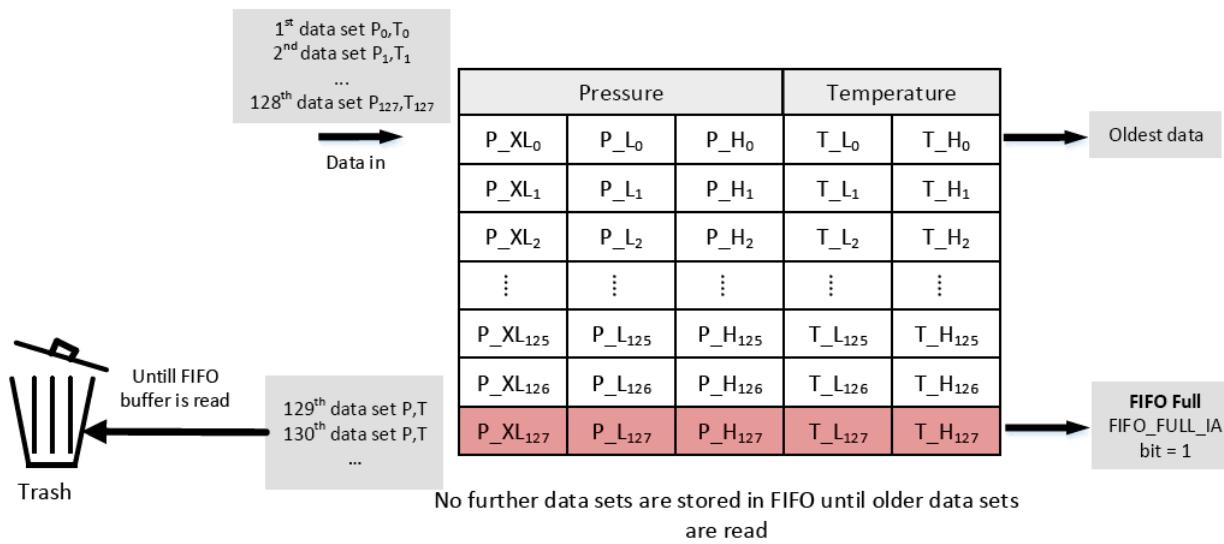


Figure 22: FIFO mode



In order to fill the FIFO buffer with new sets of measurement data, the device must be first configured in the bypass mode to reset the FIFO buffer and then again in the FIFO mode.

### 9.3 Continuous mode

This mode is enabled by settings bits [2:0] of *FIFO\_CTRL* (0x13) to '010' or '011'.

In this mode, each data set (pressure and temperature) is stored in the FIFO buffer at selected ODR. Once the FIFO buffer is full or reaches the user-defined FIFO threshold, oldest data sets will be overwritten by the new data sets, meaning older data sets will be lost.

FSS[7:0] bits in *FIFO\_STATUS\_1* register (0x25) indicate the number of data sets stored in FIFO buffer. This register is updated every 1/ODR period.

Once the FIFO is full, bit *FIFO\_FULL\_IA* or *FIFO\_WTM\_IA* (if user defined FIFO threshold level is enabled) in the *FIFO\_STATUS\_2* register (0x26) will be set to '1'. At this point, older data sets are replaced by new data sets and *FIFO\_OVR\_IA* bit in the *FIFO\_STATUS\_2* register (0x26) goes to '1', indicating that at least one data set has been overwritten.

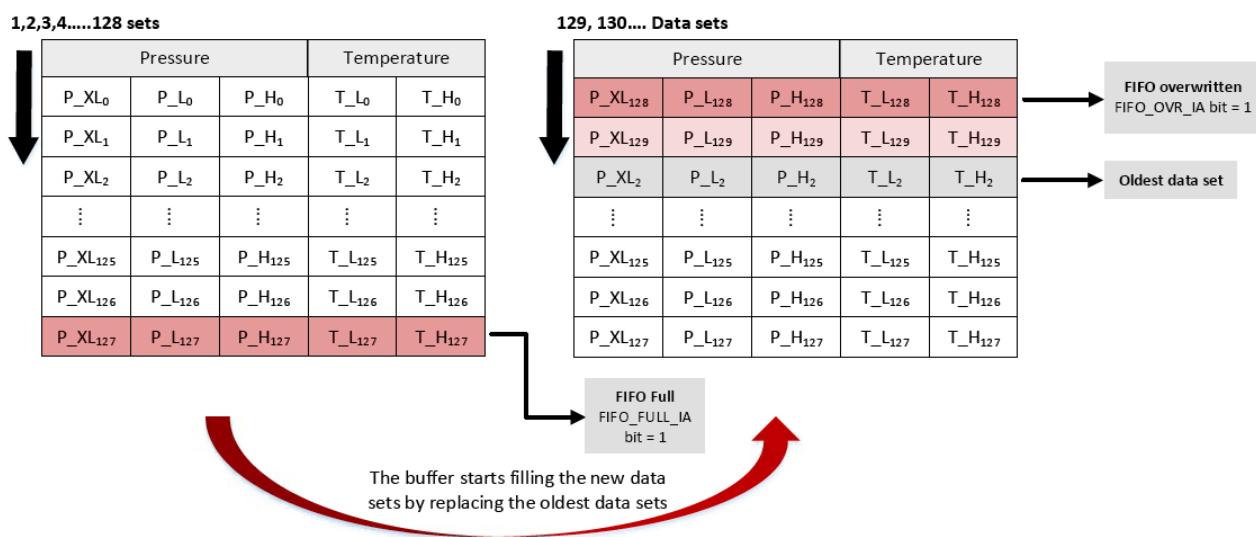


Figure 23: Continuous mode



If FIFO buffer is overwritten without a read operation, bits *FIFO\_FULL\_IA* and *FIFO\_WTM\_IA* are set back to '0' after the first data set is overwritten.

New data sets will continue to overwrite the old data sets until a read operation is initiated by the host controller or the FIFO is reset. In order to avoid losing the older data sets, data must be read faster than the ODR. Host controller can be alerted about FIFO full or FIFO overwritten event by routing the status of *FIFO\_FULL\_IA*, *FIFO\_WTM\_IA* or *FIFO\_OVR\_IA* to the *INT* pin of the device through corresponding bits of *CTRL\_3* register (0x12).

## 9.4 Bypass-to-FIFO mode

This mode is enabled by settings bits [2:0] of *FIFO\_CTRL* (0x13) to '101'.

In this mode, initially FIFO buffer is in bypass mode. When an interrupt trigger event is generated, FIFO switches from bypass mode to FIFO mode and starts filling the slots with measurement data sets until the buffer is full.

Switching from the bypass mode to the FIFO mode can be triggered by an interrupt event selected by user through *INT\_CFG* (0x0B) register. The selected event generation leads IA bit of *INT\_SOURCE* (0x24) register to rise to '1'. When this bit rises to '1' for the first time, the buffer switches to FIFO mode.



When the IA bit goes back to '0', FIFO does not switch back to bypass mode.

## 9.5 Bypass-to-continuous mode

This mode is enabled by settings bits [2:0] of *FIFO\_CTRL* (0x13) to '110'.

In this mode, initially FIFO buffer is in bypass mode. When an interrupt trigger event is generated, FIFO switches from bypass mode to continuous mode and starts filling the slots with measurement data sets; once FIFO is full, it will overwrite old data sets with the new data.

Switching from the bypass mode to the continuous mode can be triggered by an interrupt event selected by the user through *INT\_CFG* (0x0B) register. The selected event generation leads IA bit of *INT\_SOURCE* (0x24) register to rise to '1'. When this bit rises to '1' for the first time, FIFO switches to continuous mode.

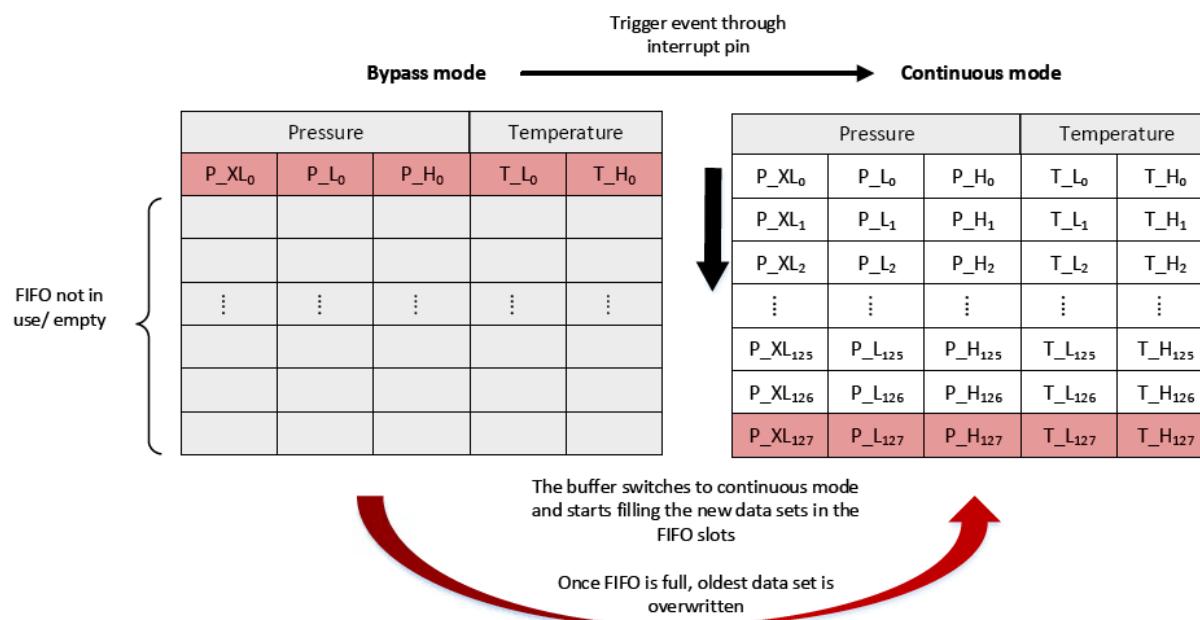


Figure 24: Bypass-to-Continuous mode



When the IA bit goes back to '0', FIFO does not switch back to bypass mode.

## 9.6 Continuous-to-FIFO mode

This mode is enabled by settings bits [2:0] of *FIFO\_CTRL* (0x13) to '111'.

In this mode, initially FIFO buffer is in continuous mode. When an interrupt trigger event is generated, FIFO switches from continuous mode to FIFO mode and continues to fill the slots with the data sets; once FIFO is full, it will stop storing the data in the FIFO buffer.

Switching from continuous to FIFO mode can be triggered by an interrupt event selected by the user through *INT\_CFG* (0x0B) register. The selected event generation leads IA bit of *INT\_SOURCE* (0x24) register to rise to '1'. When this bit rises to '1' for the first time, the buffer switches to FIFO mode.

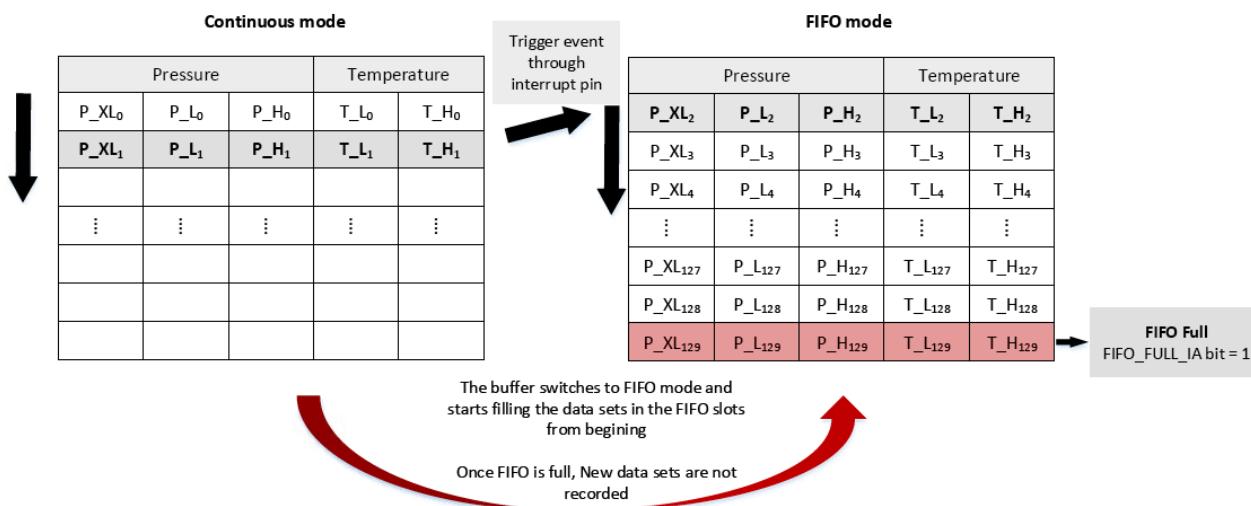


Figure 25: Continuous-to-FIFO mode



When the IA bit goes back to '0', FIFO does not switch back to continuous mode.

## 9.7 FIFO status monitoring and control

When FIFO is in operation, its status can be monitored by reading two registers, *FIFO\_STATUS\_1* (0x25) and *FIFO\_STATUS\_2* (0x26).

*FIFO\_STATUS\_1* register shows the current number of data sets stored in the FIFO buffer. 0000000b indicates FIFO is empty and 1000000b indicates FIFO is full with 128 data sets.

*FIFO\_STATUS\_2* register has 3 FIFO buffer flags.

- *FIFO\_WTM\_IA* flag indicates when FIFO buffer is equal to or higher than user defined FIFO threshold level (only if this feature is enabled through *FIFO\_CTRL* register). The status of this flag can be routed to *INT* pad of the sensor via *CTRL\_3* register by setting *INT\_F\_WTM* bit to '1'.
- *FIFO\_OVER\_IA* flag indicates when FIFO is full and at least one data set is overwritten with a new one. The status of this flag can be routed to *INT* pad of the sensor via *CTRL\_3* register by setting *INT\_F\_OVR* bit to '1'.
- *FIFO\_FULL\_IA* flag indicates when FIFO is completely filled with 128 data sets. The status of this flag can be routed to *INT* pad of the sensor via *CTRL\_3* register by setting *INT\_F\_FULL* bit to '1'.

### 9.7.1 User-defined FIFO threshold

Normally, FIFO can be filled with 128 sets of data. However, user can limit the FIFO buffer depth with *FIFO\_WTM* (0x14) register. The user can define the required FIFO threshold level by setting bits WTM[6:0] of *FIFO\_WTM* registers to the corresponding value. Maximum allowable value in this register is 0x7F.

The user-defined FIFO threshold has to be enabled by setting *STOP\_ON\_WTM* bit of *FIFO\_CTRL* (0x13) register to '1'. When enabled, the FIFO level size will be considered as the value defined in the *FIFO\_WTM* register.



User-defined FIFO threshold level can not be changed when FIFO is already in operation.

### 9.7.2 Reading data from FIFO buffer

When FIFO buffer is in operation, the data stored in FIFO is available to read from dedicated FIFO data registers. Pressure values can be read from *FIFO\_P\_x* (0x78 to 0x7A) and temperature values can be read from *FIFO\_T\_x* (0x7B to 0x7C) registers. Every time a data set is read, remaining oldest entry in the FIFO buffer is placed in the FIFO data registers, available to be read. FIFO status registers *FIFO\_STATUS\_1* (0x0x25) and *FIFO\_STATUS\_2* (0x0x26) are also updated accordingly.

FIFO data registers (0x78-0x7C) can be read with multi read/write feature which is enabled by default. Number of read operations can be determined based on the number of data sets stored in the FIFO buffer. The current number of data sets stored in the FIFO buffer can be known by reading *FIFO\_STATUS\_1* (0x0x25) register.



If differential interrupt is enabled (bit *DIFF\_EN* = '1') with *AUTOZERO* mode (bit *AUTOZERO* = '1'), then FIFO buffer will contain values other than the standard pressure data registers.

## 10 Interrupt functionality

The sensor has a dedicated interrupt generator which generates various interrupt events. The interrupt events can be monitored via dedicated status registers. Available interrupt events and their dedicated status registers are listed below.

- Pressure data ready event (*STATUS* register (0x27))
- Based on pressure threshold (*INT\_SOURCE* register (0x24))
  - Pressure high
  - Pressure low
  - Pressure high or low
- FIFO status (*FIFO\_STATUS\_2* register (0x26))
  - FIFO full
  - FIFO overrun
  - FIFO threshold

### 10.1 Interrupt generation on pressure data-ready

It is possible to generate a hardware signal through the *INT* pin of the sensor when a new set of measurement data is available. This feature can be used to trigger an external action synchronously as soon as a new set of data is available.

As mentioned in the section 8.3, *P\_DA* bit in the *STATUS* register goes to '1', whenever a new set of pressure data is generated. This can be routed to the *INT* pin of the device by setting bit *DRDY* = 1 and *INT\_S[1:0]* = 00 of *CTRL\_3* register (0x12).

*P\_DA* bit and the data-ready signal on *INT* resets after the most significant byte of pressure data is read.



Data-ready interrupt generation is only available for pressure data.

## 10.2 Interrupt generation based on pressure threshold

Interrupt can be generated on the differential pressure signal when DIFF\_EN bit is set to '1'. When differential pressure is above or below user-defined threshold pressure, an interrupt signal on the *INT* pin can be generated.

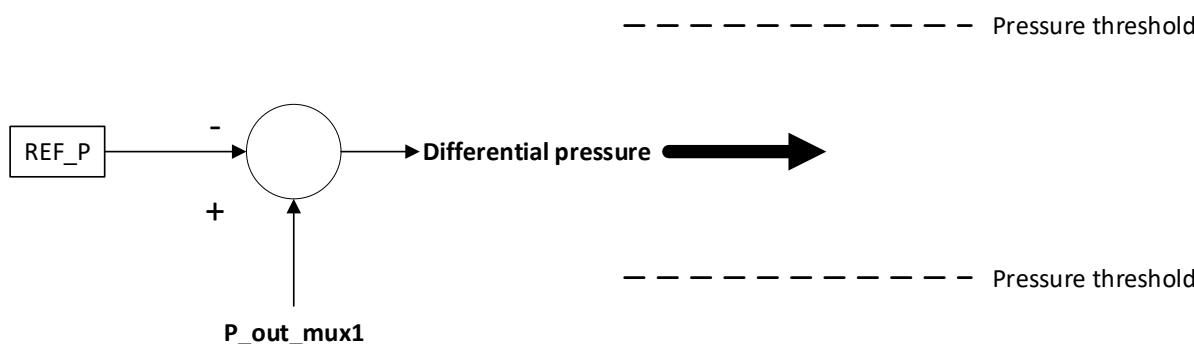


Figure 26: Differential pressure interrupt

DIFF\_EN is used with either AUTOZERO or AUTOREFP configuration. When one of these configuration is enabled, the measured pressure is automatically stored in the REF\_P (0x15-0x16) as a 16-bit signed value.



Measured pressure is a 3-byte long signed value, but REF\_P contains the 2 most significant bytes of the measured pressure value

If AUTOZERO mode is engaged, the pressure data registers DATA\_P\_x (0x28-0x2A) are updated with the difference between the measured pressure and REF\_P value. The differential pressure value is also updated with the difference between the measured pressure and REF\_P value.

- Differential pressure = measured pressure-REF\_P
- Data\_P\_x = measured pressure-REF\_P

If AUTOREFP mode is engaged, the pressure data registers DATA\_P\_x (0x28-0x2A) will contain the measured pressure but the the differential pressure value will still be updated with the difference between the measured pressure and REF\_P value.

- Differential pressure = measured pressure-REF\_P
- Data\_P\_x = measured pressure

The sensor has dedicated pressure threshold registers *THR\_P\_L* and *THR\_P\_H*, where user-defined pressure can be stored as a 15 bit unsigned value. Desired pressure threshold value can be stored in the *THR\_P\_x* registers as shown below.

$$\text{Pressure threshold value [digit]} = \frac{\text{Pressure threshold value [kPa]}}{\text{SEN}_P[\text{kPa}/\text{digit}]}$$

$$\text{SEN}_P = 1/40960 \text{ [kPa/digit]}$$



User defined pressure threshold is a 15-bit unsigned value which represents a differential pressure and not absolute pressure value.

When, bits PHE = '1' or PLE = '1' or both are set to '1', the differential pressure is compared to the user defined pressure value at each new sample generation and an interrupt signal is generated accordingly. Based on the status of the PHE and PLE bits, interrupt signals can be generated on the *INT* pin of the sensor.

PHE	PLE	Interrupt Event
1	0	Differential pressure is above the THR_P value (+THR)
0	1	Differential pressure is below the THR_P value (-THR)
1	1	Differential pressure is above or below the THR_P value

Table 16: Interrupt based on pressure threshold

### 10.2.1 Interrupt latching

The interrupt generated based on the pressure threshold, can be also latched. Interrupt flags (PH, PL or IA) in the *INT\_SOURCE* registers can be latched to their 'high' states, even if the condition that triggered their rise is not valid anymore. The interrupt flags only get reset when *INT\_SOURCE* (0x24) register has been read.

Interrupt latching is enabled by setting LIR bit of *INT\_CFG* (0x0B) register to '1'. In this case, when the IA bit rises to '1' it will remain in the same state until the *INT\_SOURCE* is read.

Interrupt latching is also routed to the *INT* pin of the sensor if IA or PH or PL flags are routed to generate an interrupt.

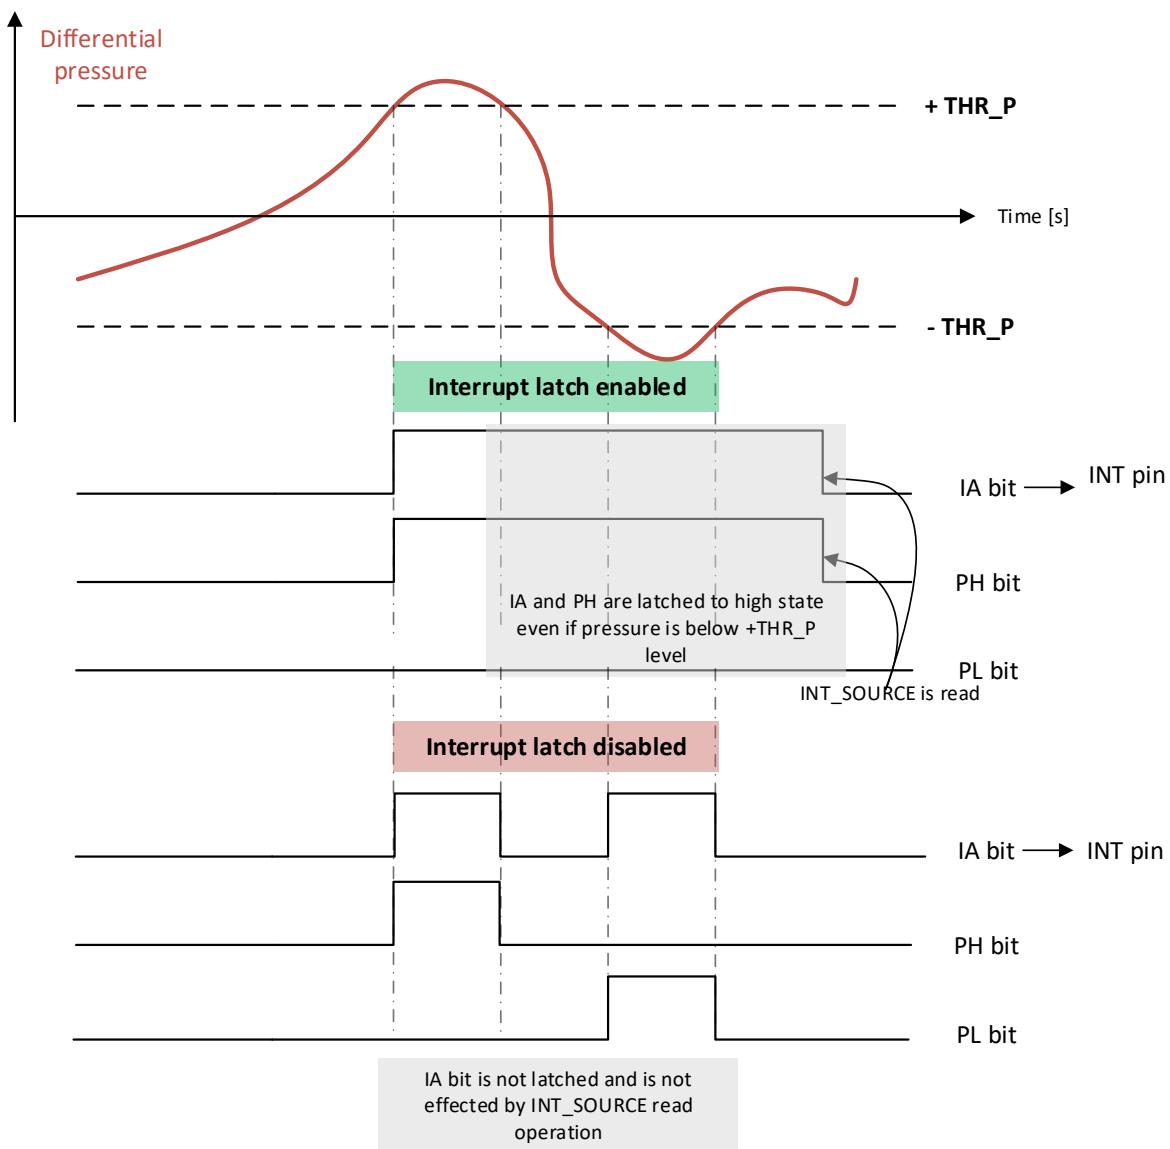


Figure 27: Interrupt latching

## 10.3 FIFO status based interrupt events

When FIFO is active, interrupt event can be generated based on the status of FIFO registers. Status of FIFO registers can be checked from *FIFO\_STATUS\_2* (0x26) register. By configuring the *CTRL\_3* register, it is possible to route the event to the *INT* pin.

Bit	Bit value	Event
INT_F_FULL	1	FIFO is full
INT_F_WTM	1	User-defined FIFO threshold level is reached
INT_F_OVR	1	FIFO is full and at least one measurement is overwritten

Table 17: FIFO interrupts

FIFO modes can also be triggered from the interrupt events. When the bit IA in the *INT\_SOURCE* register 0x24 is set to '1', following FIFO buffer mode can be triggered.

- Bypass-to-FIFO mode (when *FIFO\_CTRL* bits [2:0] are set to '101')
- Bypass-to-Continuous mode (when *FIFO\_CTRL* bits [2:0] are set to '110')
- Continuous-to-FIFO mode (when *FIFO\_CTRL* bits [2:0] are set to '111')

## 10.4 Routing interrupt events to the *INT* pin

All the interrupt events can be individually selected and routed to the *INT* pin of the sensor from *CTRL\_3* register.

Interrupt Event	Routing to <i>INT</i> pin
Pressure data ready	Bit DRDY = '1' and bits INT_S[1:0] = '00'
FIFO full	Bit INT_F_FULL = '1' and bits INT_S[1:0] = '00'
FIFO Overrun	Bit INT_F_OVR = '1' and bits INT_S[1:0] = '00'
FIFO threshold	Bit INT_F_WTM = '1' and bits INT_S[1:0] = '00'
Pressure high or low	Bit PLE or PHE= '1' and bits INT_S[1:0] = '11'
Pressure high	Bit PLE= '1' and bits INT_S[1:0] = '01'
Pressure low	Bit PLE= '1' and bits INT_S[1:0] = '10'

Table 18: Routing interrupt events to *INT* pin

It is also possible to route multiple interrupt events to the *INT*. The interrupt events are connected via logical OR operation and multiplexed to the *INT* pin (see figure 28). To know which interrupt event triggered the interrupt signal on *INT* pin, the corresponding status registers have to be read.

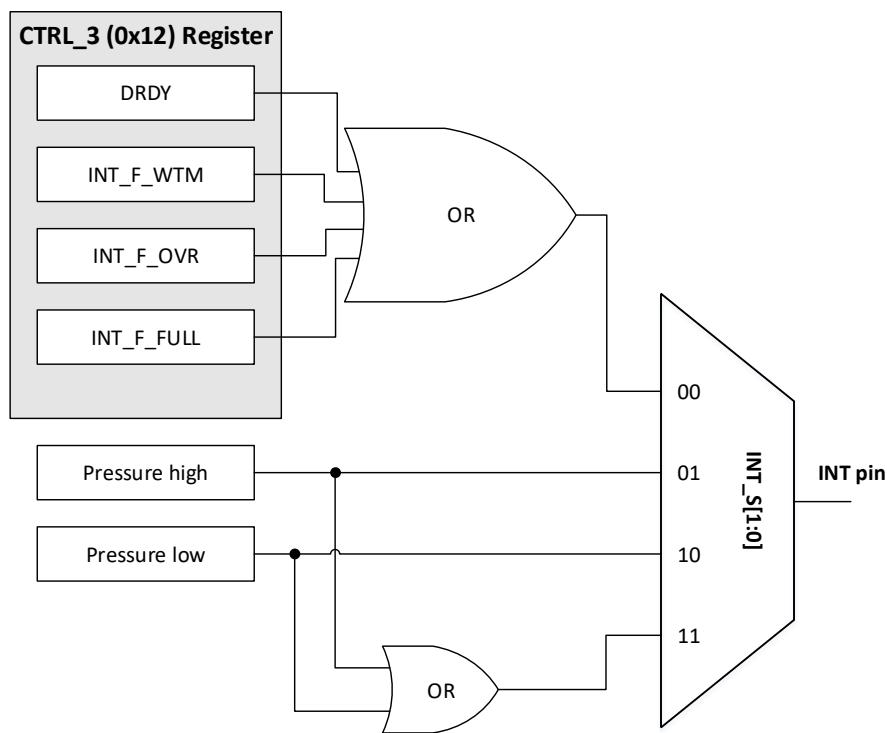


Figure 28: Routing interrupt events to *INT* pin

INT_S[1]	INT_S[0]	<i>INT</i> pin configuration
0	0	Data signal (priority order: DRDY or INT_F_WTM or INT_F_OVER or INT_F_FULL)
0	1	Pressure high event
1	0	Pressure low event
1	1	Pressure low or high event

Table 19: INT pin configuration

# 11 Register map

Addr.	Register Name	Type	Bits								Comments
			7	6	5	4	3	2	1	0	
0x0B	<i>INT_CFG</i>	R/W	AUTO REFP	RESET_ ARP	AUTO ZERO	RESET_ AZ	DIFF_ EN	LIR	PLE	PHE	Interrupt configuration register
0x0C	<i>THR_P_L</i>	R/W					THR[7:0]				Pressure threshold register
0x0D	<i>THR_P_H</i>	R/W					THR[15:8]				
0x0E	<i>INTERFACE_CTRL</i>	R/W	0	0	0	SDA_ PU_EN	SAO_ PU_EN	PD_ DIS_INT	0	I2C_ DIS_ABLE	Interface control register
0x0F	<i>DEVICE_ID</i>	R	1	0	1	1	0	0	1	1	Device ID register
0x10	<i>CTRL_1</i>	R/W	0	ODR[2:0]			EN_ LPFP	LPFP_ CFG	BDU	0	Control register-1
0x11	<i>CTRL_2</i>	R/W	BOOT	INT_H_L	PP_OD	IF_ADD_ INC	0	SW RESET	LOW NOISE ENABLE	ONE SHOT	Control register-2
0x12	<i>CTRL_3</i>	R/W	0	0	INT_F_ FULL	INT_F_ WTM	INT_F_ OVR	DRDY	INT_S[1:0]		Control register-3
0x13	<i>FIFO_CTRL</i>	R/W	0	0	0	0	STOP_ ON_WTM	TRIG_ MODES	F_MODE[1:0]		FIFO control register
0x14	<i>FIFO_WTM</i>	R/W	0	WTM[6:0]							
0x15	<i>REF_P_L</i>	R/W					REFL[7:0]				Reference pressure register
0x16	<i>REF_P_H</i>	R/W					REFH[15:8]				
0x18	<i>OPC_P_L</i>	R/W					OPCP[7:0]				Reference pressure register
0x19	<i>OPC_P_H</i>	R/W					OPCP[15:8]				
0x1A- 0x23	Reserved						-				Reserved
0x24	<i>INT_SOURCE</i>	R	BOOT_ ON	0	0	0	0	IA	PL	PH	Interrupt register
0x25	<i>FIFO_STATUS_1</i>	R					FSS[7:0]				FIFO status registers
0x26	<i>FIFO_STATUS_2</i>	R	FIFO_ WTM_IA	FIFO_ OVR_IA	FIFO_ FULL_IA	0	0	0	0	0	
0x27	<i>STATUS</i>	R	0	0	T_OR	P_OR	0	0	T_DA	P_DA	Status register
0x28	<i>DATA_P_XL</i>	R					DATA_P[7:0]				Pressure output registers
0x29	<i>DATA_P_L</i>	R					DATA_P[15:8]				
0x2A	<i>DATA_P_H</i>	R					DATA_P[23:16]				
0x2B	<i>DATA_T_L</i>	R					DATA_T[7:0]				Temperature output registers
0x2C	<i>DATA_T_H</i>	R					DATA_T[15:8]				
0x2C- 0x77	Reserved						-				Reserved
0x78	<i>FIFO_DATA_P_XL</i>	R					FIFO_P[7:0]				Pressure output registers
0x79	<i>FIFO_DATA_P_L</i>	R					FIFO_P[15:8]				
0x7A	<i>FIFO_DATA_P_H</i>	R					FIFO_P[23:15]				
0x7B	<i>FIFO_DATA_T_L</i>	R					FIFO_T[7:0]				Temperature output registers
0x7C	<i>FIFO_DATA_T_H</i>	R					FIFO_P[15:8]				



Writing to reserved registers may cause permanent damage to the device. Register addresses not listed in the above table, must not be accessed and content must not be modified.



Register contents that are loaded during the boot process should not be changed. They contain factory calibration values and their content is automatically restored at the power up.

## 12 Register description

### 12.1 INT\_CFG (0x0B)

Address: 0x0B  
 Type: R/W  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
AUTO REFP	RESET_ ARP	AUTO ZERO	RESET_ AZ	DIFF_EN	LIR	PLE	PHE

AUTOREFP	Enable AUTOREFP function. Measured pressure value is stored in REF_P_x registers (0x15-0x16) and pressure data registers, DATA_P_x show actual measured values 0: AUTOREFP is disabled 1: AUTOREFP is enabled
RESET_ARP	Reset AUTOREFP function. Resets REF_P_x register values 0: normal mode 1: reset AUTOREFP
AUTOZERO	Enable AUTOZERO mode. Measured pressure value is stored in REF_P_x registers (0x15-0x16) and used as reference for measured data. Pressure data registers DATA_P_x contain the difference between measured pressure and REF_P registers. 0: AUTOZERO is disabled 1: AUTOZERO is enabled
RESET_AZ	Reset AUTOZERO function; Resets REF_P_x register values 0: normal mode 1: reset AUTOZERO
DIFF_EN	Enable differential interrupt generation. To be used with AUTOREFP and AUTOZERO mode 0: differential interrupt disabled; 1: differential interrupt is enabled
LIR	Interrupt request is latched to the <i>INT_SOURCE</i> register (0x24) 0: interrupt is not latched; 1: interrupt is latched
PLE	Enable differential pressure interrupt generation when pressure value is lower than the user-defined threshold value set in register THR_P_x (0x0c-0x0D) 0: interrupt is inactive; 1: interrupt active on pressure low event

PHE	Enable differential pressure interrupt generation when pressure value is higher than the user-defined threshold value set in register <b>THR_P_x</b> (0x0c-0x0D) 0: interrupt is inactive; 1: interrupt active on pressure high event
-----	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



AUTOZERO or AUTOREFP mode must be enabled when differential pressure interrupt is desired.



AUTOZERO and AUTOREFP bits are set back to '0' after the first measurement and two most significant bytes of the measured value are stored in *REF\_P\_H* and *REF\_P\_L* registers. In order to return to normal mode, *RESET\_AZ* or *RESET\_ARP* must be set to '1'.

## 12.2 THR\_P\_L (0x0C)

Address: 0x0C  
 Type: R/W  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
THR[7:0]							

THR[7:0] LSB of the user defined pressure threshold value to generate a pressure based interrupt event.

## 12.3 THR\_P\_H (0x0D)

Address: 0x0D  
 Type: R/W  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
-	THR[14:8]						

THR[15:8] MSB of the user defined pressure threshold value to generate a pressure based interrupt event.

User-defined pressure threshold value is expressed in 15-bit unsigned right-justified value stored in *THR\_P\_H* and *THR\_P\_L* registers. It can be calculated as follows:

$$\text{Pressure threshold value (kPa)} \times 16 = \text{THR\_P}[15:0]$$



THR\_P value is a differential pressure threshold and not absolute pressure threshold.

### Enable interrupt based on user-defined pressure threshold

1. Set DIFF\_EN bit to '1' in *INT\_CFG* register (0x0B)
2. Set PHE or PLE (or both) = '1', based on the user application

## 12.4 INTERFACE\_CTRL (0x0E)

Address: 0x0E  
 Type: R/W  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
0	0	0	SDA_PU_EN	SAO_PU_EN	PD_DIS_INT	0	I2C_DISABLE

SDA\_PU\_EN      Enable internal pull-up resistors on the *SDA* pin  
 0: internal pull-up not connected; 1: internal pull-up is connected

SAO\_PU\_EN      Enable internal pull-up resistors on the *SAO* pin  
 0: internal pull-up not connected; 1: internal pull-up is connected

PD\_DIS\_INT      Disable internal pull-down on *INT* pin  
 0: *INT* pin pull-down connected; 1: *INT* pin pull-down is disconnected

I2C\_DISABLE      Disable I<sup>2</sup>C digital interface  
 0: I<sup>2</sup>C enabled; 1: I<sup>2</sup>C disabled

## 12.5 DEVICE\_ID (0x0F)

Address: 0x0F  
 Type: R  
 Default Value: 10110011b (0xB3)

7	6	5	4	3	2	1	0
1	0	1	1	0	0	1	1



Device ID for this device is a fixed number (0xB3) which is stored in this register.

## 12.6 CTRL\_1 (0x10)

Address: 0x10  
 Type: R/W  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
0	ODR[2:0]			EN_LPFP	LPFP_CFG	BDU	0

ODR[2:0] Selection of operating mode and ODR as per table 20

ODR[2:0]	Output Data Rate [Hz]
000	Power-down mode / single-conversion mode
001	1
010	10
011	25
100	50
101	75
110	100
111	200

Table 20: Output data rate selection

EN\_LPFP Enable/disable Low-pass filter. For more information refer to section 7.4.2  
 0: low-pass filter is disabled; 1: low-pass filter is enabled

EN\_LPFP Configure low-pass filter. For more information refer to section 7.4.2

BDU Block data update feature  
 0: data register updates continuously; 1: data register not updated until MSB and LSB has been read

### BDU: Block data update feature

While reading the output data, this feature can be enabled to inhibit the values of data registers to be updated until all bytes of the pressure or temperature data registers have been read.

This feature should be enabled when the reading of the data is slower than the output data rate (ODR). By default, the BDU bit is set to '0' and data registers are updated continuously. When BDU feature is enabled, reading of the pressure or temperature values sampled at different times can be avoided.

For example, when reading of the register *DATA\_P\_XL* is initialized, the remaining part of the pressure data registers *DATA\_P\_L* and *DATA\_P\_H* are not updated until all three bytes (XL, L and H) have been read. In case of temperature data readout, if *DATA\_T\_L* is read than the value of *DATA\_T\_H* will not be updated until read.



It is strongly recommended to enable BDU feature. This avoids an update of the DATA\_x\_x registers until all the parts of the corresponding DATA\_x registers have been read.

## 12.7 CTRL\_2 (0x11)

Address: 0x11

Type: R/W

Default Value: 00010000b (0x10)

7	6	5	4	3	2	1	0
BOOT	INT_H_L	PP_OD	IF_ADD_INC	0	SW_RESET	LOW_NOISE_EN	ONE_SHOT

INT\_H\_L Select interrupt: active high or active low  
0: active high; 1: active low

PP\_OD Push-pull or open-drain selection on the *INT* pin  
0: push-pull; 1: open-drain

IF\_ADD\_INC Register address is automatically incremented during multiple byte access

0: disabled; 1: enabled

This is a multi-read/write feature that enables a repeated read/write operation during a single bus transaction by automatically incrementing the register address. This feature is enabled by default.

**SWRESET** Perform a software reset. For more information, refer to section 6.4.0: Normal operation; 1: software reset

LOW_NOISE_ENABLE	Enable low-noise or low-power configuration. For more information refer to section 7.4.1 0: low-power mode; 1: low-noise mode
ONE_SHOT	Enables single data acquisition of pressure and temperature. For more information refer to section 7.2 0: normal operation; 1: a new data set is acquired

## 12.8 CTRL\_3 (0x12)

Address: 0x12  
 Type: R/W  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
0	0	INT_F_FULL	INT_F_WTM	INT_F_OVR	DRDY	INT_S[1:0]	

INT_F_FULL	FIFO full status (128 unread samples) is routed to <i>INT</i> pin 0: disabled; 1: FIFO full interrupt enabled
INT_F_WTM	User defined FIFO threshold full status is routed to <i>INT</i> pin 0: disabled; 1: FIFO threshold level interrupt enabled
INT_F_OVR	FIFO overrun status is routed to <i>INT</i> pin 0: disabled; 1: FIFO overrun interrupt enabled
DRDY	Data-ready signal routed to <i>INT</i> pin 0: disabled; 1: enabled
INT_S[1:0]	Interrupt event control on <i>INT</i> pin. Refer to table 21

INT_S[1]	INT_S[0]	<i>INT</i> pin configuration
0	0	Data signal (priority order: DRDY or INT_F_WTM or INT_F_OVR or INT_F_FULL)
0	1	Pressure high event
1	0	Pressure low event
1	1	Pressure low or high event

Table 21: INT pin configuration

## 12.9 FIFO\_CTRL (0x13)

Address: 0x13  
 Type: R/W  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
0	0	0	0	STOP_ON_WTM	TRIG_MODES	F_MODE[1:0]	

**STOP\_ON\_WTM** Enables user defined FIFO threshold level (defined in register FIFO\_WTM, 0x14) for FIFO buffer. when number of samples in the FIFO buffer are equal to the set threshold value then FIFO is considered as full.  
 0: disabled; 1: enabled

**TRIG\_MODES** Enable triggered FIFO mode. Refer Table 22

**F\_MODE[1:0]** Select FIFO mode. Refer Table 22

FIFO_CTRL [2:0]			FIFO Mode
TRIG_MODE	F_MODE[1]	F_MODE[0]	
x	0	0	Bypass mode
0	0	1	FIFO mode
0	1	x	Continuous mode
1	0	1	Bypass-to-FIFO mode
1	1	0	Bypass-to-Continuous mode
1	1	1	Continuous-to-FIFO mode

Table 22: Setting FIFO modes

## 12.10 FIFO\_WTM (0x14)

Address: 0x14  
 Type: R/W  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
0	WTM[6:0]						

WTM[6:0] User-defined FIFO threshold level.

## 12.11 REF\_P\_L (0x15)

Address: 0x15  
 Type: R  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
	REFL[7:0]						

REFL[7:0] LSB part of the reference pressure value

## 12.12 REF\_P\_H (0x16)

Address: 0x16  
 Type: R  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
	REFH[15:8]						

REFH[15:8] MSB part of the reference pressure value

Reference pressure is stored as 16-bits two's complement value. When AUTOZERO or AUTOREFP function for differential pressure interrupt is enabled, first instantaneous pressure measurement data is automatically stored in the *REF\_P\_H* and *REF\_P\_L* registers.



Compensated pressure data is a 24-bit value but *REF\_P* is a 16-bit value. Only 16 most significant bits of the compensated pressure value are stored in the *REF\_P\_H* and *REF\_P\_L* registers.

## 12.13 OPC\_L (0x18)

Address: 0x18  
 Type: R/W  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
OPC[7:0]							

OPC[7:0] LSB part of the pressure offset value

## 12.14 OPC\_H (0x19)

Address: 0x19  
 Type: R/W  
 Default Value: 00000000b

7	6	5	4	3	2	1	0
OPC[15:8]							

OPC[15:8] MSB part of the pressure offset value

Pressure offset value can be stored in OPC\_L and OPC\_H register as a 16-bit word expressed as two's complement.

In case a residual pressure offset is present after soldering, it can be removed by performing one-point calibration with OPC registers. The offset or calibration value can be stored in the OPC\_L and OPC\_H registers.

Content of OPC registers is automatically subtracted from the standard pressure data registers DATA\_P (0x28-0x2A) and FIFO data registers (0x78-0x7A)

$$\text{DATA\_P registers} = \text{Measured pressure} - \text{OPC register value} * 256$$

## 12.15 INT\_SOURCE (0x24)

Address: 0x24

Type: R

Default Value: Output

7	6	5	4	3	2	1	0
BOOT_ON	0	0	0	0	IA	PL	PH

BOOT\_ON Indicates Boot process status

0: BOOT process over; 1: BOOT process running

IA Interrupt active

0: no interrupt event has been generated; 1: one or more interrupt event has been generated

PL Differential pressure low event

0: no interrupt event has been generated; 1: differential pressure low event generated

PH Differential pressure high event

0: no interrupt event has been generated; 1: differential pressure high event generated

## 12.16 FIFO\_STATUS\_1 (0x25)

Address: 0x25

Type: R

Default Value: Output

7	6	5	4	3	2	1	0
FSS[7:0]							

FSS[7:0]

Indicates the FIFO fill level; Number of unread samples stored in FIFO (00000000b: FIFO empty, 10000000b: FIFO full with 128 unread samples)

## 12.17 FIFO\_STATUS\_2 (0x26)

Address: 0x26  
 Type: R  
 Default Value: Output

7	6	5	4	3	2	1	0
FIFO_WTM_IA	FIFO_OVER_IA	FIFO_FULL_IA	0	0	0	0	0

FIFO\_WTM\_IA User defined FIFO threshold level status  
 0: FIFO is lower than threshold level; 1: FIFO is equal to or higher than the threshold level

FIFO\_OVER\_IA FIFO overrun status  
 0: FIFO is not completely filled; 1: FIFO is full and at least one sample in the FIFO has been overwritten

FIFO\_FULL\_IA FIFO full status  
 0: FIFO is not completely filled; 1: FIFO is full and no samples in the FIFO have been overwritten

## 12.18 STATUS (0x27)

Address: 0x27  
 Type: R  
 Default Value: Output

7	6	5	4	3	2	1	0
0	0	T_OR	P_OR	0	0	T_DA	P_DA

T\_OR Temperature data overrun  
 0: no overrun has occurred; 1: a new temperature sample has been overwritten

P\_OR Pressure data overrun  
 0: no overrun has occurred; 1: a new pressure sample has been overwritten

T_DA	Temperature data available 0: no new temperature sample is available; 1: a new temperature sample has been generated
P_DA	Pressure data available 0: no new pressure sample is available; 1: a new pressure sample has been generated

## 12.19 DATA\_P\_XL (0x28)

Address: 0x28  
Type: R  
Default Value: Output

7	6	5	4	3	2	1	0
DATA_P[7:0]							

DATA\_P[7:0] Low part of the pressure data.  
Combine this value with *DATA\_P\_L* and *DATA\_P\_H* register values to form a 24-bit number expressed in a two's complement, that gives the pressure value.

## 12.20 DATA\_P\_L (0x29)

Address: 0x29  
Type: R  
Default Value: Output

7	6	5	4	3	2	1	0
DATA_P[15:8]							

DATA\_P[15:8] Middle part of the pressure data.  
Combine this value with *DATA\_P\_XL* and *DATA\_P\_H* register values to form a 24-bit number expressed in a two's complement, that gives the pressure value.

## 12.21 DATA\_P\_H (0x2A)

Address: 0x2A

Type: R

Default Value: Output

7	6	5	4	3	2	1	0
DATA_P[23:16]							

DATA\_P[23:16] High part of the pressure data.

Combine this value with *DATA\_P\_XL* and *DATA\_P\_L* register values to form a 24-bit number expressed in a two's complement, that gives the pressure value.

## 12.22 DATA\_T\_L (0x2B)

Address: 0x2B

Type: R

Default Value: Output

7	6	5	4	3	2	1	0
DATA_T[7:0]							

DATA\_T[7:0] Low part of the temperature data.

Combine this value with *DATA\_T\_H* register value to form a 16-bit number expressed in a two's complement, that gives the temperature value.

## 12.23 DATA\_T\_H (0x2C)

Address: 0x2C

Type: R

Default Value: Output

7	6	5	4	3	2	1	0
DATA_T[15:8]							

DATA\_T[15:8] High part of the temperature data.

Combine this value with *DATA\_T\_L* register value to form a 16-bit number expressed in a two's complement, that gives the temperature value.

## 12.24 FIFO\_DATA\_P\_XL (0x78)

Address: 0x78  
 Type: R  
 Default Value: Output

7	6	5	4	3	2	1	0
FIFO_P[7:0]							

FIFO\_P[7:0] Low part of the FIFO buffer pressure data.  
 Combine this value with *DATA\_P\_L* and *DATA\_P\_H* register values to form a 24-bit number expressed in a two's complement, that gives the pressure value.

## 12.25 FIFO\_DATA\_P\_L (0x79)

Address: 0x79  
 Type: R  
 Default Value: Output

7	6	5	4	3	2	1	0
FIFO_P[15:8]							

FIFO\_P[15:8] Middle part of the FIFO buffer pressure data.  
 Combine this value with *DATA\_P\_XL* and *DATA\_P\_H* register values to form a 24-bit number expressed in a two's complement, that gives the pressure value.

## 12.26 FIFO\_DATA\_P\_H (0x7A)

Address: 0x7A  
 Type: R  
 Default Value: Output

7	6	5	4	3	2	1	0
FIFO_P[23:15]							

FIFO\_P[23:16] High part of the FIFO buffer pressure data.  
 Combine this value with *DATA\_P\_XL* and *DATA\_P\_L* register values to form a 24-bit number expressed in a two's complement, that gives the pressure value.

## 12.27 FIFO\_DATA\_T\_L (0x7B)

Address: 0x7B  
 Type: R  
 Default Value: Output

7	6	5	4	3	2	1	0
FIFO_T[7:0]							

FIFO\_T[7:0] Low part of the FIFO buffer temperature data  
 Combine this value with *DATA\_T\_H* register value to form a 16-bit number expressed in a two's complement, that gives the temperature value.

## 12.28 FIFO\_DATA\_T\_H (0x7A)

Address: 0x7C  
 Type: R  
 Default Value: Output

7	6	5	4	3	2	1	0
FIFO_T[15:8]							

FIFO\_T[15:8] High part of the FIFO buffer temperature data.  
 Combine this value with *DATA\_T\_L* register value to form a 16-bit number expressed in a two's complement, that gives the temperature value.

# 13 Physical dimensions

## 13.1 Sensor drawing

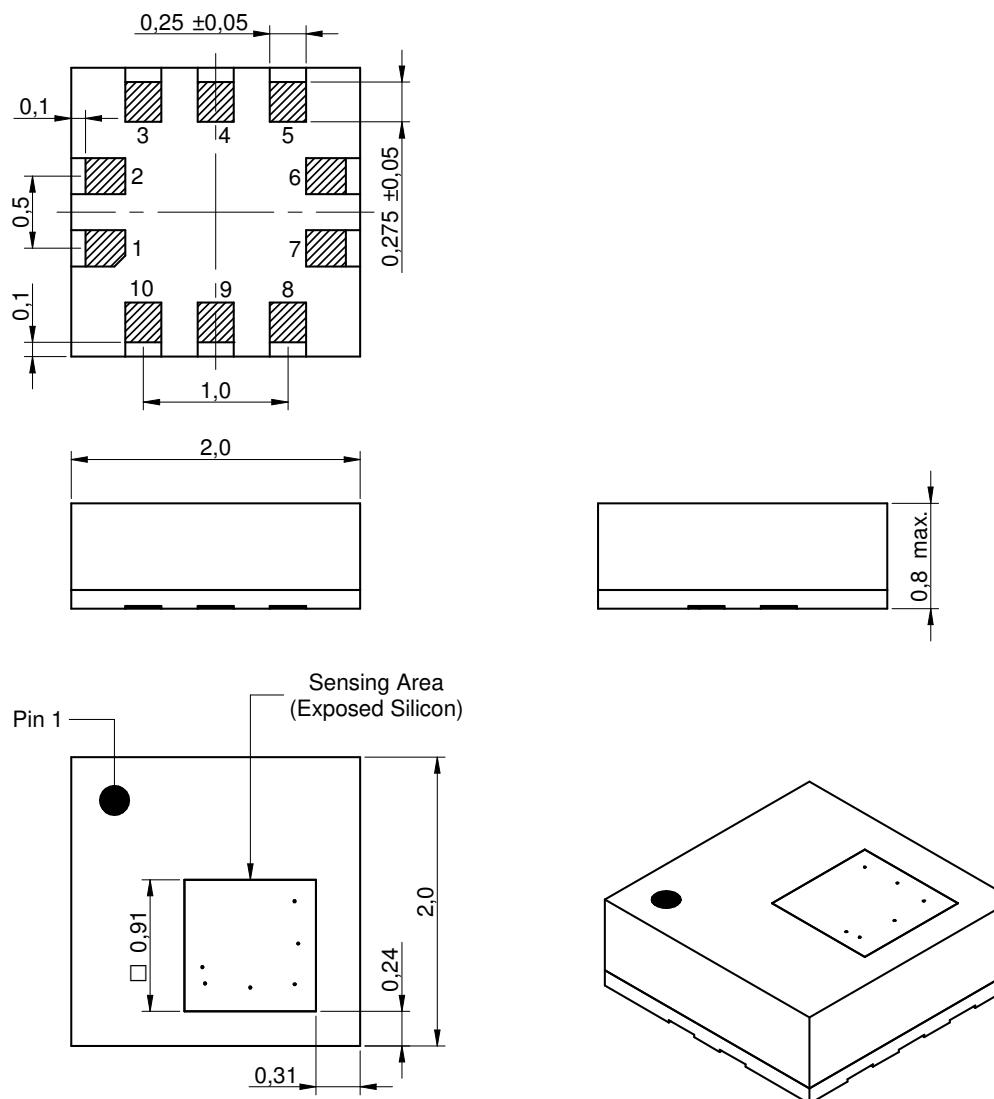


Figure 29: Sensor dimensions [mm]

## 13.2 Footprint

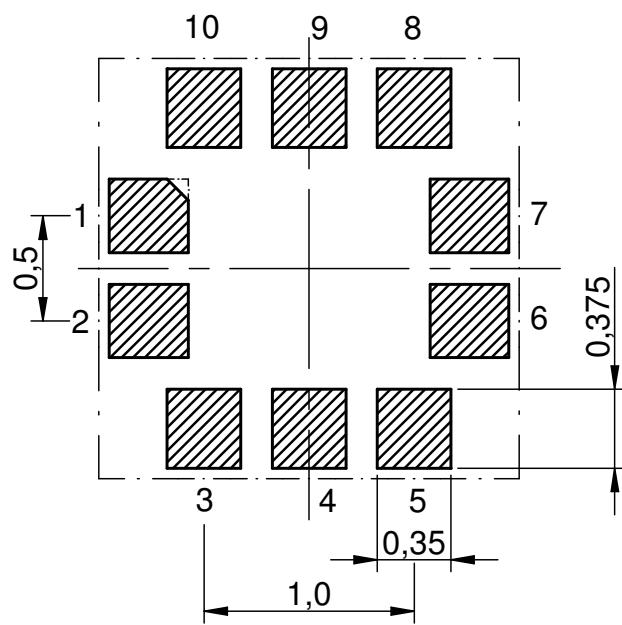


Figure 30: Recommended land pattern [mm] (top view)

## 14 Manufacturing information

### 14.1 Moisture sensitivity level

The sensor product is categorized as JEDEC Moisture Sensitivity Level 3 (MSL3), which requires special handling.

More information regarding the MSL requirements can be found in the IPC/JEDEC J-STD-020 standard on [www.jedec.org](http://www.jedec.org). More information about the handling, picking, shipping and the usage of moisture/re-flow and/or process sensitive products can be found in the IPC/JEDEC J-STD-033 standard on [www.jedec.org](http://www.jedec.org).

### 14.2 Soldering

#### 14.2.1 Reflow soldering

Attention must be paid on the thickness of the solder resist between the host PCB top side and the modules bottom side. Only lead-free assembly is recommended according to JEDEC J-STD020.

Profile feature		Value
Preheat temperature Min	$T_S$ Min	150 °C
Preheat temperature Max	$T_S$ Max	200 °C
Preheat time from $T_S$ Min to $T_S$ Max	$t_S$	60 - 120 seconds
Ramp-up rate ( $T_L$ to $T_P$ )		3 °C / second max.
Liquidous temperature	$T_L$	217 °C
Time $t_L$ maintained above $T_L$	$t_L$	60 - 150 seconds
Peak package body temperature	$T_P$	see table below
Time within 5 °C of actual preak temperature	$t_P$	20 - 30 seconds
Ramp-down Rate ( $T_P$ to $T_L$ )*		6 °C / second max.
Time 20 °C to $T_P$		8 minutes max.

Table 23: Classification reflow soldering profile, Note: refer to IPC/JEDEC J-STD-020E

\* In order to reduce residual stress on the sensor component, the recommended ramp-down temperature slope should be lower than 3 %/s.

Package thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350-2000	Volume mm <sup>3</sup> >2000
< 1.6mm	260 °C	260 °C	260 °C
1.6mm - 2.5mm	260 °C	250 °C	245 °C
> 2.5mm	250 °C	245 °C	245 °C

Table 24: Package classification reflow temperature, PB-free assembly, Note: refer to IPC-/JEDEC J-STD-020E

It is recommended to solder the sensor on the last re-flow cycle of the PCB. For solder paste use a LFM-48W or Indium based SAC 305 alloy (Sn 96.5 / Ag 3.0 / Cu 0.5 / Indium 8.9HF / Type 3 / 89%) type 3 or higher.

The reflow profile must be adjusted based on the thermal mass of the entire populated PCB, heat transfer efficiency of the re-flow oven and the specific type of solder paste used. Based on the specific process and PCB layout the optimal soldering profile must be adjusted and verified. Other soldering methods (e.g. vapor phase) have not been verified and have to be validated by the customer at their own risk. Rework is not recommended.

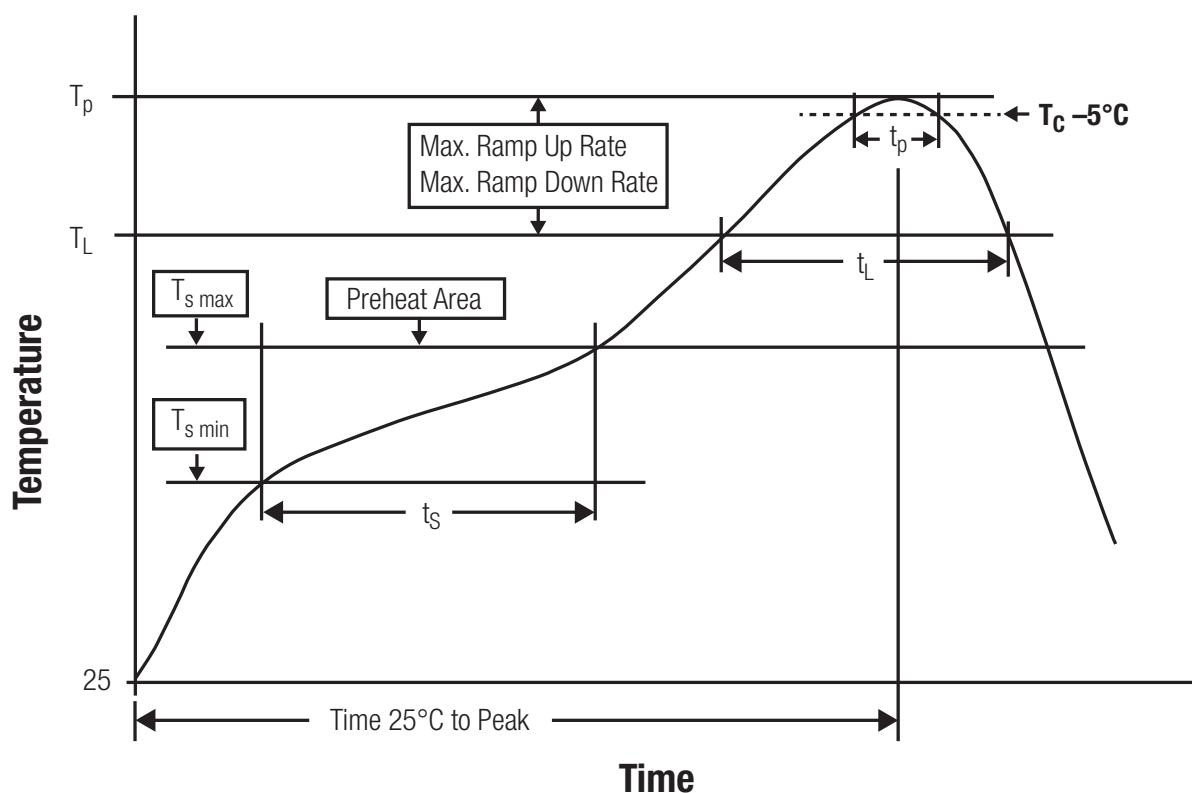


Figure 31: Reflow soldering profile

After reflow soldering, visually inspect the board to confirm proper alignment

## 14.2.2 Cleaning and washing

Do not clean the product. Any residue cannot be easily removed by washing. Use a "no clean" soldering paste and do not clean the board after soldering.

- Washing agents used during the production to clean the customer application might damage or change the characteristics of the component. Washing agents may have a negative effect on the long-term functionality of the product.
- Using a brush during the cleaning process may damage the component. Therefore, we do not recommend using a brush during the PCB cleaning process

## 14.2.3 Potting and coating

- Potting material might shrink or expand during and after hardening. This might apply mechanical stress on the components, which can influence the characteristics of the transfer function. In addition, potting material can close existing openings in the housing. This can lead to a malfunction of the component. Thus, potting is not recommended.
- Conformal coating may affect the product performance. We do not recommend coating the components.

## 14.2.4 Storage conditions

- A storage of Würth Elektronik eiSos products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760 - 2.
- For a moisture sensitive component, the storage condition in the original packaging is defined according to IPC/JEDEC-J-STD-033. It is also recommended to return the component to the original moisture proof bag and reseal the moisture proof bag again.

## 14.2.5 Handling

- Violation of the technical product specifications such as exceeding the nominal rated supply voltage, will void the warranty.
- Violation of the technical product specifications such as but not limited to exceeding the absolute maximum ratings will void the conformance to regulatory requirements.
- ESD prevention methods need to be followed for manual handling and processing by machinery.
- The edge castellation is designed and made for prototyping, i.e. hand soldering purposes only.

- The applicable country regulations and specific environmental regulations must be observed.
- Do not disassemble the product. Evidence of tampering will void the warranty.

## 15 Important notes

The following conditions apply to all goods within the sensors product range of Würth Elektronik eiSos GmbH & Co. KG:

### 15.1 General customer responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact, it is up to the customer to evaluate, where appropriate to investigate and to decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not. Accordingly, the customer is cautioned to verify that the documentation is current before placing orders.

### 15.2 Customer responsibility related to specific, in particular safety-relevant applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. The same statement is valid for all software and software parts contained in or used with or for products in the sensor product range of Würth Elektronik eiSos GmbH & Co. KG. In certain customer applications requiring a high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health, it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

### 15.3 Best care and attention

Any product-specific data sheets, manuals, application notes, PCN's, warnings and cautions must be strictly observed in the most recent versions and matching to the products revisions. This documents can be downloaded from the product specific sections on the wireless connectivity and sensors homepage.

### 15.4 Customer support for product specifications

Some products within the product range may contain substances, which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case, the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

## 15.5 Product improvements

Due to constant product improvement, product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard, we inform about major changes. In case of further queries regarding the PCN, the field sales engineer, the internal sales person or the technical support team in charge should be contacted. The basic responsibility of the customer as per section 15.1 and 15.2 remains unaffected.

The sensor driver software "Sensor SDK" and its source codes are not subject to the Product Change Notification information process.

## 15.6 Product life cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this, we cannot ensure that all products within our product range will always be available. Therefore, it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

## 15.7 Property rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG. Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

## 15.8 General terms and conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at [www.we-online.com](http://www.we-online.com).

# 16 Legal notice

## 16.1 Exclusion of liability

Würth Elektronik eiSos GmbH & Co. KG considers the information in this document to be correct at the time of publication. However, Würth Elektronik eiSos GmbH & Co. KG reserves the right to modify the information such as technical specifications or functions of its products or discontinue the production of these products or the support of one of these products without any written announcement or notification to customers. The customer must make sure that the information used corresponds to the latest published information. Würth Elektronik eiSos GmbH & Co. KG does not assume any liability for the use of its products. Würth Elektronik eiSos GmbH & Co. KG does not grant licenses for its patent rights or for any other of its intellectual property rights or third-party rights.

Notwithstanding anything above, Würth Elektronik eiSos GmbH & Co. KG makes no representations and/or warranties of any kind for the provided information related to their accuracy, correctness, completeness, usage of the products and/or usability for customer applications. Information published by Würth Elektronik eiSos GmbH & Co. KG regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof.

## 16.2 Suitability in customer applications

The customer bears the responsibility for compliance of systems or units, in which Würth Elektronik eiSos GmbH & Co. KG products are integrated, with applicable legal regulations. Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Würth Elektronik eiSos GmbH & Co. KG components in its applications, notwithstanding any applications-related information or support that may be provided by Würth Elektronik eiSos GmbH & Co. KG. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences lessen the likelihood of failures that might cause harm and take appropriate remedial actions. The customer will fully indemnify Würth Elektronik eiSos GmbH & Co. KG and its representatives against any damages arising out of the use of any Würth Elektronik eiSos GmbH & Co. KG components in safety-critical applications.

## 16.3 Usage restriction

Würth Elektronik eiSos GmbH & Co. KG products have been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover, Würth Elektronik eiSos GmbH & Co. KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. Würth Elektronik eiSos GmbH & Co. KG must be

informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component, which is used in electrical circuits that require high safety and reliability function or performance. By using Würth Elektronik eiSos GmbH & Co. KG products, the customer agrees to these terms and conditions.

## 17 License agreement for Würth Elektronik eiSos GmbH & Co. KG sensor product software and source code

### Agreement between You and Würth Elektronik eiSos GmbH & Co. KG

This License Terms will take effect upon the purchase and usage of the Würth Elektronik eiSos GmbH & Co. KG sensor products. You hereby agree that this license agreement is applicable to the product and the incorporated software, firmware and source codes (collectively, "Software") made available by Würth Elektronik eiSos in any form, including but not limited to binary, executable or source code form.

The software included in any Würth Elektronik eiSos sensor product is purchased to you on the condition that you accept the terms and conditions of this license agreement. You agree to comply with all provisions under this license agreement.

#### 17.1 Limited license

Würth Elektronik eiSos hereby grants you a limited, non-exclusive, non-transferable and royalty-free license to use the software and under the conditions that will be set forth in this license agreement. You are free to use the provided software only in connection with one of the products from Würth Elektronik eiSos to the extent described in this license agreement. You are entitled to change or alter the source code for the sole purpose of creating an application embedding the Würth Elektronik eiSos sensor product. The transfer of the source code to third parties is allowed to the sole extent that the source code is used by such third parties in connection with our product or another hardware provided by Würth Elektronik eiSos under strict adherence of this license agreement. Würth Elektronik eiSos will not assume any liability for the usage of the incorporated software and the source code.

You are not entitled to transfer the source code in any form to third parties without prior written consent of Würth Elektronik eiSos.

You are not allowed to reproduce, translate, reverse engineer, decompile, disassemble or create derivative works of the incorporated software and the source code in whole or in part. No more extensive rights to use and exploit the products are granted to you.

#### 17.2 Usage and obligations

The responsibility for the applicability and use of the Würth Elektronik eiSos sensor product with the incorporated software in a particular customer design is always solely within the authority of the customer. Due to this fact, it is up to you to evaluate and investigate, where appropriate, and to decide whether the device with the specific product characteristics described in the product specification is valid and suitable for your respective application or not.

You are responsible for using the Würth Elektronik eiSos sensor product with the incorporated software in compliance with all applicable product liability and product safety laws. You acknowledge to minimize the risk of loss and harm to individuals and bear the risk for failure leading to personal injury or death due to your usage of the product.

Würth Elektronik eiSos' products are not authorized for use in safety-critical applications,

or where a failure of the product is reasonably expected to cause severe personal injury or death. Moreover, Würth Elektronik eiSos' products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. You shall inform Würth Elektronik eiSos about the intent of such usage before design-in stage. In certain customer applications requiring a very high level of safety and in which the malfunction or failure of an electronic component could endanger human life or health, you must ensure to have all necessary expertise in the safety and regulatory ramifications of your applications. You acknowledge and agree that you are solely responsible for all legal, regulatory and safety-related requirements concerning your products and any use of Würth Elektronik eiSos' products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by Würth Elektronik eiSos. **YOU SHALL INDEMNIFY WÜRTH ELEKTRONIK EISOS AGAINST ANY DAMAGES ARISING OUT OF THE USE OF WÜRTH ELEKTRONIK EISOS' PRODUCTS IN SUCH SAFETY-CRITICAL APPLICATIONS.**

### 17.3 Ownership

The incorporated Software created by Würth Elektronik eiSos is and will remain the exclusive property of Würth Elektronik eiSos.

### 17.4 Disclaimer of warranty

THE SOFTWARE AND IT'S SOURCE CODE IS PROVIDED "AS IS". YOU ACKNOWLEDGE THAT WÜRTH ELEKTRONIK EISOS MAKES NO REPRESENTATIONS AND WARRANTIES OF ANY KIND RELATED TO, BUT NOT LIMITED TO THE NON-INFRINGEMENT OF THIRD PARTIES' INTELLECTUAL PROPERTY RIGHTS OR THE MERCHANTABILITY OR FITNESS FOR YOUR INTENDED PURPOSE OR USAGE. WÜRTH ELEKTRONIK EISOS DOES NOT WARRANT OR REPRESENT THAT ANY LICENSE, EITHER EXPRESS OR IMPLIED, IS GRANTED UNDER ANY PATENT RIGHT, COPYRIGHT, MASK WORK RIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT RELATING TO ANY COMBINATION, MACHINE, OR PROCESS IN WHICH THE WÜRTH ELEKTRONIK EISOS' PRODUCT WITH THE INCORPORATED SOFTWARE IS USED. INFORMATION PUBLISHED BY WÜRTH ELEKTRONIK EISOS REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE A LICENSE FROM WÜRTH ELEKTRONIK EISOS TO USE SUCH PRODUCTS OR SERVICES OR A WARRANTY OR ENDORSEMENT THEREOF.

### 17.5 Limitation of liability

Any liability not expressly provided by Würth Elektronik eiSos shall be disclaimed.

You agree to hold us harmless from any third-party claims related to your usage of the Würth Elektronik eiSos' products with the incorporated software and source code. Würth Elektronik eiSos disclaims any liability for any alteration, development created by you or your customers as well as for any combination with other products.

## 17.6 Applicable law and jurisdiction

Applicable law to this license agreement shall be the laws of the Federal Republic of Germany. Any dispute, claim or controversy arising out of or relating to this license agreement shall be resolved and finally settled by the court competent for the location of Würth Elektronik eiSos registered office.

## 17.7 Severability clause

If a provision of this license agreement is or becomes invalid, unenforceable or null and void, this shall not affect the remaining provisions of the agreement. The parties shall replace any such provisions with new valid provisions that most closely approximate the purpose of the agreement.

## 17.8 Miscellaneous

Würth Elektronik eiSos reserves the right at any time to change this terms at its own discretion. It is your responsibility to check at Würth Elektronik eiSos homepage for any updates. Your continued usage of the products will be deemed as the acceptance of the change. We recommend you to be updated about the status of new software, which is available on our website or in our data sheet, and to implement new software in your device where appropriate.

By ordering a sensor product, you accept this license agreement in all terms.

## List of Figures

1	Block diagram . . . . .	8
2	Filtering chain and data path . . . . .	9
3	Pin specifications (top view) . . . . .	13
4	Master-slave concept . . . . .	14
5	<i>SDA</i> and <i>SCL</i> logic levels . . . . .	15
6	Data validity, START and STOP condition . . . . .	16
7	Slave address format . . . . .	17
8	Complete data transfer . . . . .	18
9	Write and read operations with the device . . . . .	19
10	Application circuit with $I^2C$ interface (top view) . . . . .	21
11	Power-up sequence . . . . .	23
12	Communication check with host controller . . . . .	24
13	Reboot and software reset sequence . . . . .	25
14	Sensor operation: single-conversion mode . . . . .	26
15	Sensor operation: continuous mode . . . . .	27
16	Operating modes . . . . .	29
17	Single conversion mode . . . . .	31
18	Continuous mode . . . . .	32
19	Reading pressure data using <i>STATUS</i> register . . . . .	37
20	First-In-First-Out buffer . . . . .	38
21	Bypass mode . . . . .	40
22	FIFO mode . . . . .	41
23	Continuous mode . . . . .	42
24	Bypass-to-Continuous mode . . . . .	44
25	Continuous-to-FIFO mode . . . . .	45
26	Differential pressure interrupt . . . . .	49
27	Interrupt latching . . . . .	51
28	Routing interrupt events to <i>INT</i> pin . . . . .	53
29	Sensor dimensions [mm] . . . . .	71
30	Recommended land pattern [mm] (top view) . . . . .	72
31	Reflow soldering profile . . . . .	74

## List of Tables

1	Ordering information . . . . .	7
2	General information . . . . .	10
3	Absolute maximum ratings . . . . .	10
4	Pressure sensor specifications . . . . .	11
5	Temperature sensor specifications . . . . .	11
6	Electrical specifications . . . . .	12
7	Pin description . . . . .	13
8	Slave address and Read/Write commands . . . . .	17
9	$I^2C$ timing parameters . . . . .	20
10	Data conversion time . . . . .	31
11	Output data rate selection . . . . .	32
12	Low-power/low-noise configuration . . . . .	33

13	Typical conversion time and maximum ODR . . . . .	33
14	Additional low-pass filter setting . . . . .	34
15	FIFO mode settings . . . . .	39
16	Interrupt based on pressure threshold . . . . .	50
17	FIFO interrupts . . . . .	52
18	Routing interrupt events to <i>INT</i> pin . . . . .	52
19	INT pin configuration . . . . .	53
20	Output data rate selection . . . . .	59
21	INT pin configuration . . . . .	61
22	Setting FIFO modes . . . . .	62
23	Classification reflow soldering profile, Note: refer to IPC/JEDEC J-STD-020E	73
24	Package classification reflow temperature, PB-free assembly, Note: refer to IPC/JEDEC J-STD-020E . . . . .	74



# more than you expect



**Internet  
of Things**



**Monitoring  
& Control**



**Automated Meter  
Reading**

## Contact:

Würth Elektronik eiSos GmbH & Co. KG  
Division Wireless Connectivity & Sensors

Rudi-Schillings-Str. 31  
54296 Trier  
Germany

Tel.: +49 651 99355-0  
Fax.: +49 651 99355-69  
[www.we-online.com/wireless-connectivity](http://www.we-online.com/wireless-connectivity)

