

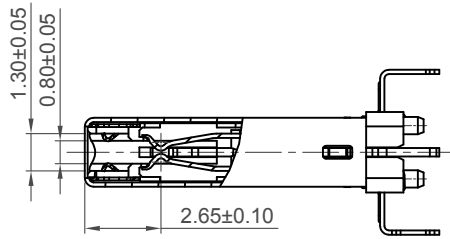


H  
G  
F  
E  
D  
C  
B  
A

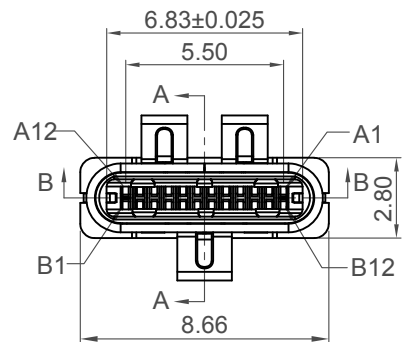


Section A-A

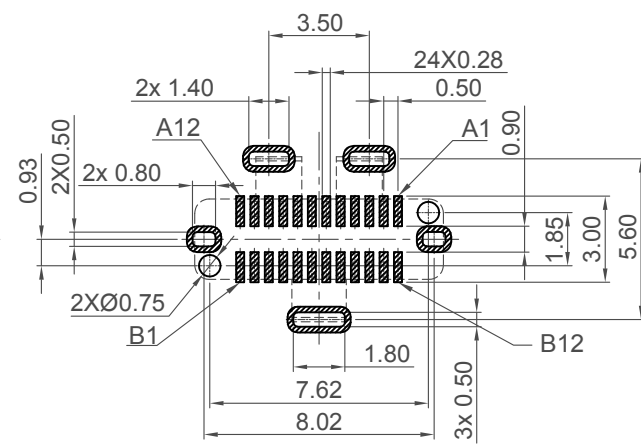


**Recommended PCB Layout**

Thickness 0.8±0.10mm  
Tolerance: ±0.05mm

▨ Solder Area □ Component Outline

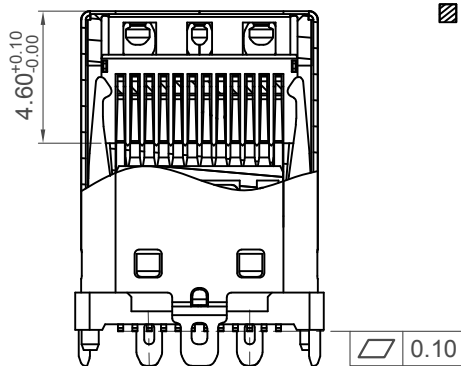

Section B-B

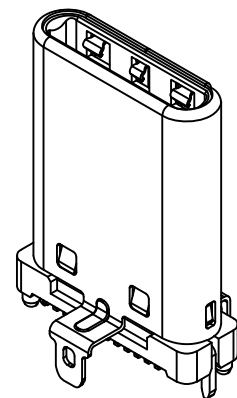

**Ordering Grid**

USB4151 - GF - C

Contact Plating  
GF = Gold Flash

Packing Options  
C = Tape & Reel with Cap  
(400 per reel)

Pin	Signal	Mating Sequence	Pin	Signal	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	Vbus	First	B9	Vbus	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	Vbus	First	B4	Vbus	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	

**Specifications**

**Material**

Insulator: LCP, UL 94V-0, Black  
Contact: C7025, T=0.15mm  
Shell: SUS304, T=0.15mm  
Latch: SUS301, T=0.30mm  
Spring: SUS304, T=0.10mm

**Plating**

**Contact**

Contact Area: Gold Flash over 50µ" min. Nickel  
Solder Tails: 80µ" min. Matte Tin over 50µ" min. Nickel  
Shell: 50µ" min. Nickel  
Latch: 80µ" min. Tin  
Spring: 50µ" min. Nickel

**Electrical**

Current Rating: 5.00A collectively for Vbus pins  
6.25A collectively for GND pins  
1.25A for B5 pin  
0.25A per pin for all other pins

Voltage Rating: 20V DC

Contact Resistance: 40mΩ max initial.

50mΩ max after test

Dielectric Withstanding Voltage: 100V AC

Insulation Resistance 100MΩ min






**Mechanical & Environmental**



Operating Temperature: -40°C to +85°C

Mating Force: 5 to 20 N.



Unmated Force: 6 to 20 N after test

Durability: 10,000 cycles

Part Number		Product Description		<div> www.gct.co</div>	
USB4151		USB3.2 Gen2 Type C Plug,Vertical, SMT			
Drawing Date					
14th January 2020					
By	CC	Tolerances (Except as Noted)		Units:	<div>This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E &amp; OE</div>
		Length	Angle	Metric (mm)	
Detail	USB4151 B PCN	X.X ± 0.30	-	<div> 3rd Angle Projection</div>	
Revision	B1	X.XX ± 0.25			
Date	27/04/21	X.XXX ± 0.10			
				<div> Deca-SIDE</div>	
				<div></div>	
				<div> 3rd Angle Projection</div>	

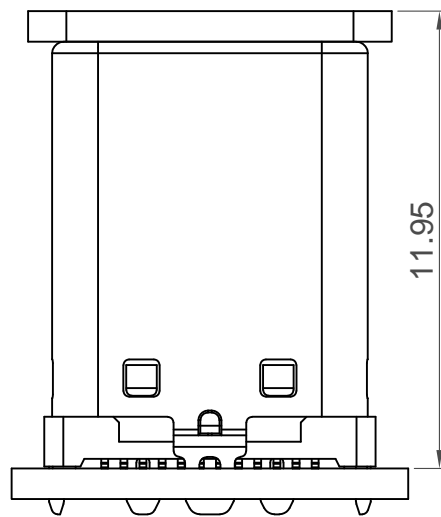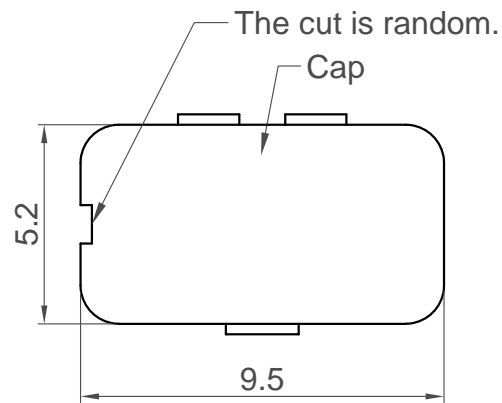

PCB Mount&Cap Information



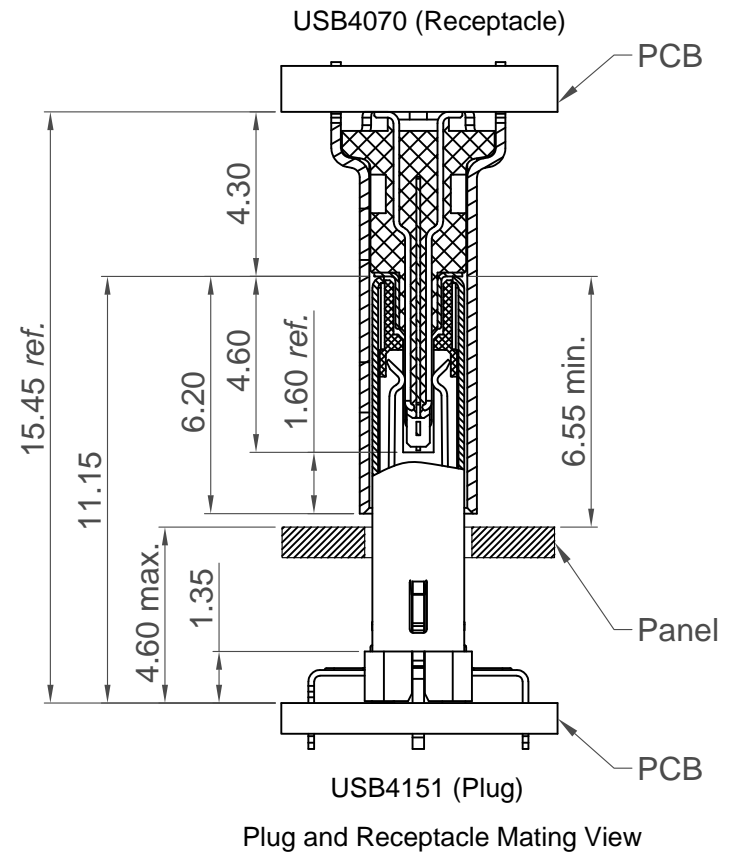
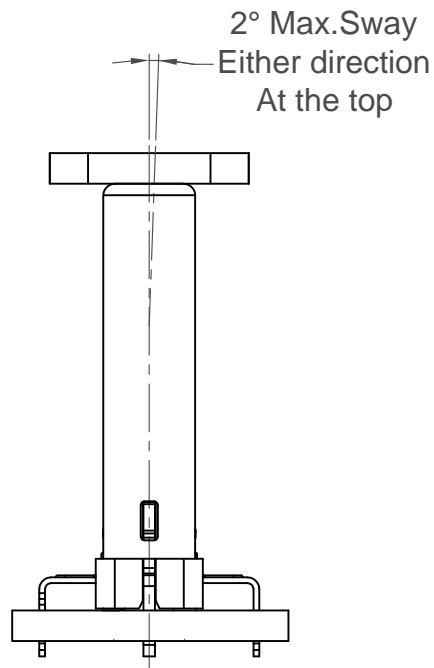


Part Number		Product Description	
USB4151		USB3.2 Gen2 Type C Plug,Vertical, SMT	
Drawing Date			
14th January 2020			
By	CC	Tolerances (Except as Noted)	Units:
Detail	USB4151 B PCN	Length Angle	Metric (mm)
Revision	B1	X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.10	
Date	27/04/21		

This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE

www.gct.co

Not to Scale	Drawn By CC	Sheet No. 2/3
--------------	----------------	------------------

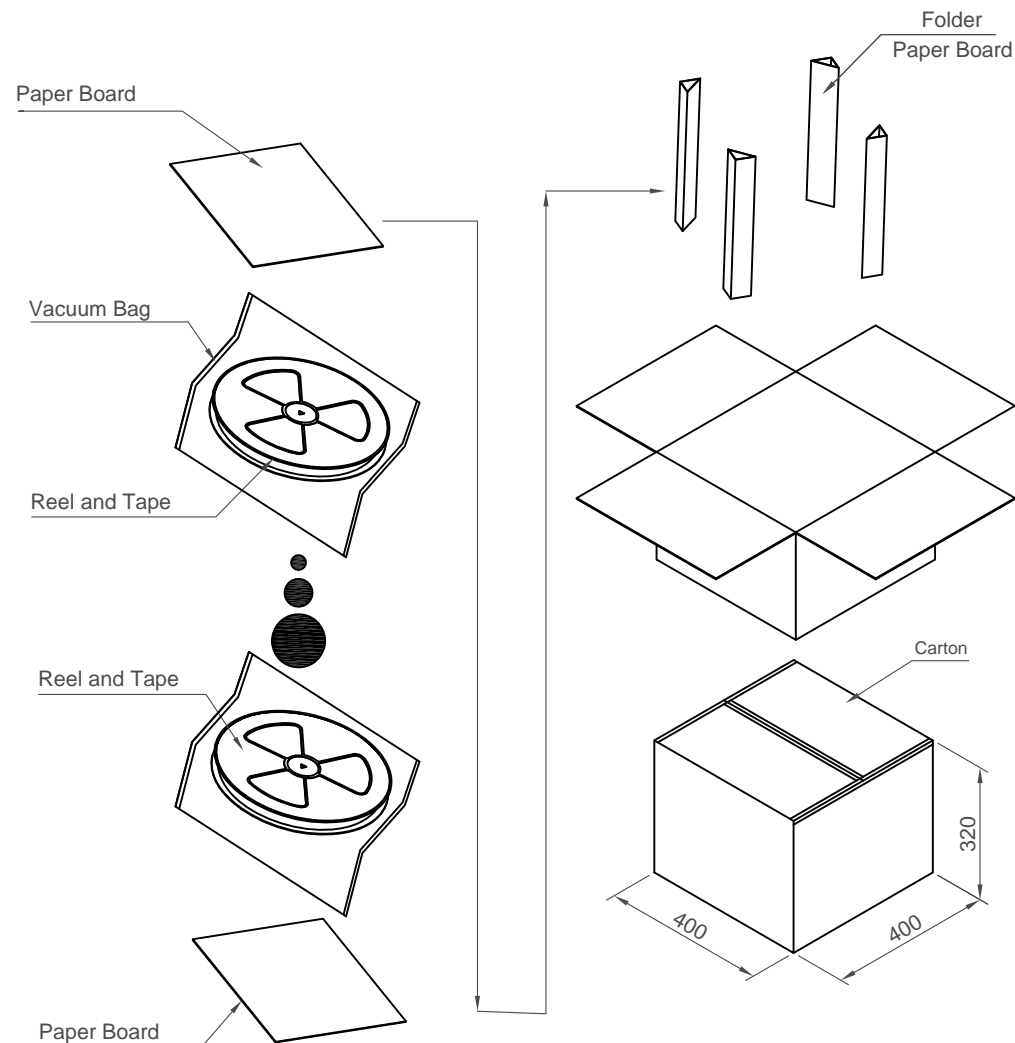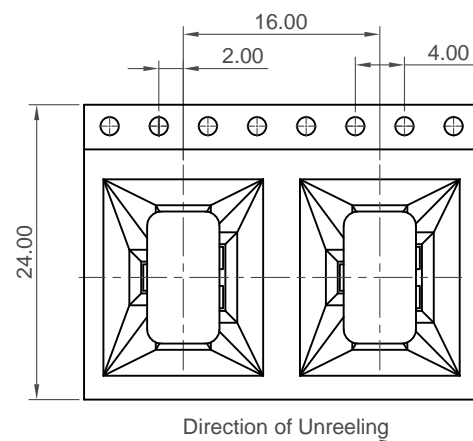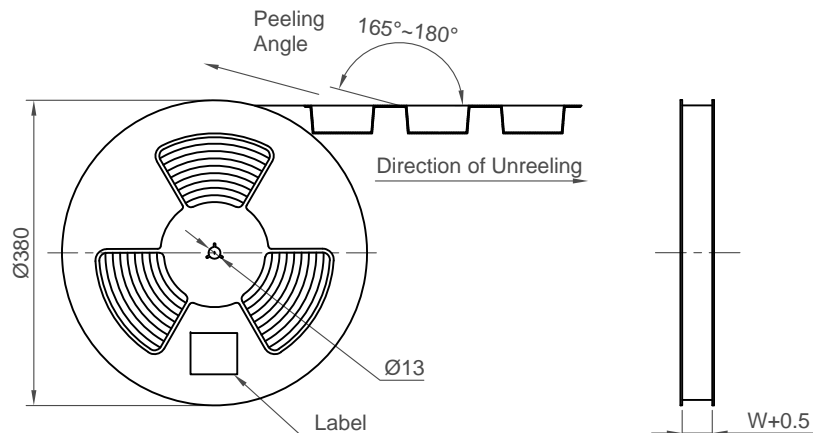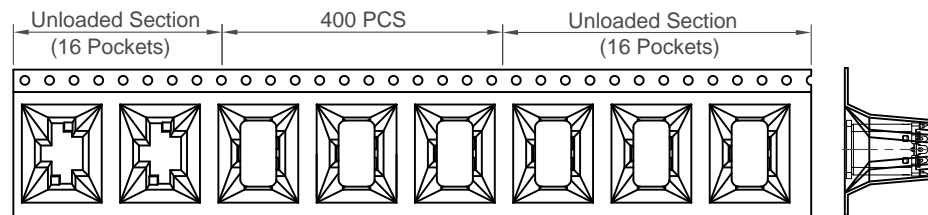

Pcs / Reel	Reels / Carton	Total Quantity
400	10	4,000 pcs

Part Number USB4151		Product Description USB3.2 Gen2 Type C Plug, Vertical, SMT	
Drawing Date 14th January 2020			
By CC		Tolerances (Except as Noted)	Units: Metric (mm)
Detail USB4151 B PCN		Length X.X ± 0.30	
Revision B1		Angle X.XX ± 0.25	
Date 27/04/21		X.XXX ± 0.10	



This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE

**GCT**  
www.gct.co

Not to Scale  
Drawn By  
CC  
Sheet No.  
3/3

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Global Connector Technology \(GCT\):](#)

[USB4151-GF-C](#)