

# ARTESYN ASA SERIES

10 Watts



This version of the ASA series of 10 watt isolated DC-DC converters features a wide 2:1 input voltage range of 18–36 Vdc and is primarily designed for use with nominal 24 V supplies. There is a choice of four single output models, offering voltages of 2.5 V, 3.3 V, 5 V, or 12 V. The converters are fully encapsulated in a compact 1.25 x 0.8 inch (31.7 x 20.3 mm) metal case and have a height of just 0.4 inch (10.2 mm). They are ideal for use ruggedized applications involving harsh environments.

## DATA SHEET

### Total Power:

10 Watts

### Input Voltage:

24 V or 48 V

### # of Outputs:

Single

## SPECIAL FEATURES

- Encapsulated
- Wide 2:1 input range
- 1.25" x 0.8" DIP package
- 1500 Vdc I/O isolation
- Single output

## SAFETY

- UL/CSA 62368-1
- CE Mark



## ELECTRICAL SPECIFICATIONS

Input	
Input range:	18 to 36 VDC; 36 to 75 VDC
Efficiency:	83% @ 12 Vo
Output	
Voltage tolerance:	±2.0%
Line regulation:	±0.8%
Load regulation:	±1.2%
Noise/ripple:	100 mV for 2.5 Vo, 3.3 Vo and 5.0 Vo 120 mV for 12 Vo
Short circuit protection:	Auto-restart
Switching frequency:	350 KHz
Temperature coefficient:	±0.02 /°C
Isolation	
I/O isolation	1500 VDC min.
Insulation resistance:	10 Mohm
Insulation capacitance:	1000 pF

## ENVIRONMENTAL SPECIFICATIONS


Operating ambient temperature range:	-40°C to +60°C (no derating)
Storage temperature:	-55 °C to +105 °C
Humidity:	5% to 95% (non-condensing)
MTBF:	1 Mhrs demonstrated MTBF
RoHS Compliant	

## ORDERING INFORMATION

Model Number	Input Voltage	Output 1 Voltage	Output 2 Voltage	Maximum Power
ASA03G24-LS	18 - 36 V	2.5 V @ 3 A		7.5 W
ASA03F24-LS	18 - 36 V	3.3 V @ 3 A		10 W
ASA02A24-LS	18 - 36 V	5.0 V @ 2 A		10 W
ASA00B24-LS	18 - 36 V	12 V @ 0.835 A		10 W
ASA03G48-LS	36 - 75 V	2.5 V @ 3 A		7.5 W
ASA03F48-LS	36 - 75 V	3.3 V @ 3 A		10 W
ASA02A48-LS	36 - 75 V	5.0 V @ 2 A		10 W
ASA00B48-LS	36 - 75 V	12 V @ 0.835 A		10 W

Please contact Artesyn Embedded Power for information on other output voltages, power ranges and configurations. Available in RoHS 6 version only.

## MECHANICAL DRAWINGS

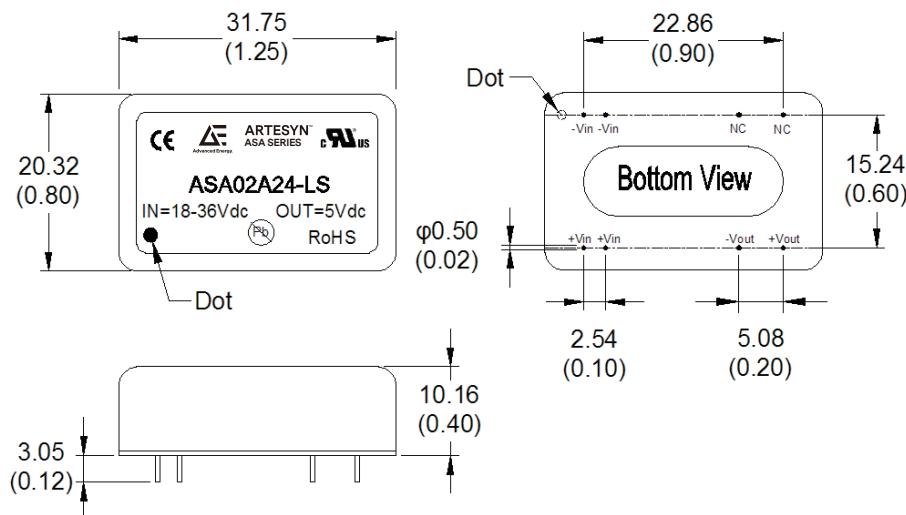

## Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 1 yr
3. Label and logo appearance may vary from what is shown on mechanical drawings.



For international contact information,  
visit [advancedenergy.com](http://advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advanced Energy:](#)

[ASA00B24-LS](#) [ASA02A24-LS](#) [ASA03F24-LS](#) [ASA02A48-LS](#) [ASA03G48-LS](#) [ASA03F48-LS](#) [ASA00B48-LS](#)  
[ASA03G24-LS](#)