

Quick Start Guide for MINISASTOCSI for i.MX 8M Evaluation Kit

Introduction

NXP provides optional accessory boards that can be used to evaluate the i.MX 8M Evaluation kit. The MINISASTOCSI for the i.MX 8M EVK is a MIPI-CSI interface camera kit, based on OmniVision chipset OV5640. The MINISASTOCSI card can be purchased at nxp.com.

This document provides a brief overview on how to get started with the MINISASTOCSI accessory card and the i.MX 8M EVK.

Key specifications / features:

- Image sensor optical size of 1/4" with 5 megapixel (2592*1944)
- Supported output formats: RAW RGB, RGB565/555/444, CCIR656, YUV422/420, YCbCr422, and compression
- Maximum image transfer rate:
 - QSXGA (2592*1944): 15 fps
 - 1080p (1920*1080): 30 fps
 - 720p (1280*720): 60 fps

Contents

| | |
|--|---|
| Introduction..... | 1 |
| 1. Get to know the MINISASTOCSI accessory card | 2 |
| 2. How to use the MINISASTOCSI accessory card..... | 2 |
| 3. References..... | 4 |

1. Get to know the MINISASTOCSI accessory card

MINISASTOCSI accessory kit contains:

| Item | Quantity |
|-------------------|----------|
| Camera module | 1 |
| 8" mini-SAS cable | 1 |

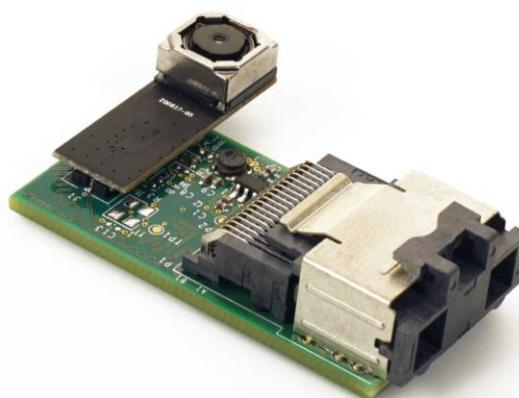


Figure 1. MINISASTOCSI accessory card

2. How to use the MINISASTOCSI accessory card

Quick steps to get started with the MINISASTOCSI accessory card are as follows:

NOTE

Before plugging in the cable, remove the plastic cover on the mini-SAS connectors.

Hardware Setup

Step 1:

Plug in the mini-SAS cable into the mini-SAS connector on the MINISASTOCSI accessory card.

Step 2:

Plug in the other end of the mini-SAS cable into J1502 on the i.MX 8M Evaluation kit.

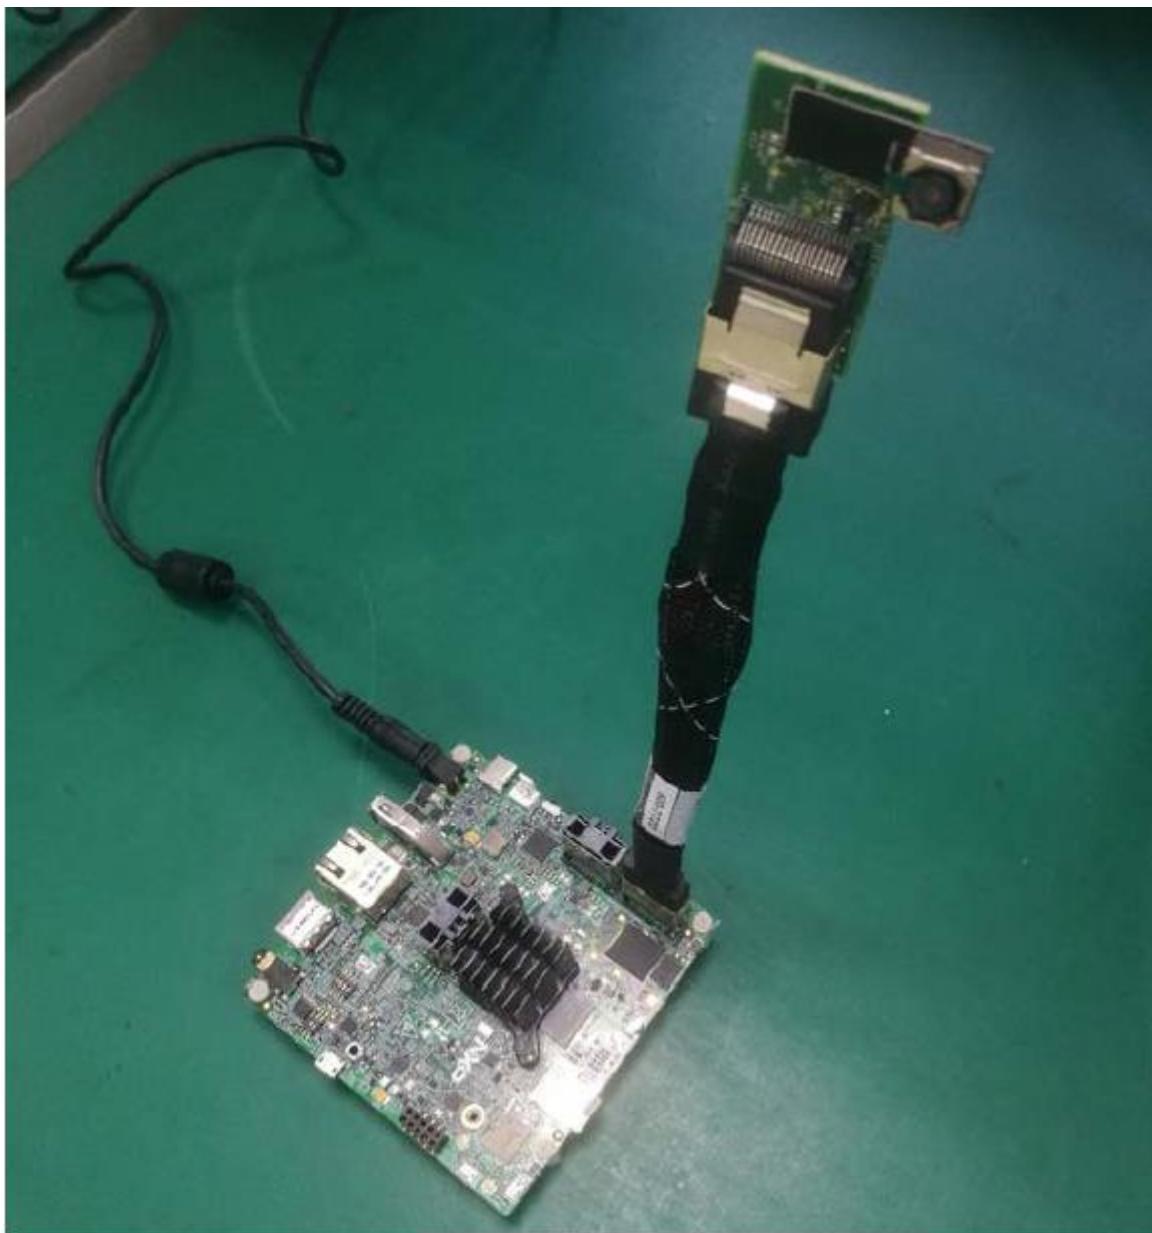


Figure 2. Hardware Setup of MINISASTOCSI Accessory card

Software Setup: Linux

The default Board Support Package (BSP) supports the MIPI-CSI on J1502. To enable the camera on J1503, replace the original *.dtb file with *fsl-imx8mq-evk-mipi-csi2.dtb* as follows.

```
U-Boot > setenv fdt_file fsl-imx8mq-evk-mipi-csi2.dtb
U-Boot > run bootcmd
```

The camera GStreamer commands are:

```
gst-launch-1.0 v4l2src ! video/x-raw,width=640,height=480 ! kmssink
gst-launch-1.0 v4l2src ! video/x-raw,width=720,height=480 ! kmssink
gst-launch-1.0 v4l2src ! video/x-raw,width=1280,height=720 ! kmssink
gst-launch-1.0 v4l2src ! video/x-raw,width=1920,height=1080 ! kmssink
gst-launch-1.0 v4l2src ! video/x-raw,width=2592,height=1944 ! kmssink
```

3. References

Table 1 provides the link to access software or order the Evaluation Kit and accessory boards.

Table 1. Link to access software/order Evaluation Kit

| Compatible boards | Description | Link |
|-------------------|------------------------|---|
| MCIMX8M-EVK | i.MX 8M Evaluation Kit | https://www.nxp.com/imx8mquadevk |

For latest software, visit - https://www.nxp.com/support/developer-resources/run-time-software/i.mx-developer-resources/i.mx-software-and-development-tool-resources:IMX_SW

Table 2 provides links to more information on MINISASTOCSI accessory card or other accessory cards for the i.MX 8M EVK.

Table 2. Links to accessory cards for the i.MX 8M EVK

| Accessory Boards | Description | Link |
|------------------|--|---|
| IMX-MIPI-HDMI | Converts MIPI-DSI signal to HDMI signal | https://www.nxp.com/support/developer-resources/run-time-software/i.mx-developer-resources/evaluation-kit-for-the-i.mx-8m-applications-processor:MCIMX8M-EVK?tab=Buy_Parametric_Tab |
| MX8-DSI-OLED1 | MIPI-DSI interface OLED display kit with touch screen | https://www.nxp.com/support/developer-resources/run-time-software/i.mx-developer-resources/evaluation-kit-for-the-i.mx-8m-applications-processor:MCIMX8M-EVK?tab=Buy_Parametric_Tab |
| MINISASTOCSI | MIPI-CSI interface camera kit based on OmniVision chipset OV5640 | https://www.nxp.com/support/developer-resources/run-time-software/i.mx-developer-resources/evaluation-kit-for-the-i.mx-8m-applications-processor:MCIMX8M-EVK?tab=Buy_Parametric_Tab |

How to Reach Us:

Home Page:
nxp.com

Web Support:
nxp.com/support

Information in this document is provided solely to enable system and software implementers to use NXP products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document. NXP reserves the right to make changes without further notice to any products herein.

NXP makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does NXP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in NXP data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. NXP does not convey any license under its patent rights nor the rights of others. NXP sells products pursuant to standard terms and conditions of sale, which can be found at the following address: nxp.com/SalesTermsandConditions.

NXP, the NXP logo, NXP SECURE CONNECTIONS FOR A SMARTER WORLD, Freescale, the Freescale logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. Arm, the Arm logo, and Cortex are registered trademarks of Arm Limited (or its subsidiaries) in the EU and/or elsewhere. mbed is a trademark of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved.

© 2018 NXP B.V.

Document Number: AN12187

Rev. 0,

05/2018

