

Antenna Datasheet

Product OC: YEMN016AA

Version: 1.0

Date: 2022-12-09

Status: Released

Product Name: 5G Screw Mount Low Profile Antenna Box

Key Features:

Low Profile

204*86.6*31mm

Optimized for 5G and 4G Networks

4 * 4 5G/4G MIMO + GNSS L1 & L5

Screw Mount

SMA Male Connector

IP Rating: IP67 & IP69K

Durable KIBILAC® ASA Housing

Overview

This ultra-wide-band 5G/4G antenna box provides broad coverage from 600-6000MHz whilst backward-compatible to support 3G/2G networks as well as Cat-M and NB-IoT. The antenna is designed to work with various GND plane sizes or in free space for ease of integration with connection via 4 various cable lengths from 300-5000mm, terminated with SMA connectors. This screw mount omnidirectional antenna is easy to install with maximum durability with its IP69 KIBILAC® ASA enclosure. It is compatible with Quectel's RM520x Series modules. Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs.

Contents

Overview.....	1
Contents.....	2
1 Specification.....	3
1.1. Electrical.....	3
1.1.1. LMHs.....	3
1.1.2. MHs.....	4
1.1.3. GNSS.....	5
1.2. Supported Bands.....	6
1.3. Mechanical, Environment & Storage.....	10
2 Drawing.....	11
3 Detail Performance.....	12
3.1. S-Parameter Test.....	12
3.1.1. VSWR.....	12
3.1.2. Return Loss.....	15
3.1.3. Isolation.....	17
3.1.3.1. Test Status: In Free Space.....	17
3.1.3.2. Test Status: On 500 × 500 mm Metal Plane.....	19
3.1.4. GNSS LNA Gain.....	21
3.2. Radiation Performance Test.....	22
3.2.1. Efficiency.....	22
3.2.2. Average Gain.....	25
3.2.3. Peak Gain.....	27
3.2.4. ECC.....	30
3.2.4.1. Test Status: In Free Space.....	30
3.2.4.2. Test Status: On 500 × 500 mm Metal Plane.....	30
3.2.5. 3D & 2D Radiation Pattern.....	31
3.2.5.1. Test Status: In Free Space.....	31
3.2.4.2. Test Status: On 500 × 500 mm Metal Plane.....	47
Contact US.....	62
Legal Notices.....	63
Revision History.....	65

1 Specification

1.1. Electrical

Electrical Specifications		
Frequency Range	LMHs	700–960 MHz, 1400–6000 MHz
	MHs	1400–6000 MHz
	GNSS	1166–1186 MHz, 1559–1606 MHz
Radiation Pattern	LMHs & MHs	Omni-directional
	GNSS	Directional
Polarization	LMHs & MHs	Linear
	GNSS	RHCP
Impedance		50 Ω
Isolation		≤ -9.8 dB
Axial Ratio (GNSS)		< 3 dB

1.1.1. LMHs

SPEC	Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	N74 /N75 /N76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /N77	N79	Wi-Fi 5G
	Freq. (MHz)		600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850
Max VSWR	FS		8.4	6.7	3.5	4.0	3.6	2.3	2.0	2.1	2.6	1.8	2.3
	MP		12.8	6.2	3.5	3.9	3.1	1.8	1.8	2.3	3.0	1.8	2.0
Max Return Loss (dB)	FS		-2.1	-2.6	-5.2	-4.5	-5.0	-8.0	-9.4	-8.9	-7.1	-10.7	-8.2
	MP		-1.4	-2.8	-5.1	-4.6	-5.8	-10.8	-11.1	-8.1	-6.1	-11.1	-9.6
AVG Eff. (%)	FS		20.1	32.2	46.3	40.0	50.5	56.0	59.2	59.0	56.9	52.9	45.3
	MP		18.3	35.7	34.1	38.8	51.7	61.7	61.1	58.2	54.3	42.1	43.9

AVG Gain (dB)	FS	-7.0	-5.1	-3.4	-4.0	-3.0	-2.5	-2.3	-2.3	-2.5	-2.8	-3.5
	MP	-7.7	-4.6	-5.4	-4.2	-2.9	-2.1	-2.1	-2.4	-2.7	-3.8	-3.6
Max Peak Gain (dBi)	FS	-2.0	1.3	1.8	0.2	5.1	4.0	4.1	4.9	5.3	4.0	4.1
	MP	-0.9	1.6	1.7	3.9	5.0	5.9	6.7	6.7	5.6	5.5	4.3
VSWR	FS	≤ 8.4										
	MP	≤ 12.8										
Return Loss	FS	≤ -2.1 dB										
	MP	≤ -1.4 dB										
Peak Gain	FS	≤ 5.3 dBi										
	MP	≤ 6.7 dBi										
Max ECC	FS	≤ 0.57										
	MP	≤ 0.58										

- LMHs: LMH1, LMH2 Antennas
- MHs: MH1, MH2 Antennas
- FS: In Free Space
- MP: On 500 × 500 mm Metal Plane

1.1.2. MHs

SPEC	Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	N74 /N75 /N76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /N77	N79	Wi-Fi 5G
	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850	
Max VSWR	FS	-	-	-	2.7	2.4	2.3	2.3	2.4	2.3	2.1	1.9	
	MP	-	-	-	2.4	2.1	2.2	2.2	2.6	2.2	2.2	1.8	
Max Return Loss (dB)	FS	-	-	-	-6.8	-7.7	-8.0	-8.0	-7.5	-8.0	-9.0	-10.5	
	MP	-	-	-	-7.6	-8.9	-8.3	-8.3	-7.0	-8.3	-8.7	-11.1	
AVG Eff. (%)	FS	-	-	-	39.0	46.7	48.9	50.6	52.4	56.4	60.6	56.7	
	MP	-	-	-	46.1	38.7	48.7	52.1	53.1	51.8	48.5	42.6	
AVG Gain (dB)	FS	-	-	-	-4.1	-3.3	-3.1	-3.0	-2.8	-2.5	-2.2	-2.5	
	MP	-	-	-	-3.4	-4.2	-3.1	-2.8	-2.8	-2.9	-3.2	-3.7	
Max Peak Gain (dBi)	FS	-	-	-	1.4	5.1	3.8	3.7	3.4	4.6	4.1	4.3	
	MP	-	-	-	4.6	4.9	4.9	5.2	5.2	7.1	6.7	4.4	

VSWR	FS	≤ 2.7
	MP	≤ 2.6
Return Loss	FS	≤ -6.8 dB
	MP	≤ -7 dB
Peak Gain	FS	≤ 5.1 dBi
	MP	≤ 7.1 dBi

- LMHs: LMH1, LMH2 Antennas
- MHs: MH1, MH2 Antennas
- FS: In Free Space
- MP: On 500 × 500 mm Metal Plane

1.1.3. GNSS

Specification	Band	Band	GNSS L5	GNSS L2	GNSS L1
		Freq. (MHz)	1164 - 1189	1217 - 1238	1559 - 1606
Max VSWR	FS		1.0	-	3.1
	MP		-	-	-
Max Return Loss (dB)	FS		-30	-	-5.8
	MP		-	-	-
AVG Eff. (%)	FS		55.5	-	31.5
	MP		-	-	-
AVG Gain (dB)	FS		-2.6	-	-5.0
	MP		-	-	-
Max Peak Gain (dBi)	FS		1.9	-	-1.2
	MP		-	-	-
VSWR	FS		≤ 3.1		
	MP		-		
Return Loss	FS		≤ -5.8 dB		
	MP		-		
Peak Gain	FS		≤ 1.9 dBi		
	MP		-		

- LMHs: LMH1, LMH2 Antennas

- MHs: MH1, MH2 Antennas
- FS: In Free Space
- MP: On 500 × 500 mm Metal Plane

GNSS LNA Electrical	
LNA Gain	28 ±2 dB
Noise Figure	≤ 2.5 dB
Output VSWR	< 2.0
Input VSWR	< 2.0
Working Voltage	DC 2–5 V
Working Current	≤ 20 mA
Impedance	50 Ω

- LMHs: LMH1, LMH2, LMH3, LMH4 Antennas
- MHs: MH1, MH2, MH3, MH4 Antennas
- FS: In Free Space
- MP: On 500 × 500 mm Metal Plane

1.2. Supported Bands


5G NR/ LTE/ LTE-Advanced/ WCDMA/ HSPA/ HSPA+/ GPRS/ GSM/ NB-IoT					
Band	Frequency (MHz)	Uplink (MHz)	Downlink (MHz)	LMHs	MHs
1	2100	1920–1980	2110–2170	√	√
2	1900	1850–1910	1930–1990	√	√
3	1800	1710–1785	1805–1880	√	√
4	1700	1710–1755	2110–2155	√	√
5	850	824–849	869–894	√	-
7	2600	2500–2570	2620–2690	√	√
8	900	880–915	925–960	√	-
9	1800	1749.9–1784.9	1844.9–1879.9	√	√

5G NR/ LTE/ LTE-Advanced/ WCDMA/ HSPA/ HSPA+/ GPRS/ GSM/ NB-IoT					
Band	Frequency (MHz)	Uplink (MHz)	Downlink (MHz)	LMHs	MHs
11	1500	1427.9–1447.9	1475.9–1495.9	√	√
12	700	699–716	729–746	√	-
13	700	777–787	746–756	√	-
14	700	788–798	758–768	√	-
17	700	704–716	734–746	√	-
18	850	815–830	860–875	√	-
19	850	830–845	875–890	√	-
20	800	832–862	791–821	√	-
21	1500	1447.9–1462.9	1495.9–1510.9	√	√
22	3500	3410–3490	3510–3590	√	√
23	2100	2000–2020	2180–2200	√	√
24	1600	1626.5–1660.5	1525–1559	√	√
25	1900	1850–1915	1930–1995	√	√
26	850	814–849	859–894	√	-
28	700	703–748	758–803	√	-
31	450	452.5–457.5	462.5 - 467.5	-	-
34	2100	2010 – 2025		√	√
38	2600	2570 - 2620		√	√
39	1900	1880 - 1920		√	√
40	2300	2300 - 2400		√	√
41	2500	2496 - 2690		√	√
42	3500	3400 - 3600		√	√
48	3500	3550 - 3700		√	√
66	1700	1710 - 1780	2110 - 2200	√	√

5G NR/ LTE/ LTE-Advanced/ WCDMA/ HSPA/ HSPA+/ GPRS/ GSM/ NB-IoT					
Band	Frequency (MHz)	Uplink (MHz)	Downlink (MHz)	LMHs	MHs
71	600	663 - 698	617 - 652	√	-
74	1500	1427 - 1470	1475 - 1518	√	√
77	3500	3300 - 4200		√	√
78	3500	3300 - 3800		√	√
79	4500	4400 - 5000		√	√
Note: Covered √ means efficiency > 20%					

GNSS Frequency Bands (MHz)					
GPS	L1	L2	L5		
	Centre 1575.42 (1565–1586)	Centre 1227.6 (1217–1238)	Centre 1176.45 (1164–1189)		
	√	-	√		
GLONASS	G1-L1OC-L1OF	G2-L2OC-L2OF	G3-L3OC		
	Centre 1601 (1595–1606)	Centre 1248.06 (1241–1255)	Centre 1202.025 (1189–1213)		
	√	-	-		
GALILEO	E1	E5a	E5b	E6	
	Centre 1575.42 (1563–1588)	Centre 1176.45 (1166–1187)	Centre 1207.14 (1197–1218)	Centre 1278.75 (1258–1300)	
	√	√	-	-	
BEIDOU	B1I	B1C (BeiDou-3)	B2a-B2I	B2b	B3
	Centre 1561.098 (1559–1564)	Centre 1575.42 (1559–1592)	Centre 1176.45 (1166–1187)	Centre 1207.14 (1197–1217)	Centre 1268.52 (1258–1279)
	√	√	√	-	-
QZSS	L1	L2C	L5	L6	
	Centre 1575.42 (1573–1578)	Centre 1227.6 (1226–1229)	Centre 1176.45 (1166–1187)	Centre 1278.75 (1257–1300)	
	√	-	√	-	
IRNSS	L5				

	Centre 1176.45 (1164–1189)				
	√				


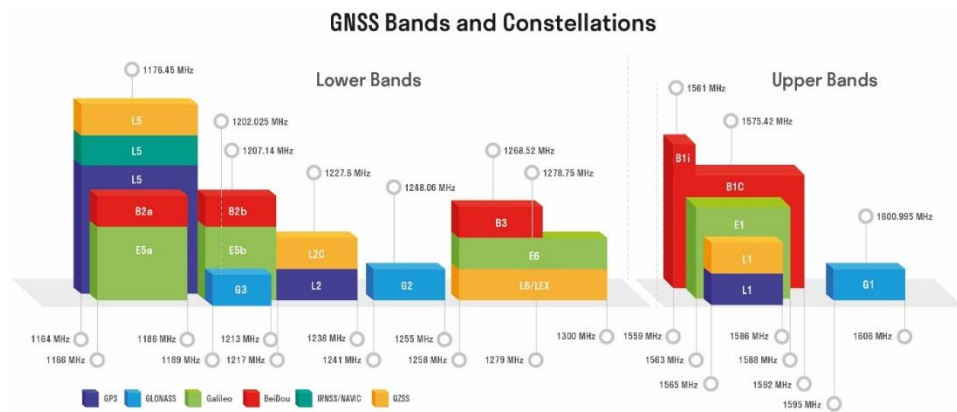


1.3. Mechanical, Environment & Storage

Mechanical		
Antenna Size		204*86.6*31mm
Casing Material & Color		PC, UL94 V0 & Black
Cable Type & Length	LMHs & MHs	LMR200 Black & 300 mm
	GNSS	RG174 Black & 300 mm
Connector Type		SMA/FARKA
Mounting Type		Screw (M20 Nut)
Environmental		
Operation Temperature		-40 °C to +85 °C
Humidity		Non-condensing 65 °C 95 % RH
Ingress Protection (IP) Rating		IP67 (After Installation) IP69K (After Installation)
Impact Protection (IK) Rating		IK09
RoHS & REACH Compliant		Yes
Storage		
Storage Temperature		-40 °C to +85 °C
Storage Humidity		Less than 75% RH
Storage Place		Away from corrosive gas and direct sunlight
Packaging		Antennas should be stored in unopened sealed manufacturer's plastic packaging.

- LMHs: LMH1, LMH2 Antennas
- MHs: MH1, MH2 Antennas
- FS: In Free Space
- MP: On 500 × 500 mm Metal Plane

2 Drawing

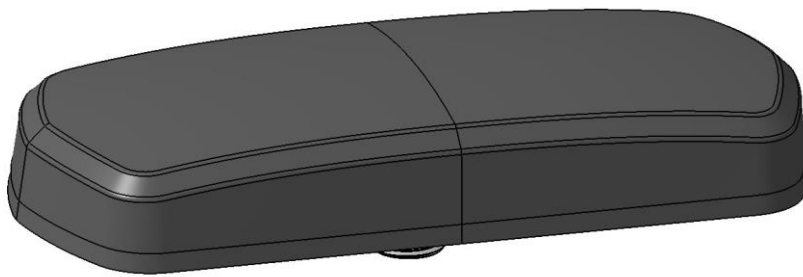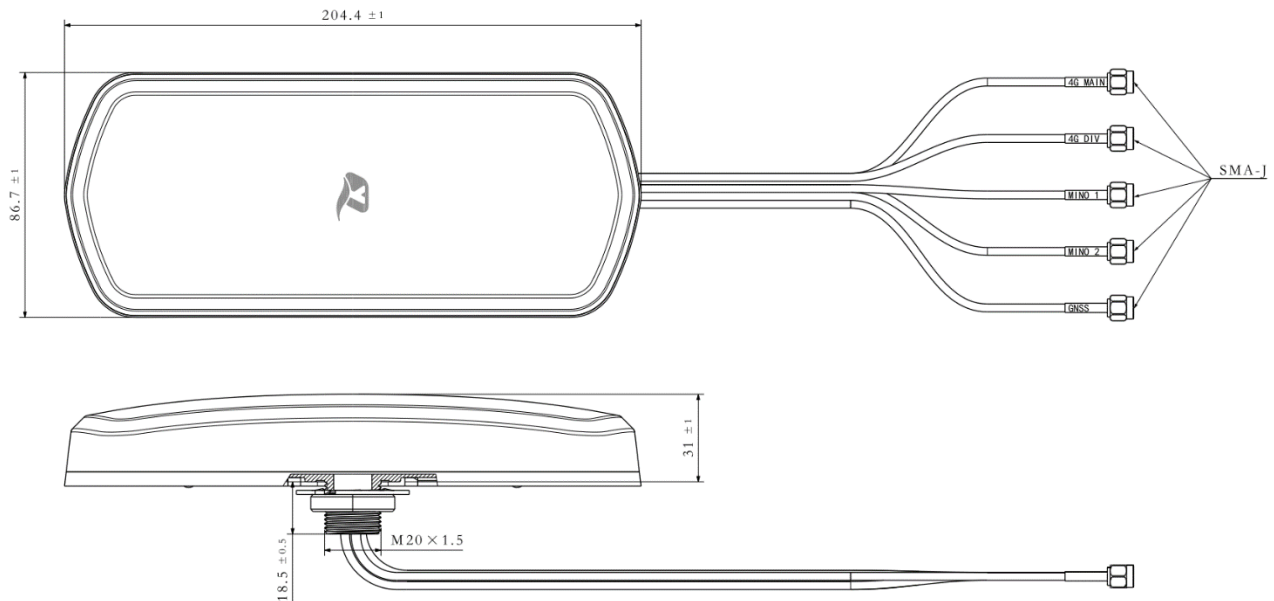



Nut & Washer Mount



Mounting Hole: $\Phi 20_{+0.5}^0$ mm

3 Detail Performance

3.1. S-Parameter Test

3.1.1. VSWR

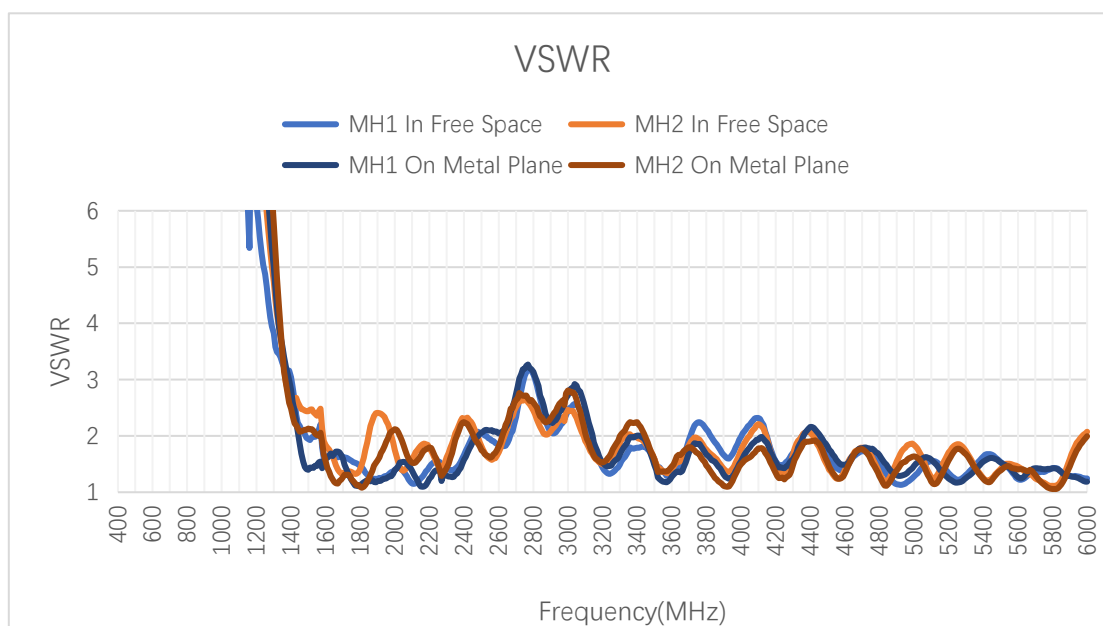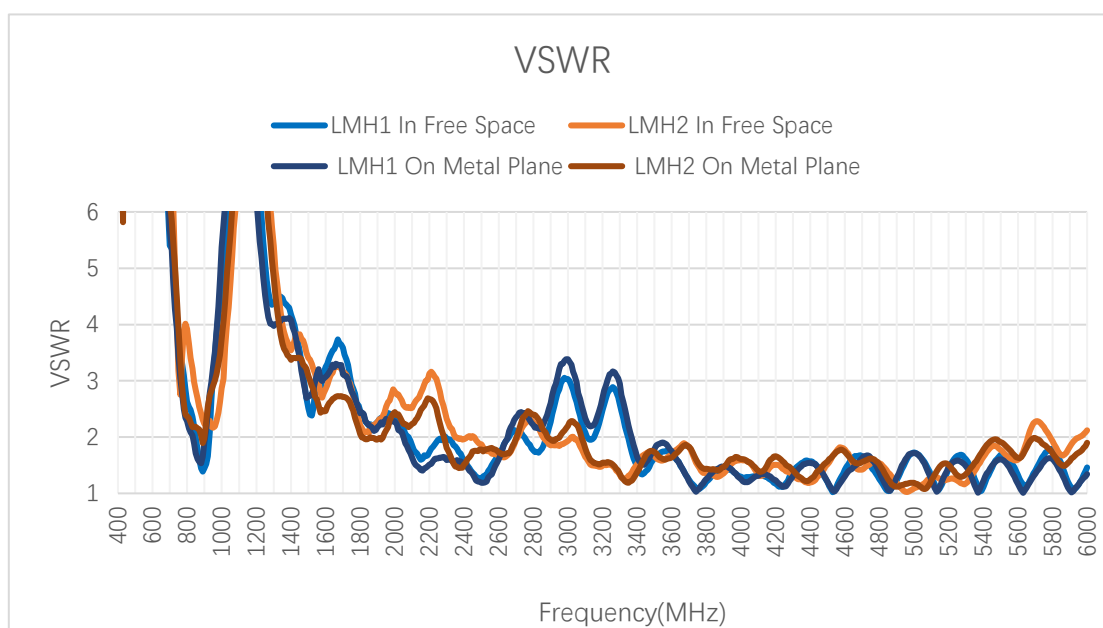

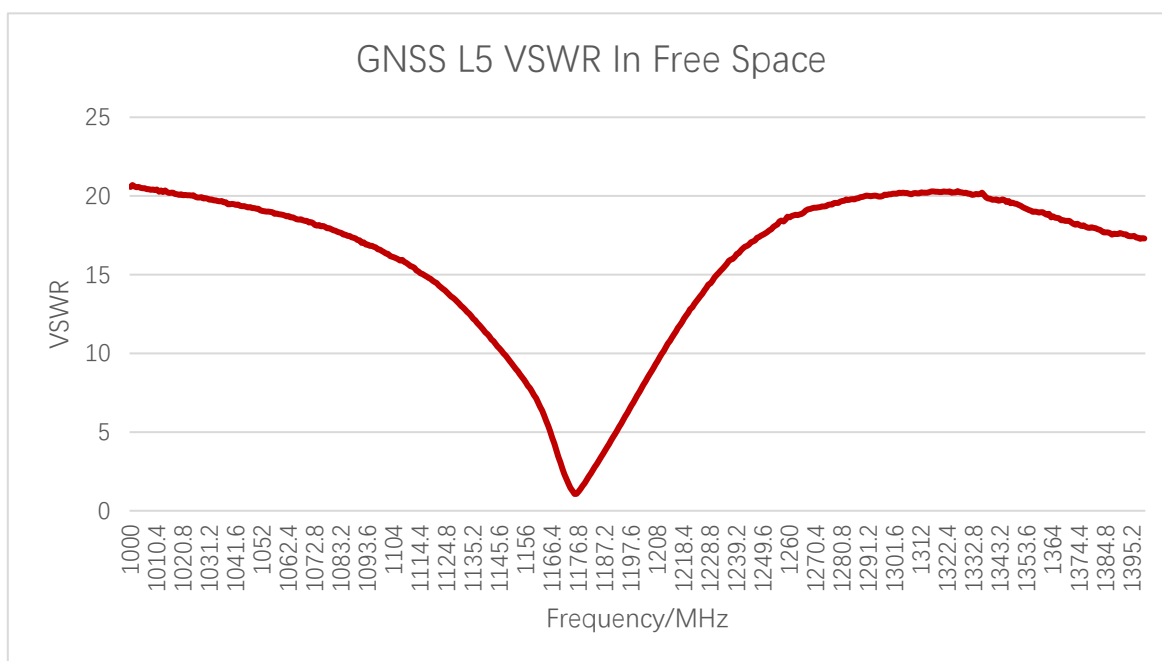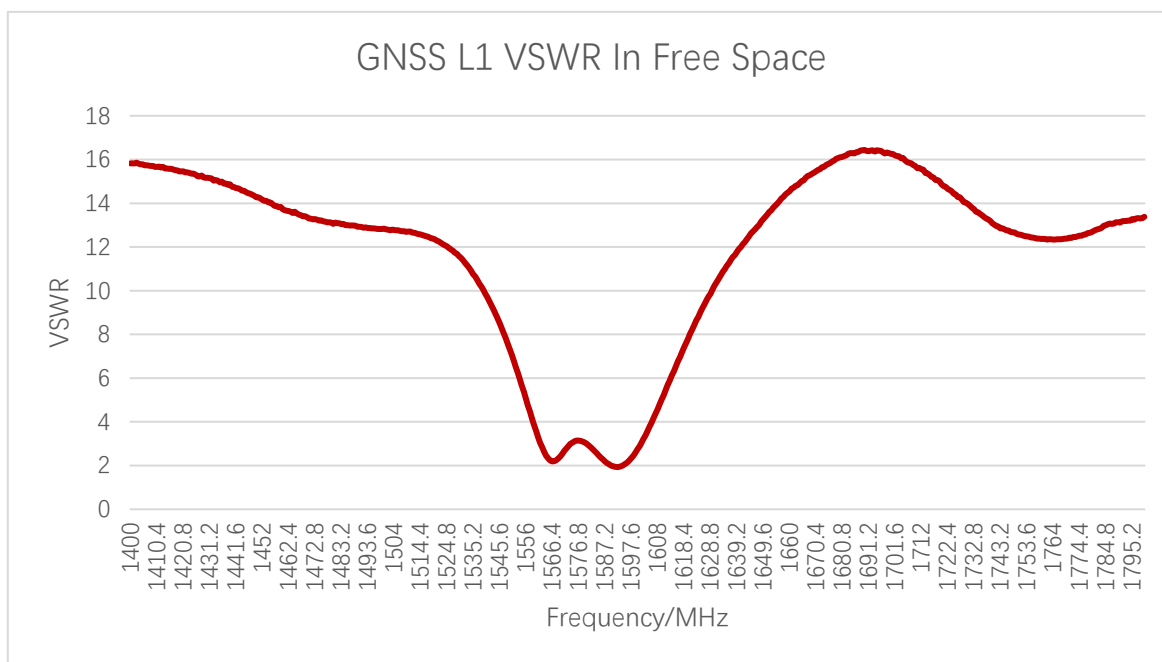

VSWR - LMH

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LMH1	FS	8.4	8.1	5.3	2.4	1.4	3.5	3.7	3.5	3.1	2.2
	MP	12.8	11.5	5.4	2.0	1.9	3.5	3.6	3.1	2.9	2.1
LMH2	FS	7.3	7.9	6.5	3.2	2.2	2.2	3.8	3.1	3.0	2.2
	MP	7.4	7.9	5.9	2.2	2.0	3.0	3.4	2.7	2.6	2.0

Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
LMH1	FS	2.4	1.6	1.8	1.4	1.7	1.7	1.7	1.7	1.7	-
	MP	2.3	1.5	1.6	1.3	1.6	1.8	1.6	1.7	1.6	-
LMH2	FS	2.5	2.7	2.0	2.0	1.7	1.7	1.4	1.1	1.8	-
	MP	2.1	2.4	1.5	1.7	1.7	1.6	1.6	1.2	1.9	-


VSWR - MH

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
MH1	FS	-	-	-	-	-	-	2.2	1.6	1.6	1.2
	MP	-	-	-	-	-	-	2.1	1.5	1.3	1.2
MH2	FS	-	-	-	-	-	-	2.6	1.3	1.4	2.4
	MP	-	-	-	-	-	-	2.1	1.3	1.3	1.5
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
MH1	FS	1.3	1.2	1.4	2.0	1.8	1.4	1.7	1.3	1.5	-
	MP	1.2	1.1	1.3	1.9	2.0	1.3	1.8	1.5	1.5	-
MH2	FS	2.3	1.8	2.0	2.2	1.7	1.4	1.8	1.8	1.4	-
	MP	1.9	1.6	1.9	2.0	1.8	1.5	1.8	1.6	1.4	-

VSWR

Frequency (MHz)		1176	1227	1561	1575	1602
GNSS	FS	1.1	-	3.0	3.0	3.2

3.1.2. Return Loss

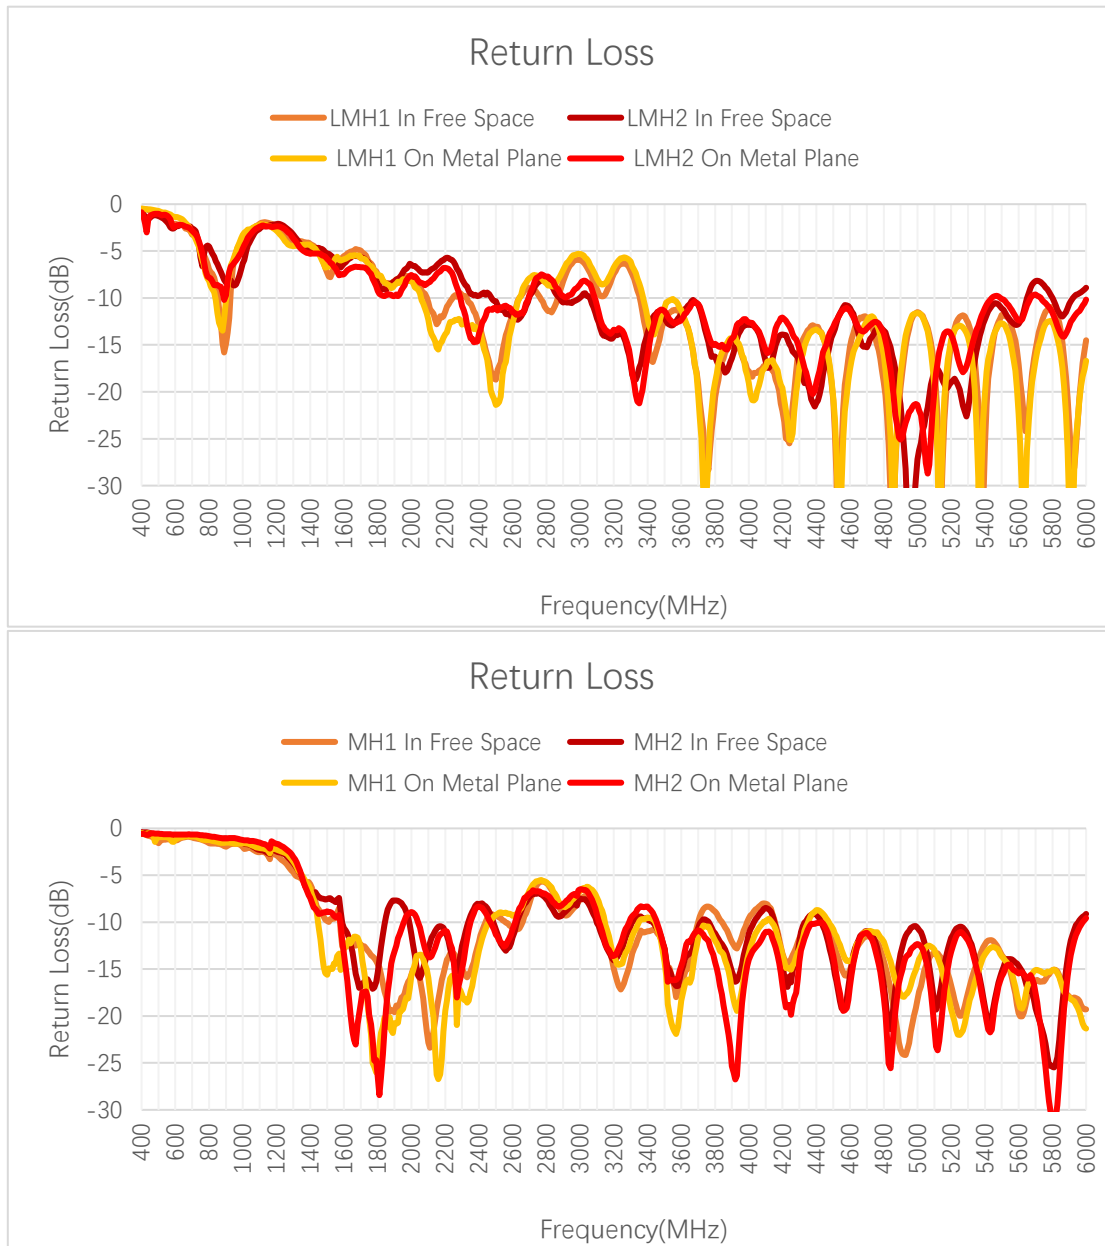

Return Loss (dB)

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LMH1	FS	-2.1	-2.1	-3.3	-7.8	-14.9	-5.2	-4.8	-5.2	-5.9	-8.5
	MP	-1.4	-1.5	-3.3	-9.4	-10.1	-5.1	-5.0	-5.8	-6.3	-9.0
LMH2	FS	-2.4	-2.2	-2.7	-5.6	-8.4	-8.6	-4.7	-5.7	-6.1	-8.6

	MP	-2.4	-2.2	-3.0	-8.6	-9.7	-6.0	-5.2	-6.7	-7.0	-9.6
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
LMH1	FS	-7.6	-12.3	-10.6	-16.1	-11.4	-11.8	-12.2	-11.5	-11.8	-
	MP	-8.0	-14.6	-13.1	-16.6	-12.7	-11.3	-12.5	-11.6	-12.7	-
LMH2	FS	-7.2	-6.7	-9.6	-9.4	-12.1	-11.8	-15.2	-27.2	-11.1	-
	MP	-8.9	-7.7	-14.3	-11.3	-11.5	-12.4	-13.2	-21.4	-10.1	-


Return Loss(dB)

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
MH1	FS	-	-	-	-	-	-	-8.4	-12.6	-13.0	-19.4
	MP	-	-	-	-	-	-	-9.1	-14.1	-18.6	-21.5
MH2	FS	-	-	-	-	-	-	-7.1	-16.6	-16.1	-7.9
	MP	-	-	-	-	-	-	-8.8	-17.4	-17.9	-14.4
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
MH1	FS	-17.9	-20.5	-15.2	-9.6	-10.6	-16.5	-11.5	-18.3	-13.5	-
	MP	-19.3	-23.5	-17.4	-10.2	-9.3	-18.4	-11.0	-14.5	-13.6	-
MH2	FS	-8.2	-10.9	-9.3	-8.5	-11.6	-15.3	-10.9	-10.6	-15.3	-
	MP	-10.2	-12.7	-10.0	-9.3	-10.7	-14.7	-11.1	-12.3	-15.8	-


3.1.3. Isolation

3.1.3.1. Test Status: In Free Space


3.1.3.1.1. LMH1

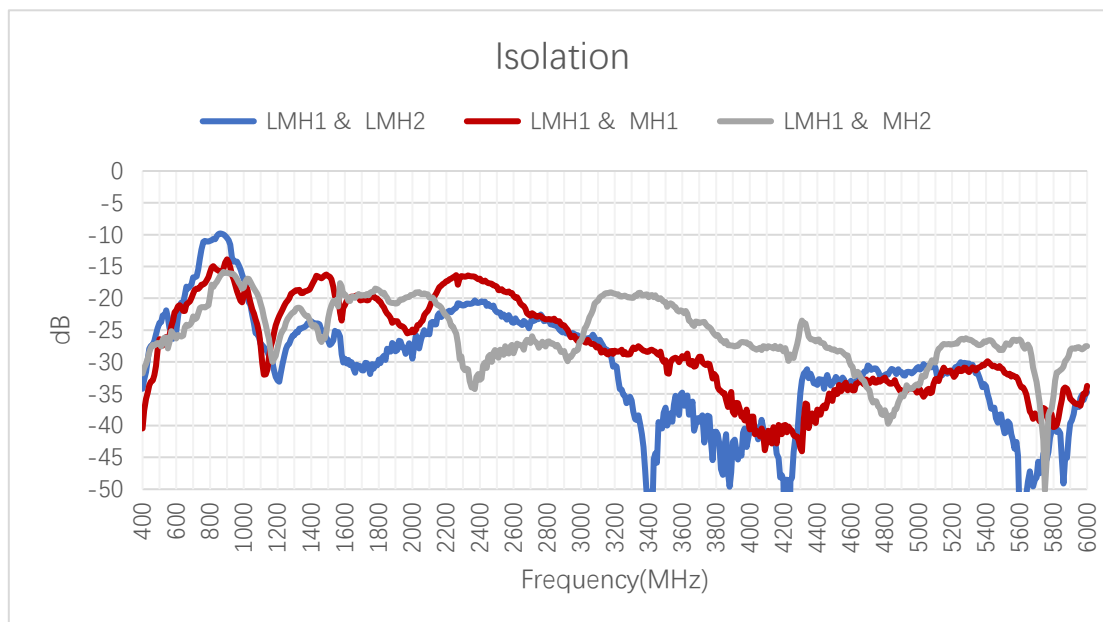


3.1.3.1.2. LMH2

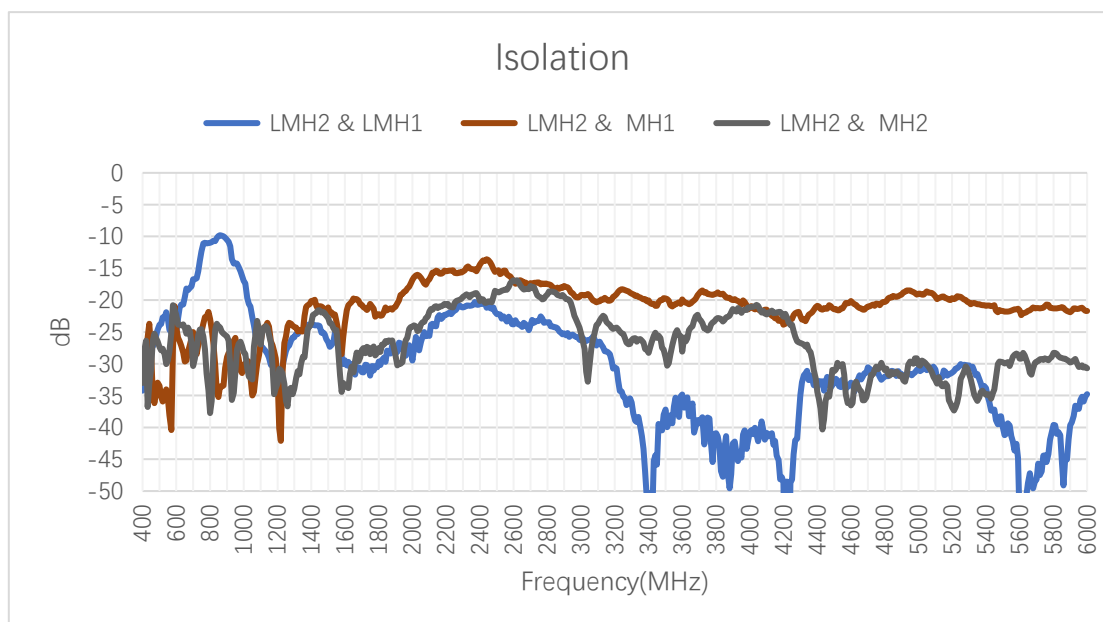

3.1.3.1.3. MH1

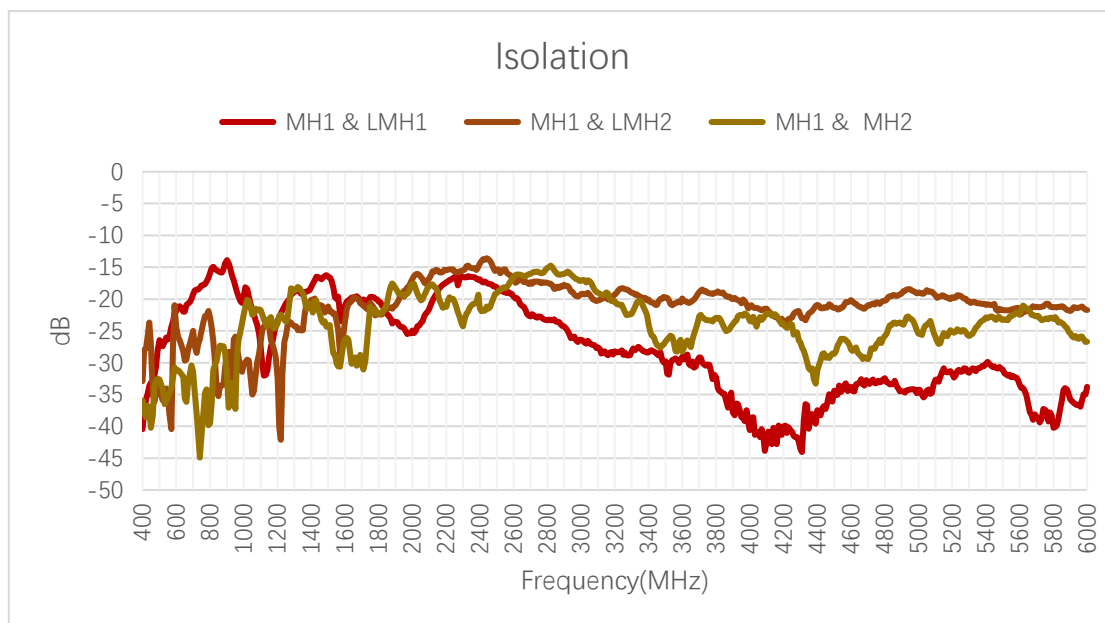


3.1.3.1.4. MH2

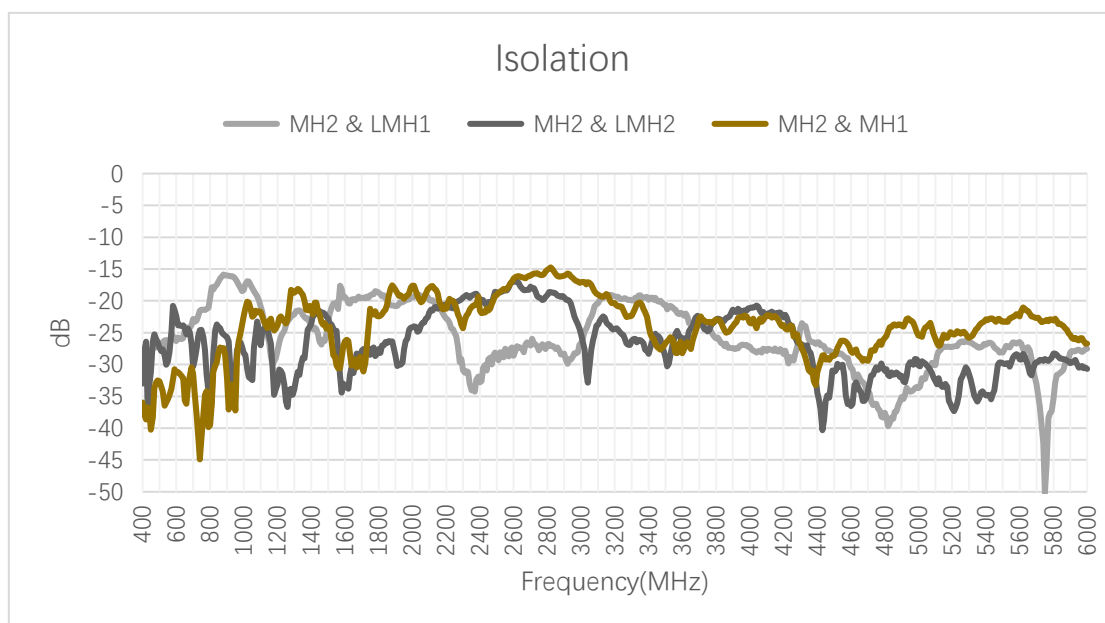


3.1.3.2. Test Status: On 500 × 500 mm Metal Plane


3.1.3.2.1. LMH1

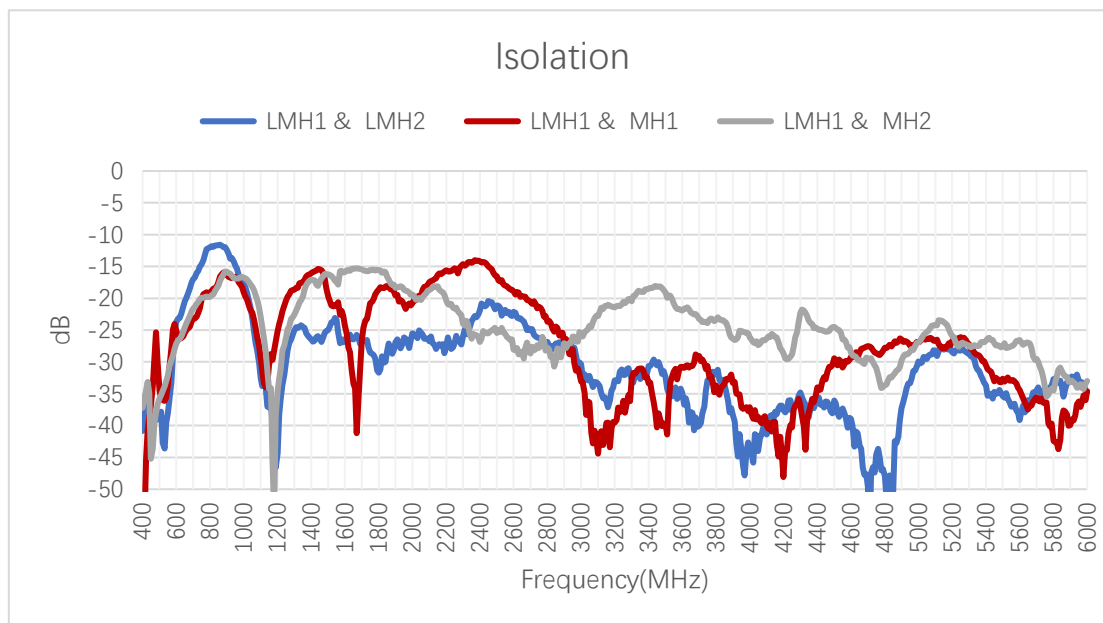


3.1.3.2.2. LMH2

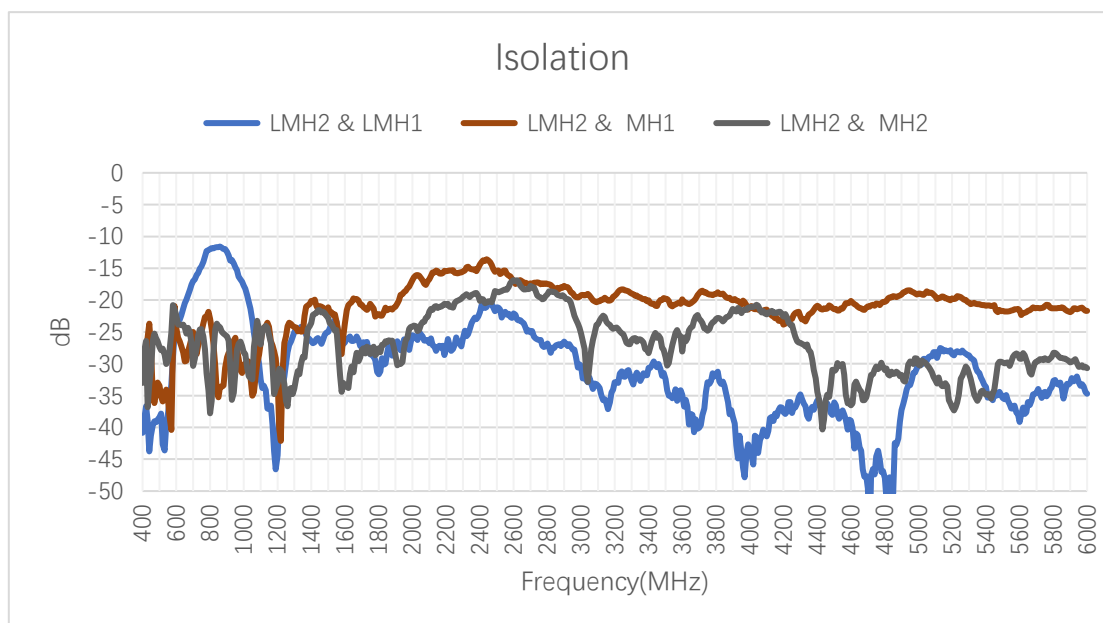

3.1.3.2.3. MH1


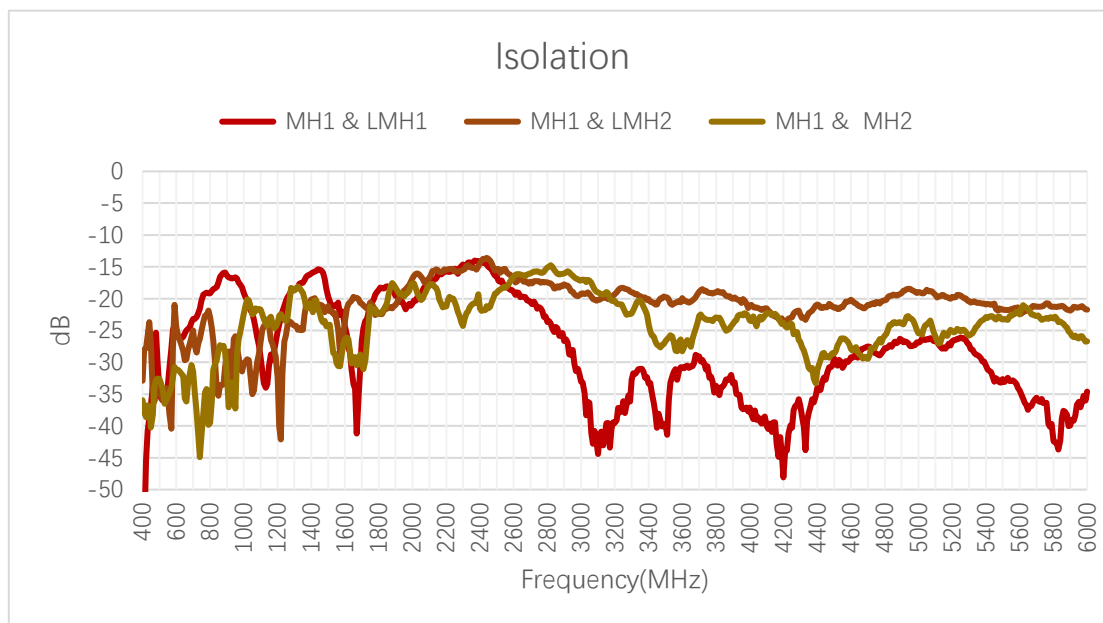


3.1.3.2.4. MH2

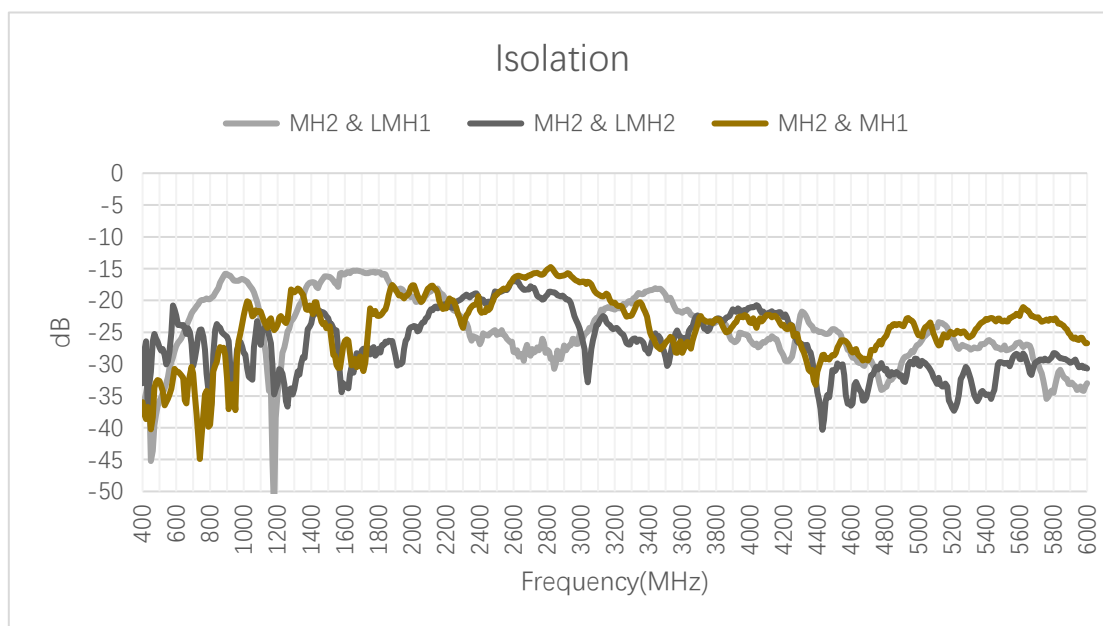

- FS: In Free Space
- MP: On 500 × 500 mm Metal Plane

3.1.4. GNSS LNA Gain

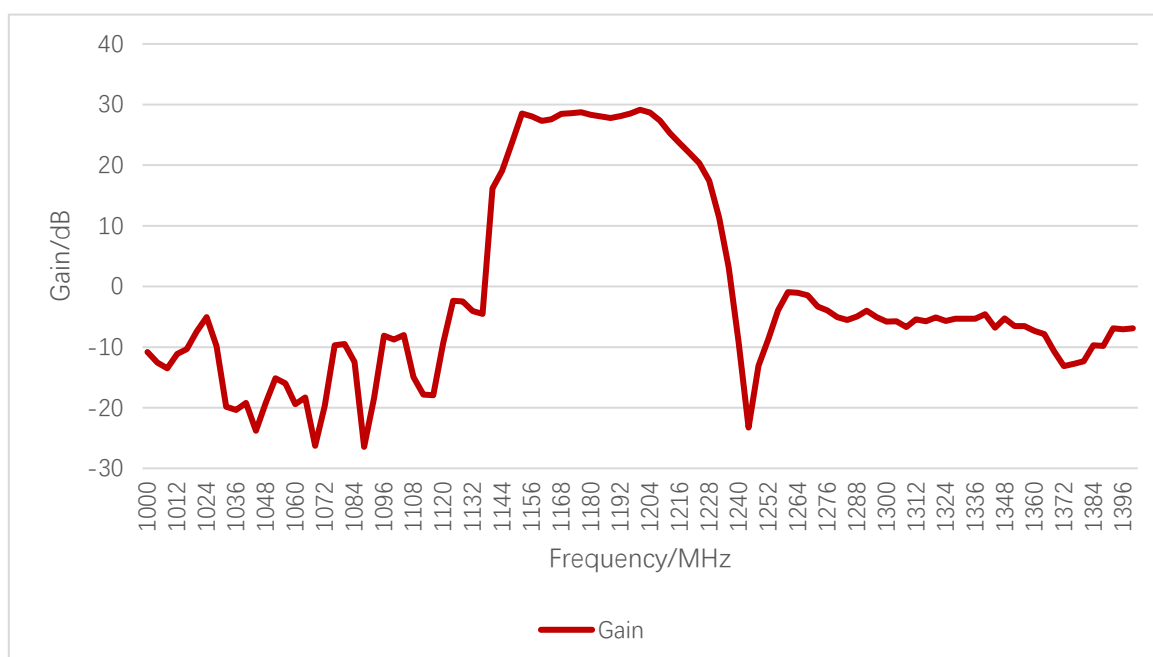
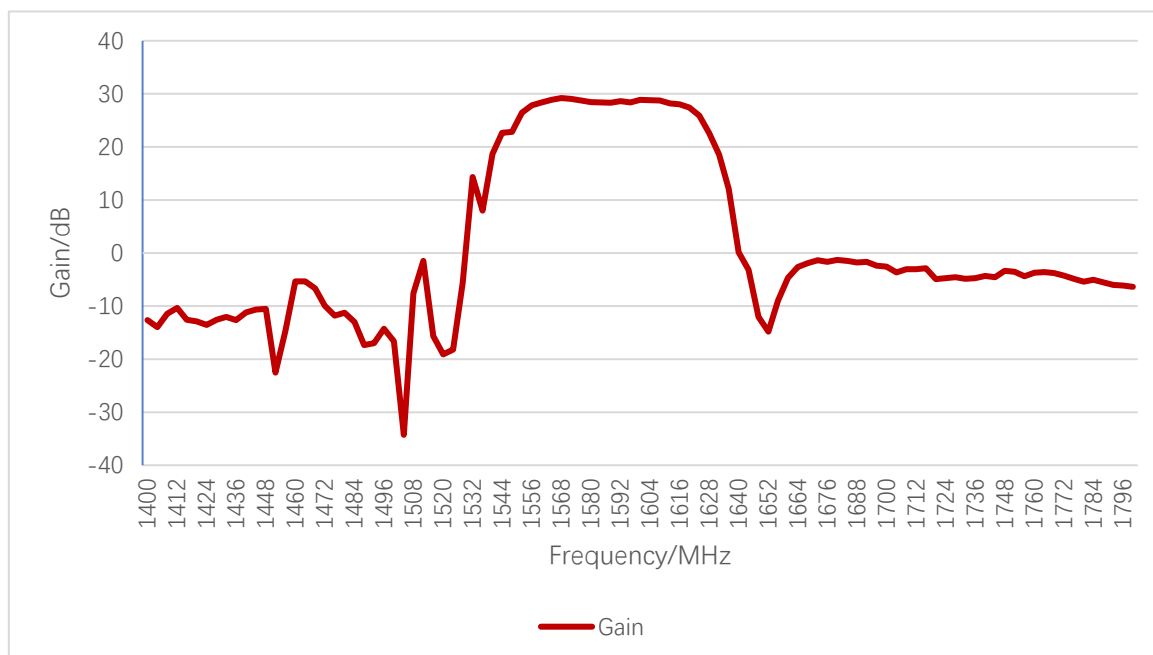




LNA Gain (dB)

Frequency (MHz)	1176	1227	1561	1575	1602
GNSS	28.7	-	28.4	28.7	28.8

3.2. Radiation Performance Test

3.2.1. Efficiency

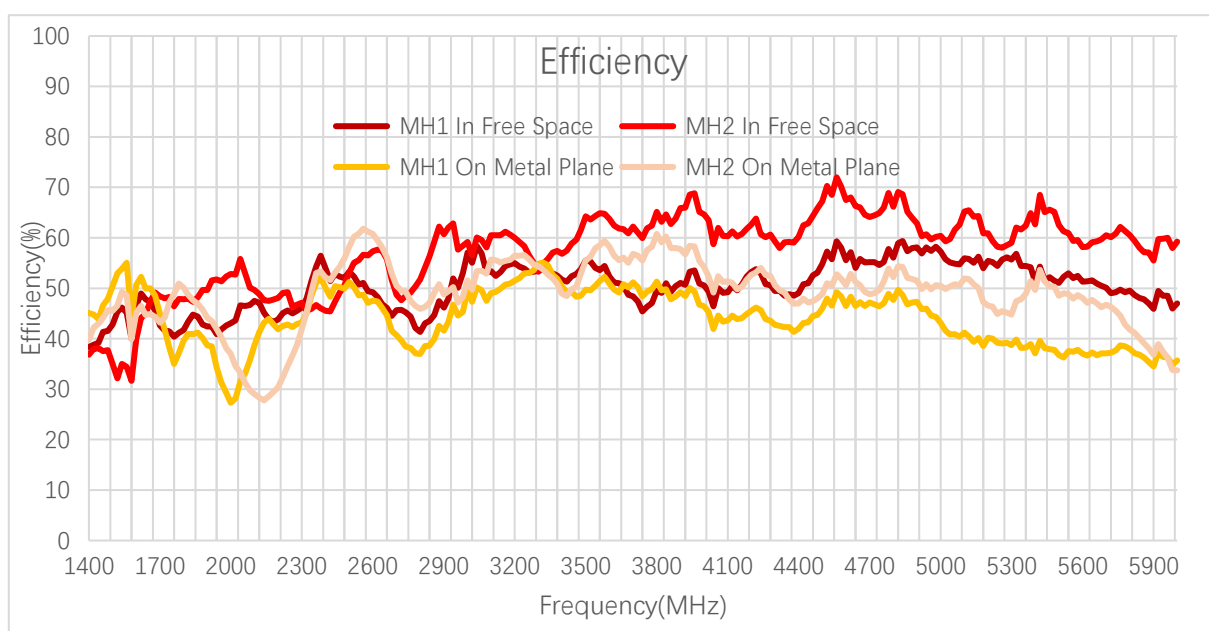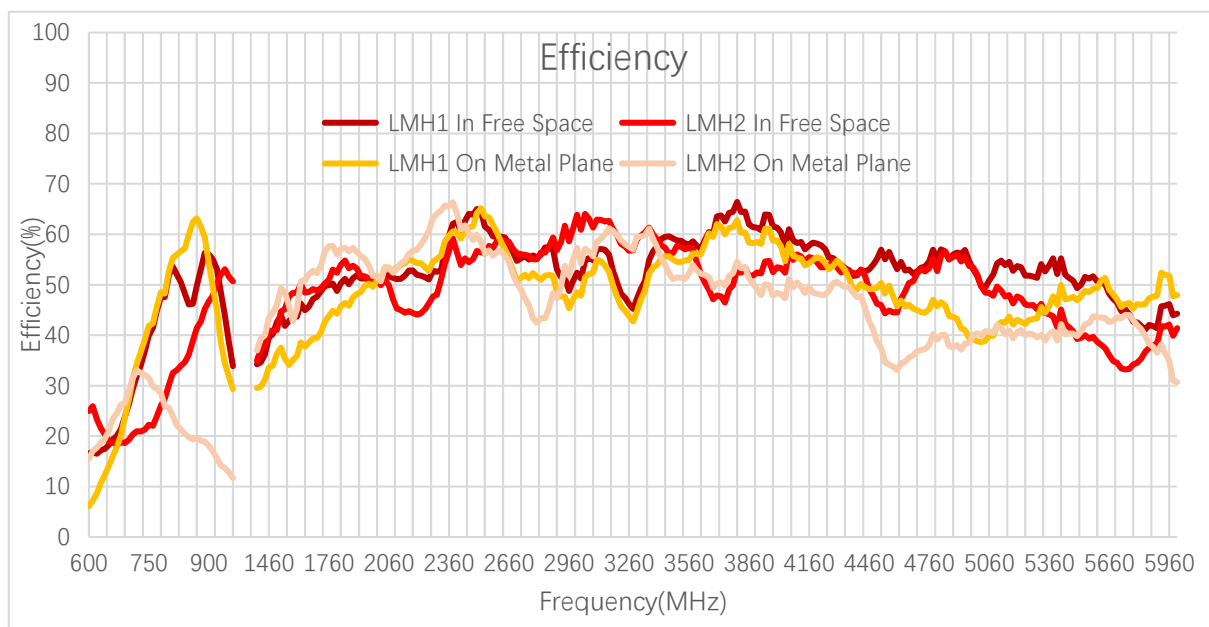

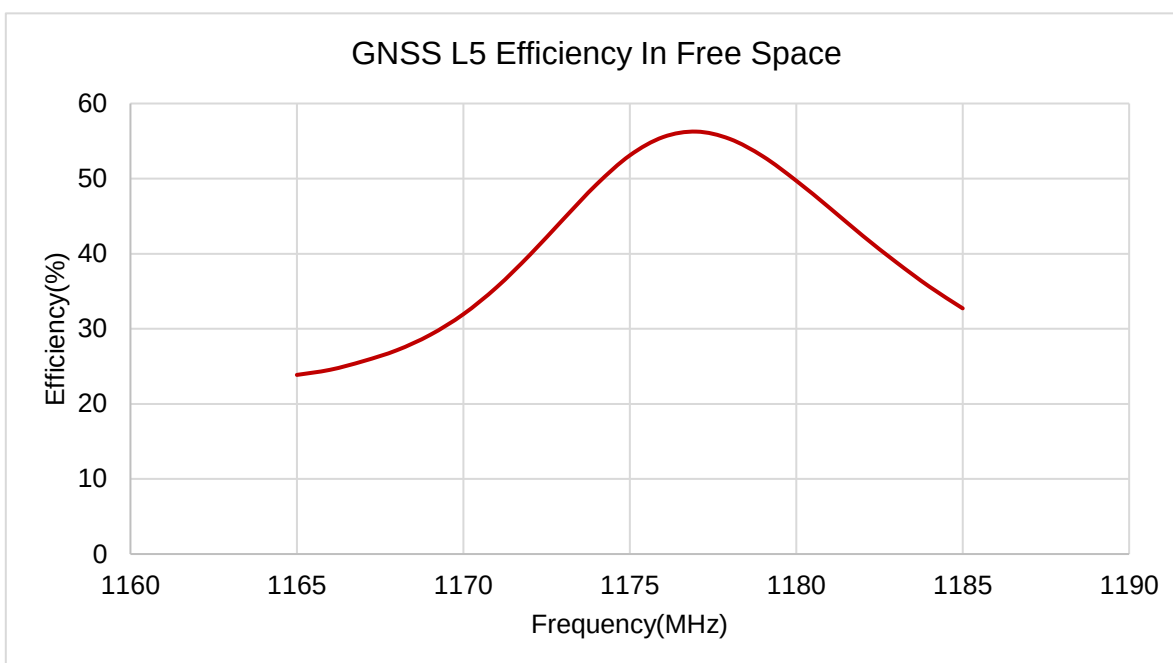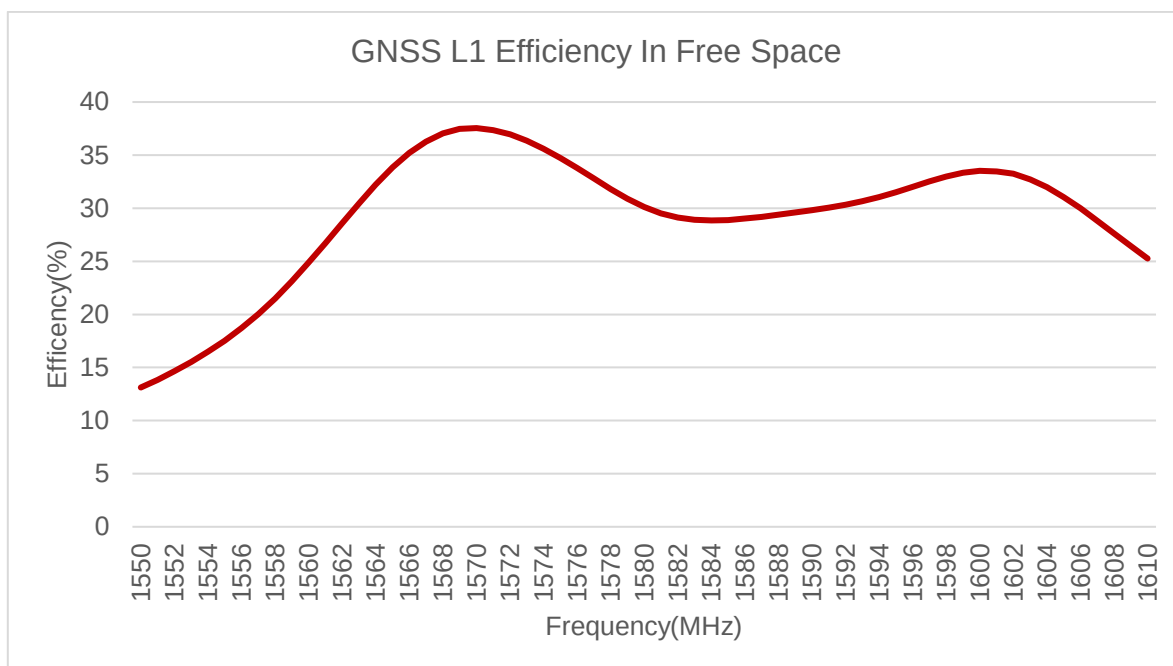

Efficiency (%)

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LMH1	FS	16.6	17.2	29.4	50.6	56.0	33.9	36.2	-	49.8	51.3
	MP	6.1	10.7	31.4	56.7	54.1	29.3	31.3	-	42.7	47.5
LMH2	FS	25.0	21.6	20.4	33.9	46.7	50.7	38.0	-	50.2	53.8
	MP	15.6	18.7	31.6	21.3	18.0	11.7	40.0	-	56.6	57.3

Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
LMH1	FS	-	51.8	-	-	59.4	57.7	52.7	51.8	49.4	44.3
	MP	-	54.3	-	-	60.3	56.1	45.0	38.8	46.9	47.9
LMH2	FS	-	44.4	-	-	58.7	54.3	52.2	52.1	39.2	41.4
	MP	-	54.7	-	-	56.5	52.8	36.9	40.4	39.8	30.7



Efficiency (%)

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
MH1	FS	-	-	-	-	-	-	39.2	-	41.5	42.8
	MP	-	-	-	-	-	-	43.9	-	38.3	40.2
MH2	FS	-	-	-	-	-	-	38.1	-	48.3	49.7
	MP	-	-	-	-	-	-	43.0	-	47.2	45.8
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
MH1	FS	-	45.2	-	-	49.2	52.3	55.2	57.3	51.1	47.0
	MP	-	43.2	-	-	47.6	50.9	47.2	43.1	36.8	35.7
MH2	FS	-	47.6	-	-	57.3	63.7	64.2	60.4	62.5	59.2
	MP	-	27.8	-	-	60.8	58.3	48.8	50.5	48.5	33.7

Efficiency (%)

Frequency (MHz)		1176	1227	1561	1575	1602
GNSS	FS	55.5	-	26.7	34.7	33.2

3.2.2. Average Gain

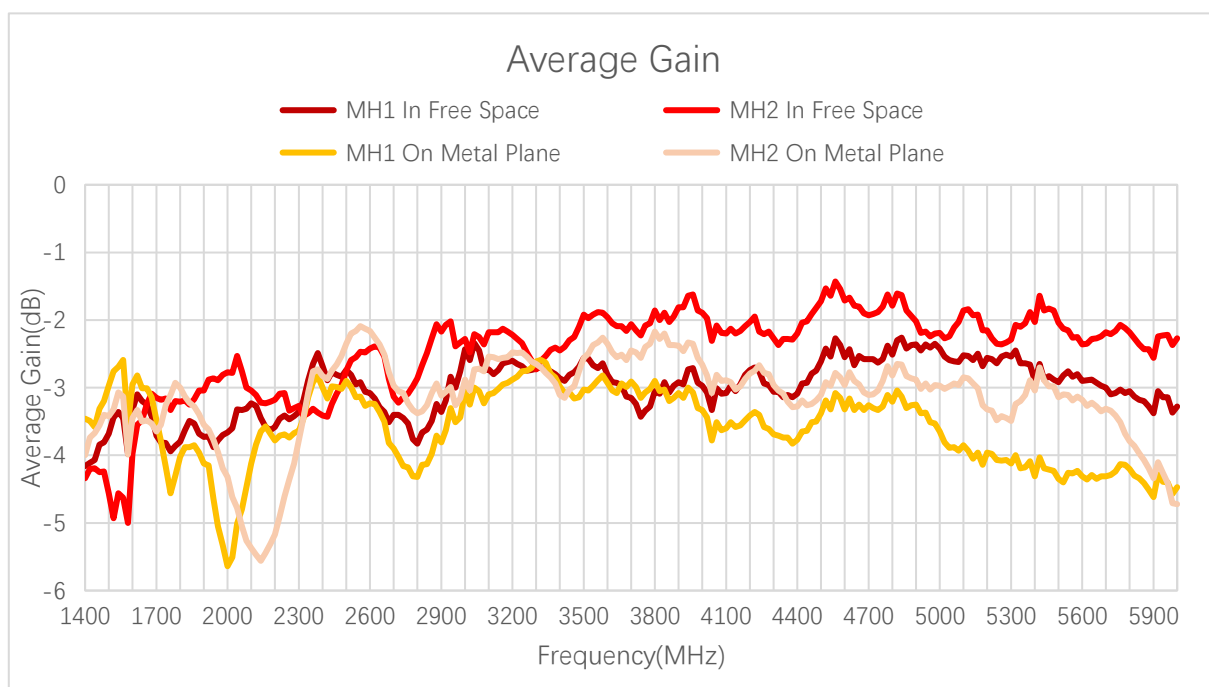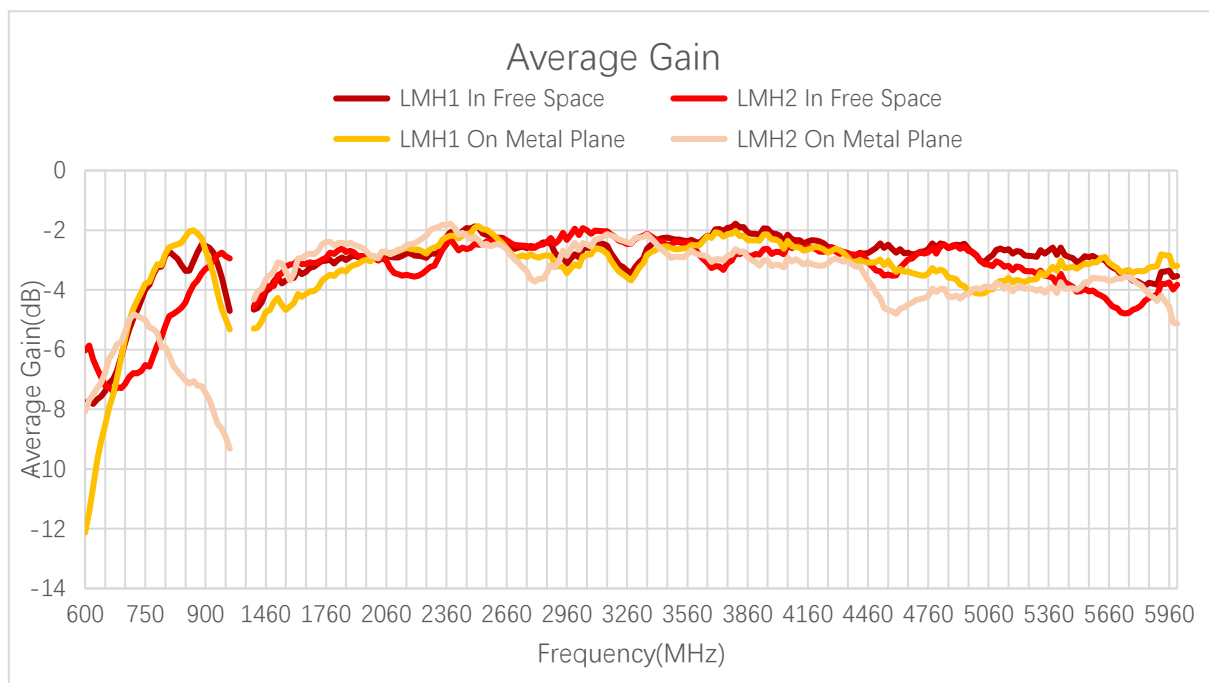

Average Gain (dB)

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LMH1	FS	-7.8	-7.7	-5.3	-3.0	-2.5	-4.7	-4.4	-	-3.0	-2.9
	MP	-12.1	-9.7	-5.0	-2.5	-2.7	-5.3	-5.1	-	-3.7	-3.2
LMH2	FS	-6.0	-6.7	-6.9	-4.7	-3.3	-3.0	-4.2	-	-3.0	-2.7
	MP	-8.1	-7.3	-5.0	-6.7	-7.4	-9.3	-4.0	-	-2.5	-2.4
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
LMH1	FS	-	-2.9	-	-	-2.3	-2.4	-2.8	-2.9	-3.1	-3.5
	MP	-	-2.7	-	-	-2.2	-2.5	-3.5	-4.1	-3.3	-3.2
LMH2	FS	-	-3.5	-	-	-2.3	-2.7	-2.8	-2.8	-4.1	-3.8
	MP	-	-2.6	-	-	-2.5	-2.8	-4.3	-3.9	-4.0	-5.1



Average Gain (dB)



Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
MH1	FS	-	-	-	-	-	-	-4.1	-	-3.8	-3.7
	MP	-	-	-	-	-	-	-3.6	-	-4.2	-4.0
MH2	FS	-	-	-	-	-	-	-4.2	-	-3.2	-3.0
	MP	-	-	-	-	-	-	-3.7	-	-3.3	-3.4
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
MH1	FS	-	-3.5	-	-	-3.1	-2.8	-2.6	-2.4	-2.9	-3.3
	MP	-	-3.7	-	-	-3.2	-2.9	-3.3	-3.7	-4.4	-4.5
MH2	FS	-	-3.2	-	-	-2.4	-2.0	-1.9	-2.2	-2.0	-2.3
	MP	-	-5.6	-	-	-2.2	-2.4	-3.1	-3.0	-3.1	-4.7

Average Gain (dB)

Frequency (MHz)		1176	1227	1561	1575	1602
GNSS	FS	-2.6	-	-5.7	-4.6	-4.8

3.2.3. Peak Gain

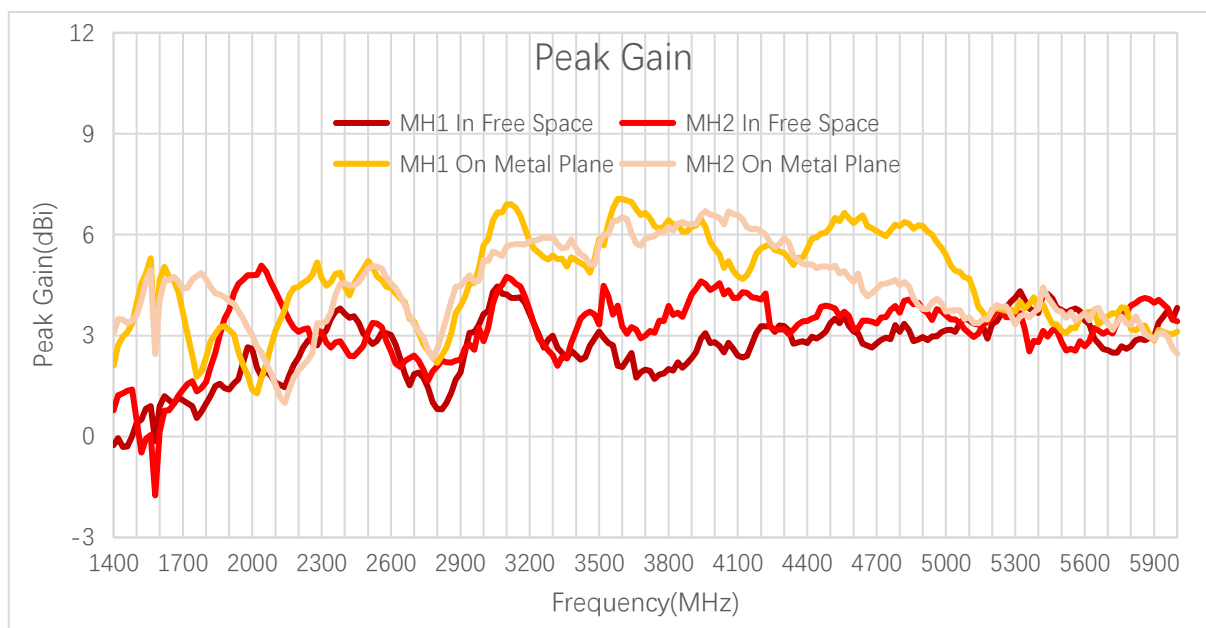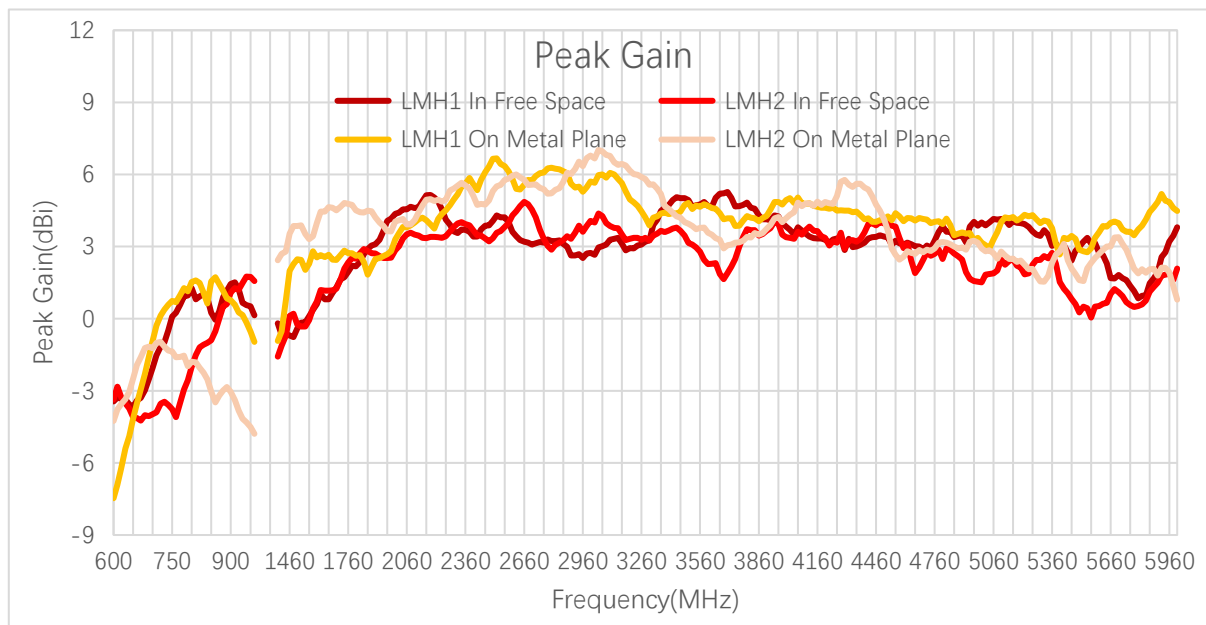

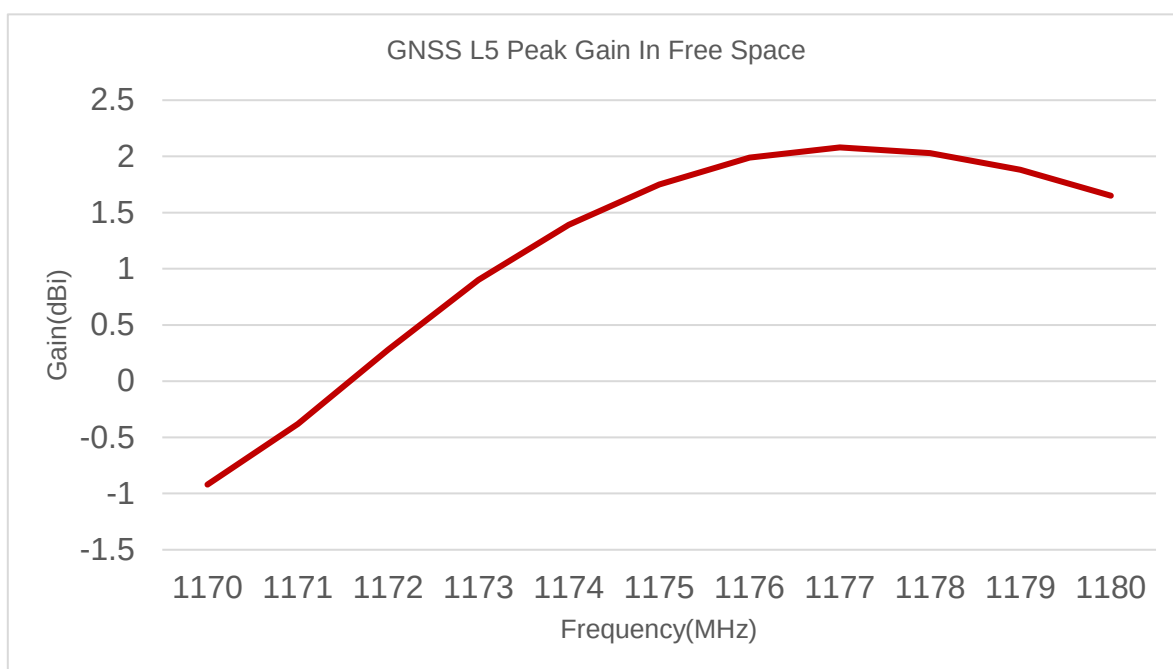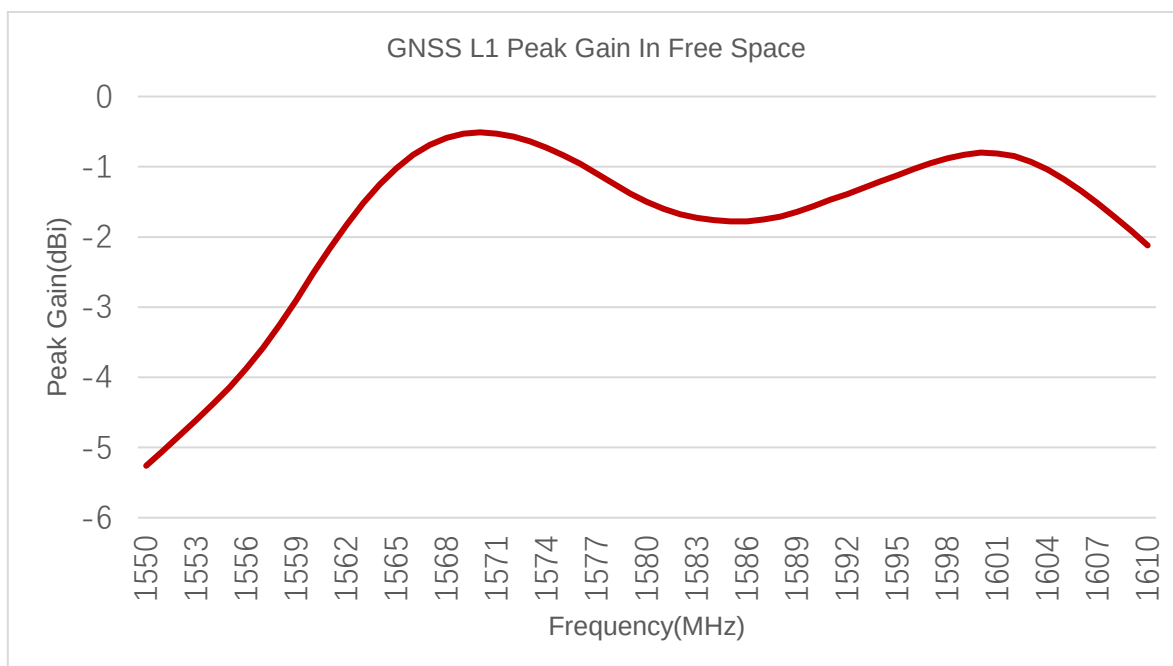

Peak Gain (dBi)

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LMH1	FS	-3.4	-3.4	-1.5	1.0	1.5	0.1	-0.6	-	1.7	3.1
	MP	-7.5	-5.4	-0.3	1.1	0.8	-1.0	0.7	-	2.8	2.2
LMH2	FS	-3.4	-3.5	-3.9	-1.1	1.1	1.6	-0.7	-	2.1	2.7
	MP	-4.3	-3.4	-1.0	-2.2	-3.0	-4.8	2.8	-	4.8	4.5

Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
LMH1	FS	-	4.9	-	-	3.6	4.7	2.9	4.0	3.0	3.8
	MP	-	4.2	-	-	5.8	4.7	4.2	3.2	2.9	4.5
LMH2	FS	-	3.4	-	-	4.3	2.3	2.4	1.5	0.3	2.1
	MP	-	4.7	-	-	6.0	3.6	2.8	2.9	1.6	0.8

Peak Gain (dBi)


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
MH1	FS	-	-	-	-	-	-	-0.3	-	0.9	1.4
	MP	-	-	-	-	-	-	3.0	-	2.4	3.3
MH2	FS	-	-	-	-	-	-	1.3	-	1.6	3.5
	MP	-	-	-	-	-	-	3.5	-	4.7	4.2
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
MH1	FS	-	1.5	-	-	3.0	2.1	2.8	3.2	3.8	3.8
	MP	-	3.8	-	-	4.4	7.1	6.1	5.4	3.1	3.1
MH2	FS	-	3.7	-	-	2.5	3.3	3.4	3.6	2.8	3.4
	MP	-	1.0	-	-	4.6	6.5	4.4	3.7	3.7	2.5

Peak Gain (dBi)


Frequency (MHz)		1176	1227	1561	1575	1602
GNSS	FS	1.9	-	-2.1	-0.8	-0.8

3.2.4. ECC

3.2.4.1. Test Status: In Free Space

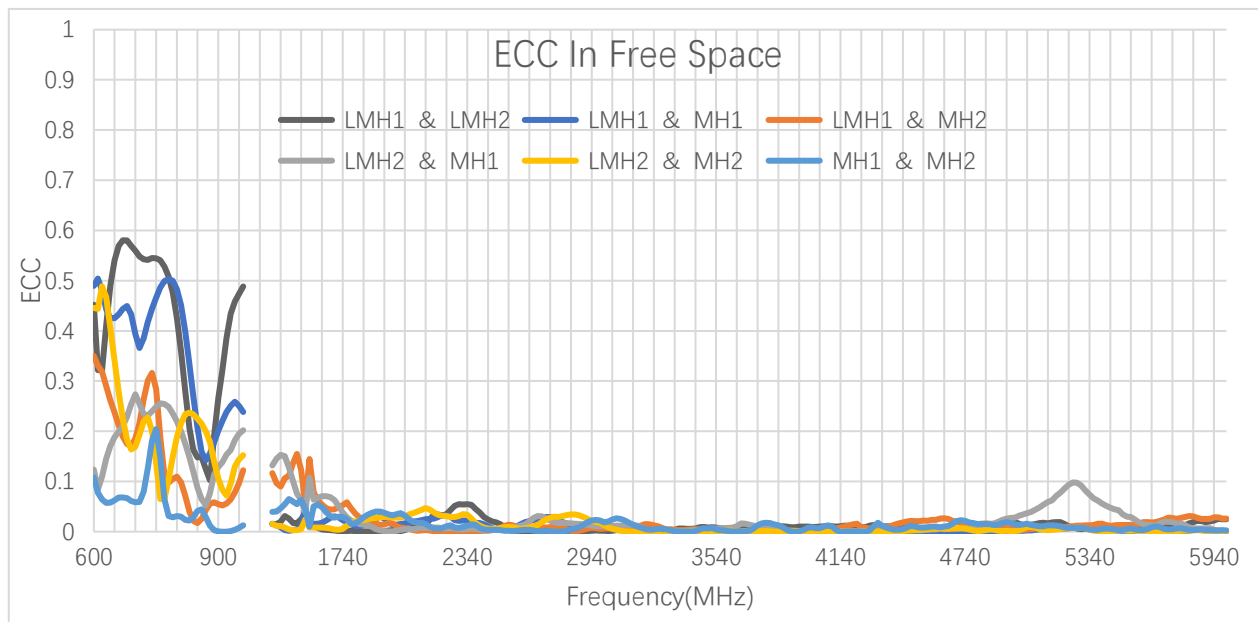


3.2.4.2. Test Status: On 500 × 500 mm Metal Plane

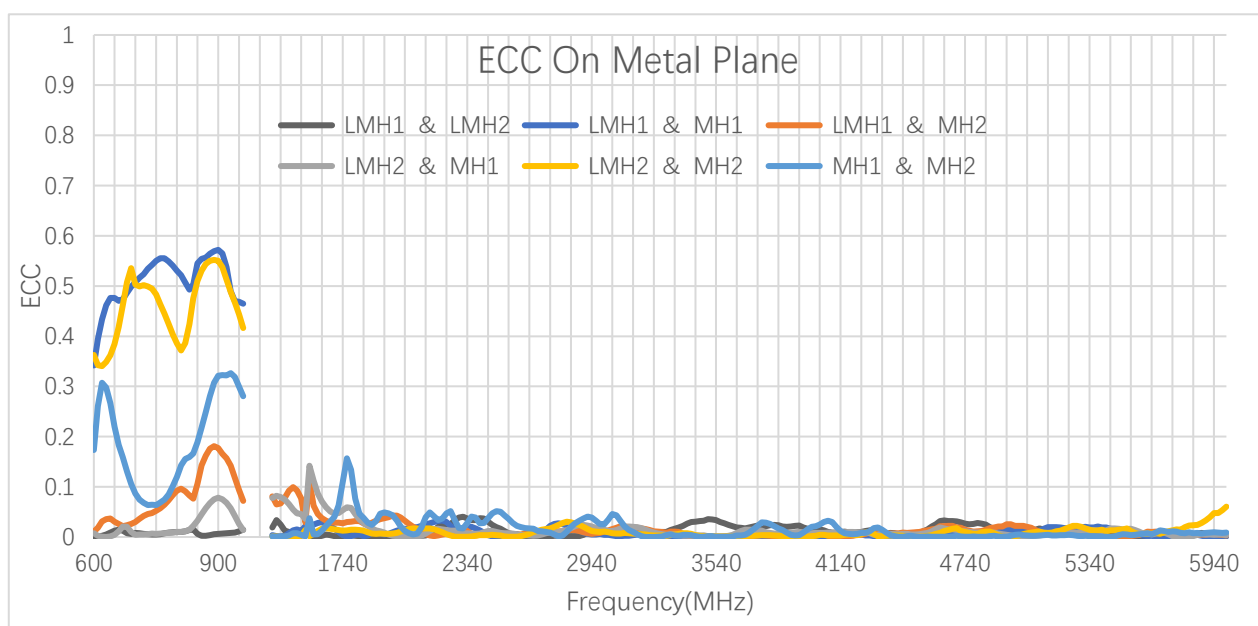


3.2.5. 3D & 2D Radiation Pattern

3.2.5.1. Test Status: In Free Space






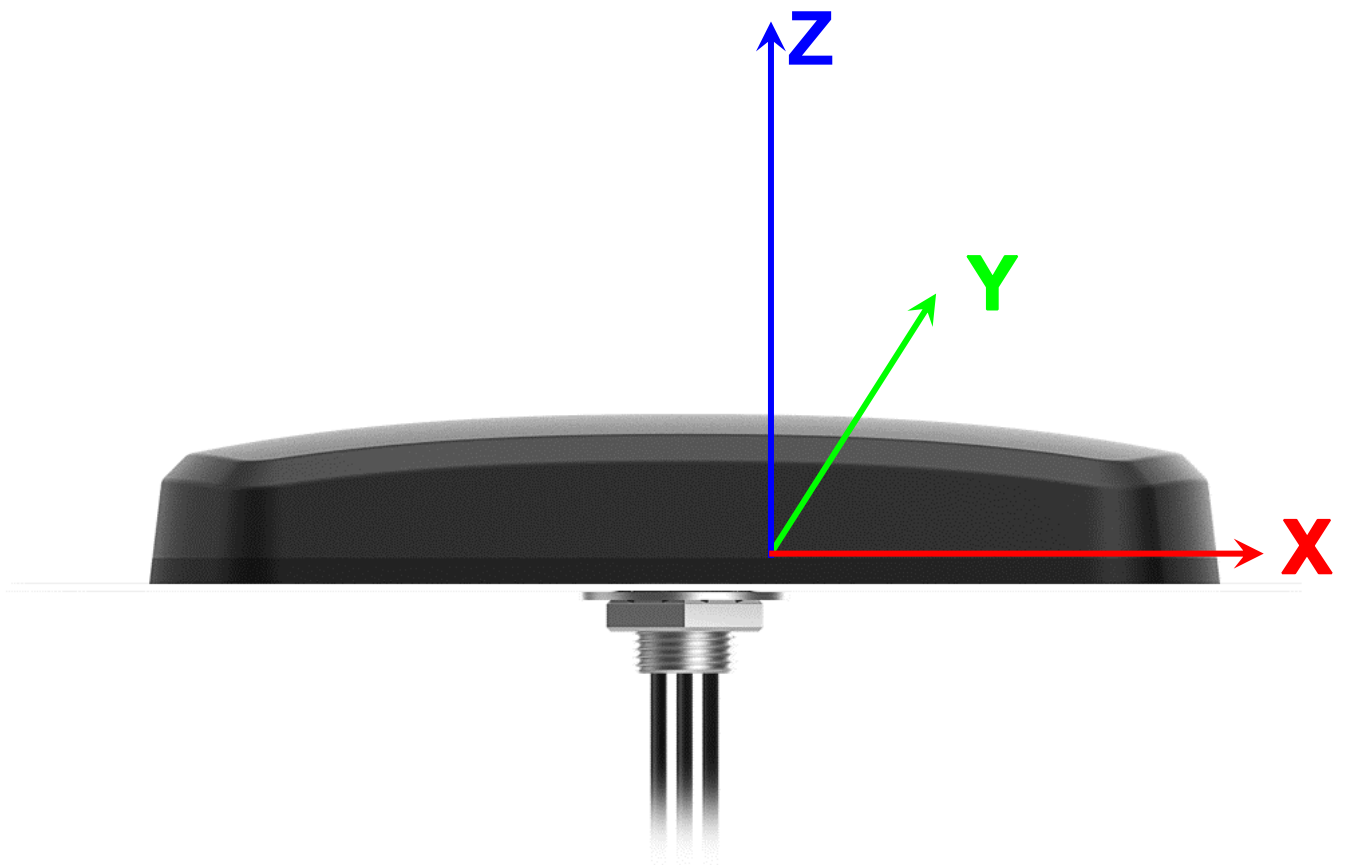


● **LMH1**



630 MHz









710 MHz

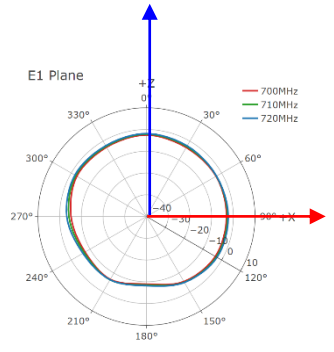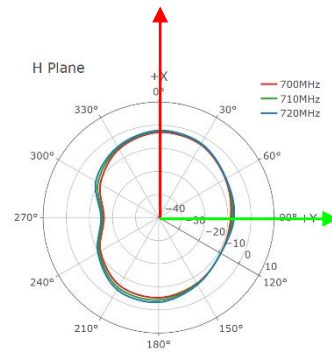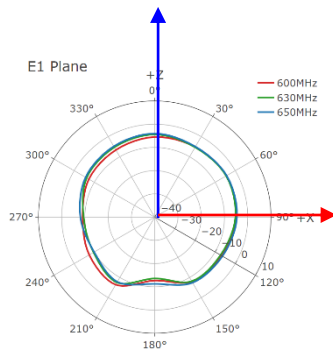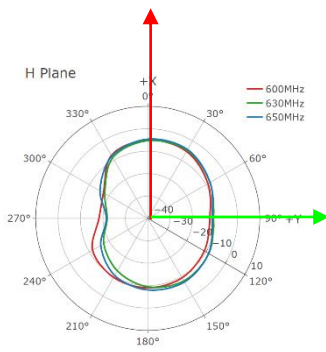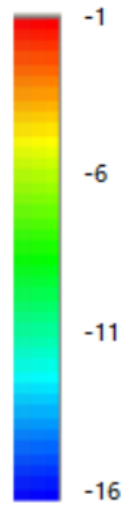

830MHz




900MHz

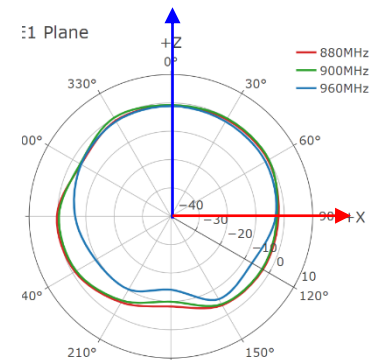
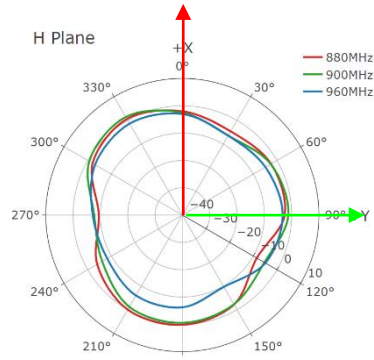
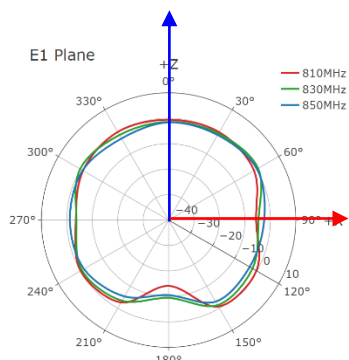
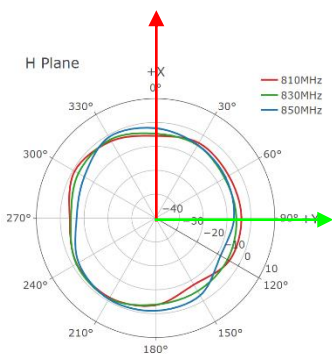
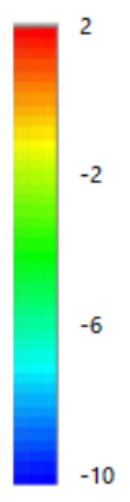



● **LMH1**


1440 MHz









1740 MHz

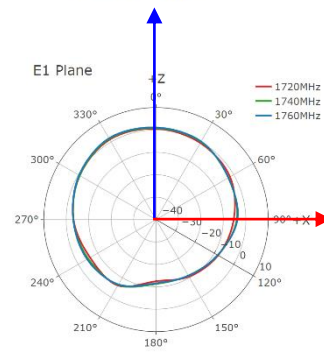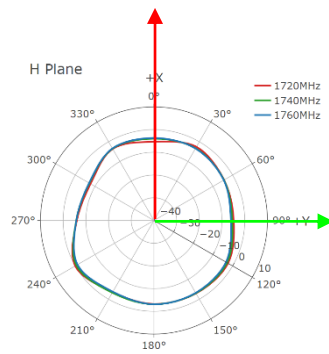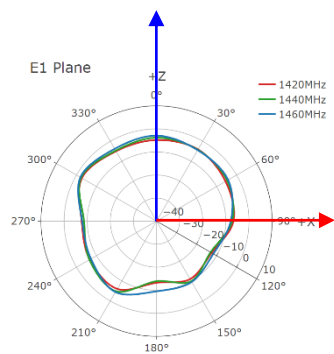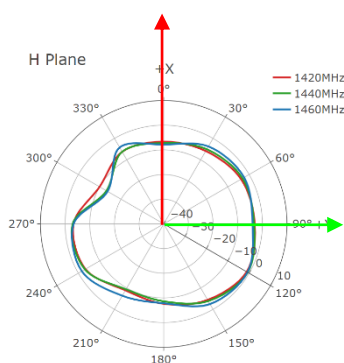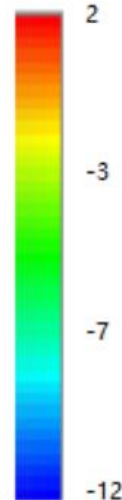

1880 MHz




1960 MHz

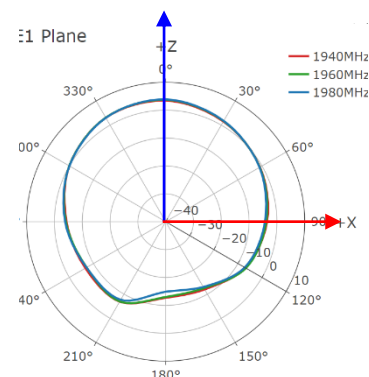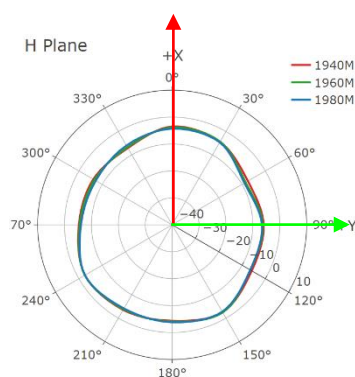
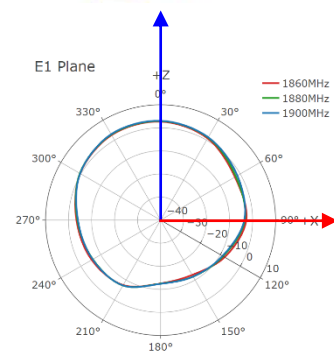
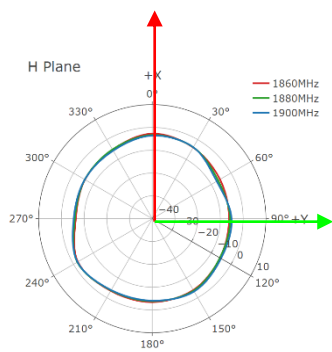

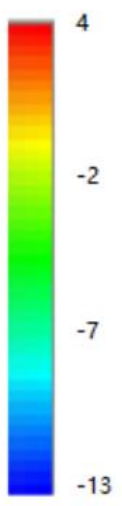


● **LMH1**


2140 MHz








2360 MHz



2460 MHz




2600 MHz


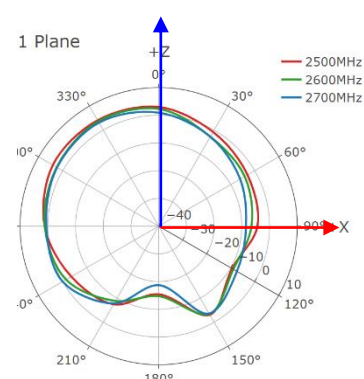
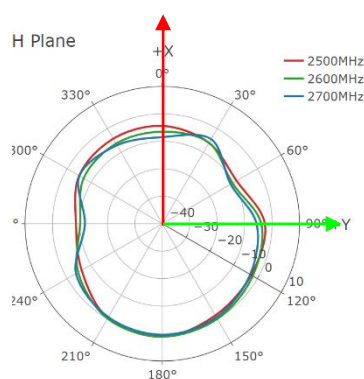





● **LMH1**


3600 MHz









4000 MHz

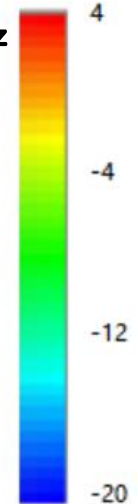

4700 MHz





5500 MHz

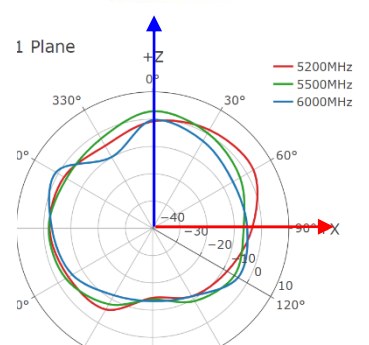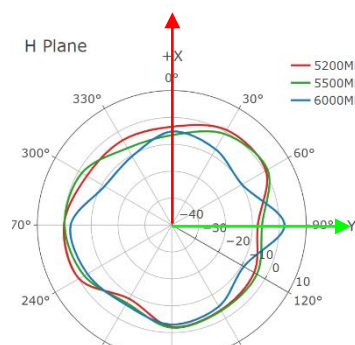


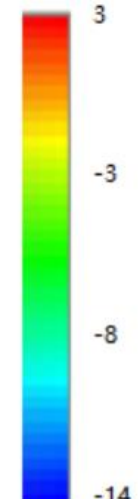



● **LMH2**


630 MHz









710 MHz



830MHz




900MHz

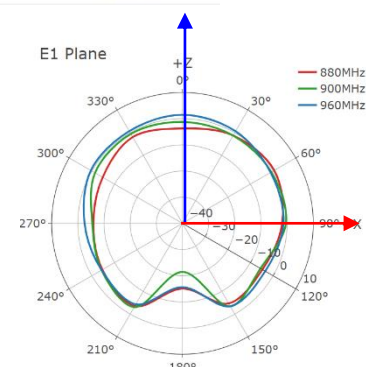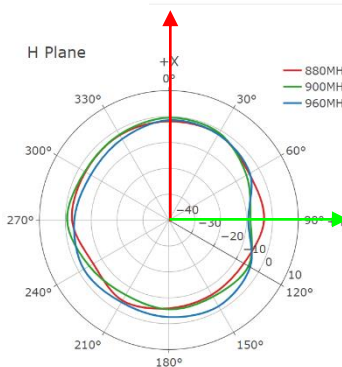
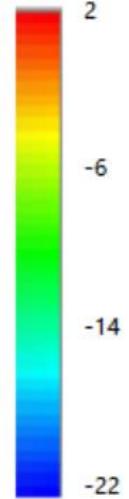



● **LMH2**


1440 MHz

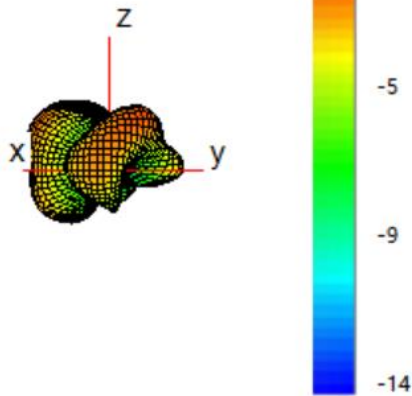




1740 MHz

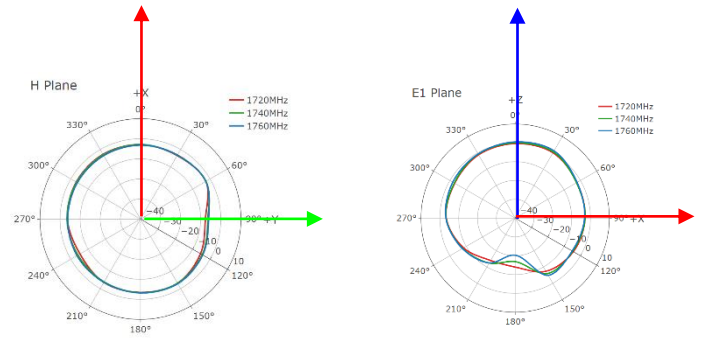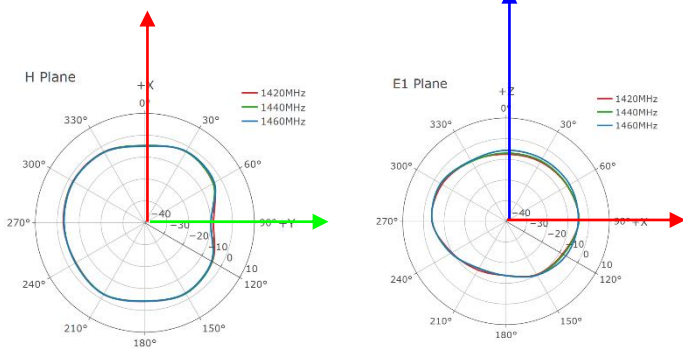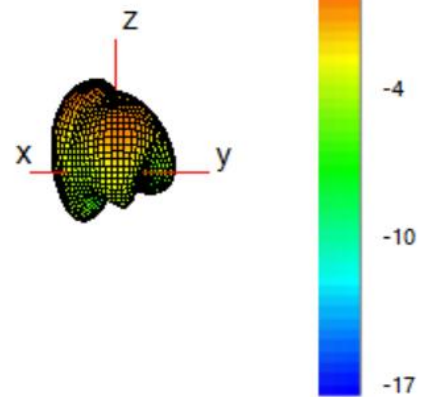

1880 MHz

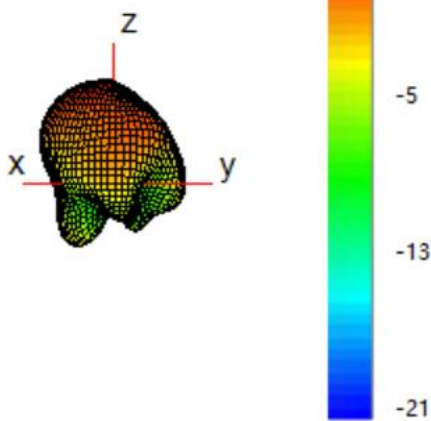


1960 MHz

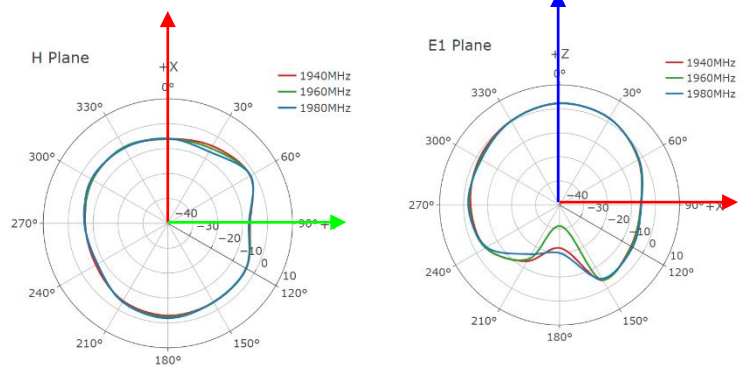
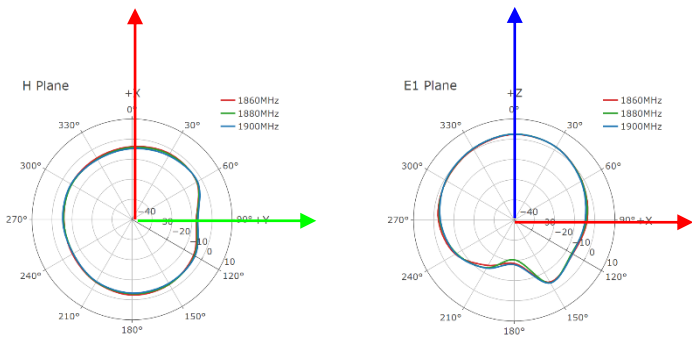
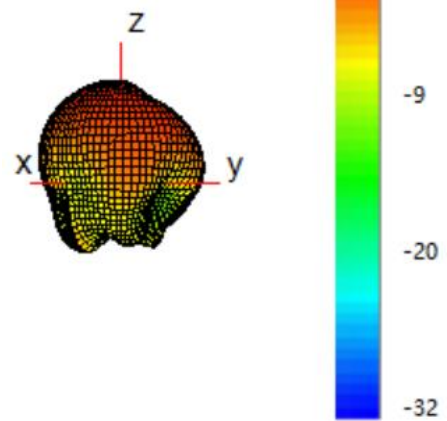


● **LMH2**


2140 MHz

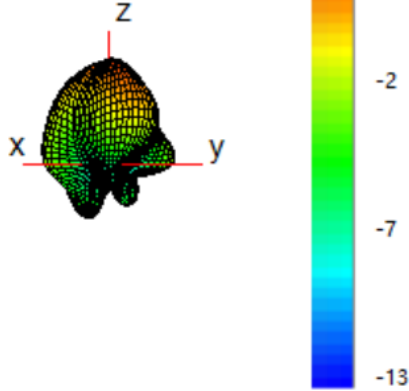




2360 MHz

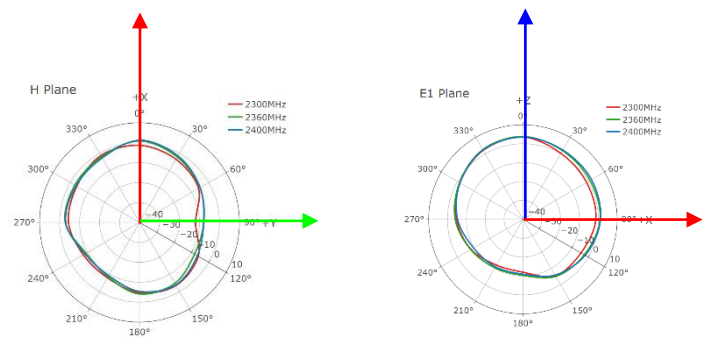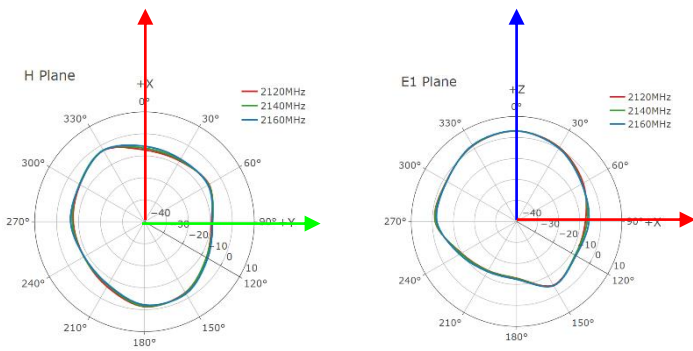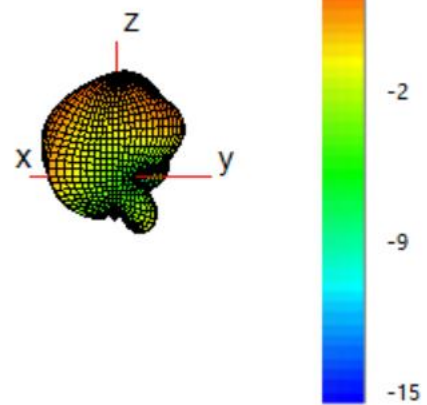

2460 MHz

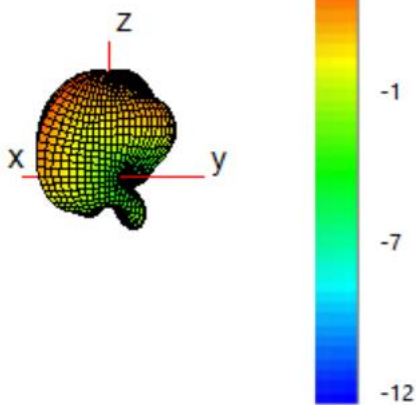


2600 MHz




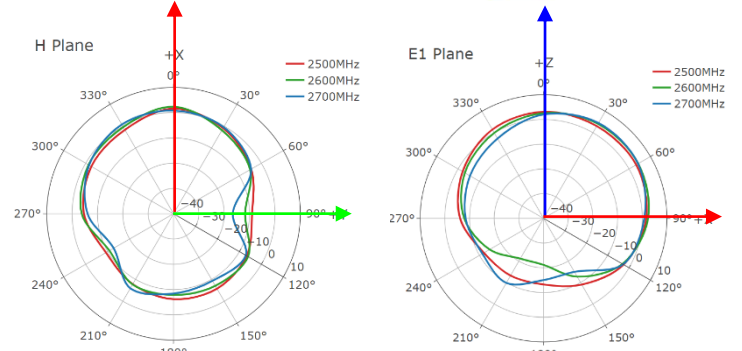
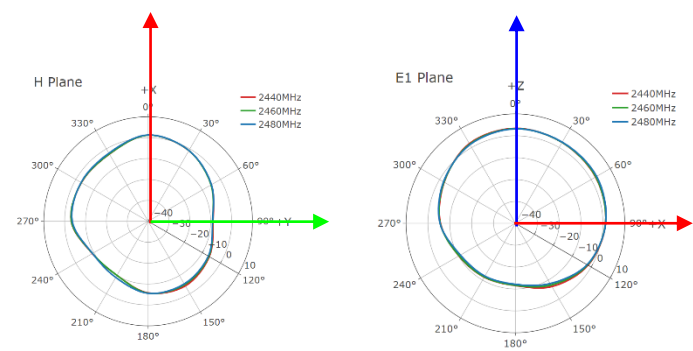
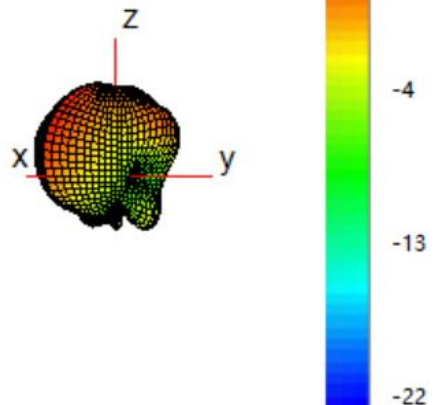


● **LMH2**



3600 MHz









4000 MHz

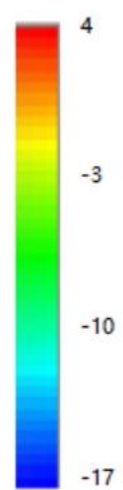

4700 MHz




5500 MHz

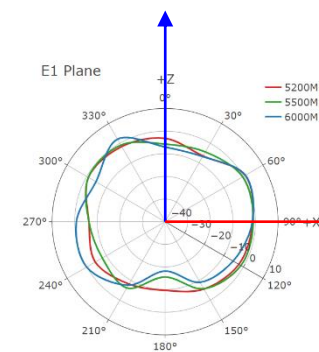
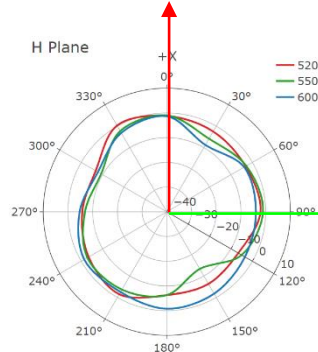


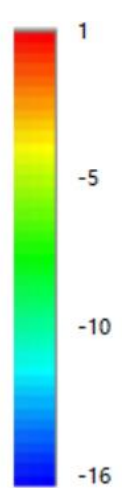



● **MH1**



1440 MHz









1740 MHz

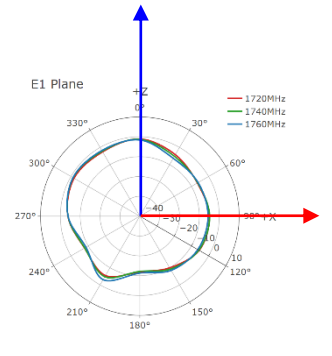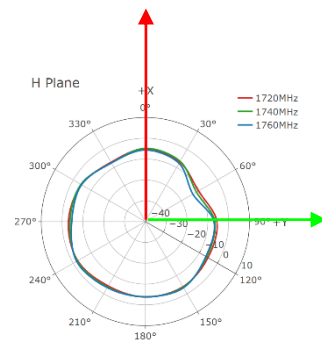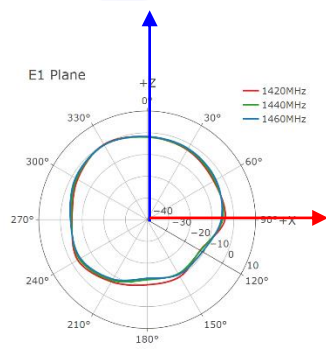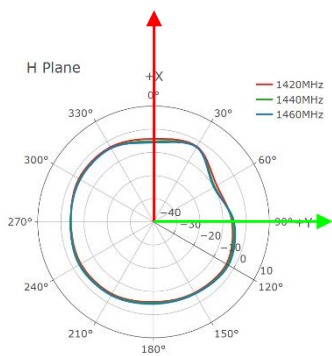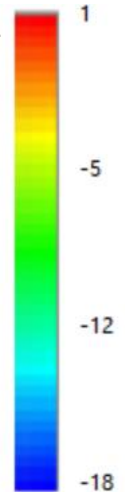

1880 MHz





1960 MHz

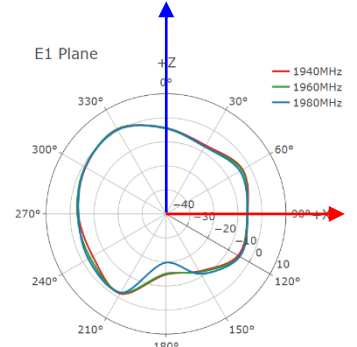



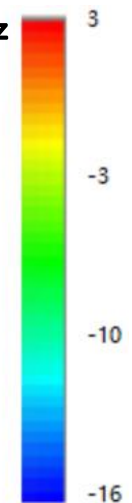



● **MH1**


2140 MHz









2360 MHz



2460 MHz







2600 MHz






● **MH1**




3600 MHz







4000 MHz



4700 MHz






5500 MHz

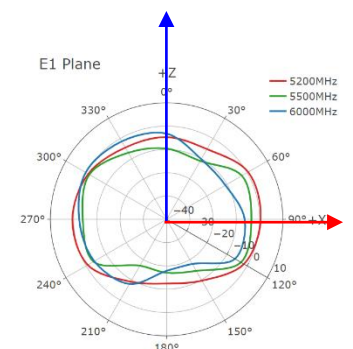

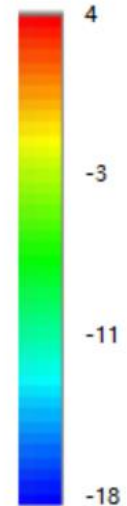



● **MH2**





1440 MHz

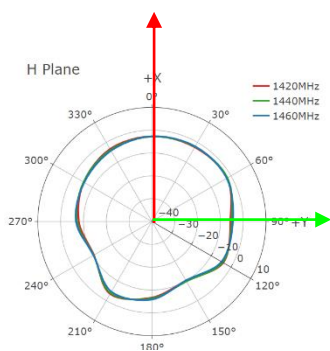




1740 MHz



1880MHz


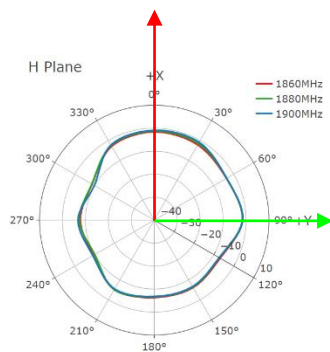




1960MHz

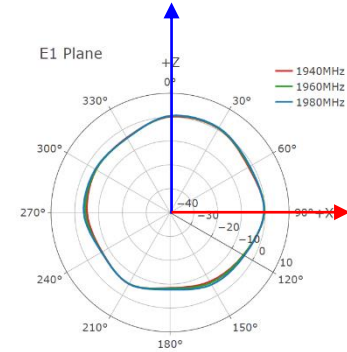
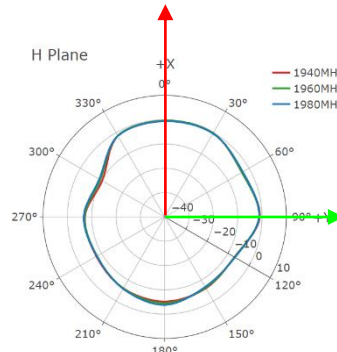



● **MH2**




2140 MHz






2360 MHz



2460 MHz







2600 MHz







● **MH2**





3600 MHz

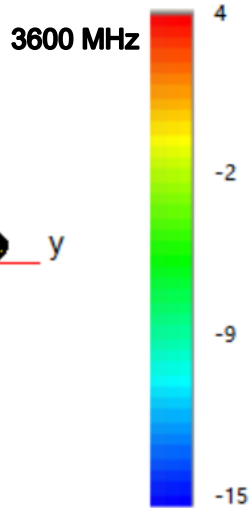





4000 MHz

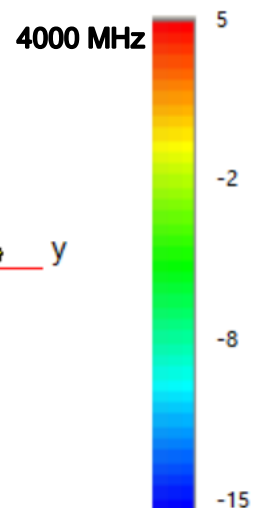

4700 MHz

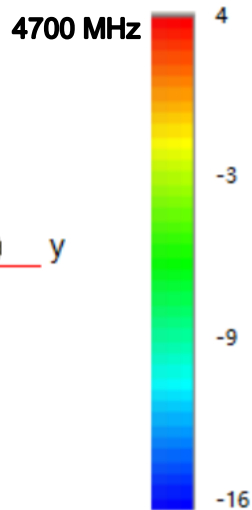


5500 MHz


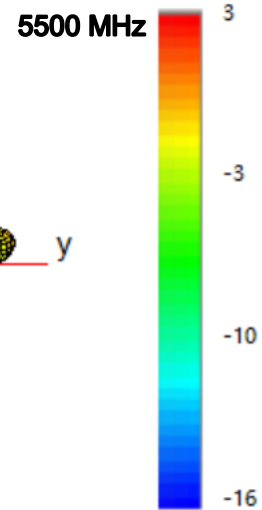



● **GNSS**


1176 MHz

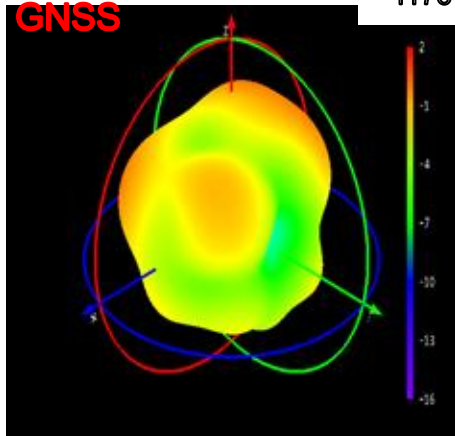




1561 MHz

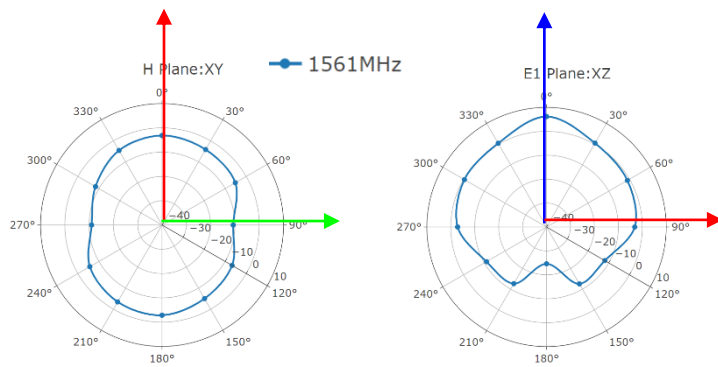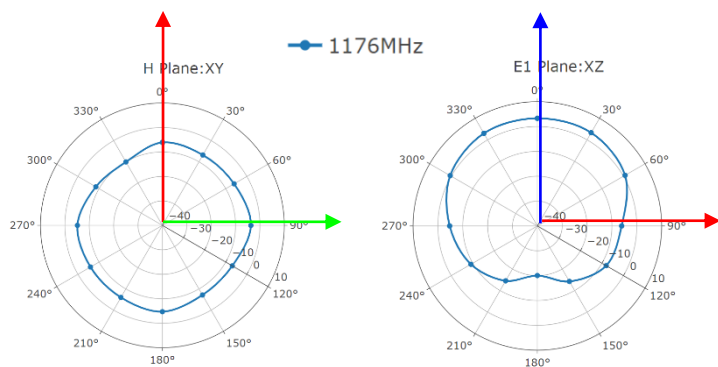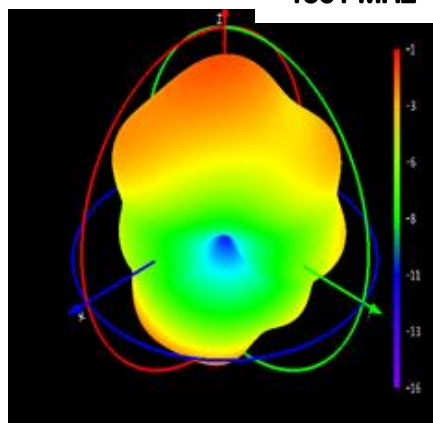


1575 MHz

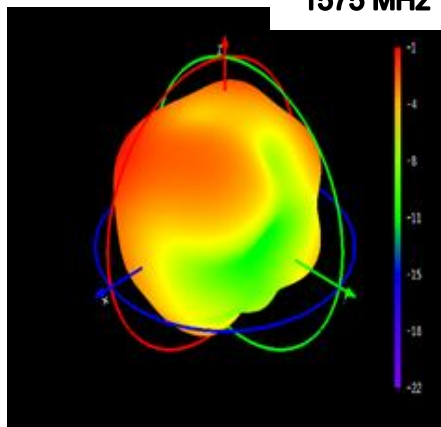


1602 MHz

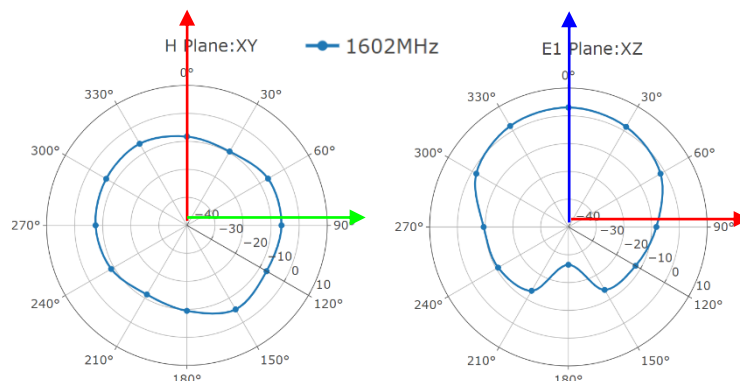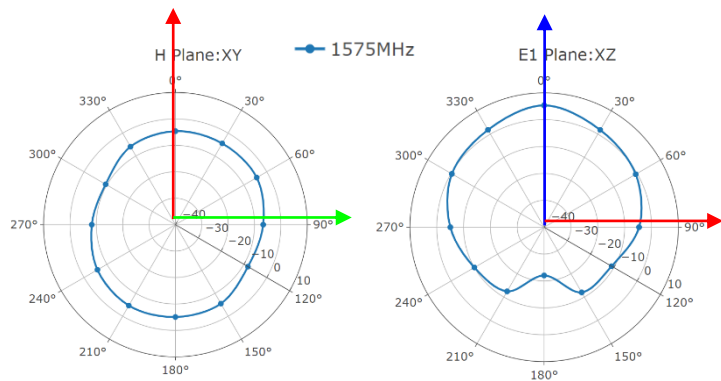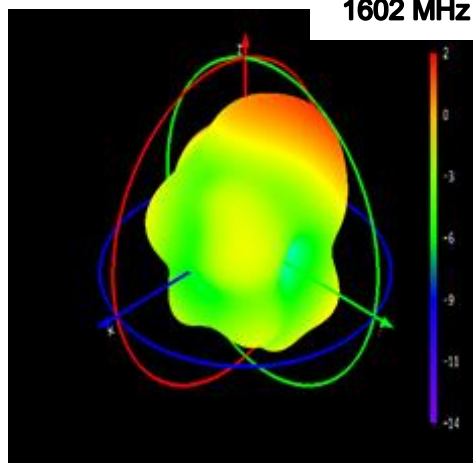





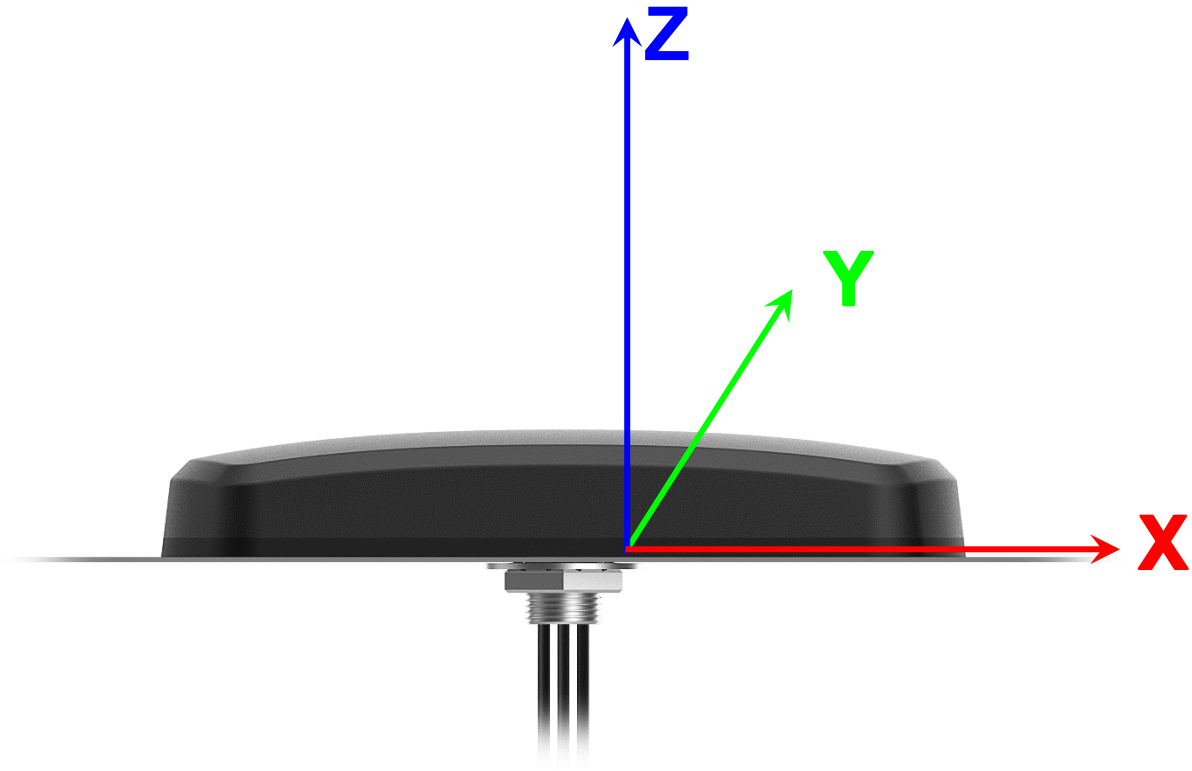
3.2.4.2. Test Status: On 500 × 500 mm Metal Plane

● **LMH1**


630 MHz

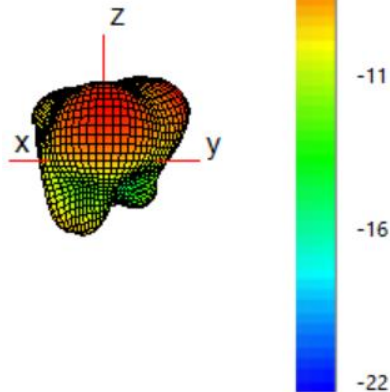






710 MHz

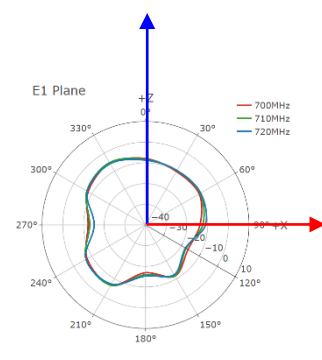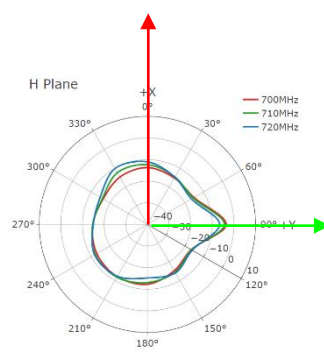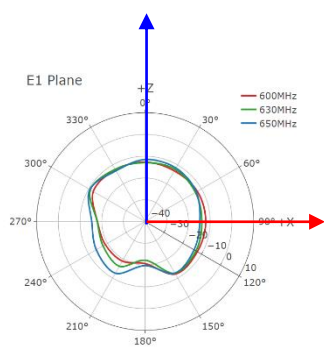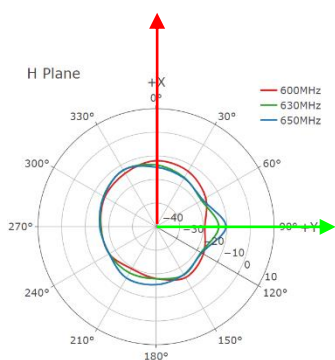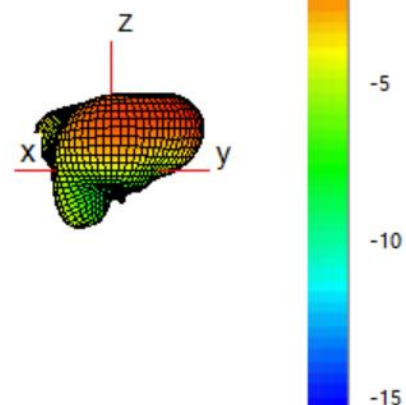

830 MHz

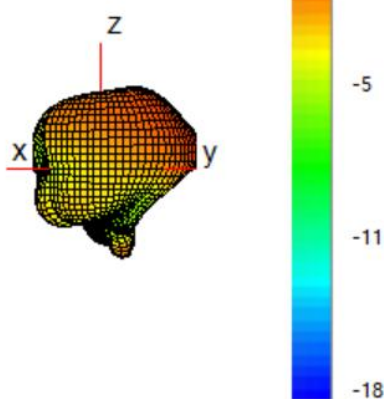

900 MHz





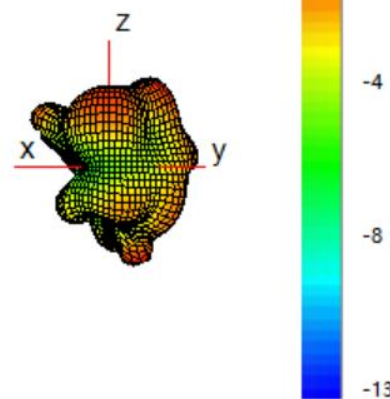


● **LMH1**


1440 MHz








1740 MHz

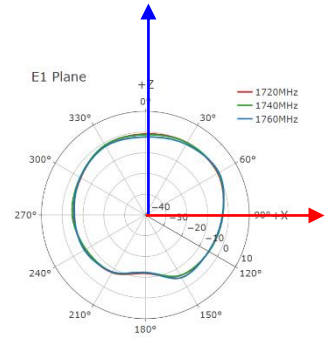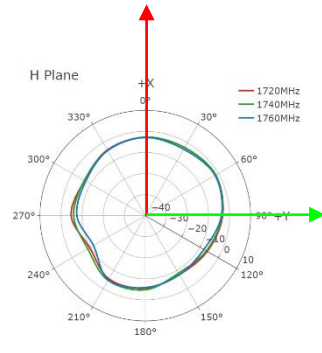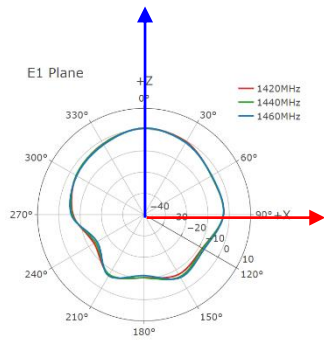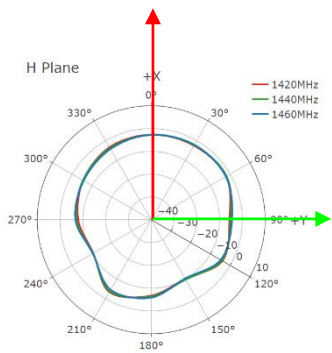

1880 MHz






1960 MHz

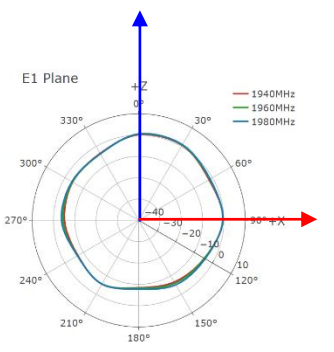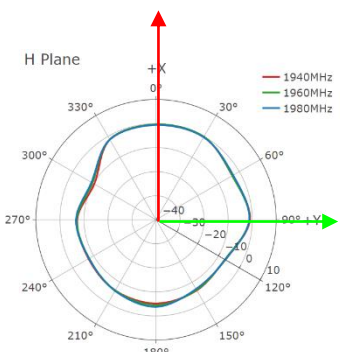
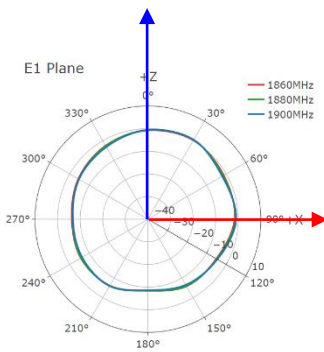
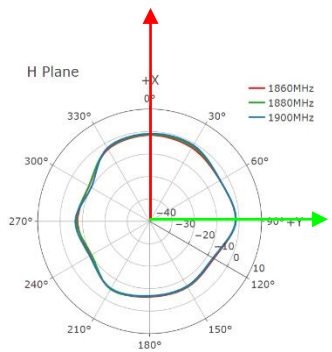



● **LMH1**





2140MHz







2360 MHz

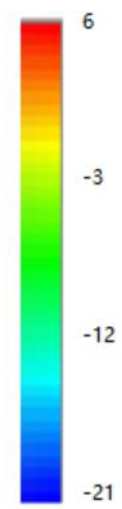

2460 MHz





2600 MHz








● **LMH1**



3600 MHz









4000 MHz



4700 MHz




5500 MHz






● **LMH2**


630 MHz

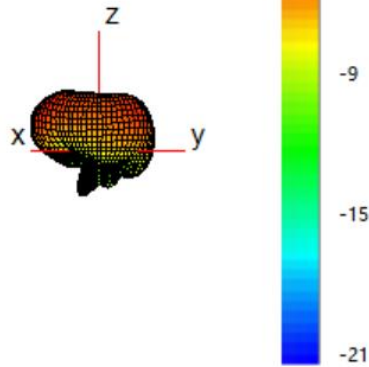




710 MHz

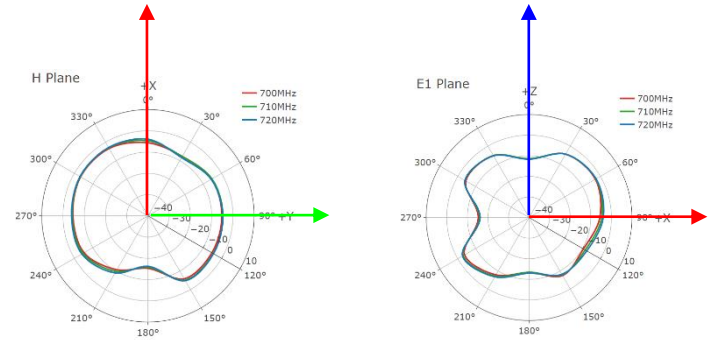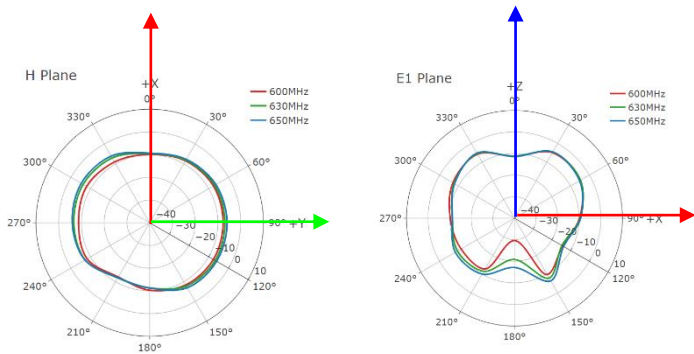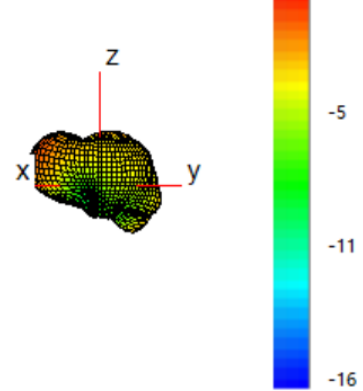

830 MHz



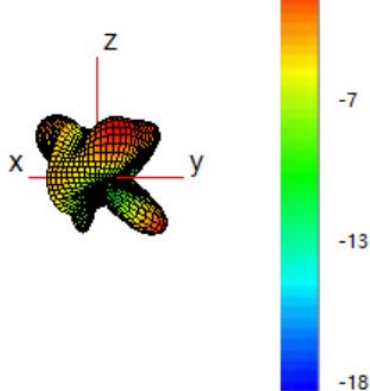


900 MHz

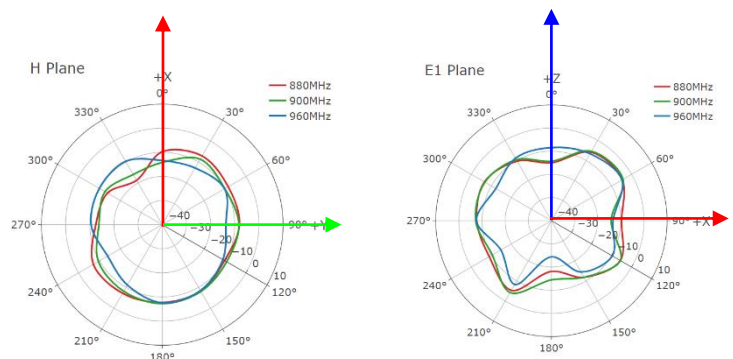
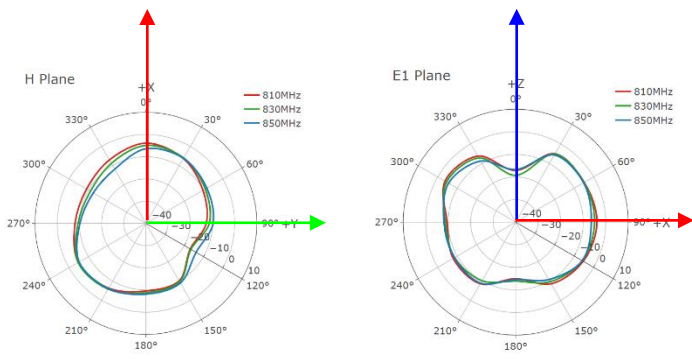
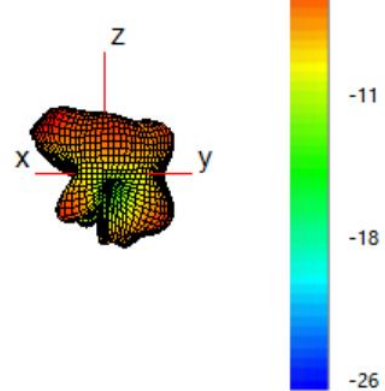


● **LMH2**



1440 MHz







1740 MHz



1880 MHz




1960 MHz



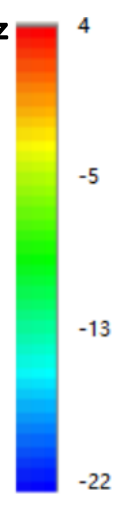


● **LMH2**


2140 MHz

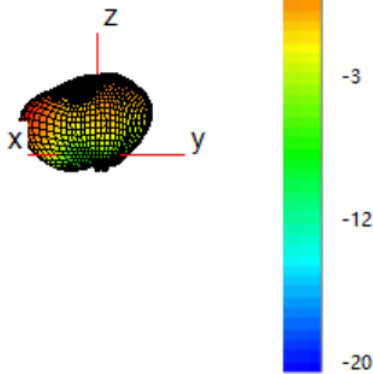




2360 MHz

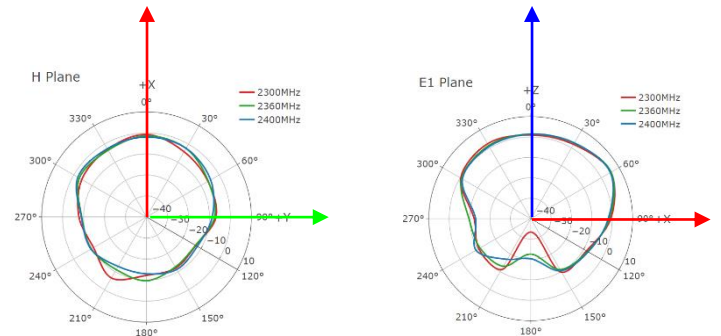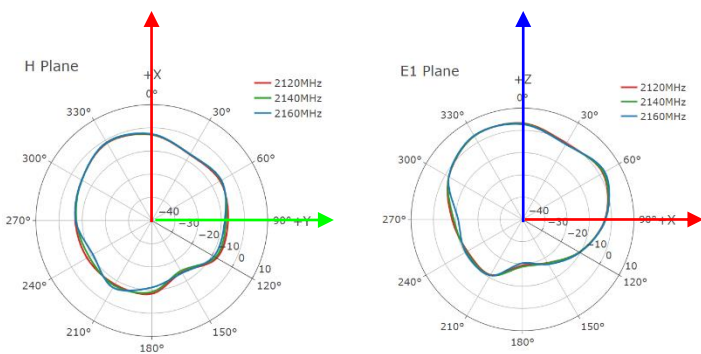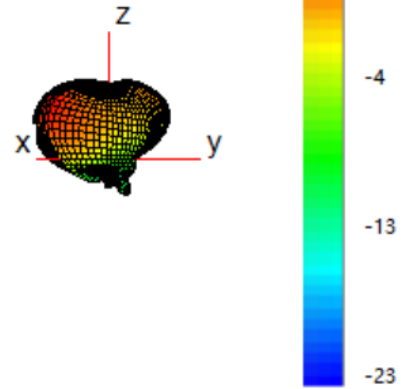

2460 MHz

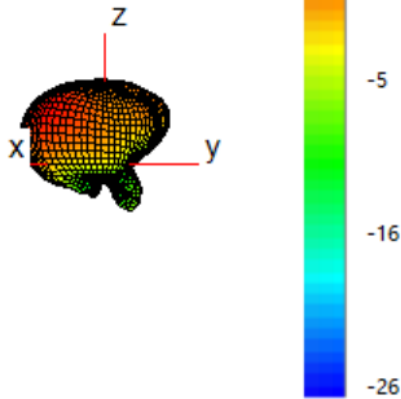

2600 MHz



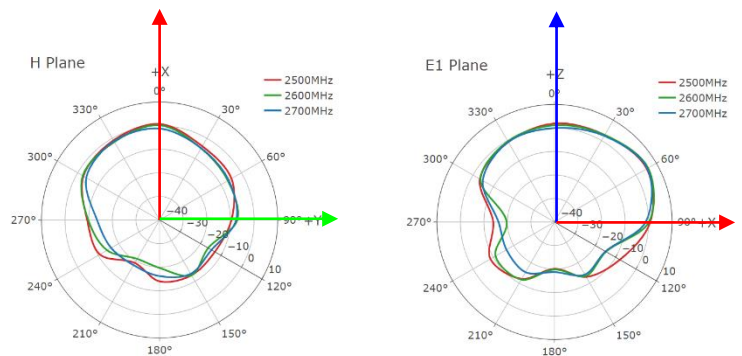
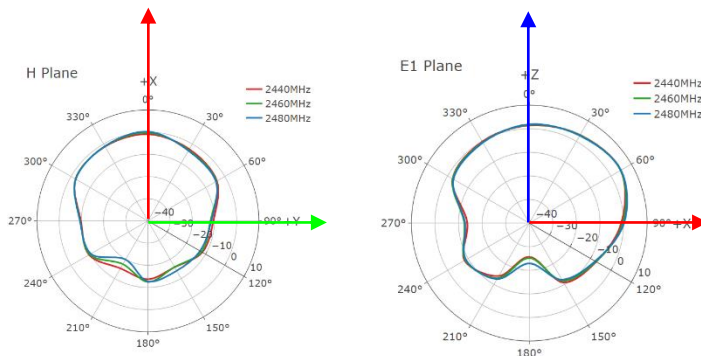
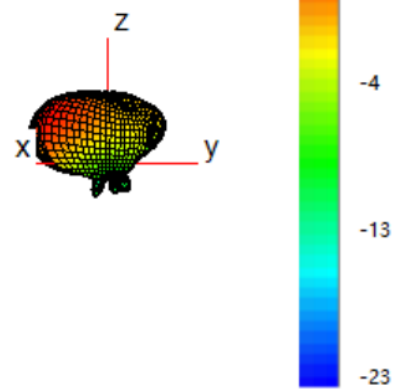


● **LMH2**


3600 MHz









4000 MHz



4700 MHz




5500 MHz








● **MH1**


1440 MHz

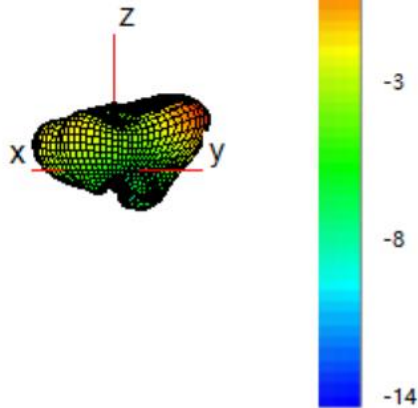






1740 MHz

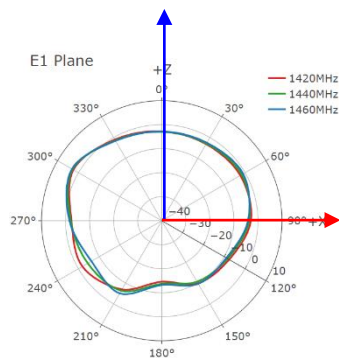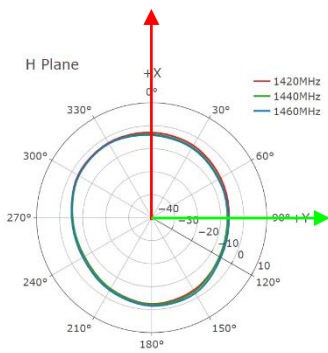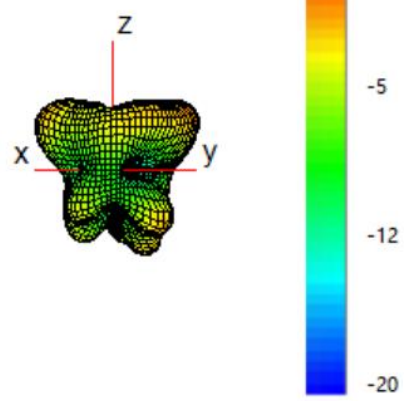

1880 MHz


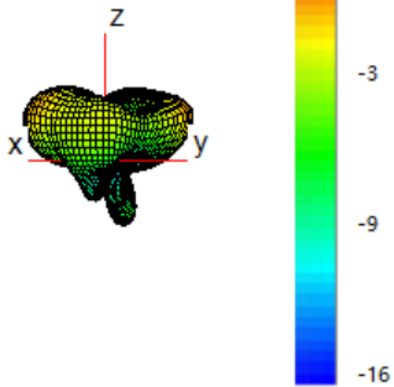


1960 MHz

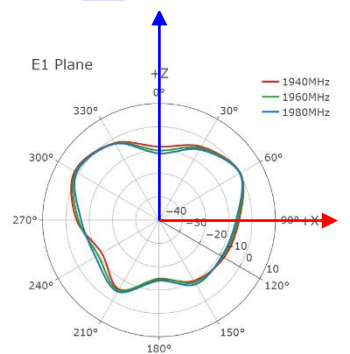
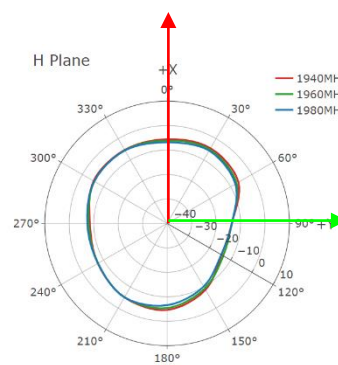


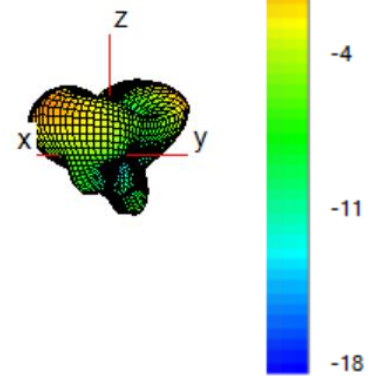


● **MH1**



2140 MHz









2360 MHz

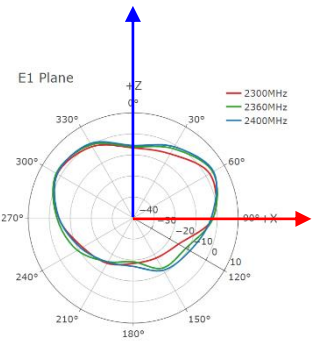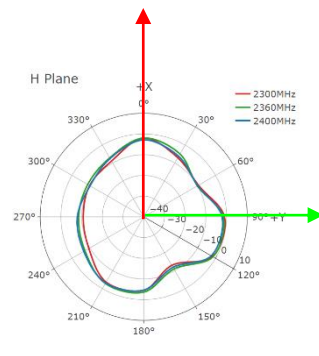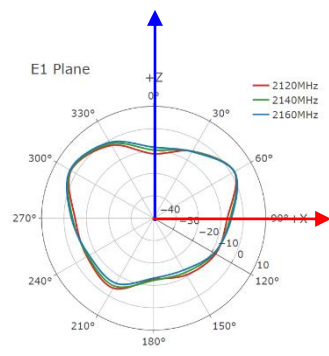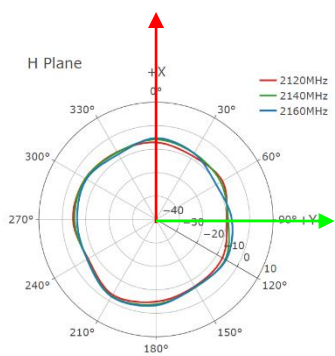

2460 MHz




2600 MHz

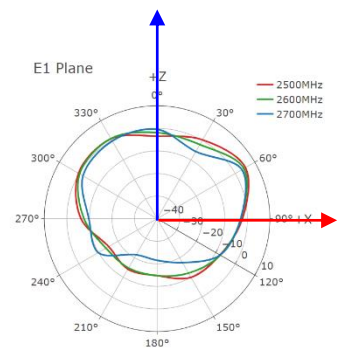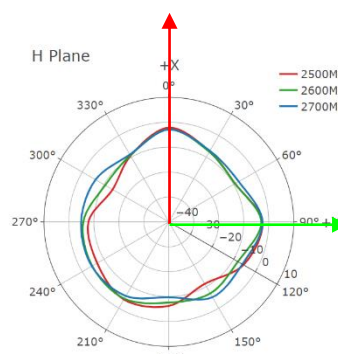
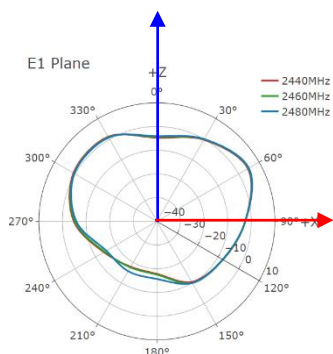
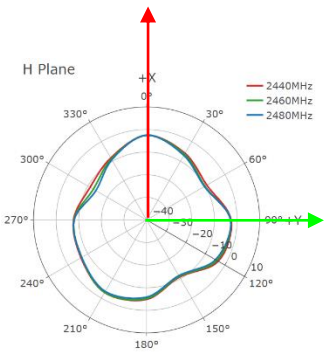




● **MH1**


3600 MHz

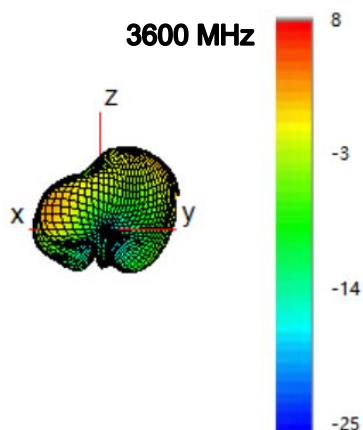






4000 MHz

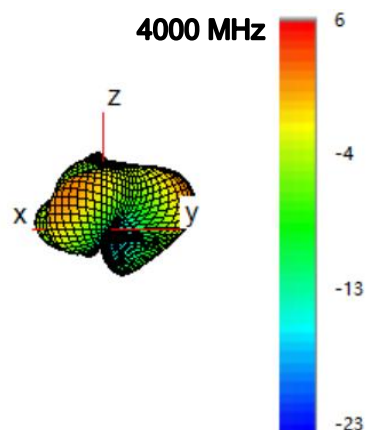

4700 MHz

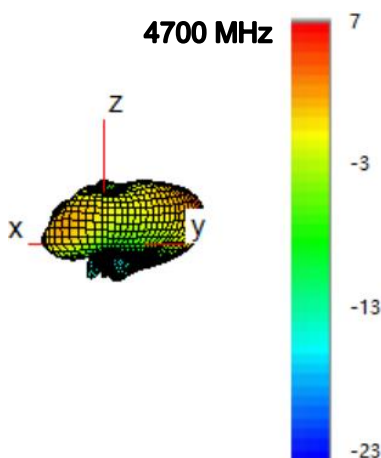


5500 MHz



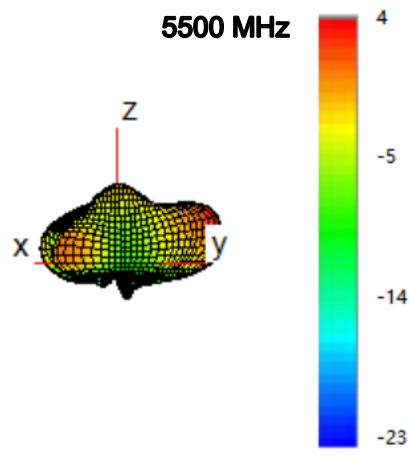


● **MH2**


1440 MHz

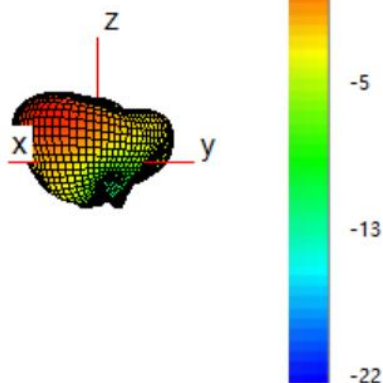




1740 MHz

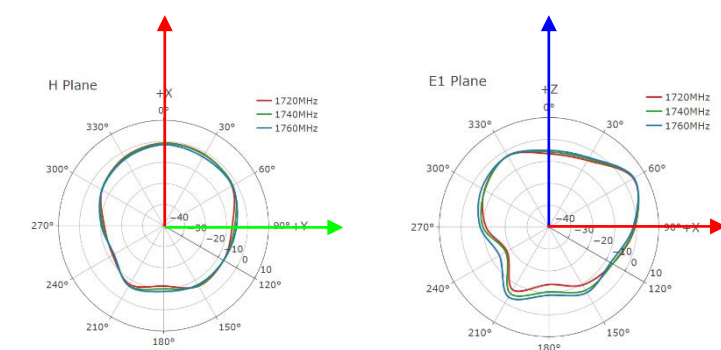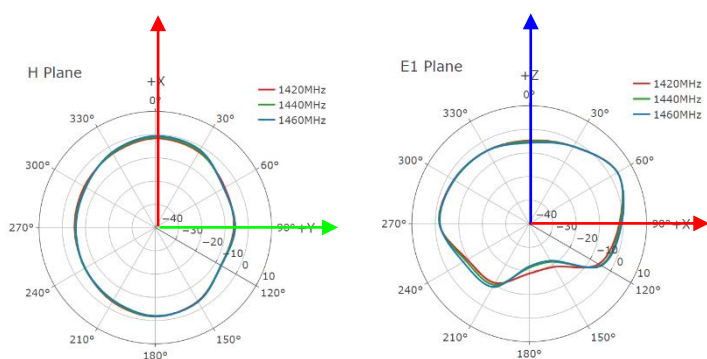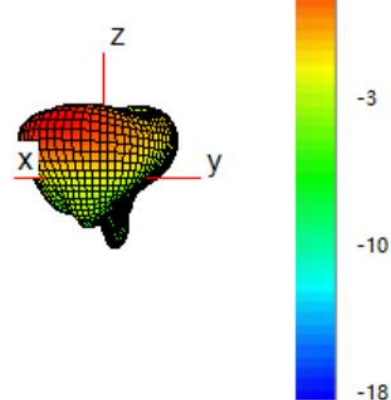

1880 MHz

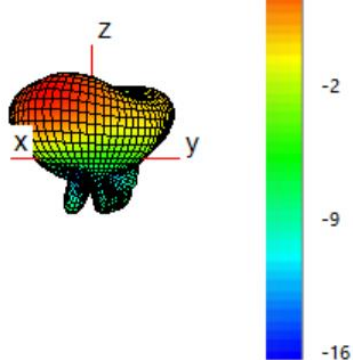


1960 MHz

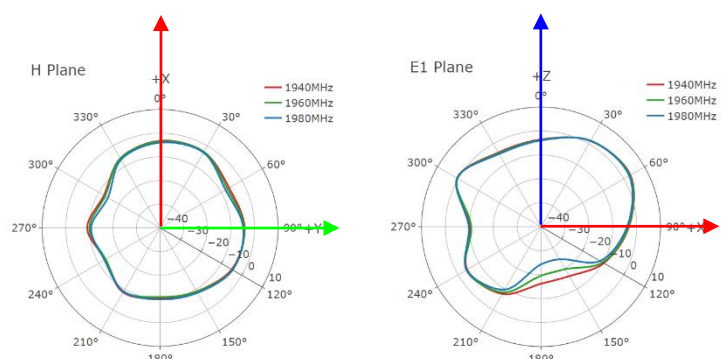
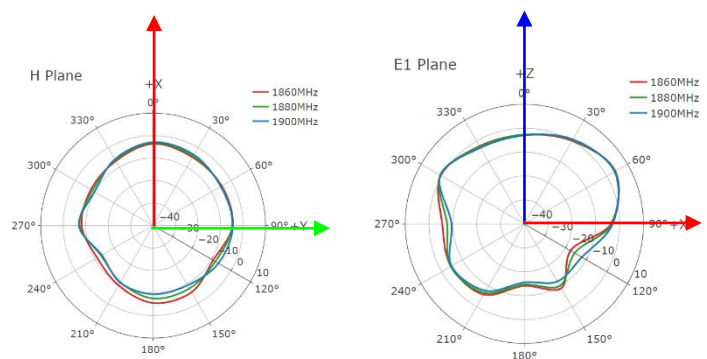
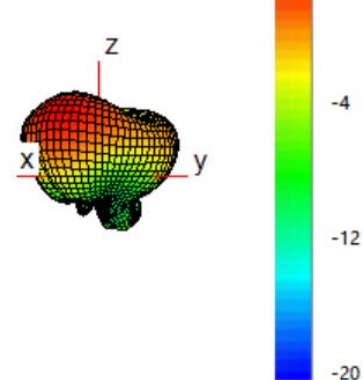


● **MH2**


2140 MHz






2360 MHz

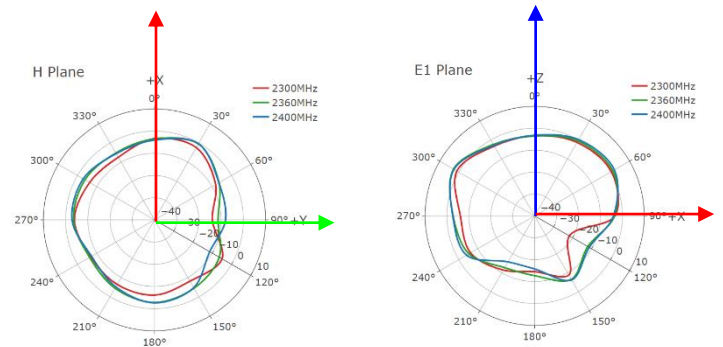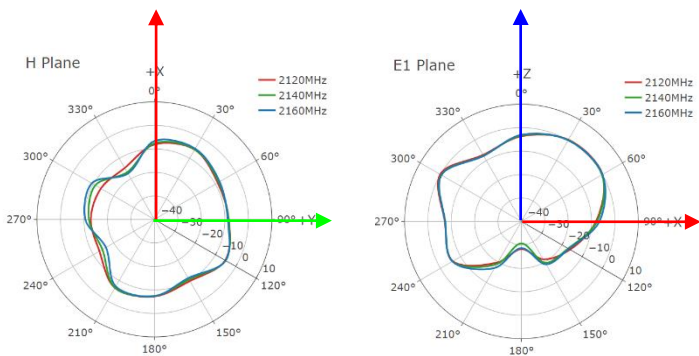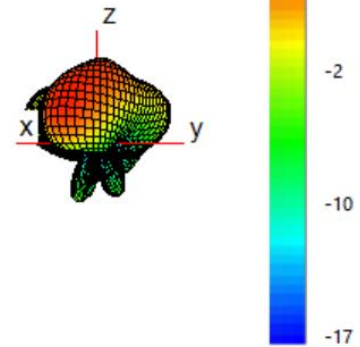

2460 MHz

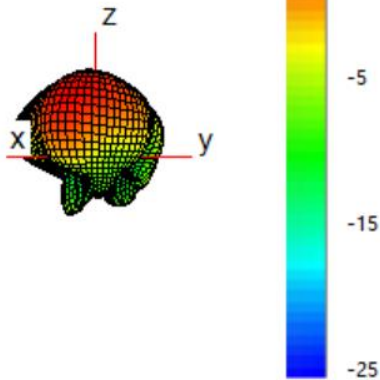


2600 MHz



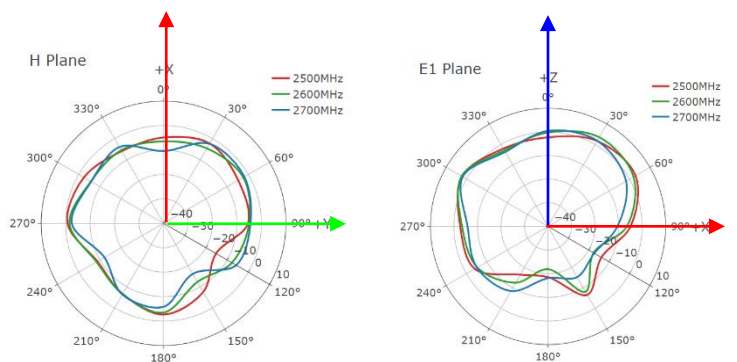
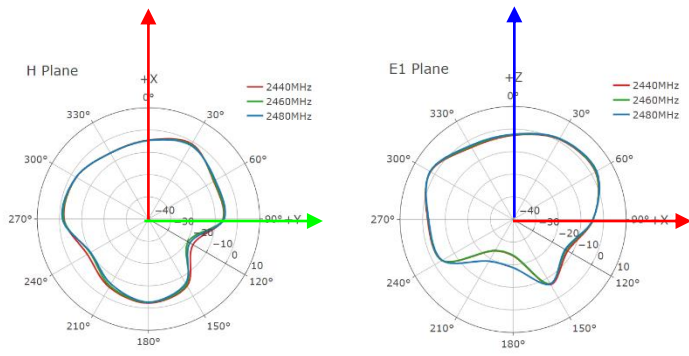
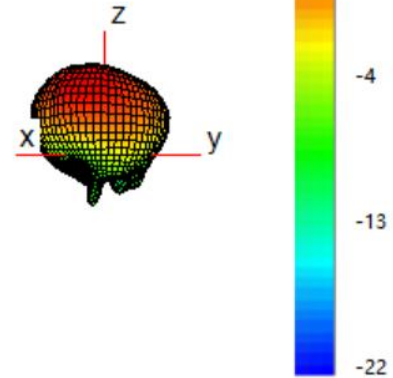


● **MH2**


3600 MHz

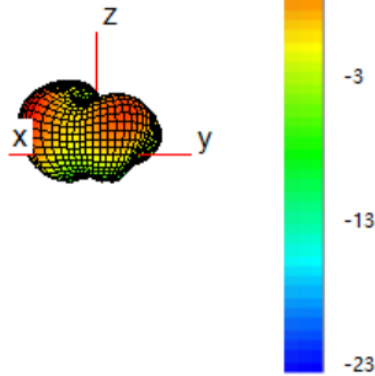






4000 MHz

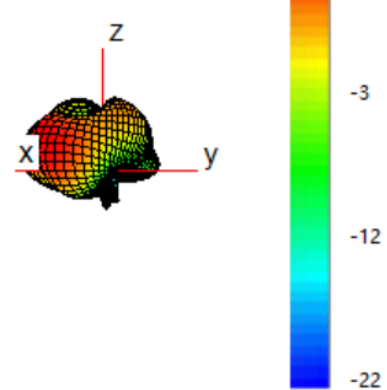

4700 MHz

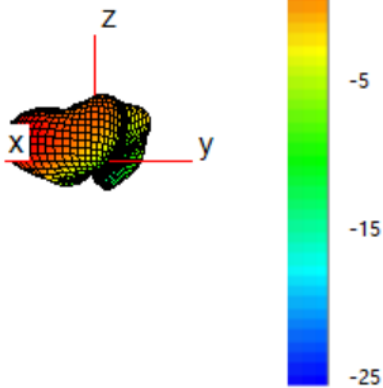

5500 MHz

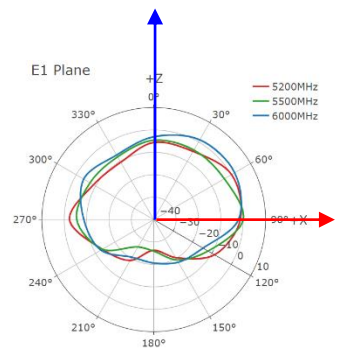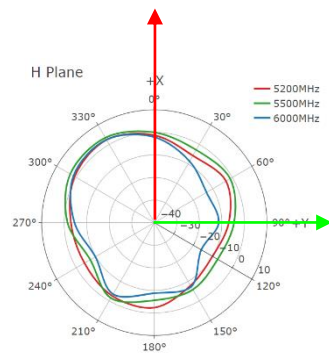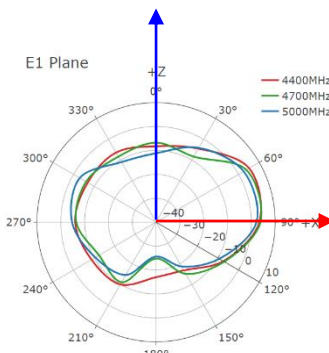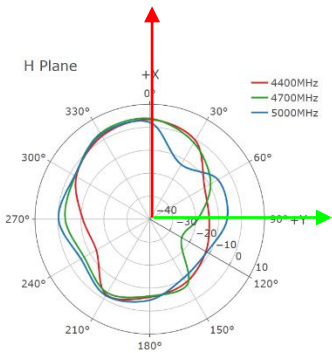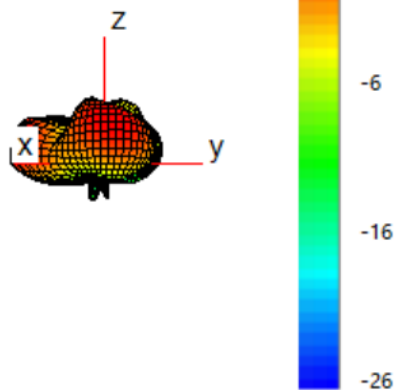

Contact US

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

[http: www.quectel.com-support-sales.htm](http://www.quectel.com-support-sales.htm)

For technical support, or to report documentation errors, please visit:

[http: www.quectel.com-support-technical.htm](http://www.quectel.com-support-technical.htm)

Or email us at: support@quectel.com

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and-or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under
- d) development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- e) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2022. All rights reserved.

Revision History

Version	Date	Author	Note
-	2022-04-08	Boris WANG-Kenny YIN	Creation of the document
1.0	2022-05-26	Boris WANG-Kenny YIN	First official release
1.1	2022-06-07	Boris WANG	Updated the data (chapter 3)
1.2	2022-09-13	Boris WANG	Updated electrical performance data
2.0	2022-11-11	Wilson Bao	New datasheet template



www.quectel.com