

COAXIAL

Adapter

24MR-24M-T+

50Ω DC to 50 GHz Right-Angle 2.4 mm-Male to 2.4 mm-Male

KEY FEATURES

- Wideband, DC to 50 GHz
- Low Insertion Loss, 0.2 dB typ.
- Excellent VSWR, 1.1:1 typ.
- Right-Angle Adapter
- Adapter provides flat surface for torquing



Generic photo used for illustration purposes only

PRODUCT OVERVIEW

Mini-Circuits' 24MR-24M-T+ is a coaxial 2.4 mm male to 2.4 mm male right-angle adapter supporting a wide range of applications from DC to 50 GHz. This model provides excellent VSWR and low insertion loss versus frequency. The 24MR-24M-T+ features passivated stainless-steel construction as well as a flat surface in the body for torquing, and measures only 0.67" in length.

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		50	GHz
Insertion Loss	DC-10	-	0.1	0.5	dB
	10-20	-	0.1	0.5	
	20-30	-	0.2	0.5	
	30-40	-	0.3	0.5	
	40-50	-	0.3	0.5	
VSWR	DC-10	-	1.1	1.4	:1
	10-20	-	1.1	1.4	
	20-30	-	1.1	1.4	
	30-40	-	1.2	1.4	
	40-50	-	1.1	1.4	

ABSOLUTE MAXIMUM RATINGS¹

Operating Case Temperature	-45°C to +125°C
Storage Temperature	-45°C to +125°C


1. Permanent damage may occur if any of these limits are exceeded.

REV. OR
ECO-023996
24MR-24M-T+
MCL NY
241218

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 4






COAXIAL

Adapter

24MR-24M-T+

50Ω DC to 50 GHz Right-Angle 2.4 mm-Male to 2.4 mm-Male

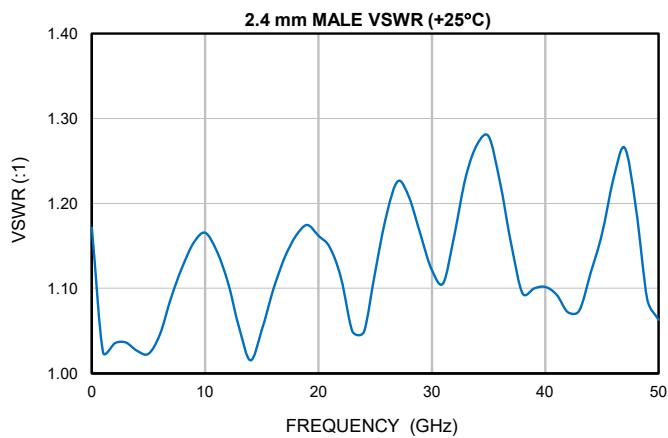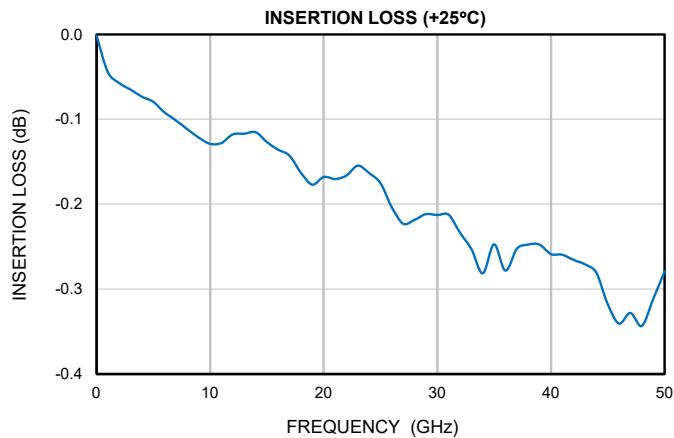TYPICAL PERFORMANCE GRAPHS



COAXIAL


Adapter

24MR-24M-T+

50Ω DC to 50 GHz Right-Angle 2.4 mm-Male to 2.4 mm-Male

CONNECTOR SPECIFICATIONS

Description	Connector 1	Connector 2
Connector Type	2.4 mm Male	2.4 mm Male
Orientation	Right-Angle	Straight

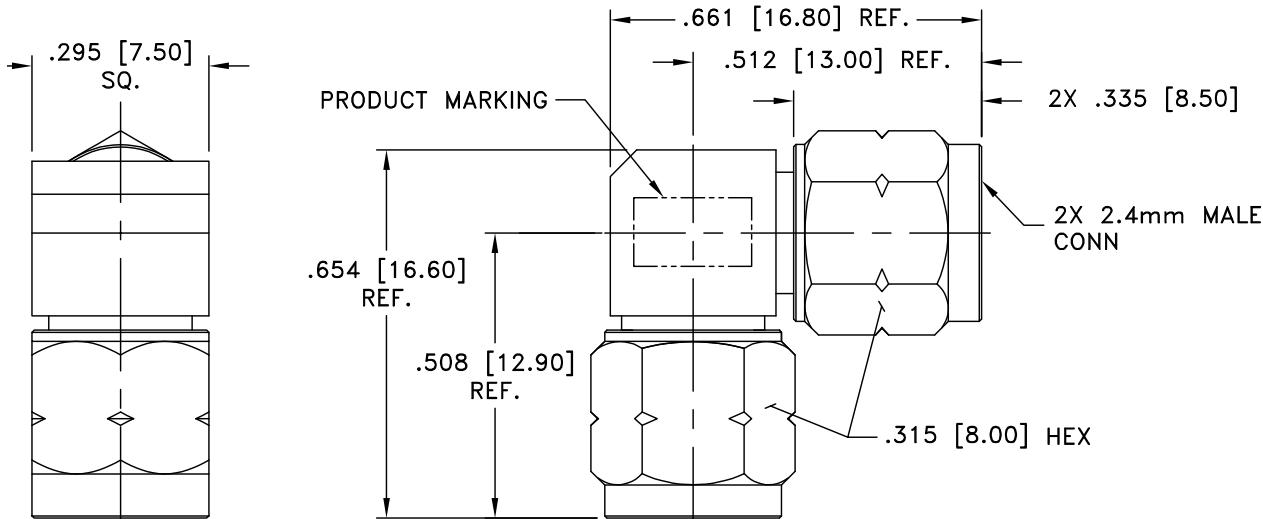CASE STYLE DRAWING

Weight: 18.5 grams


Dimensions are in inches [mm]. Tolerances: 2 Pl.±.030; 3 Pl. ±.015 Inch

PRODUCT MARKING*: 24MR-24M-T+

*Marking may contain other features or characters for internal lot control.

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 3 OF 4



COAXIAL

Adapter

24MR-24M-T+

50Ω DC to 50 GHz Right-Angle 2.4 mm-Male to 2.4 mm-Male

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD**CLICK HERE**

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DJ2442-11
RoHS Status	Compliant
Environmental Ratings	ENV147

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at <https://www.minicircuits.com/terms/viewterm.html>



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[24MR-24M-T+](#)