

## Your Search for Proximity Sensors Starts with the World-leading Performance and Quality of the E2E

- Standard Sensors for detecting ferrous metals.
- Wide array of variations. Ideal for a variety of applications.
- Models with different frequencies are also available to prevent mutual interference.
- Superior environment resistance with standard cable made of oil-resistant PVC and sensing surface made of material that resists cutting oil.
- Useful to help prevent disconnection.

Cable protector provided as a standard feature.



CE (Standards do not apply to all models.)


For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Be sure to read *Safety Precautions* on page 25.

## Features

### 2-Wire Models


**Pre-wired Models with Oil-resistant Reinforced PUR Cables Added to the Lineup and Easy Differentiation with Orange Head**




Differentiation from standard models: Orange Head



Oil Resistance (Insulation service life): twice or three times that of oil-resistant vinyl chloride




Cable Flexibility: approximately twice that of vinyl chloride cables



More Flexibility at -40°C

**Lineup includes models with Smartclick pre-wired connectors for fast connection.**

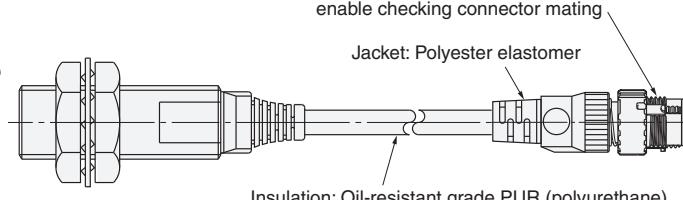

## UL-recognized Models Available



---

**Lineup includes models with self-diagnostic output to provide notification of failures and unstable detection conditions, such as coil burnout.**

- Contributes to preventive maintenance to keep the line from stopping.

**Reduced wiring, fewer resources, and low power consumption contribute to environmentalism.**

- Wiring work and amount of copper wire used reduced to two thirds of that required for 3-wire models.
- Current consumption drastically reduced to less than 10% (when a DC 2-wire model is compared with a DC 3-wire model).

**3-Wire Models**


**Wide range of ambient operating temperatures:  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  (M8 to M30 models)**

- Suitable for low-temperature and high-temperature applications, which are troublesome for photoelectric sensors.

**Lineup includes models with flexible cable (M8 to M30 models)**

- Reduced risk of disconnection in applications with moving parts.

## E2E Guide to Selection by Purpose

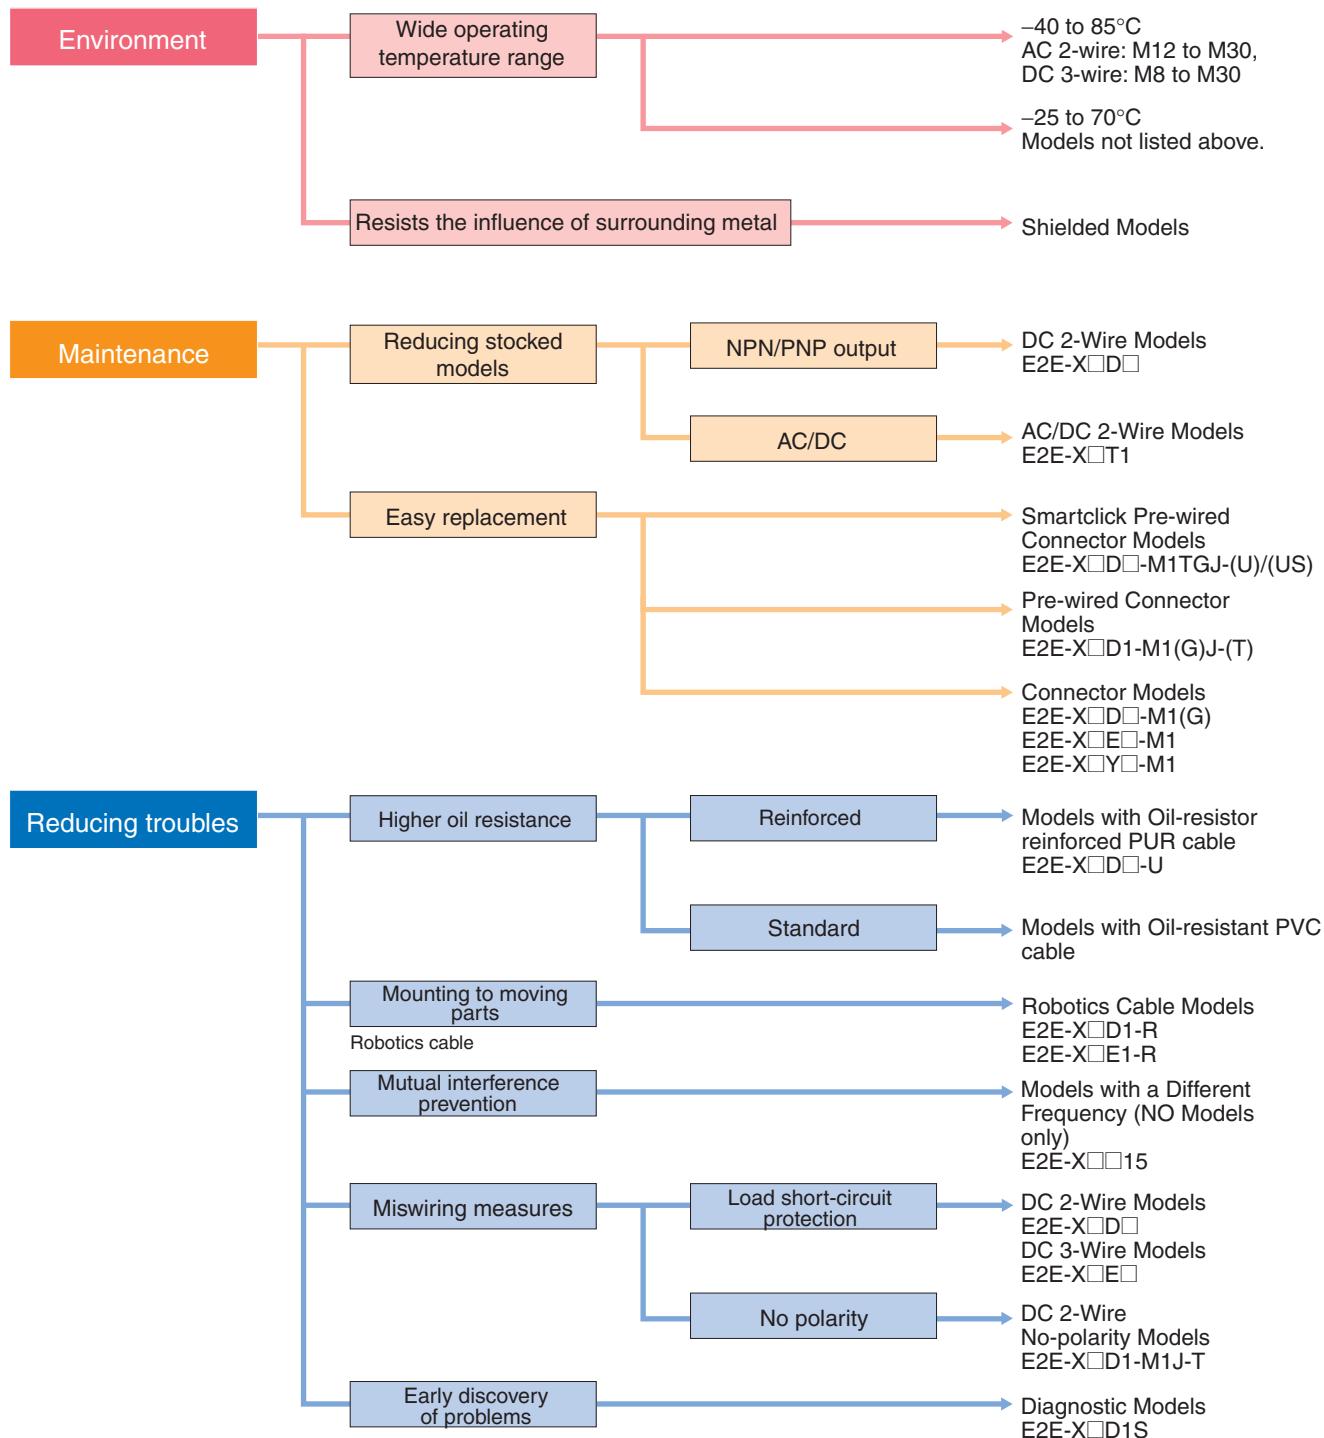

Note: Refer to *Models Not Listed in this Catalog* for Long Body Models, Transmission Couplers, and Power Couplers.

## E2E Model Number Legend

E2E- ① ② ③ ④ ⑤ ⑥ ⑦ - ⑧ ⑨ - ⑩ - ⑪ - ⑫ ⑬				
No.	Classification	Code	Meaning	Remarks
①	Appearance	X	Cylindrical (threaded)	
②	Sensing distance	Number	Sensing distance (Unit: mm)	Example: 1R5: 1.5 mm
		R	Indication of decimal point	
③	Shielding	Blank	Shielded Model	
		M	Unshielded Model	
④	Power supply and output specifications	B	DC 3-wire PNP open-collector output	Whether D models have polarity is defined by number ⑩.
		C	DC 3-wire NPN open-collector output	
		D	DC 2-wire polarity/no polarity	
		E	DC 3-wire NPN collector load built-in output	
		F	DC 3-wire PNP collector load built-in output	
		T	AC/DC 2-wire	
		Y	AC 2-wire	
⑤	Form of output switching element	1	Normally open (NO)	
		2	Normally closed (NC)	
⑥	Oscillation frequency type	Blank	Standard frequency	Used to prevent mutual interference.
		5	Different frequency	
⑦	Self-diagnosis	Blank	No	
		5	Yes	
⑧	Connection method	Blank	Pre-wired	
		M1	M12-size metal connector	
		M3	M8-size metal connector	
⑨	Connector specifications	Blank	Connector Model DC 3-wire and AC 2-wire, DC 2-wire with self-diagnosis output, DC 2-wire with old pin arrangement	
		G	Connector Model DC 2-wire with IEC pin arrangement	
		J	Pre-wired Connector Model DC 3-wire and AC 2-wire, DC 2-wire with old pin arrangement	
		GJ	Pre-wired Connector Model DC 2-wire with IEC pin arrangement	
		TJ	Pre-wired Smartclick Connector Model DC 2-wire	
		TGJ	Pre-wired Smartclick Connector Model DC 2-wire with IEC pin arrangement	
⑩	DC 2-wire polarity	Blank	Polarity	
		T	No polarity	
⑪	Cable specifications	Blank	Standard PVC cable (oil resistant)	
		R	Flexible PVC cable (oil resistant)	
		U	Polyurethane cable (oil resistant and reinforced)	
⑫	New model	N	New model (Applies only to DC 2-wire pre-wired and shielded models.)	This is blank if the cable specification in number ⑪ is R or U.
	Standard-certified model	US	UL-recognized model (Applies to DC 2-wire pre-wired models and pre-wired connector models.)	
⑬	Cable length	Letter M	Cable length (Unit: m) (Applicable to Pre-wired Models and Pre-wired Connector Models.)	Example: 2M 0.3M

Note: The purpose of this model number legend is to provide understanding of the meaning of specifications from the model number.  
Models are not available for all combinations of code numbers.

## Ordering Information

## 2-Wire Models

Shielded DC 2-wire Models with No Self-diagnostic Output [Refer to *Dimensions* on page 27.]

Appearance	Sensing distance		Connection method	Cable specifications	Polarity	Operation mode	Pin arrangement	Applicable connector code *2	Model	
M8	2 mm		M12 Pre-wired Smart-click Connector Models (0.3m)	PUR (increased oil-resistant)	Yes	NO	1: +V, 4: 0 V	H	E2E-X2D1-M1TGJ-U 0.3M	
				PVC (oil-resistant)		NC	1: +V, 2: 0 V		E2E-X2D2-M1TGJ-U 0.3M	
			Pre-wired Models (2 m)	PUR (increased oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X2D1-M1TGJ 0.3M	
				PVC (oil-resistant)		NC	---		E2E-X2D1-U 2M	
			M12 Connector Models	---		NO	---	---	E2E-X2D2-U 2M	
				---		NC	---		E2E-X2D1-N 2M	
			M8 Connector Models	---		NO	1: +V, 4: 0 V	I	E2E-X2D2-N 2M	
				---		NC	1: +V, 2: 0 V		E2E-X2D1-M3G	
M12	3 mm		M12 Pre-wired Smart-click Connector Models (0.3m)	PUR (increased oil-resistant)	Yes	NO	1: +V, 4: 0 V	H	E2E-X3D1-M1TGJ-U 0.3M	
				PVC (oil-resistant)		NC	1: +V, 2: 0 V		E2E-X3D2-M1TGJ-U 0.3M	
			Pre-wired Models (2 m)	PUR (increased oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X3D1-M1TGJ 0.3M	
				PVC (oil-resistant)		NC	---		E2E-X3D1-U 2M	
			M12 Connector Models	---		NO	---	---	E2E-X3D2-U 2M	
				---		NC	---		E2E-X3D1-N 2M *1	
			M12 Standard Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X3D2-M1G *1	
						NC	1: +V, 2: 0 V		E2E-X3D1-M1G	
						NO	(3, 4): (+V, 0 V)	C	E2E-X3D1-M1J-T 0.3M	
						NC	(1, 2): (+V, 0 V)		---	
M18	7 mm		M12 Pre-wired Smart-click Connector Models (0.3m)	PUR (increased oil-resistant)	Yes	NO	1: +V, 4: 0 V	H	E2E-X7D1-M1TGJ-U 0.3M	
				PVC (oil-resistant)		NC	1: +V, 2: 0 V		E2E-X7D2-M1TGJ-U 0.3M	
			Pre-wired Models (2 m)	PUR (increased oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X7D1-M1TGJ 0.3M	
				PVC (oil-resistant)		NC	---		E2E-X7D1-U 2M	
			M12 Connector Models	---		NO	---	---	E2E-X7D2-U 2M	
				---		NC	---		E2E-X7D1-N 2M *1	
			M12 Standard Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X7D2-N 2M	
						NC	1: +V, 2: 0 V		E2E-X7D1-M1G *1	
						NO	(3, 4): (+V, 0 V)	C	E2E-X7D1-M1J-T 0.3M	
						NC	(1, 2): (+V, 0 V)		---	
M30	10 mm		M12 Pre-wired Smart-click Connector Models (0.3m)	PUR (increased oil-resistant)	Yes	NO	1: +V, 4: 0 V	H	E2E-X10D1-M1TGJ-U 0.3M	
				PVC (oil-resistant)		NC	1: +V, 2: 0 V		E2E-X10D2-M1TGJ-U 0.3M	
			Pre-wired Models (2 m)	PUR (increased oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X10D1-M1TGJ 0.3M	
				PVC (oil-resistant)		NC	---		E2E-X10D1-U 2M	
			M12 Connector Models	---		NO	---	---	E2E-X10D2-U 2M	
				---		NC	---		E2E-X10D1-N 2M *1	
			M12 Standard Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X10D2-N 2M	
						NC	1: +V, 2: 0 V		E2E-X10D1-M1G *1	
						NO	(3, 4): (+V, 0 V)	C	E2E-X10D1-M1J-T 0.3M	
						NC	(1, 2): (+V, 0 V)		---	

\*1. Models with different frequencies are also available. The model number is E2E-X□D15 (example: E2E-X3D15-N 2M).

\*2. Refer to page 22 for details.

\*3. The residual voltage for models without polarity is 5 V, so use caution concerning the connection load interface conditions (e.g., PLC ON voltage).

Refer to page 26

## 2-Wire Models

Shielded DC 2-Wire UL-recognized Models with No Self-diagnostic Output [Refer to *Dimensions* on page 27.]



Appearance	Sensing distance		Connection method	Cable specifications	Polar- ity	Opera- tion mode	Pin arrangement	Applicable connector code *	Model	
M8	2 mm		M12 Pre-wired Smart-click Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 4: 0 V	G	E2E-X2D1-M1TGJ-US 0.3M	E2E-X2D2-M1TGJ-US 0.3M	
			Pre-wired Models (2 m)			1: +V, 2: 0 V		E2E-X2D1-US 2M	E2E-X2D2-US 2M	
			M12 Pre-wired Smart-click Connector Models (0.3 m)		NO	---	---	E2E-X3D1-M1TGJ-US 0.3M	E2E-X3D2-M1TGJ-US 0.3M	
			Pre-wired Models (2 m)					E2E-X3D1-US 2M	E2E-X3D2-US 2M	
	3 mm		M12 Pre-wired Smart-click Connector Models (0.3 m)		NO	1: +V, 4: 0 V	G	E2E-X7D1-M1TGJ-US 0.3M	E2E-X7D2-M1TGJ-US 0.3M	
			Pre-wired Models (2 m)			1: +V, 2: 0 V		E2E-X7D1-US 2M	E2E-X7D2-US 2M	
			M12 Pre-wired Smart-click Connector Models (0.3 m)			---	---	E2E-X10D1-M1TGJ-US 0.3M	E2E-X10D2-M1TGJ-US 0.3M	
			Pre-wired Models (2 m)					E2E-X10D1-US 2M	E2E-X10D2-US 2M	
M18	7 mm									
M30	10 mm									

\* Refer to page 22 for details.

## 2-Wire Models

Unshielded DC 2-Wire Models with No Self-diagnosis Output [Refer to *Dimensions* on page 27.]



Appearance	Sensing distance			Connection method	Cable specifications	Polarity	Operation mode	Pin arrangement	Applicable connector code *2	Model
M8	4 mm			Pre-wired Models (2 m)	PVC (oil-resistant)		NO	---	---	E2E-X4MD1 2M
				M12 Connector Models	---		NC	---	---	E2E-X4MD2 2M
				M8 Connector Models	---		NO	1: +V, 4: 0 V	A	E2E-X4MD1-M1G
							NC	1: +V, 2: 0 V	D	E2E-X4MD2-M1G
							NO	1: +V, 4: 0 V	I	E2E-X4MD1-M3G
							NC	1: +V, 2: 0 V	---	E2E-X4MD2-M3G
M12	8 mm			M12 Pre-wired Smart-click Connector Models (0.3m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X8MD1-M1TGJ 0.3M
				Pre-wired Models (2 m)	PVC (oil-resistant)		NO	---	---	E2E-X8MD1 2M *1
				M12 Connector Models	---		NC	---	---	E2E-X8MD2 2M
				M12 Standard Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X8MD1-M1G *1
							NC	1: +V, 2: 0 V	D	E2E-X8MD2-M1G
							NO	1: +V, 4: 0 V	A	E2E-X8MD1-M1GJ 0.3M
M18	14 mm			M12 Pre-wired Smart-click Connector Models (0.3m)	PVC (oil-resistant)		NC	---	---	---
				Pre-wired Models (2 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X14MD1-M1TGJ 0.3M
				M12 Connector Models	---		NC	---	---	E2E-X14MD1 2M *1
				M12 Standard Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X14MD2 2M
							NC	1: +V, 2: 0 V	D	E2E-X14MD1-M1G *1
							NO	1: +V, 4: 0 V	A	E2E-X14MD2-M1G
M30	20 mm			M12 Pre-wired Smart-click Connector Models (0.3m)	PVC (oil-resistant)		NC	---	---	---
				Pre-wired Models (2 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X20MD1-M1TGJ 0.3M
				M12 Connector Models	---		NC	---	---	E2E-X20MD1 2M *1
				M12 Standard Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X20MD2 2M
							NC	1: +V, 2: 0 V	D	E2E-X20MD1-M1G *1
							NO	1: +V, 4: 0 V	A	E2E-X20MD2-M1G
							NC	1: +V, 2: 0 V	D	E2E-X20MD1-M1GJ 0.3M

\*1. Models with different frequencies are also available. The model number is E2E-X □D15 (example: E2E-X8MD15 2M).

\*2. Refer to page 22 for details.

## 2-Wire Models

Unshielded DC 2-Wire UL-recognized Models with No Self-diagnostic Output [Refer to *Dimensions* on page 27.]



Appearance	Sensing distance		Connection method	Cable specifications	Polarity	Operation mode	Pin arrangement	Applicable connector code *	Model
M8	4 mm		M12 Pre-wired Smart-click Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 4: 0 V	G	E2E-X4MD1-M1TGJ-US 0.3M	
			Pre-wired Models (2 m)			1: +V, 2: 0 V		E2E-X4MD2-M1TGJ-US 0.3M	
			M12 Pre-wired Smart-click Connector Models (0.3 m)		NO	---	---	E2E-X4MD1-US 2M	
			Pre-wired Models (2 m)					E2E-X4MD2-US 2M	
	8 mm		M12 Pre-wired Smart-click Connector Models (0.3 m)		G	1: +V, 4: 0 V	NO	E2E-X8MD1-M1TGJ-US 0.3M	
			Pre-wired Models (2 m)			1: +V, 2: 0 V		E2E-X8MD2-M1TGJ-US 0.3M	
			M12 Pre-wired Smart-click Connector Models (0.3 m)			---		E2E-X8MD1-US 2M	
			Pre-wired Models (2 m)			---		E2E-X8MD2-US 2M	
M18	14 mm		M12 Pre-wired Smart-click Connector Models (0.3 m)	PVC (oil-resistant)	G	1: +V, 4: 0 V	NO	E2E-X14MD1-M1TGJ-US 0.3M	
			Pre-wired Models (2 m)			1: +V, 2: 0 V		E2E-X14MD2-M1TGJ-US 0.3M	
			M12 Pre-wired Smart-click Connector Models (0.3 m)			---		E2E-X14MD1-US 2M	
			Pre-wired Models (2 m)			---		E2E-X14MD2-US 2M	
	20 mm		M12 Pre-wired Smart-click Connector Models (0.3 m)		G	1: +V, 4: 0 V	NO	E2E-X20MD1-M1TGJ-US 0.3M	
			Pre-wired Models (2 m)			1: +V, 2: 0 V		E2E-X20MD2-M1TGJ-US 0.3M	
			M12 Pre-wired Smart-click Connector Models (0.3 m)			---		E2E-X20MD1-US 2M	
			Pre-wired Models (2 m)			---		E2E-X20MD2-US 2M	

\* Refer to page 22 for details.

Shielded DC 2-Wire Models with Self-diagnosis Output [Refer to *Dimensions* on page 27.]



Appearance	Sensing distance		Connection method	Cable specifications	Polarity	Operation mode	Pin arrangement	Applicable connector code *2	Model
M12	3 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	2: +V and diagnostic output 3: 0 V 4: +V and control output	---	---	E2E-X3D1S 2M *1
			M12 Connector Models	---			D	E2E-X3D1S-M1	
			Pre-wired Models (2 m)	PVC (oil-resistant)		2: +V and diagnostic output 3: 0 V 4: +V and control output	---	---	E2E-X7D1S 2M *1
			M12 Connector Models	---			D	E2E-X7D1S-M1	
	7 mm		Pre-wired Models (2 m)	PVC (oil-resistant)			---	---	E2E-X10D1S 2M *1
			M12 Connector Models	---			D	E2E-X10D1S-M1	
			Pre-wired Models (2 m)	PVC (oil-resistant)		2: +V and diagnostic output 3: 0 V 4: +V and control output	---	---	E2E-X10D1S 2M *1
			M12 Connector Models	---			D	E2E-X10D1S-M1	
M18	7 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	2: +V and diagnostic output 3: 0 V 4: +V and control output	---	---	E2E-X7D1S 2M *1
			M12 Connector Models	---			D	E2E-X7D1S-M1	
M30	10 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	2: +V and diagnostic output 3: 0 V 4: +V and control output	---	---	E2E-X10D1S 2M *1
			M12 Connector Models	---			D	E2E-X10D1S-M1	

\*1. Models with different frequencies are also available. The model number is E2E-X □D1S (example: E2E-X3D1S 2M).

\*2. Refer to page 22 for details.

## 2-Wire Models

Unshielded DC 2-Wire Models with Self-diagnosis Output [Refer to *Dimensions* on page 27.]



Appearance	Sensing distance		Connection method	Cable specifications	Polarity	Operation mode	Pin arrangement	Applicable connector code *2	Model
M12	8 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	Yes	NO	---	---	E2E-X8MD1S 2M *1
			M12 Connector Models	---			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X8MD1S-M1
	14 mm		Pre-wired Models (2 m)	PVC (oil-resistant)			---	---	E2E-X14MD1S 2M *1
			M12 Connector Models	---			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X14MD1S-M1
M30	20 mm		Pre-wired Models (2 m)	PVC (oil-resistant)			---	---	E2E-X20MD1S 2M *1
			M12 Connector Models	---			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X20MD1S-M1


\*1. Models with different frequencies are also available. The model number is E2E-X□MD1S (example: E2E-X8MD1S 2M).

\*2. Refer to page 22 for details.

### Connector Pin Assignments of DC 2-Wire Models

- The connector pin assignments of each New E2E DC 2-Wire Model conform to IEC 947-5-2 Table III. (Only DC 2-Wire Models have been changed in comparison to the previous models.)
- The following models with conventional connector pin assignments are available as well. (Only NO Models can be used.)  
The cable at the right should also be used if the XW3A-P□45-G11 Connector Junction Box is already being used.

Cable length	Model
500 mm	XS2W-D421-BY1

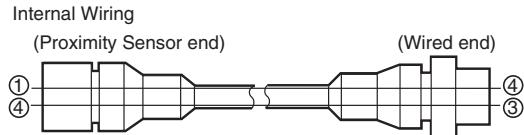

Models with conventional connector pin assignments are available as well.

Appearance		Model			
		NO	Applicable connector code *	NC	Applicable connector code *
Shielded	M8	E2E-X2D1-M1	C	E2E-X2D2-M1	D
	M12	E2E-X3D1-M1	C	E2E-X3D2-M1	D
	M18	E2E-X7D1-M1	C	E2E-X7D2-M1	D
	M30	E2E-X10D1-M1	C	E2E-X10D2-M1	D
Unshielded	M8	E2E-X4MD1-M1	C	E2E-X4MD2-M1	D
	M12	E2E-X8MD1-M1	C	E2E-X8MD2-M1	D
	M18	E2E-X14MD1-M1	C	E2E-X14MD2-M1	D
	M30	E2E-X20MD1-M1	C	E2E-X20MD2-M1	D

\* Refer to page 22 for details.

## 2-Wire Models

### AC 2-Wire Models Shielded Models [Refer to *Dimensions* on page 27.]



Appearance	Sensing distance		Connection method	Cable specifications	Operation mode	Pin arrangement	Applicable connector code *2	Model
M8	1.5 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X1R5Y1 2M
					NC			E2E-X1R5Y2 2M
M12	2 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X2Y1 2M *1
					NC			E2E-X2Y2 2M
			M12 Connector Models	---	NO	(3, 4): (AC, AC)	E	E2E-X2Y1-M1
M18	5 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X5Y1 2M *1
					NC			E2E-X5Y2 2M
			M12 Connector Models	---	NO	(3, 4): (AC, AC)	E	E2E-X5Y1-M1
M30	10 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X10Y1 2M *1
					NC			E2E-X10Y2 2M
			M12 Connector Models	---	NO	(3, 4): (AC, AC)	E	E2E-X10Y1-M1
			NC	(1, 2): (AC, AC)	F	E2E-X10Y2-M1		

\*1. Models with different frequencies are also available. The model number is E2E-X□Y□5 (example: E2E-X5Y15 2M).

\*2. Refer to page 22 for details.

## Unshielded Models



Appearance	Sensing distance		Connection method	Cable specifications	Operation mode	Pin arrangement	Applicable connector code *2	Model
M8	2 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X2MY1 2M
					NC			E2E-X2MY2 2M
M12	5 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X5MY1 2M *1
					NC			E2E-X5MY2 2M
			M12 Connector Models	---	NO	(3, 4): (AC, AC)	E	E2E-X5MY1 2M
M18	10 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X10MY1 2M *1
					NC			E2E-X10MY2 2M
			M12 Connector Models	---	NO	(3, 4): (AC, AC)	E	E2E-X10MY1-M1
M30	18 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X18MY1 2M *1
					NC			E2E-X18MY2 2M
			M12 Connector Models	---	NO	(3, 4): (AC, AC)	E	E2E-X18MY1-M1
			NC	(1, 2): (AC, AC)	F	E2E-X18MY2-M1		

\*1. Models with different frequencies are also available. The model number is E2E-X□MY□5 (example: E2E-X5MY15 2M).

\*2. Refer to page 22 for details.

### AC 2-Wire Models Shielded Models [Refer to *Dimensions* on page 27.]

(There are no unshielded models.)



Appearance	Sensing distance		Connection method	Cable specifications	Operation mode	Pin arrangement	Applicable connector code	Model
M12	3 mm		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X3T1 2M
								E2E-X7T1 2M
								E2E-X10T1 2M

## 3-Wire Models

Shielded DC 3-Wire Models [Refer to *Dimensions* on page 27.]

Appearance	Sensing distance	Connection method	Cable specifications	Operation mode	Pin arrangement	Applicable connector code *2	Model	
							NPN output	PNP output
M8	1.5 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X1R5E1 2M	E2E-X1R5F1 2M
			PVC (oil-resistant)	NC			E2E-X1R5E2 2M	E2E-X1R5F2 2M
		M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X1R5E1-M1	E2E-X1R5F1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X1R5E2-M1	E2E-X1R5F2-M1
		M8 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	I	E2E-X1R5E1-M3	E2E-X1R5F1-M3
				NC	1: +V, 3: 0 V, 2: Control output		E2E-X1R5E2-M3	E2E-X1R5F2-M3
		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X2E1 2M *1	E2E-X2F1 2M *1
				NC			E2E-X2E2 2M	E2E-X2F2 2M
M12	2 mm	M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X2E1-M1	E2E-X2F1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X2E2-M1	E2E-X2F2-M1
		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X5E1 2M *1	E2E-X5F1 2M *1
				NC			E2E-X5E2 2M	E2E-X5F2 2M
M18	5 mm	M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X5E1-M1	E2E-X5F1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X5E2-M1	E2E-X5F2-M1
		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X10E1 2M *1	E2E-X10F1 2M
				NC			E2E-X10E2 2M	E2E-X10F2 2M
M30	10 mm	M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X10E1-M1	E2E-X10F1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X10E2-M1	E2E-X10F2-M1

\*1. Models with different frequencies are also available. The model number is E2E-X□□□5 (example: E2E-X5E15 2M).

\*2. Refer to page 22 for details.

## 3-Wire Models

Unshielded DC 3-Wire Models [Refer to *Dimensions* on page 27.]

Appearance	Sensing distance	Connection method	Cable specifications	Operation mode	Pin arrangement	Applicable connectorcode *2	Model	
							NPN output	PNP output
M8	2 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X2ME1 2M	E2E-X2MF1 2M
				NC			E2E-X2ME2 2M	E2E-X2MF2 2M
		M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X2ME1-M1	E2E-X2MF1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X2ME2-M1	E2E-X2MF2-M1
		M8 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	I	E2E-X2ME1-M3	E2E-X2MF1-M3
				NC	1: +V, 3: 0 V, 2: Control output		E2E-X2ME2-M3	E2E-X2MF2-M3
M12	5 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X5ME1 2M *1	E2E-X5MF1 2M
				NC			E2E-X5ME2 2M	E2E-X5MF2 2M
		M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X5ME1-M1	E2E-X5MF1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X5ME2-M1	E2E-X5MF2-M1
M18	10 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X10ME1 2M *1	E2E-X10MF1 2M
				NC			E2E-X10ME2 2M	E2E-X10MF2 2M
		M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X10ME1-M1	E2E-X10MF1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X10ME2-M1	E2E-X10MF2-M1
M30	18 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X18ME1 2M *1	E2E-X18MF1 2M
				NC			E2E-X18ME2 2M	E2E-X18MF2 2M
		M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X18ME1-M1	E2E-X18MF1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X18ME2-M1	E2E-X18MF2-M1

\*1. Models with different frequencies are also available. The model number is E2E-X□M□□5 (example: E2E-X5ME15 2M).

\*2. Refer to page 22 for details.

## Ratings and Specifications

### E2E-X□D□ DC 2-Wire Models

Item	Model	Size		M8		M12		M18		M30													
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded												
<b>Sensing distance</b>	E2E-X2D□	2 mm $\pm 10\%$	4 mm $\pm 10\%$	3 mm $\pm 10\%$	8 mm $\pm 10\%$	7 mm $\pm 10\%$	14 mm $\pm 10\%$	10 mm $\pm 10\%$	20 mm $\pm 10\%$														
<b>Set distance *1</b>		0 to 1.6 mm	0 to 3.2 mm	0 to 2.4 mm	0 to 6.4 mm	0 to 5.6 mm	0 to 11.2 mm	0 to 8 mm	0 to 16 mm														
<b>Differential travel</b>		15% max. of sensing distance		10% max. of sensing distance																			
<b>Detectable object</b>		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on pages 17 and 18.)																					
<b>Standard sensing object</b>		Iron, 8 $\times$ 8 $\times$ 1 mm	Iron, 20 $\times$ 20 $\times$ 1 mm	Iron, 12 $\times$ 12 $\times$ 1 mm	Iron, 30 $\times$ 30 $\times$ 1 mm	Iron, 18 $\times$ 18 $\times$ 1 mm	Iron, 30 $\times$ 30 $\times$ 1 mm	Iron, 54 $\times$ 54 $\times$ 1 mm															
<b>Response frequency *2</b>		1.5 kHz	1 kHz		0.8 kHz	0.5 kHz	0.4 kHz	0.1 kHz															
<b>Power supply voltage (operating voltage range)</b>		Standard Models: 12 to 24 VDC, ripple (p-p): 10% max. (10 to 30 VDC) US Models and Connector Models Used as UL-certified Models: 12 to 24 VDC, ripple (p-p): 10% max. (The operating voltage range is also the same.) *3																					
<b>Leakage current</b>		0.8 mA max.																					
<b>Control output</b>	<b>Load current</b>	3 to 100 mA, Diagnostic output: 50 mA for -D1(5)S Models																					
	<b>Residual voltage *4</b>	3 V max. (Load current: 100 mA, Cable length: 2 m, M1J-T Models only: 5 V max.)																					
<b>Indicators</b>		D1 Models: Operation indicator (red) and setting indicator (green) D2 Models: Operation indicator (red)																					
<b>Operation mode (with sensing object approaching)</b>		D1 Models: NO Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 20 for details. D2 Models: NC																					
<b>Diagnostic output delay</b>		0.3 to 1 s																					
<b>Protection circuits</b>		Surge suppressor, Load short-circuit protection (for control and diagnostic output)																					
<b>Ambient temperature range</b>		Operating: $-25$ to $70^\circ\text{C}$ , Storage: $-40$ to $85^\circ\text{C}$ (with no icing or condensation)																					
<b>Ambient humidity range</b>		Operating/storage: 35% to 95% (with no condensation)																					
<b>Temperature influence</b>		$\pm 15\%$ max. of sensing distance at $23^\circ\text{C}$ in the temperature range of $-25$ to $70^\circ\text{C}$	$\pm 10\%$ max. of sensing distance at $23^\circ\text{C}$ in the temperature range of $-25$ to $70^\circ\text{C}$																				
<b>Voltage influence</b>		$\pm 1\%$ max. of sensing distance at rated voltage in the rated voltage $\pm 15\%$ range																					
<b>Insulation resistance</b>		50 M $\Omega$ min. (at 500 VDC) between current-carrying parts and case																					
<b>Dielectric strength</b>		1000 VAC, 50/60 Hz for 1 minute between current carry parts and case																					
<b>Vibration resistance</b>		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions																					
<b>Shock resistance</b>		Destruction: 500 m/s $^2$ 10 times each in X, Y, and Z directions	Destruction: 1,000 m/s $^2$ 10 times each in X, Y, and Z directions																				
<b>Degree of protection</b>		Pre-wired Models: IEC 60529 IP67, in-house standards: oil-resistant Connector Models: IEC 60529 IP67																					
<b>Connection method</b>		Pre-wired Models (Standard cable length: 2 m), Connector Models, or Pre-wired Connector Models (Standard cable length: 0.3 m)																					
<b>Weight (packed state)</b>	<b>Pre-wired Models</b>	Approx. 60 g	Approx. 70 g		Approx. 130 g		Approx. 175 g																
	<b>Pre-wired Connector Models</b>	---	Approx. 40 g		Approx. 70 g		Approx. 110 g																
	<b>Connector Models</b>	Approx. 15 g	Approx. 25 g		Approx. 40 g		Approx. 90 g																
<b>Materials</b>	<b>Case</b>	Stainless steel (SUS303)	Nickel-plated brass																				
	<b>Sensing surface</b>	PBT																					
	<b>Clamping nuts</b>	Nickel-plated brass																					
	<b>Toothed washer</b>	Zinc-plated iron																					
<b>Accessories</b>		Instruction manual																					

\*1. Use the E2E within the range in which the setting indicator (green LED) is ON (except D2 Models).

\*2. The response frequency is an average value.

Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

\*3. For the information on UL-certified connector models, refer to your OMRON website.

\*4. The residual voltage of each M1J-T Model is 5 V. When connecting to a device, make sure that the device can withstand the residual voltage. (Refer to page 26 for details.)

## E2E-X□Y□ AC 2-Wire Models

Item	Size Shielded Model	M8		M12		M18		M30											
		Shielded E2E-X1R5Y□	Unshielded E2E-X2MY□	Shielded E2E-X2Y□	Unshielded E2E-X5MY□	Shielded E2E-X5Y□	Unshielded E2E-X10MY□	Shielded E2E-X10Y□	Unshielded E2E-X18MY□										
<b>Sensing distance</b>	1.5 mm ±10%	2 mm ±10%		5 mm ±10%		10 mm ±10%		18 mm ±10%											
<b>Set distance</b>	0 to 1.2 mm	0 to 1.6 mm		0 to 4 mm		0 to 8 mm		0 to 14 mm											
<b>Differential travel</b>	10% max. of sensing distance																		
<b>Detectable object</b>	Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 18.)																		
<b>Standard sensing object</b>	Iron, 8 × 8 × 1 mm	Iron, 12 × 12 × 1 mm		Iron, 15 × 15 × 1 mm	Iron, 18 × 18 × 1 mm	Iron, 30 × 30 × 1 mm		Iron, 54 × 54 × 1 mm											
<b>Response frequency</b>	25 Hz																		
<b>Power supply voltage (operating voltage range)<sup>1</sup></b>	24 to 240 VAC (20 to 264 VAC), 50/60 Hz																		
<b>Leakage current</b>	1.7 mA max.																		
<b>Control output</b>	Load current <sup>2</sup>	5 to 100 mA		5 to 200 mA		5 to 300 mA													
	Residual voltage	Refer to <i>Engineering Data</i> on page 19.																	
<b>Indicators</b>	Operation indicator (red)																		
<b>Operation mode (with sensing object approaching)</b>	Y1 Models: NO Y2 Models: NC	Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 21 for details.																	
<b>Protection circuits</b>	Surge suppressor																		
<b>Ambient temperature range<sup>1+2</sup></b>	Operating/Storage: -25 to 70°C (with no icing or condensation)	Operating/Storage: -40 to 85°C (with no icing or condensation)																	
<b>Ambient humidity range</b>	Operating/storage: 35% to 95% (with no condensation)																		
<b>Temperature influence</b>	±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C	±15% max. of sensing distance at 23°C in the temperature range of -40 to 85°C, ±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C																	
<b>Voltage influence</b>	±1% max. of sensing distance at rated voltage in the rated voltage ±15% range																		
<b>Insulation resistance</b>	50 MΩ min. (at 500 VDC) between current-carrying parts and case																		
<b>Dielectric strength</b>	4,000 VAC (M8 Models: 2,000 VAC), 50/60 Hz for 1 min between current-carrying parts and case																		
<b>Vibration resistance</b>	Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions																		
<b>Shock resistance</b>	Destruction: 500 m/s <sup>2</sup> 10 times each in X, Y, and Z directions	Destruction: 1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions																	
<b>Degree of protection</b>	Pre-wired Models: IEC 60529 IP67, in-house standards: oil-resistant Connector Models: IEC 60529 IP67																		
<b>Connection method</b>	Pre-wired Models (Standard cable length: 2 m) and Connector Models																		
<b>Weight (packed state)</b>	Pre-wired Models Model	Approx. 60 g		Approx. 70 g		Approx. 130 g		Approx. 175 g											
	Connector Models	Approx. 15 g		Approx. 25 g		Approx. 40 g		Approx. 90 g											
<b>Materials</b>	Case	Stainless steel (SUS303)		Nickel-plated brass															
	Sensing surface	PBT																	
	Clamp-nuts	Nickel-plated brass																	
	Toothed washer	Zinc-plated iron																	
<b>Accessories</b>	Instruction manual																		

\*1. When supplying 24 VAC to any of the above models, make sure that the operating ambient temperature range is at least -25°C.

\*2. When using an M18 or M30 Connector Model at an ambient temperature between 70 and 85°C, make sure that the Sensor has a control output (load current) of 5 to 200 mA max.

## E2E-X□T1 AC/DC 2-Wire Models

Item	Model	Size	M12	M18	M30
		Shielded	Shielded		
		E2E-X3T1	E2E-X7T1	E2E-X10T1	
Sensing distance		3 mm $\pm 10\%$	7 mm $\pm 10\%$	10 mm $\pm 10\%$	
Set distance		0 to 2.4 mm	0 to 5.6 mm	0 to 8 mm	
Differential travel		10% max. of sensing distance			
Detectable object		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 17.)			
Standard sensing object		Iron, 12 $\times$ 12 $\times$ 1 mm	Iron, 18 $\times$ 18 $\times$ 1 mm	Iron, 30 $\times$ 30 $\times$ 1 mm	
Response frequency *1	DC	1 kHz	0.5 kHz	0.4 kHz	
	AC	25 Hz			
Power supply voltage (operating voltage range) *2		24 to 240 VDC (20 to 264 VDC) 48 to 240 VAC (40 to 264 VAC)			
Leakage current		DC: 1 mA max. AC: 2 mA max.			
Control output	Load current	5 to 100 mA			
	Residual voltage	DC: 6 V max. (Load current: 100 mA, Cable length: 2 m) AC: 10 V max. (Load current: 5 mA, Cable length: 2 m)			
Indicators		Operation indicator (red), Setting indicator (green)			
Operation mode (with sensing object approaching)		NO (Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 21 for details.)			
Protection circuits		Load short-circuit protection (20 to 40 VDC only), Surge suppressor			
Ambient temperature range		Operating: -25 to 70°C, Storage: -40 to 85°C (with no icing or condensation)			
Ambient humidity range		Operating/Storage: 35% to 95% (with no condensation)			
Temperature influence		$\pm 10\%$ max. of sensing distance at 23°C in the temperature range of -25 to 70°C			
Voltage influence		$\pm 1\%$ max. of sensing distance at rated voltage in the rated voltage $\pm 15\%$ range			
Insulation resistance		50 M $\Omega$ min. (at 500 VDC) between current-carrying parts and case			
Dielectric strength		4,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case			
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			
Shock resistance		Destruction: 1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions			
Degree of protection		IEC 60529 IP67, in-house standards: oil-resistant			
Connection method		Pre-wired Models (Standard cable length: 2 m)			
Weight (packed state)		Approx. 80 g	Approx. 140 g	Approx. 190 g	
Materials	Case	Nickel-plated brass			
	Sensing surface	PBT			
	Clamping nuts	Nickel-plated brass			
	Toothed washer	Zinc-plated iron			
Accessories		Instruction manual			

\*1. The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

\*2. Power Supply Voltage Waveform:

Use a sine wave for the power supply. Using a rectangular AC power supply may result in faulty reset.

## E2E-X□E□/F□ DC 3-Wire Models

Item	Model	Size		M8		M12		M18		M30											
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded										
	E2E-X1R5E□/F□	E2E-X2ME□/F□	E2E-X2E□/F□	E2E-X5ME□/F□	E2E-X5E□/F□	E2E-X10ME□/F□	E2E-X10E□/F□	E2E-X18ME□/F□	E2E-X18E□/F□												
<b>Sensing distance</b>	1.5 mm ±10%	2 mm ±10%		5 mm ±10%		10 mm ±10%		18 mm ±10%													
<b>Set distance</b>	0 to 1.2 mm	0 to 1.6 mm		0 to 4 mm		0 to 8 mm		0 to 14 mm													
<b>Differential travel</b>	10% max. of sensing distance																				
<b>Detectable object</b>	Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 18.)																				
<b>Standard sensing object</b>	Iron, 8 × 8 × 1 mm	Iron, 12 × 12 × 1 mm		Iron, 15 × 15 × 1 mm	Iron, 18 × 18 × 1 mm	Iron, 30 × 30 × 1 mm		Iron, 54 × 54 × 1 mm													
<b>Response frequency *1</b>	2 kHz	0.8 kHz	1.5 kHz	0.4 kHz	0.6 kHz	0.2 kHz	0.4 kHz	0.1 kHz													
<b>Power supply voltage (operating voltage range) *2</b>	12 to 24 VDC, ripple(p-p): 10% max. (10 to 30 VDC) Connector Models Used as UL-certified Models: 12 to 24 VDC, ripple (p-p): 10% max. (The operating voltage range is also the same.) *3																				
<b>Current consumption</b>	13 mA max.																				
<b>Control output</b>	<b>Load current *2</b>	200 mA max.																			
	<b>Residual voltage</b>	2 V max. (Load current: 200 mA, Cable length: 2 m)																			
<b>Indicators</b>	Operation indicator (red)																				
<b>Operation mode (with sensing object approaching)</b>	E1/F1 Models: NO E2/F2 Models: NC Refer to the timing charts under <i>/O Circuit Diagrams</i> on page 21 for details.																				
<b>Protection circuits</b>	Load short-circuit protection, Surge suppressor, Reverse polarity protection																				
<b>Ambient temperature range *2</b>	Operating/Storage: -40 to 85°C (with no icing or condensation)																				
<b>Ambient humidity range</b>	Operating/Storage: 35% to 95% (with no condensation)																				
<b>Temperature influence</b>	±15% max. of sensing distance at 23°C in the temperature range of -40 to 85°C ±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C																				
<b>Voltage influence</b>	±1% max. of sensing distance at rated voltage in the rated voltage ±15% range																				
<b>Insulation resistance</b>	50 MΩ min. (at 500 VDC) between current-carrying parts and case																				
<b>Dielectric strength</b>	1,000 VAC, 50/60 Hz for 1 minute between current carry parts and case																				
<b>Vibration resistance</b>	Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions																				
<b>Shock resistance</b>	Destruction: 500 m/s <sup>2</sup> 10 times each in X, Y, and Z directions	Destruction: 1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions																			
<b>Degree of protection</b>	Pre-wired Models : IEC 60529 IP67, in-house standards: oil-resistant Connector Models : IEC 60529 IP67																				
<b>Connection method</b>	Pre-wired Models (Standard cable length: 2 m) and Connector Models																				
<b>Weight (packed state)</b>	<b>Pre-wired Models</b>	Approx. 65 g	Approx. 75 g		Approx. 150 g		Approx. 195 g														
	<b>Connector Models</b>	Approx. 15 g	Approx. 25 g		Approx. 40 g		Approx. 90 g														
<b>Materials</b>	<b>Case</b>	Stainless steel (SUS303)		Nickel-plated brass																	
	<b>Sensing surface</b>	PBT																			
	<b>Clamp-nuts</b>	Nickel-plated brass																			
	<b>Toothed washer</b>	Zinc-plated iron																			
<b>Accessories</b>	Instruction manual																				


- \*1. The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.
- \*2. When using an M8 Model at an ambient temperature between 70 and 85°C, supply 10 to 30 VDC to the Sensor and make sure that the Sensor has a control output of 100 mA maximum.
- \*3. For the information on UL-certified connector models, refer to your OMRON website.

## Engineering Data (Reference Value)


### Sensing Area

#### Shielded Models

##### E2E-X□D□/-X□T1

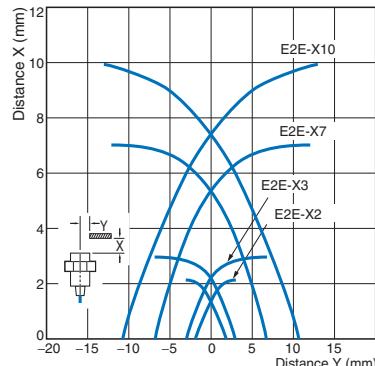


##### E2E-X□E□/-X□Y□/-X□F□

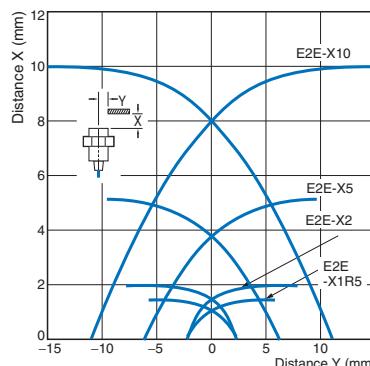


#### Unshielded Models

##### E2E-X□MD□

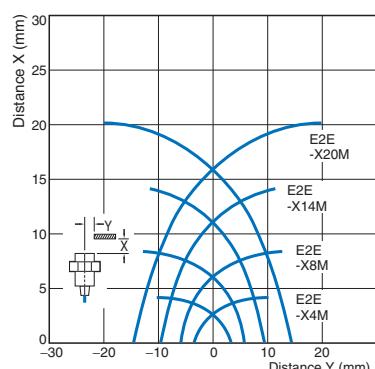


##### E2E-X□ME□/-X□MY□/-X□MF□

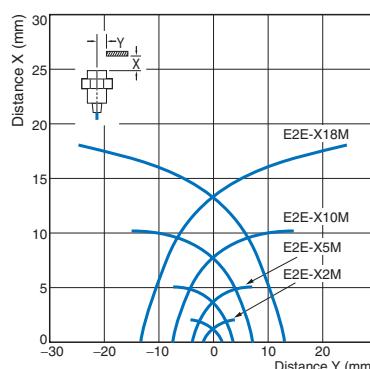


#### Influence of Sensing Object Size and Material


##### E2E-X2D□

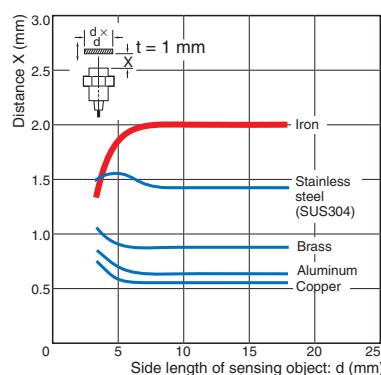


##### E2E-X3D□/-X3T1

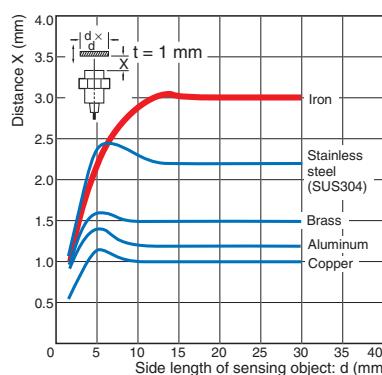


##### E2E-X7D□/-X7T1

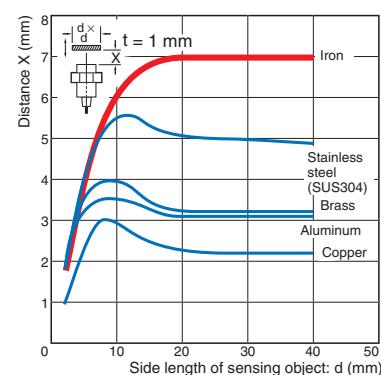


##### E2E-X10D□/-X10T1

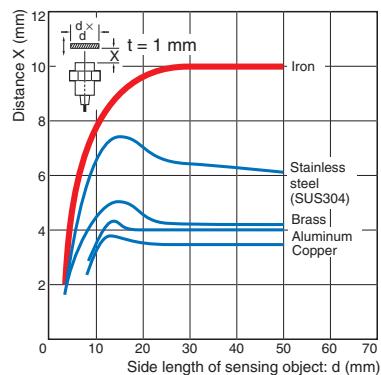


##### E2E-X4MD□

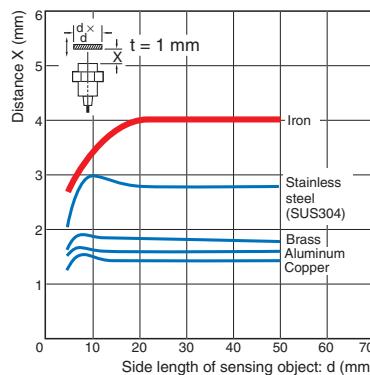


##### E2E-X8MD□

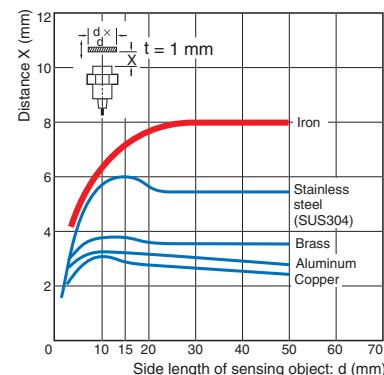


E2E-X14MD

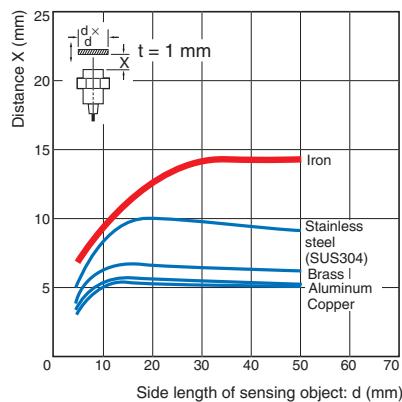


E2E-X20MD

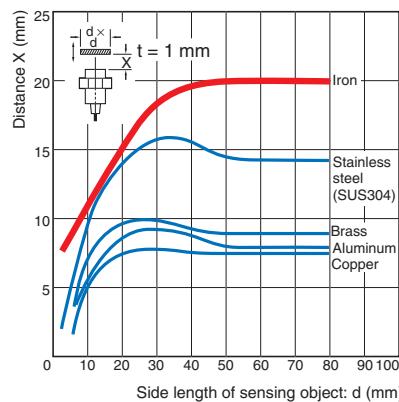


**E2E-X1R5E□/-X1R5Y□/-X1R5F□**

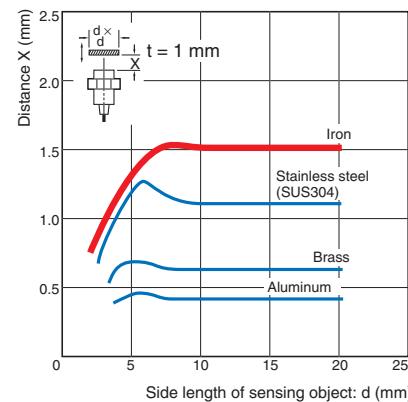


E2E-X2E□/-X2Y□/-X2F□

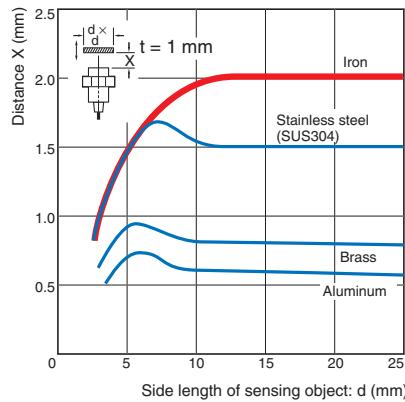


E2E-X5E□/-X5Y□/-X5F□

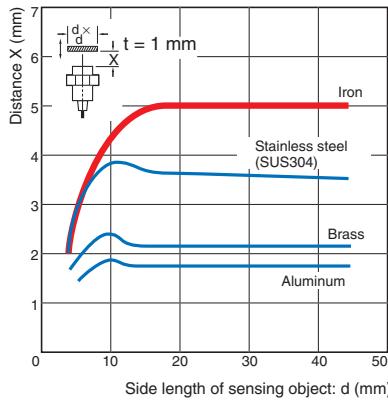


E2E-X10E□/-X10Y□/-X10F□

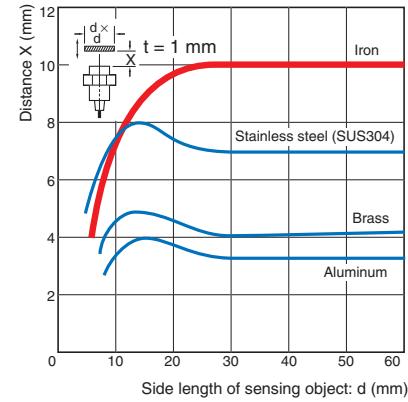


**E2E-X2ME□/-X2MY□/-X2MF□**

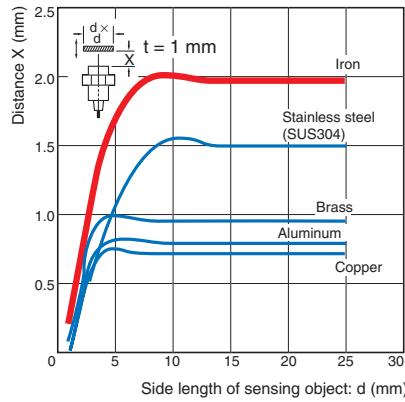


**E2E-X5ME□/-X5MY□/-X5MF□**

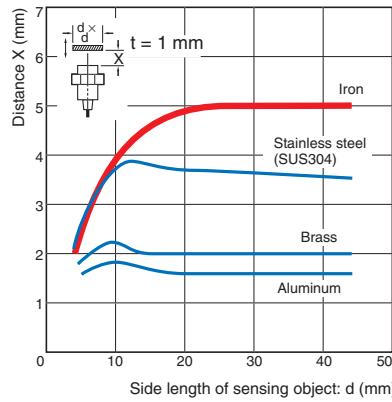

**E2E-X10ME□/-X10MY□/-X10MF□**

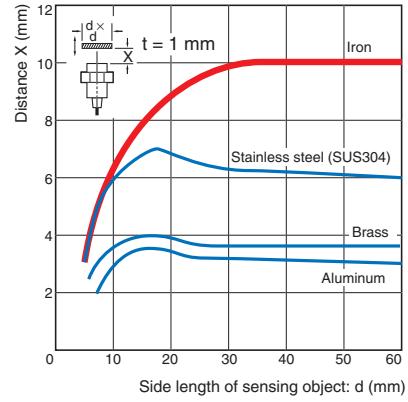


**E2E-X18ME□/-X18MY□/-X18MF□**

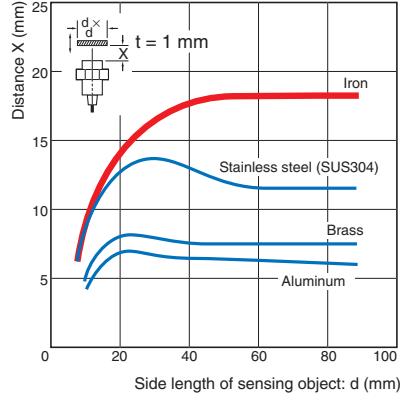


## Leakage Current


E2E-X□D□

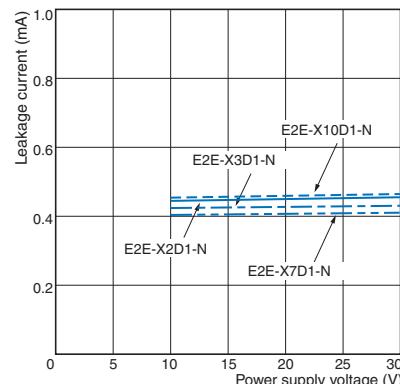

E2E-X□Y□

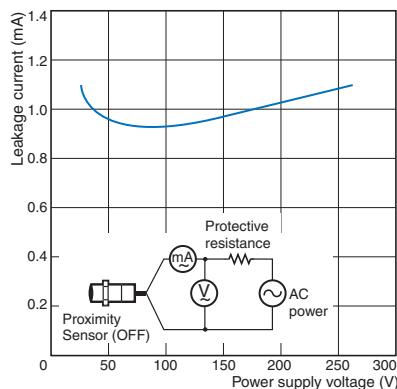


E2E-X□T1

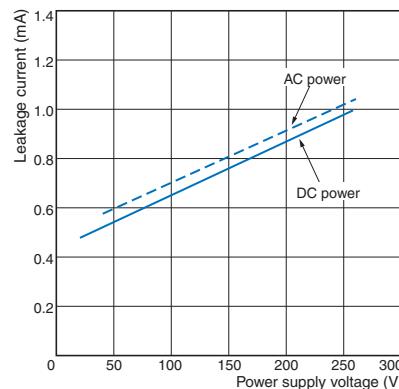


## Residual Output Voltage


E2E-X□D□

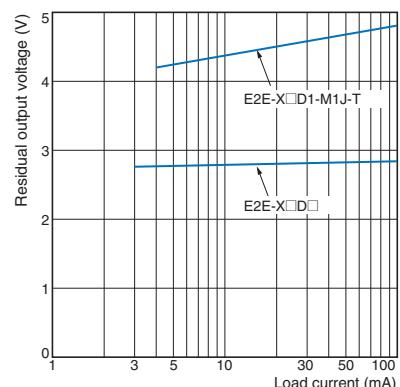


E2E-X□T1

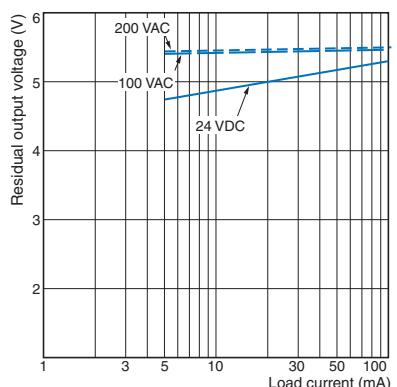


E2E-X□Y□ at 24 VAC

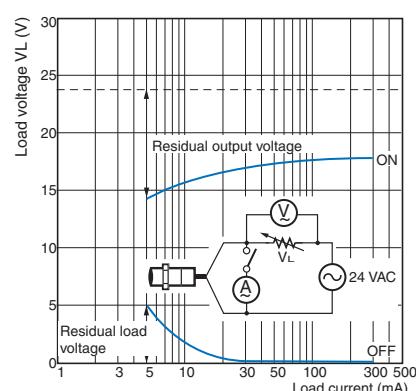

E2E-X□Y□ at 100 VAC







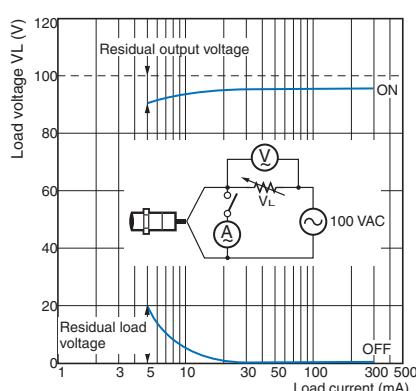


E2E-X□Y□ at 200 VAC

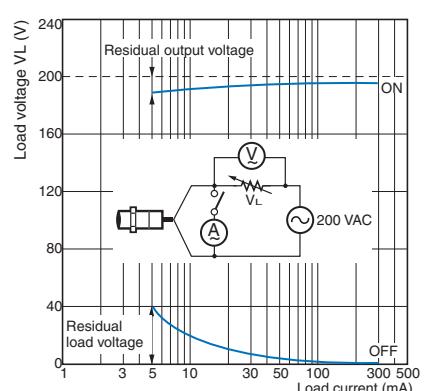

## I/O Circuit Diagrams

## E2E-X□D□ DC 2-Wire Models

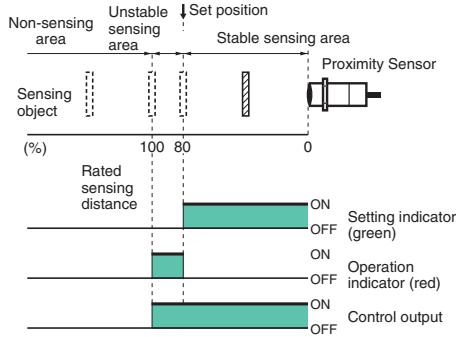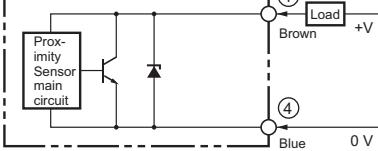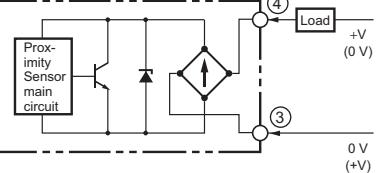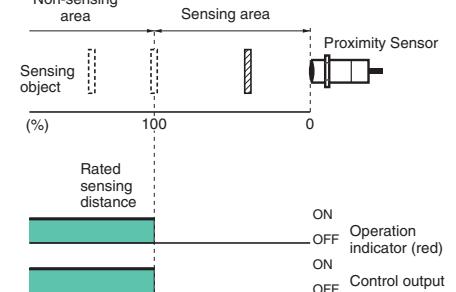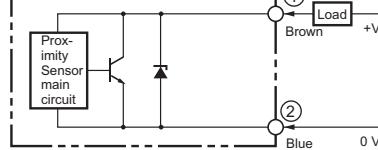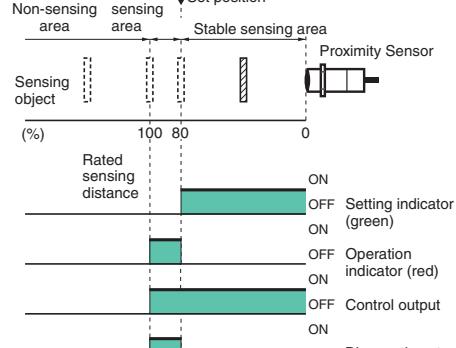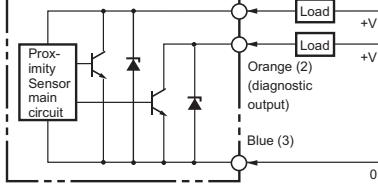Operation mode	Model	Timing Chart	Output circuit
Without self-diagnostic output: NO	E2E-X□D1-N E2E-X□D1-M1G(J) E2E-X□D1-(M1TGJ)-U E2E-X□D1-M3G E2E-X□D1-(M1TGJ)-US	 <p>Non-sensing area      Unstable sensing area      Set position      Stable sensing area</p> <p>Proximity Sensor</p> <p>Sensing object</p> <p>(%) 100 80 0</p> <p>Rated sensing distance</p> <p>ON OFF Setting indicator (green) ON OFF Operation indicator (red) ON OFF Control output</p>	<p>Polarity: Yes</p>  <p>Note: The load can be connected to either the +V or 0 V side.</p>
	E2E-X□D1-M1J-T		<p>Polarity: None</p>  <p>Note 1. The load can be connected to either the +V or 0 V side. 2. The E2E-X□D1-M1J-T has no polarity. Therefore, terminals 3 and 4 have no polarity.</p>
Without self-diagnostic output: NC	E2E-X□D2-N E2E-X□D2-M1G E2E-X□D2-(M1TGJ)-U E2E-X□D2-M3G E2E-X□D2-(M1TGJ)-US	 <p>Non-sensing area      Sensing area</p> <p>Proximity Sensor</p> <p>Sensing object</p> <p>(%) 100 0</p> <p>Rated sensing distance</p> <p>ON OFF Operation indicator (red) ON OFF Control output</p>	 <p>Note: The load can be connected to either the +V or 0 V side.</p>
With self-diagnostic output: NO	E2E-X□D1S E2E-X□D1S-M1	 <p>Non-sensing area      Unstable sensing area      Set position      Stable sensing area</p> <p>Proximity Sensor</p> <p>Sensing object</p> <p>(%) 100 80 0</p> <p>Rated sensing distance</p> <p>ON OFF Setting indicator (green) ON OFF Operation indicator (red) ON OFF Control output ON OFF Diagnostic output*</p>	 <p>Note: Connect both the loads to the +V side of the control output and diagnostic output.</p>

\* The diagnostic output is ON when there is a coil burnout or the sensing object is located in the unstable sensing area for 0.3 s or longer.

## DC 3-Wire Models

Operation mode	Output specifications	Model	Timing Chart	Output circuit
NO	NPN output	E2E-X□E□ E2E-X□E□-M1 E2E-X□E□-M3	<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output (between brown and black leads) ON</p> <p>OFF</p> <p>Output voltage (between black and blue leads) High</p> <p>Low</p>	
			<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output (between brown and black leads) ON</p> <p>OFF</p> <p>Output voltage (between black and blue leads) High</p> <p>Low</p>	
NC			<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output (between brown and black leads) ON</p> <p>OFF</p> <p>Output voltage (between black and blue leads) High</p> <p>Low</p>	<p>*Constant current output is 1.5 to 3 mA.</p> <p>Note: For Connector Models, the connection between pins 1, 4 and 3 uses an NO contact, and the connection between pins 1, 2 and 3 uses an NC contact.</p>
			<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output (Between blue and black leads) ON</p> <p>OFF</p> <p>Output voltage (between brown and black leads) High</p> <p>Low</p>	
NO	PNP output	E2E-X□F□ E2E-X□F□-M1 E2E-X□F□-M3	<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output (Between blue and black leads) ON</p> <p>OFF</p> <p>Output voltage (between brown and black leads) High</p> <p>Low</p>	
			<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output (Between blue and black leads) ON</p> <p>OFF</p> <p>Output voltage (between brown and black leads) High</p> <p>Low</p>	
NC			<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output (Between blue and black leads) ON</p> <p>OFF</p> <p>Output voltage (between brown and black leads) High</p> <p>Low</p>	<p>*When a transistor is connected</p> <p>Note: For Connector Models, the connection between pins 1, 4 and 3 uses an NO contact, and the connection between pins 1, 2 and 3 uses an NC contact.</p>
			<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output (Between blue and black leads) ON</p> <p>OFF</p> <p>Output voltage (between brown and black leads) High</p> <p>Low</p>	

## AC 2-Wire Models

Operation mode	Model	Timing Chart	Output circuit
NO	E2E-X□Y□ E2E-X□Y□-M1	<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output Operate</p> <p>Reset</p>	
		<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output Operate</p> <p>Reset</p>	
NC		<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output Operate</p> <p>Reset</p>	<p>Note: For Connector Models, the connection between pins 3 and 4 uses an NO contact, and the connection between pins 1 and 2 uses an NC contact.</p>
		<p>Sensing object Present</p> <p>Not present</p> <p>Operation indicator (red) ON</p> <p>OFF</p> <p>Control output Operate</p> <p>Reset</p>	

## AC/DC 2-Wire Models

Operation mode	Model	Timing Chart	Output circuit
NO	E2E-X□T1	<p>Non-sensing area</p> <p>Unstable sensing area</p> <p>Stable sensing area</p> <p>Sensing object (%) 100 80 0</p> <p>Rated sensing distance</p> <p>ON Setting indicator OFF (green)</p> <p>ON Operation indicator (red)</p> <p>ON Control output OFF</p>	<p>Note: The load can be connected to either the +V or 0 V side.</p> <p>There is no need to be concerned about the polarity (brown/blue) of the Proximity Sensor.</p>

## Sensor I/O Connectors (Sockets on One Cable End)

Model for Connectors and Pre-wired Connectors: A Connector is not provided with the Sensor. Be sure to order a Connector separately.  
 [Refer to Dimensions for the XS2, XS3, and XS5.]

Applicable connector code	Connector				Applicable Proximity Sensor model number	Connection diagram No. *2
	Screw	Appearance *1	Cable length 2m	Cable length 5m		
			CablConnector model number	CablConnector model number		
A		Straight	XS2F-D421-DA0-F	XS2F-D421-GA0-F	E2E-X□D1-M1G(J)	1
		L-shape	XS2F-D422-DA0-F	XS2F-D422-GA0-F		
B		Straight	XS2F-D421-DC0-F	XS2F-D421-GC0-F	E2E-X□E1-M1 E2E-X□F1-M1	10
		L-shape	XS2F-D422-DC0-F	XS2F-D422-GC0-F		
C		Straight	XS2F-D421-DD0	XS2F-D421-GD0	E2E-X□D1-M1J-T E2E-X□D1-M1	3 2
		L-shape	XS2F-D422-DD0	XS2F-D422-GD0		
D	M12	Straight	XS2F-D421-D80-F	XS2F-D421-G80-F	E2E-X□D2-M1G(J) E2E-X□D2-M1J-T E2E-X□D2-M1 E2E-X□D1S-M1 E2E-X□E2-M1 E2E-X□F2-M1	6 8 7 5 11
		L-shape				
		Straight				
		L-shape				
		Straight	XS2F-A421-DB0-F	XS2F-A421-GB0-F	E2E-X□D2-M1G(J) E2E-X□D2-M1J-T	6 8
		L-shape	XS2F-A422-DB0-F	XS2F-A422-GB0-F		
		Straight	XS2F-A421-D90-F	XS2F-A421-G90-F	E2E-X□D2-M1	7
		Smartclick Connector, Straight	XS5F-D421-D80-F	XS5F-D421-G80-F	E2E-X□D1-M1TGJ(-US) E2E-X□D2-M1TGJ-US	5 15
		Smartclick Connector, Straight Oil-resistant Reinforced Cables	XS5F-D421-D80-P	XS5F-D421-G80-P		
				E2E-X□D1-M1TGJ-U	18	
I	M8	Straight	XS3F-M421-402-A	XS3F-M421-405-A	E2E-X□D1-M3G E2E-X□D2-M3G E2E-X□E1-M3 E2E-X□F1-M3 E2E-X□E2-M3 E2E-X□F2-M3	4 9 12 13
		L-shape				
		Straight				
		L-shape				
		Straight				
		L-shape				
		Straight				
		L-shape				

Note: Refer to *Introduction to Sensor I/O Connectors/Sensor Controllers* for details and for information on Cable length and Robotics Cables.

\*1. Images of straight and L-shaped connectors.



\*2. Refer to *Connection Diagrams* on page 23 for information on Proximity Sensor and I/O Connector connections.

## Connections for Sensor I/O Connectors

Connection diagram No.	Proximity Sensor			Sensor I/O Connector model number	Connections
	Type	Operation mode	Model		
1	DC 2-wire (IEC pin wiring)	NO	E2E-X□D1-M1G/M1GJ	XS2F-D42□-□A0-F 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E XS2F Main circuit ① Brown (+) ② Blue (-)
2	DC 2-wire (previous pin wiring)		E2E-X□D1-M1	XS2F-D42□-□D0 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E XS2F Main circuit ① Blue (-) ② Brown (+)
3	DC 2-wire (no polarity)		E2E-X□D1-M1J-T	XS2F-D42□-□D0 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E XS2F Main circuit ① Blue (+/-) ② Brown (-/+)
4	DC 2-wire (M8 connector)		E2E-X□D1-M3G	XS3F-M42□-40□-A 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	E2E XS3F * Main circuit ① Brown (+) ② White (not connected) ③ Blue (not connected) ④ Black (-)
5	DC 2-wire (diagnostic type)		E2E-X□D1S-M1	XS2F-D42□-□80-F 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E XS2F * Main circuit ① Brown (not connected) ② White (diagnostic output) (+) ③ Blue (0 V) ④ Black (control output) (+)
6	DC 2-wire (IEC pin wiring)	NC	E2E-X□D2-M1G/M1GJ	XS2F-D42□-□80-F 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E XS2F * Main circuit ① Brown (+) ② White (-) ③ Blue (not connected) ④ Black (not connected)
7	DC 2-wire (previous pin wiring)		E2E-X□D2-M1	XS2F-D42□-□80-F 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E XS2F * Main circuit ① Brown (not connected) ② White (+) ③ Blue (-) ④ Black (not connected)
8	DC 2-wire (no polarity)		E2E-X□D2-M1J-T	XS2F-D42□-□80-F 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E XS2F * Main circuit ① Brown (+/-) ② White (-/+) ③ Blue (not connected) ④ Black (not connected)
9	DC 2-wire (M8 connector)		E2E-X□D2-M3G	XS3F-M42□-40□-A 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	E2E XS3F * Main circuit ① Brown (+) ② White (-) ③ Blue (not connected) ④ Black (not connected)

\* Different from Proximity Sensor wire colors.

Connection diagram No.	Proximity Sensor			Sensor I/O Connector model number	Connections	
	Type	Operation mode	Model			
10	DC 3-wire	NO	E2E-X□E/F1-M1	XS2F-D42□□C0-F 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F Main circuit ① Brown (+V) ② Blue (0 V) ③ Black (output)
11		NC	E2E-X□E2/F2-M1	XS2F-D42□□80-F 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F Main circuit ① Brown (+V) ② White (output) ③ Blue (0 V) ④ Black (not connected)
12	DC 3-wire (M8 connector)	NO	E2E-X□E1/F1-M3	XS3F-M42□-40□-A 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	E2E	XS3F Main circuit ① Brown (+V) ② White (not connected) ③ Blue (0 V) ④ Black (output)
13		NC	E2E-X□E2/F2-M3	XS3F-M42□-40□-A 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	E2E	XS3F Main circuit ① Brown (+V) ② White (output) ③ Blue (0 V) ④ Black (not connected)
14	AC 2-wire	NO	E2E-X□Y1-M1	XS2F-A42□□B0-F 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F Main circuit ① Brown ② Blue
15		NC	E2E-X□Y2-M1	XS2F-A421-□90-F D: 2-m cable G: 5-m cable	E2E	XS2F * Main circuit ① Brown ② White ③ Blue (not connected) ④ Black (not connected)
16	DC 2-wire (Smartclick connector)	NO	E2E-X□D1-M1TGJ(-US)	XS5F-D421-□80-F D: 2-m cable G: 5-m cable	E2E	XS5F Main circuit ① Brown (+) ② White (not connected) ③ Blue (not connected) ④ Black (-)
17		NC	E2E-X□D2-M1TGJ-US	XS5F-D421-□80-F D: 2-m cable G: 5-m cable	E2E	XS5F Main circuit ① Brown (+) ② White (-) ③ Blue (not connected) ④ Black (not connected)
18		NO	E2E-X□D1-M1TGJ-U	XS5F-D421-□80-P D: 2-m cable G: 5-m cable	E2E	XS5F Main circuit ① Brown (+) ② White (not connected) ③ Blue (not connected) ④ Black (-)
19		NC	E2E-X□D2-M1TGJ-U	XS5F-D421-□80-P D: 2-m cable G: 5-m cable	E2E	XS5F Main circuit ① Brown (+) ② White (-) ③ Blue (not connected) ④ Black (not connected)

\* Different from Proximity Sensor wire colors.

Refer to **Introduction to Sensor I/O Connectors/Sensor Controllers** for details.

## Safety Precautions

Refer to **Warranty and Limitations of Liability**.

### WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly.

Do not use it for such purposes.



### CAUTION

- Do not short the load. Explosion or burning may result.
- Do not supply power to the Sensor with no load, otherwise Sensor may be damaged.


### Precautions for Correct Use

Do not use this product under ambient conditions that exceed the ratings.

#### ● Design

##### Influence of Surrounding Metal

When mounting the Sensor within a metal panel, ensure that the clearances given in the following table are maintained. Failure to maintain these distances may cause deterioration in the performance of the Sensor.

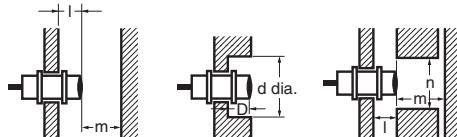

**Influence of Surrounding Metal** (Unit: mm)


Model		Item	M8	M12	M18	M30
DC 2-Wire Models E2E-X□D□	Shielded	I		0		
		d	8	12	18	30
		D		0		
		m	4.5	8	20	40
		n	12	18	27	45
	Unshielded	I	12	15	22	30
		d	24	40	70	90
		D	12	15	22	30
		m	8	20	40	70
		n	24	40	70	90
AC/DC 2-Wire Models E2E-X□T1	Shielded	I		0		
		d	8	12	18	30
		D		0		
		m	4.5	8	20	40
		n	12	18	27	45
	Unshielded	I	12	15	22	30
		d	24	40	70	90
		D	12	15	22	30
		m	8	20	40	70
		n	24	40	70	90
DC 3-Wire Models E2E-X□E□ E2E-X□F□	Shielded	I		0		
		d	8	12	18	30
		D		0		
		m	4.5	8	20	40
		n	12	18	27	45
	Unshielded	I	6	15	22	30
		d	24	40	55	90
		D	6	15	22	30
		m	8	20	40	70
		n	24	36	54	90
AC 2-Wire Models E2E-X□Y□	Shielded	I		0		
		d	8	12	18	30
		D		0		
		m	4.5	8	20	40
		n	12	18	27	45
	Unshielded	I	6	15	22	30
		d	24	40	55	90
		D	6	15	22	30
		m	8	20	40	70
		n	24	36	54	90

### Relationship between Sizes and Models

	Model	Model
M8	Shielded	E2E-X2D□ E2E-X1R5E□ E2E-X1R5F□ E2E-X1R5Y□
	Unshielded	E2E-X4MD□ E2E-X2ME□ E2E-X2MF□ E2E-X2MY□
	Shielded	E2E-X3D□ E2E-X2E□ E2E-X2F□ E2E-X2Y□ E2E-X3T1
	Unshielded	E2E-X8MD□ E2E-X5ME□ E2E-X5MF□ E2E-X5MY□
	Shielded	E2E-X7D□ E2E-X5E□ E2E-X5F□ E2E-X5Y□ E2E-X7T1
	Unshielded	E2E-X14MD□ E2E-X10ME□ E2E-X10MF□ E2E-X10MY□
	Shielded	E2E-X10D□ E2E-X10E□ E2E-X10F□ E2E-X10Y□ E2E-X10T1
	Unshielded	E2E-X20MD□ E2E-X18ME□ E2E-X18MF□ E2E-X18MY□

## Mutual Interference

When installing Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.



## Mutual Interference

(Unit: mm)

Model		Item	M8	M12	M18	M30
DC 2-Wire Models E2E-X□D□	Shielded	A	20	30 (20)	50 (30)	100 (50)
		B	15	20 (12) *	35 (18) *	70 (35)
AC/DC 2-Wire Models E2E-X□T1	Unshielded	A	80	120 (60)	200 (100)	300 (100)
		B	60	100 (50)	110 (60)	200 (100)
DC 3-Wire Models E2E-X□E□/X□F□	Shielded	A	20	30 (20)	50 (30)	100 (50)
		B	15	20 (12) *	35 (18) *	70 (35)
AC 2-Wire Models E2E-X□Y□	Unshielded	A	80	120 (60)	200 (100)	300 (100)
		B	60	100 (50)	110 (60)	200 (100)

Note: Values in parentheses apply to Sensors operating at different frequencies.

\* Mutual interference will not occur for close-proximity mounting if models with different frequencies are used together.


## Loads with Large Surge Currents (E2E-X□T□)

If a load with a large surge current is connected, such as a relay, lamp, or motor, the surge current may cause the load short-circuit protection circuit to operate, resulting in operating errors.

### Mounting

#### Tightening Force

Do not tighten the nut with excessive force.  
A washer must be used with the nut.

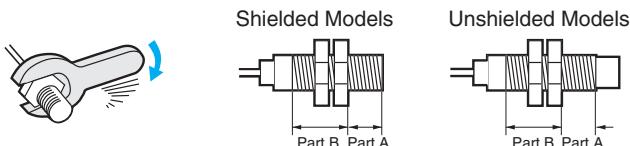

Note: 1. The allowable tightening strength depends on the distance from the edge of the head, as shown in the following table. (A is the distance from the edge of the head. B includes the nut on the head side. If the edge of the nut is in part A, the tightening torque for part A applies instead.)  
2. The following strengths assume washers are being used.

Model	Part A		Part B
	Dimension	Torque	Torque
M8	Shielded	9	12 N·m
	Unshielded	3	
M12			30 N·m
M18			70 N·m
M30			180 N·m

## Connecting a DC 2-Wire Proximity Sensor to a PLC (Programmable Controller)

### Required Conditions

Connection to a PLC is possible if the specifications of the PLC and the Proximity Sensor satisfy the following conditions. (The meanings of the symbols are given at the right.)

1. The ON voltage of the PLC and the residual voltage of the Proximity Sensor must satisfy the following.

$$V_{ON} \leq V_{CC} - V_R$$

2. The OFF current of the PLC and the leakage current of the Proximity Sensor must satisfy the following.

$$I_{OFF} \geq I_{leak}$$

(If the OFF current is not listed in the PLC's input specifications, take it to be 1.3 mA.)

3. The ON current of the PLC and the control output of the Proximity Sensor must satisfy the following.

$$I_{OUT} (\text{min.}) \leq I_{ON} \leq I_{OUT} (\text{max.})$$

The ON current of the PLC will vary, however, with the power supply voltage and the input impedance, as shown in the following equation.

$$I_{ON} = (V_{CC} - V_{PC}) / R_{IN}$$

### Example

In this example, the above conditions are checked when the Proximity Sensor is the E2E-X7D1-N and the power supply voltage is 24 V.

$$1. V_{ON} (14.4 V) \leq V_{CC} (20.4 V) - V_R (3 V) = 17.4 V: \text{OK}$$

$$2. I_{OFF} (1.3 mA) \geq I_{leak} (0.8 mA): \text{OK}$$

$$3. I_{ON} = [V_{CC} (20.4 V) - V_R (3 V) - V_{PC} (4 V)] / R_{IN} (3 k\Omega) \\ = \text{Approx. } 4.5 \text{ mA}$$

$$\text{Therefore, } I_{OUT} (\text{min.}) (3 \text{ mA}) \leq I_{ON} (4.5 \text{ mA}): \text{OK}$$

Connection is thus possible.

### Connection Example (Reference)

PLC	$V_{ON}$ : ON voltage (14.4 V) $I_{ON}$ : ON current (typically 7 mA) $I_{OFF}$ : OFF current (1.3 mA) $R_{IN}$ : Input impedance (3 kΩ) $V_{PC}$ : Internal residual voltage (4 V)
Proximity Sensor	$V_R$ : Output residual voltage (3 V) $I_{leak}$ : Leakage current (0.8 mA) $I_{OUT}$ : Control output (3 to 100 mA) $V_{CC}$ : Power supply voltage (PLC: 20.4 to 26.4 V)

## Dimensions

(Unit: mm)  
Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

## Main Units

## Model Number-Dimensions Drawing Number Lookup Table

Model	Model	DC 2-Wire Models		DC 3-Wire Models		AC 2-Wire Models		AC/DC 2-Wire Models	
		Model	No.	Model	No.	Model	No.	Model	No.
Pre-wired Models	Shielded	M8	E2E-X2D□(-US)	1	E2E-X1R5E□/F□	1	E2E-X1R5Y□	3	---
		M12	E2E-X3D□(-US)	5	E2E-X2E□/F□	5	E2E-X2Y□	7	E2E-X3T1
		M18	E2E-X7D□(-US)	10	E2E-X5E□/F□	10	E2E-X5Y□	10	E2E-X7T1
		M30	E2E-X10D□(-US)	12	E2E-X10E□/F□	12	E2E-X10Y□	12	E2E-X10T1
	Unshielded	M8	E2E-X4MD□(-US)	2	E2E-X2ME□/F□	2	E2E-X2MY□	4	---
		M12	E2E-X8MD□(-US)	6	E2E-X5ME□/F□	6	E2E-X5MY□	8	---
		M18	E2E-X14MD□(-US)	11	E2E-X10ME□/F□	11	E2E-X10MY□	11	---
		M30	E2E-X20MD□(-US)	13	E2E-X18ME□/F□	13	E2E-X18MY□	13	---
Connector Models (M12)	Shielded	M8	E2E-X2D□-M1(G)	14	E2E-X1R5E/F□-M1	14	---	---	---
		M12	E2E-X3D□-M1(G)	16	E2E-X2E/F□-M1	16	E2E-X2Y□-M1	18	---
		M18	E2E-X7D□-M1(G)	20	E2E-X5E/F□-M1	20	E2E-X5Y□-M1	20	---
		M30	E2E-X10D□-M1(G)	22	E2E-X10E/F□-M1	22	E2E-X10Y□-M1	22	---
	Unshielded	M8	E2E-X4MD□-M1(G)	15	E2E-X2ME/F□-M1	15	---	---	---
		M12	E2E-X8MD□-M1(G)	17	E2E-X5ME/F□-M1	17	E2E-X5MY□-M1	19	---
		M18	E2E-X14MD□-M1(G)	21	E2E-X10ME/F□-M1	21	E2E-X10MY□-M1	21	---
		M30	E2E-X20MD□-M1(G)	23	E2E-X18ME/F□-M1	23	E2E-X18MY□-M1	23	---
Connector Models (M8)	Shielded	M8	E2E-X2D□-M3G	24	E2E-X1R5E/F□-M3	24	---	---	---
	Unshielded	M8	E2E-X4MD□-M3G	25	E2E-X2ME/F□-M3	25	---	---	---
Pre-wired Connector Models	Shielded	M8	E2E-X2D□-M1(T)GJ(-U)	26	---		---		---
			E2E-X2D□-M1TGJ-US						
		M12	E2E-X3D□-M1(T)GJ(-U)	27					
			E2E-X3D□-M1TGJ-US						
		M18	E2E-X7D□-M1(T)GJ(-U)	28					
			E2E-X7D□-M1TGJ-US						
		M30	E2E-X10D□-M1(T)GJ(-U)	29					
			E2E-X10D□-M1TGJ-US						
	Unshielded	M8	E2E-X4MD□-M1TGJ-US	30	---		---		---
			E2E-X8MD1-M1(T)GJ	31					
		M12	E2E-X8MD□-M1TGJ-US						
		M18	E2E-X14MD1-M1(T)GJ	32					
			E2E-X14MD□-M1TGJ-US						
Pre-wired Connector Models (no polarity)	Shielded	M12	E2E-X3D1-M1J-T	27	---		---		---
		M18	E2E-X7D□-M1J-T	28					
		M30	E2E-X10D□-M1J-T	29					


Note 1. Two clamping nuts and one toothed washer are provided with M8 to M30 Models.

2. The model numbers of M8 to M30 Pre-wired Models are laser-marked on the milled section and cable section. This does not apply, however, to models that end in -U.

## Pre-wired Models (Shielded)



**Diagram 1** **E2E-X2D□**  
**E2E-X1R5E□/F□**

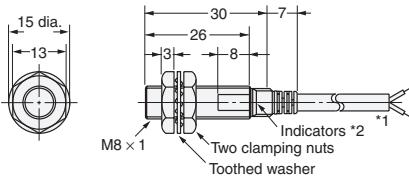


\*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.3 mm). Standard length: 2 m  
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.3 mm). Standard length: 2 m  
Robotics Cable Models:  
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.27 mm). Standard length: 2 m  
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.27 mm). Standard length: 2 m  
Models with Highly Oil-resistant Cables:  
4-dia. polyurethane-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.3 mm). Standard length: 2 m  
The cable can be extended up to 200 m (separate metal conduit).  
\*2. D1 Models: Operation indicator (red) and setting indicator (green), D2/E/F Models: Operation indicator (red)

## Pre-wired Models (Unshielded)




**Diagram 2** **E2E-X4MD□**  
**E2E-X2ME□/F□**

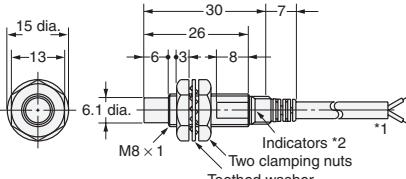


\*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.3 mm). Standard length: 2 m  
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.3 mm). Standard length: 2 m  
Robotics Cable Models:  
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.27 mm). Standard length: 2 m  
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.27 mm). Standard length: 2 m  
The cable can be extended up to 200 m (separate metal conduit).  
\*2. D1 Models: Operation indicator (red) and setting indicator (green), D2/E/F Models: Operation indicator (red)


**Diagram 3** **E2E-X1R5Y□**

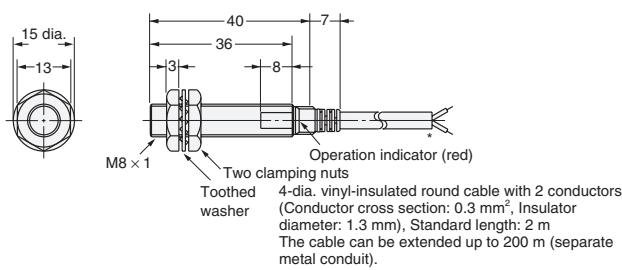

**Diagram 4** **E2E-X2MY□**

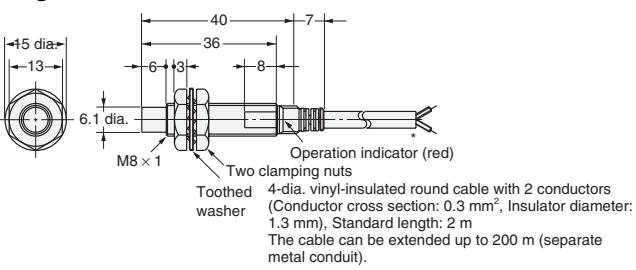


**Diagram 5** **E2E-X3D□**  
**E2E-X2E□/F□**

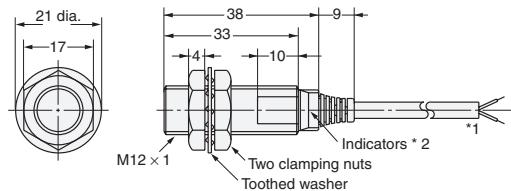


\*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.3 mm). Standard length: 2 m  
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.3 mm). Standard length: 2 m  
Robotics Cable Models:  
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.27 mm). Standard length: 2 m  
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.27 mm). Standard length: 2 m  
Models with Highly Oil-resistant Cables:  
4-dia. polyurethane-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.3 mm). Standard length: 2 m  
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.  
\*2. D1 Models: Operation indicator (red) and setting indicator (green), D2/E/F Models: Operation indicator (red)

**Diagram 6** **E2E-X8MD□**  
**E2E-X5ME□/F□**

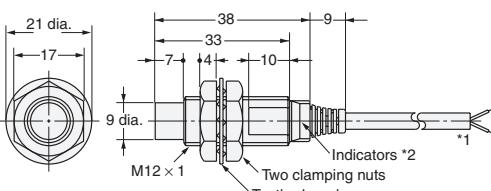


\*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.3 mm). Standard length: 2 m  
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.3 mm). Standard length: 2 m  
Robotics Cable Models:  
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.27 mm). Standard length: 2 m  
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm<sup>2</sup>, Insulator diameter: 1.27 mm). Standard length: 2 m  
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.  
\*2. D1 Models: Operation indicator (red) and setting indicator (green), D2/E/F Models: Operation indicator (red)


**Diagram 7** **E2E-X2Y□**

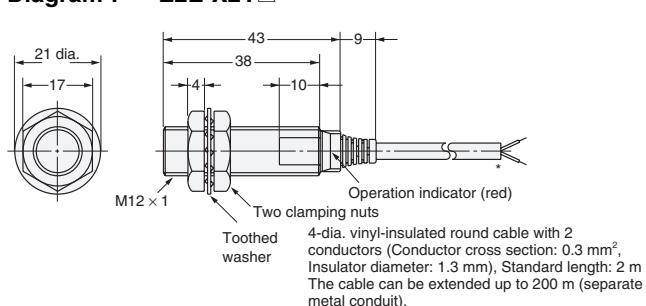

**Diagram 8** **E2E-X5MY□**

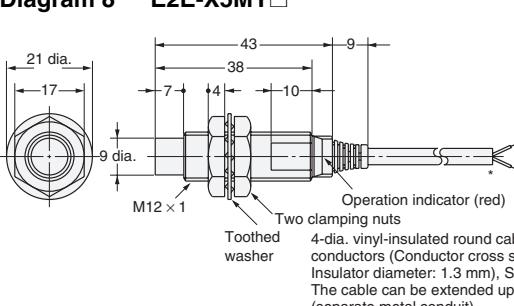

## Mounting Hole Dimensions





Dimension	M8	M12
F (mm)	8.5 <sup>+0.5</sup> <sub>0</sub> dia.	12.5 <sup>+0.5</sup> <sub>0</sub> dia.

## Pre-wired Models (Shielded)


## Pre-wired Models (Unshielded)



Diagram 9 E2E-X3T1

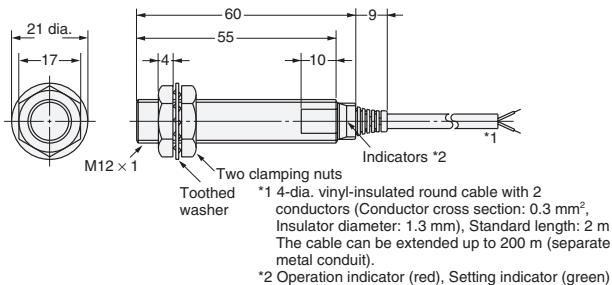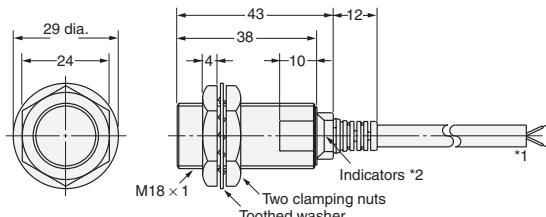Diagram 10 E2E-X7D□/E2E-X5E□/F□  
E2E-X5Y□/E2E-X7T1

\*1. 6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.9 mm), Standard length: 2 m  
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.9 mm), Standard length: 2 m  
Robotics Cable Models:  
6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.74 mm), Standard length: 2 m  
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.74 mm), Standard length: 2 m  
Models with Highly Oil-resistant Cables:  
6-dia. polyurethane-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.9 mm), Standard length: 2 m  
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.  
\*2. D1/T Models: Operation indicator (red), Setting indicator (green)  
D2/E/F/Y Models: Operation indicator (red)

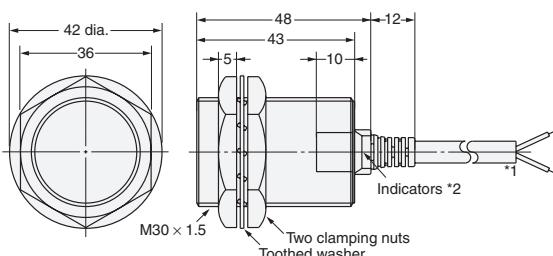
Diagram 12 E2E-X10D□/E2E-X10E□/F□  
E2E-X10Y□/E2E-X10T1

\*1. 6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.9 mm), Standard length: 2 m  
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.9 mm), Standard length: 2 m  
Robotics Cable Models:  
6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.74 mm), Standard length: 2 m  
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.74 mm), Standard length: 2 m  
Models with Highly Oil-resistant:  
6-dia. polyurethane-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.9 mm), Standard length: 2 m  
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.  
\*2. D1/T Models: Operation indicator (red), Setting indicator (green)  
D2/E/F/Y Models: Operation indicator (red)


## Mounting Hole Dimensions



Dimension	M12	M18	M30
F (mm)	12.5 <sup>+0.5</sup> <sub>0</sub> dia.	18.5 <sup>+0.5</sup> <sub>0</sub> dia.	30.5 <sup>+0.5</sup> <sub>0</sub> dia.

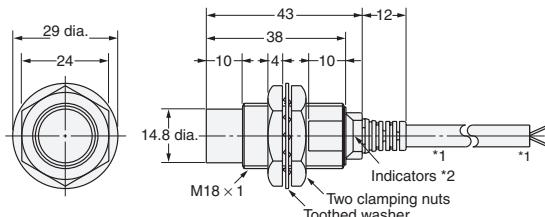Diagram 11 E2E-X14MD□/E2E-X10ME□/F□  
E2E-X10MY□

\*1. 6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.9 mm), Standard length: 2 m  
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.9 mm), Standard length: 2 m  
Robotics Cable Models:  
6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.74 mm), Standard length: 2 m  
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.74 mm), Standard length: 2 m  
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.  
\*2. D1/T Models: Operation indicator (red), Setting indicator (green)  
D2/E/F/Y Models: Operation indicator (red)

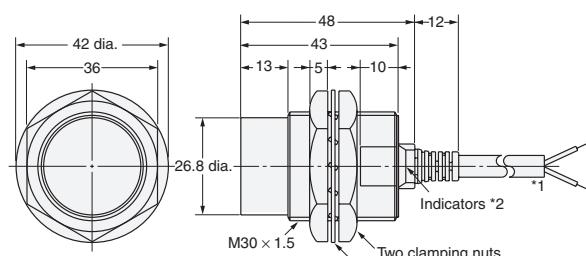
Diagram 13 E2E-X20MD□/E2E-X18ME□/F□  
E2E-X18MY□

\*1. 6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.9 mm), Standard length: 2 m  
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.9 mm), Standard length: 2 m  
Robotics Cable Models:  
6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.74 mm), Standard length: 2 m  
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm<sup>2</sup>, Insulator diameter: 1.74 mm), Standard length: 2 m  
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.  
\*2. D1/T Models: Operation indicator (red), Setting indicator (green)  
D2/E/F/Y Models: Operation indicator (red)

**M8 Connector Models  
(Shielded)**




**Diagram 24 E2E-X2D□-M3G/E2E-X1R5E□-M3/X1RF□-M3**

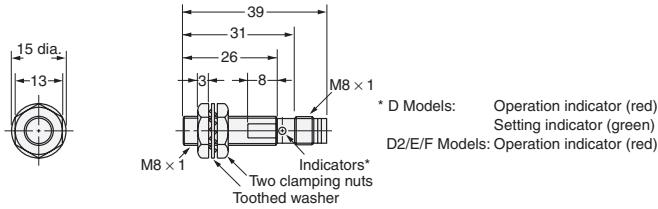


**M12 Connector Models  
(Shielded)**




**Diagram 14 E2E-X2D□-M1(G)  
E2E-X1R5E□-M1/E2E-X1R5F□-M1**

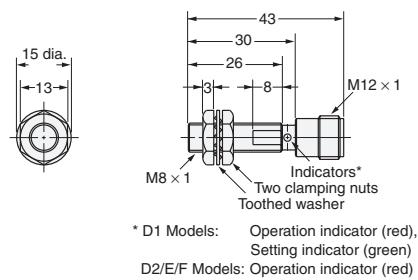

**Diagram 16 E2E-X3D□-M1(G)  
E2E-X2E□-M1/E2E-X2F□-M1**

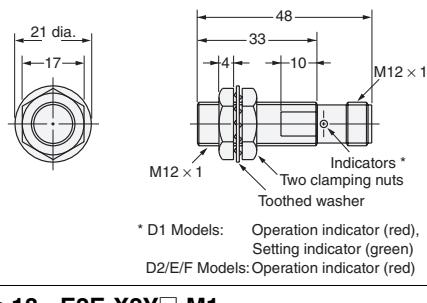


**Diagram 18 E2E-X2Y□-M1**

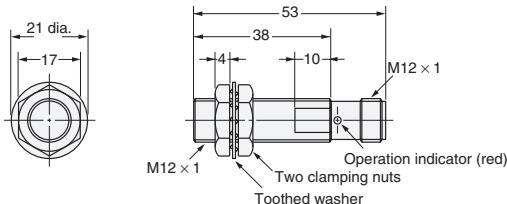

**M8 Connector Models  
(Unshielded)**




**Diagram 25 E2E-X4MD□-M3G/E2E-X2ME□-M3/X2MF□-M3**

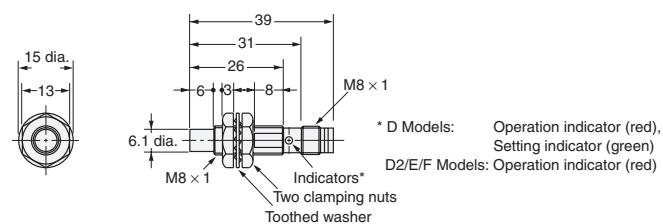


**M12 Connector Models  
(Unshielded)**




**Diagram 15 E2E-X4MD□-M1(G)  
E2E-X2ME□-M1/E2E-X2MF□-M1**

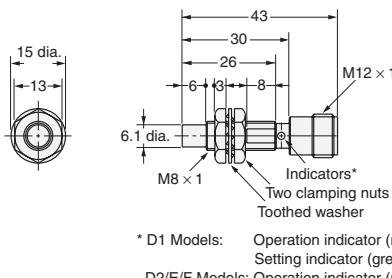


**Diagram 17 E2E-X8MD□-M1(G)  
E2E-X5ME□-M1/E2E-X5MF□-M1**

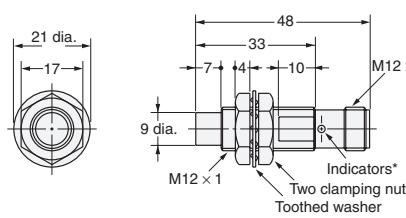

**Diagram 19 E2E-X5MY□-M1**

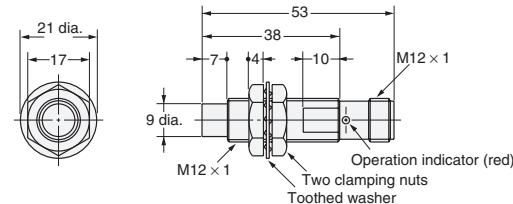


**Diagram 20 E2E-X7D□-M1(G)/E2E-X5E□-M1/X5F□-M1  
E2E-X5Y□-M1**

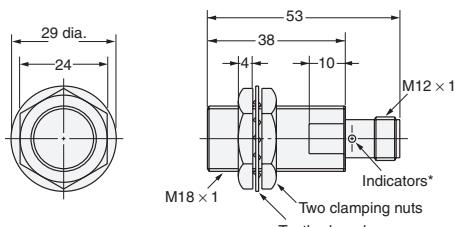


\* D1 Models: Operation indicator (red), Setting indicator (green)  
D2/E/Y Models: Operation indicator (red)

**Diagram 22 E2E-X10D□-M1(G)/E2E-X10E□-M1/X10F□-M1  
E2E-X10Y□-M1**

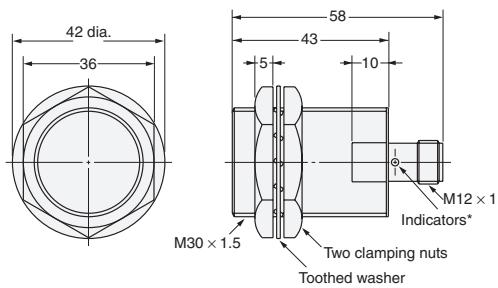


\* D1 Models: Operation indicator (red), Setting indicator (green)  
D2/E/Y Models: Operation indicator (red)

**Diagram 21 E2E-X14MD□-M1(G)/E2E-X10ME□-M1  
X10MF□-M1  
E2E-X10MY□-M1**

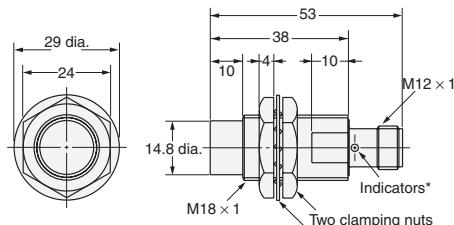


\* D1 Models: Operation indicator (red), Setting indicator (green)  
D2/E/Y Models: Operation indicator (red)

**Diagram 23 E2E-X20MD□-M1(G)/E2E-X18ME□-M1/  
X18MF□-M1  
E2E-X18MY□-M1**

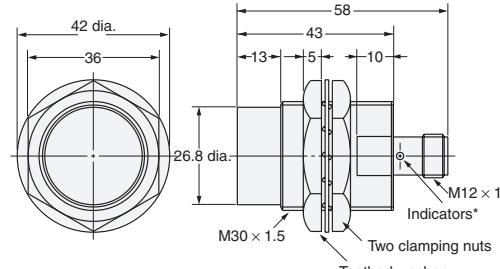


\* D1 Models: Operation indicator (red), Setting indicator (green)  
D2/E/Y Models: Operation indicator (red)

### Mounting Hole Dimensions





Dimensions	M8	M12	M18	M30
F (mm)	$8.5^{+0.5}$ dia.	$12.5^{+0.5}$ dia.	$18.5^{+0.5}$ dia.	$30.5^{+0.5}$ dia.

## Pre-wired Connector Models (Shielded)





**Diagram 26** E2E-X2D□-M1TGJ-U \*3  
E2E-X2D1-M1TGJ  
E2E-X2D□-M1TGJ-US

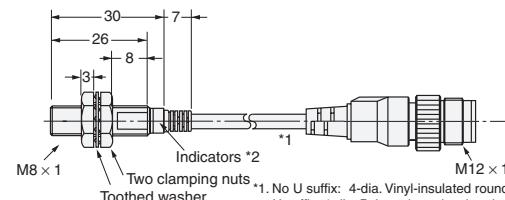



\*1. No U suffix: 4-dia. Vinyl-insulated round cable  
U suffix: 4-dia. Polyurethane insulated round cable,  
Standard length: 300 mm  
\*2. D1 Models: Operation indicator (red), Setting indicator (green)  
D2 Models: Operation indicator (red)  
\*3. The connectors for M1TGJ models are XS5 Smartclick connectors.

**Diagram 27** E2E-X3D□-M1GJ  
E2E-X3D1-M1J-T  
E2E-X3D□-M1TGJ-U \*3  
E2E-X3D1-M1TGJ  
E2E-X3D□-M1TGJ-US

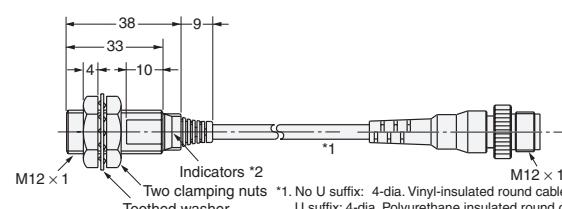



\*1. No U suffix: 4-dia. Vinyl-insulated round cable  
U suffix: 4-dia. Polyurethane insulated round cable,  
Standard length: 300 mm  
\*2. D1 Models: Operation indicator (red), Setting indicator (green)  
D2 Models: Operation indicator (red)  
\*3. The connectors for M1TGJ models are XS5 Smartclick connectors.

**Diagram 28** E2E-X7D□-M1GJ  
E2E-X7D□-M1J-T  
E2E-X7D□-M1TGJ-U \*3  
E2E-X7D1-M1TGJ  
E2E-X7D□-M1TGJ-US

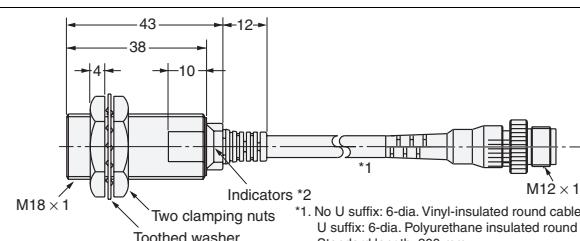

\*1. No U suffix: 6-dia. Vinyl-insulated round cable  
U suffix: 6-dia. Polyurethane insulated round cable,  
Standard length: 300 mm  
\*2. D1 Models: Operation indicator (red), Setting indicator (green)  
D2 Models: Operation indicator (red)  
\*3. The connectors for M1TGJ models are XS5 Smartclick connectors.


**Diagram 29** E2E-X10D□-M1GJ  
E2E-X10D□-M1J-T  
E2E-X10D□-M1TGJ-U \*3  
E2E-X10D1-M1TGJ  
E2E-X10D□-M1TGJ-US

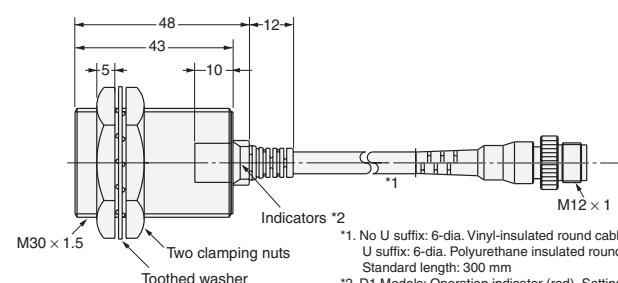

\*1. No U suffix: 6-dia. Vinyl-insulated round cable  
U suffix: 6-dia. Polyurethane insulated round cable,  
Standard length: 300 mm  
\*2. D1 Models: Operation indicator (red), Setting indicator (green)  
D2 Models: Operation indicator (red)  
\*3. The connectors for M1TGJ models are XS5 Smartclick connectors.


### Pre-wired Connector Models (Unshielded)

**Diagram 30 E2E-X4MD□-M1TGJ-US**

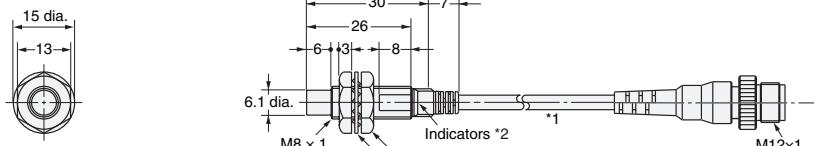


\*1. 4-dia. vinyl-insulated round cable  
Standard length: 300 mm  
\*2. D1 Models: Operation indicator (red),  
Setting indicator (green)  
D2 Models: Operation indicator (red)

**Diagram 31 E2E-X8MD1-M1GJ  
E2E-X8MD1-M1TGJ  
E2E-X8MD□-M1TGJ-US**

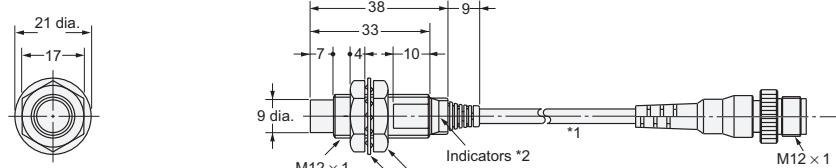


\*1. 4-dia. vinyl-insulated round cable,  
Standard length: 300 mm  
\*2. D1 Models: Operation indicator (red),  
Setting indicator (green)  
D2 Models: Operation indicator (red)

**Diagram 32 E2E-X14MD□-M1GJ  
E2E-X14MD1-M1TGJ  
E2E-X14MD□-M1TGJ-US**

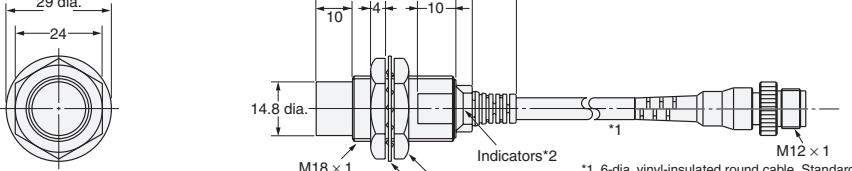

\*1. 6-dia. vinyl-insulated round cable,  
Standard length: 300 mm  
\*2. D1 Models: Operation indicator (red),  
Setting indicator (green)  
D2 Models: Operation indicator (red)

**Diagram 33 E2E-X20MD1-M1GJ  
E2E-X20MD1-M1TGJ  
E2E-X20MD□-M1TGJ-US**

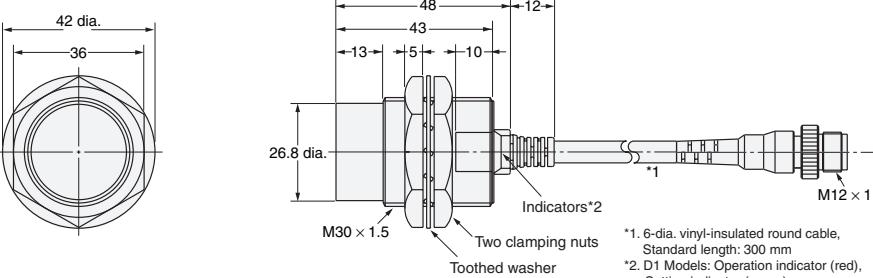

\*1. 6-dia. vinyl-insulated round cable,  
Standard length: 300 mm  
\*2. D1 Models: Operation indicator (red),  
Setting indicator (green)  
D2 Models: Operation indicator (red)


### Mounting Hole Dimensions




Dimension	M8	M12	M18	M30
F (mm)	$8.5^{+0.5}$ dia.	$12.5^{+0.5}$ dia.	$18.5^{+0.5}$ dia.	$30.5^{+0.5}$ dia.

## Dimensions for Proximity Sensors with Sensor I/O Connectors

### Shielded Models

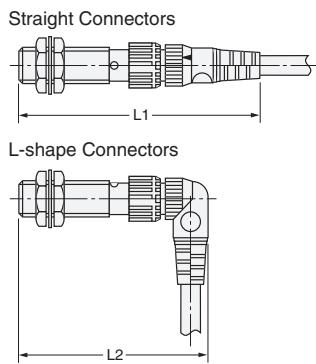

### Unshielded Models

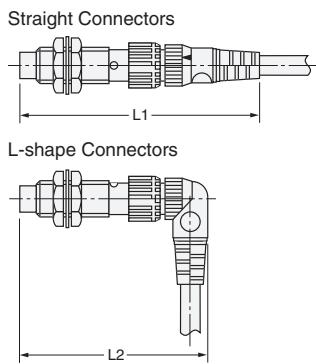

### Dimensions with the XS2F/XS5F Connected (Unit: mm)

Dimension	Sensor diameter	L1	L2
	<b>M8</b>	Approx. 75	Approx. 62
<b>M12*</b>	<b>DC</b>	Approx. 80	Approx. 67
	<b>AC</b>	Approx. 85	Approx. 72
	<b>M18</b>	Approx. 85	Approx. 72
	<b>M30</b>	Approx. 90	Approx. 77

\* The overall length of the Sensor is different between AC and DC Models for Sensors with diameters of M12. This will change the dimension when the I/O Connector is connected.

### Dimensions with the XS3F Connected (Unit: mm)

Dimension	Sensor diameter	L1	L2
	<b>M8</b>	Approx. 65	Approx. 54

## Accessories (Order Separately)

### Sensor I/O Connectors

Refer to *Introduction to Sensor I/O Connectors/Sensor Controllers* for details.

### Mounting Brackets

### Protective Covers

### Sputter Protective Covers

Refer to Y92 for details.

## Terms and Conditions Agreement

### Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

### Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

### Limitation on Liability: Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

### Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

### Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

### Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

### Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

2019.4

In the interest of product improvement, specifications are subject to change without notice.

**OMRON Corporation**  
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2019 All Right Reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Omron:

[E2E-X10ME1](#) [E2E-X2D2-M1](#) [E2E-X5ME1-M1](#) [E2E-X1R5E1](#) [E2E-C1C1](#) [E2E-CR8C1](#) [E2E-CR8B1](#) [E2E-X1B1](#)  
[E2E-X4MD1](#) [E2E-X1B2](#) [E2E-X18MF1-M1](#) [E2E-C1C1 10M](#) [E2E-C1C1-5M](#) [E2E-C1C1-R](#) [E2E-X10D15-M1J-T 0.3M](#)  
[E2E-X10D1-M1G](#) [E2E-X10D1-M1GJ-T 0.3M](#) [E2E-X10D1-M1GJ-T1 0.5M](#) [E2E-X10D1-M1GJ-T 1M](#) [E2E-X10D1-M1G-](#)  
[T1](#) [E2E-X10D1-M1J 0.3M](#) [E2E-X10D1-M1J-T 0.3M](#) [E2E-X10D1-M1J-T1 0.3M](#) [E2E-X10D1-M1J-T 1M](#) [E2E-X10D1-](#)  
[M1J-T1N 0.3M](#) [E2E-X10D1-N](#) [E2E-X10D1-N3](#) [E2E-X10D2-M1G-T1](#) [E2E-X10D2-M1G-T3](#) [E2E-X10D2-M1J-T4N 0.3M](#)  
[E2E-X10E1](#) [E2E-X10E1 5M](#) [E2E-X10E1-9 2M](#) [E2E-X10E1-M1](#) [E2E-X10E2](#) [E2E-X10E2-M1](#) [E2E-X10E2-N 5M](#)  
[E2E-X10F1](#) [E2E-X10F1 10M](#) [E2E-X10F1-M1](#) [E2E-X10F2](#) [E2E-X10ME1-M1](#) [E2E-X10ME2](#) [E2E-X10MF1](#) [E2E-](#)  
[X10MF1-M1](#) [E2E-X10MF2](#) [E2E-X10MY1](#) [E2E-X10MY1-M1](#) [E2E-X10MY1-M4](#) [E2E-X10MY1-US](#) [E2E-X10MY2-M1](#)  
[E2E-X10MY2-M4](#) [E2E-X10T1](#) [E2E-X10Y1-5](#) [E2E-X10Y15 10M](#) [E2E-X10Y1-M4](#) [E2E-X10Y2-M4](#) [E2E-X14MD1](#) [E2E-](#)  
[X14MD1-M1](#) [E2E-X14MD1-M1G](#) [E2E-X14MD1-M1GJ](#) [E2E-X14MD1-M1J 0.3M](#) [E2E-X14MD1S-M1](#) [E2E-X14MD2](#)  
[E2E-X14MD2-M1G](#) [E2E-X16MC1-M1\(E-PROX\)](#) [E2E-X18ME1](#) [E2E-X18ME1 5M](#) [E2E-X18ME1-M1J 0.3M](#) [E2E-](#)  
[X18ME2](#) [E2E-X18ME2-M1](#) [E2E-X18MF1](#) [E2E-X18MF1-M1J 0.3M](#) [E2E-X18MF2](#) [E2E-X18MY1-M1](#) [E2E-X18MY1-M4](#)  
[E2E-X18MY2-M4](#) [E2E-X1B1 5M](#) [E2E-X1B1-R](#) [E2E-X1C1-3](#) [E2E-X1C1 5M](#) [E2E-X1C1-R](#) [E2E-X1C2](#) [E2E-X1C2](#)  
[5M](#) [E2E-X1R5E1-40](#) [E2E-X1R5E1 5M](#) [E2E-X1R5E1-M1](#) [E2E-X1R5E1-M3](#) [E2E-X1R5E1-R](#) [E2E-X1R5E2-M1](#) [E2E-](#)  
[X1R5E2-M3](#) [E2E-X1R5F1](#) [E2E-X1R5F1 5M](#) [E2E-X1R5F1-M3](#) [E2E-X1R5F1-R](#) [E2E-X1R5F2-M1](#) [E2E-X1R5F2-M3](#)  
[E2E-X1R5Y1](#) [E2E-X1R5Y1 5M](#) [E2E-X1R5Y1-G7 10M](#)