

# Integrated Current Transducer GO-SME series

## Definition

The GO-SME series is a LEM integrated current transducer solution designed to measure AC and DC currents in both industrial and automotive applications. The differential sensing technique allows the transducer to reject an external field coming from a noisy environment. Proprietary stress and temperature compensation algorithms are implemented in order to achieve very good accuracy over wide temperature range. The primary conductor (pins 1 to 4) has a very low electrical resistance of 0.9 mΩ (typical), which enables excellent performance and low power losses. The GO-SME is capable of measuring continuous currents from 20 to 50 A over wide temperature range. The galvanic insulation between the primary and the secondary eliminates the need for any additional insulation, reducing the total footprint and cost of the system.

## Main features & advantages

- Open loop multi-range current transducer: 50 A
- Low electrical resistance 0.9 mΩ
- Dual supply voltage 5 V or 3.3 V
- High bandwidth: 300 kHz
- No magnetic hysteresis
- 1 % total error over temperature
- Galvanic separation between primary and secondary with 4 mm of  $d_{Cl}$  and  $d_{Cp}$
- Insulated test voltage 2400 V RMS
- AEC-Q-100 Grade 1.

## Typical applications

- Small drives
- HVAC inverters
- Appliances
- Solar inverters
- E-Bikes
- Automotive & Industry qualified.

## Standards

- IEC 61800-5-1: 2007
- IEC 62109-1: 2010
- IEC 62368-1:2018 (supersedes IEC 60950-1: 2005)
- UL 1577: 2014
- UL 62368: 2019.



Figure 1: GO-SME package - SOIC-8  
(Not to scale - For illustration:  
not representative)

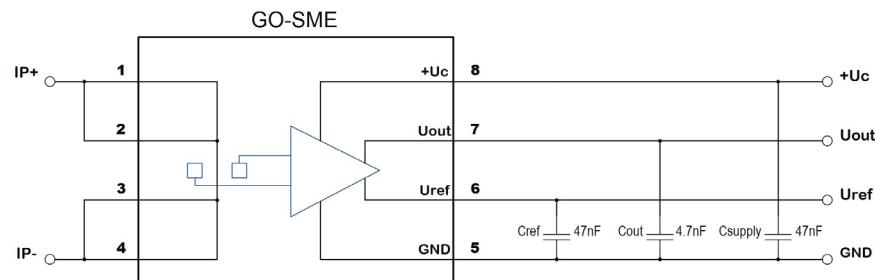
**Application circuit and pinout**


Figure 2: Application circuit

**Table 1**

Pin#	Name	Type	Function
1	$I_{P+}$	IN/OUT	Positive input of the primary current
2	$I_{P+}$	IN/OUT	Positive input of the primary current
3	$I_{P-}$	IN/OUT	Negative input of the primary current
4	$I_{P-}$	IN/OUT	Negative input of the primary current
5	GND	PWR	Ground terminal
6	$U_{ref}$	IN/OUT	Reference voltage
7	$U_{out}$	OUT	Output voltage
8	$+U_c$	PWR	Supply voltage

**Table 2**

External circuit example#	Min	Typ	Max	Unit
$C_{L_{out}}$		4.7	6	nF
$C_{L_{supply}}$		47		nF
$C_{L_{ref}}$		47	100	nF

Note: For ratiometric versions of the product,  $C_{ref}$  is not necessary.

**Available products**

Product name#	Current measurement range (A max)	Nominal current (A RMS) <sup>1)</sup>	Supply voltage $U_c$	Ratiometricity	Temperature range (°C)
GO 10-SME	±25	±10	5 V	N	-40 ... 125 °C
GO 20-SME	±50	±20	5 V	N	
GO 12-SME/SP2	±30	±12	5 V	Y	
GO 20-SME/SP2	±50	±20	5 V	Y	
GO 10-SME/SP3	±25	±10	3.3 V	N	
GO 20-SME/SP3	±50	±20	3.3 V	N	
GO 8-SME/SP4	±20	±8	3.3 V	Y	
GO 15-SME/SP4	±37.5	±15	3.3 V	Y	

Other configurations available, contact LEM for more options.

Note: <sup>1)</sup> Trimmings at LEM are done at this nominal current.

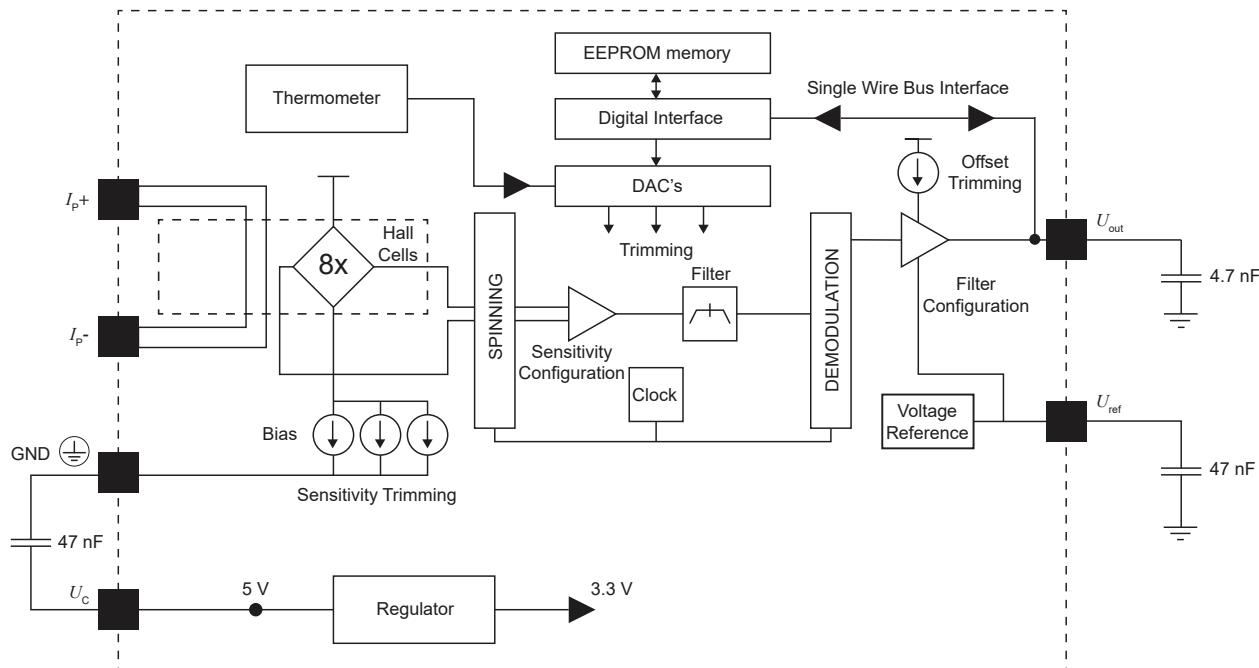
**Block diagram**


Figure 3: Block diagram GO-SME

## Absolute maximum ratings

Parameter	Symbol	Unit	Min	Max	Conditions
Ambient operating temperature	$T_A$	°C	-40	125	
Ambient storage temperature	$T_{A\ st}$	°C	-40	150	
Maximum junction temperature	$T_{J\ max}$	°C		165	
Output sink current		mA		50	
Output source current		mA		25	

Absolute maximum ratings apply at 25 °C unless otherwise noted.

Stresses above these ratings may cause permanent damage.

Exposure to absolute maximum ratings for extended periods may degrade reliability.

## Environmental and mechanical characteristics

Parameter	Symbol	Unit	Value
Maximum supply voltage (not destructive)	$U_{C\ max}$	V	8
Maximum supply voltage on other pins (not entering non-standard modes)			6.5
Electrostatic discharge voltage (HBM-Human Body Model)	$U_{ESD\ HBM}$	kV	2
Electrostatic discharge voltage (CDM-Charged Device Model)	$U_{ESD\ CDM}$	V	500
Thermal resistance junction to board <sup>1)</sup>	$R_{th\ JB}$	K/W	15
Time constant (to reach steady state)	$t$	s	1
Mass	$m$	g	0.07

Note: <sup>1)</sup> Done with LEM evaluation board PCB 2320-03 described on later paragraph.

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC insulation test, 50 Hz, 1 min	$U_d$	kV	2.5 <sup>1)</sup>	According to IEC 62368
RMS voltage for AC insulation test, 60 Hz, 1 min	$U_d$	kV	2.5	According to UL 62368 & UL 1577
RMS voltage for AC insulation test, 50 Hz, 1 min	$U_d$	kV	2.5	According to IEC 60664-1
Impulse withstand voltage 1.2/50 $\mu$ s	$U_{Ni}$	kV	4	According to IEC 62109-1, IEC 61800-5-1
Partial discharge recurring peak voltage	$U_{PD}$	V	330	According to IEC 62109-1, IEC 61800-5-1
Partial discharge test inception RMS voltage <sup>2)</sup>	$U_i$	V	619	According to IEC 62109-1, IEC 61800-5-1
Partial discharge extinction RMS test voltage		V	495	According to IEC 62109-1, IEC 61800-5-1
Clearance (pri. - sec.)	$d_{Cl}$	mm	4	Shortest distance through air
Creepage distance (pri. - sec.)	$d_{Cp}$			Shortest path along body
Comparative tracking index	CTI		600	Grade requirements mass compound

Notes: <sup>1)</sup> Tested at 2.5 kV in production

<sup>2)</sup>  $U_i = U_{PD} \cdot 1.875$ .

### Working voltage according to IEC 62368-1

Working voltages		PD 2	Standards
Basic insulation	RMS voltage	> 600 V	According to IEC 62368-1 (replacing IEC 60950-1)
	Peak or DC voltage	847 V	
Reinforced insulation	RMS voltage	300 V	According to IEC 61800-5-1 and IEC 62109-1
	Peak or DC voltage	423 V	

### Rated insulation voltage according to IEC 61800-5-1 / IEC 62109-1

Rated insulation voltage	OV II / PD 2	OV III / PD 2	Standards
Basic insulation	RMS voltage	600 / 600	According to IEC 61800-5-1 and IEC 62109-1
	Peak or DC voltage	NA/ 848	
Reinforced insulation	RMS voltage	300 / 300	
	Peak or DC voltage	NA/ 424	

### UL 62368-1 Audio/Video, information and communication technology equipment - Component

File # E521147, Vol 1

Audio/Video, Information and Communication Technology Equipment - component, 4800 V AC Insulation

#### Standard

- UL 62368-1, Audio/video, information and communication technology equipment.

#### Marking

Only those products bearing the UL or UR Mark should be considered to be Listed or Recognized and covered under UL's Follow-Up Service. Always look for the Mark on the product.

**UL 1577 Non Optical insulating devices - Component**

File # E486776, Vol 1

Single protection, non-optical isolators, 2500 V AC insulation

**Standards**

- UL 1577, Optical Isolators;
- CSA Component Acceptance Service Notice N°. 5 A, Component Acceptance Service for Optocouplers and Related Devices.

**Marking**

Only those products bearing the UL or UR Mark should be considered to be Listed or Recognized and covered under UL's Follow-Up Service. Always look for the Mark on the product.

**Common electrical data (independent of sensitivity)**

At  $T_A = 25^\circ\text{C}$ ,  $U_C = +5\text{ V}$  or  $+3.3\text{ V}$ ,  $R_L = 100\text{ k}\Omega$  unless otherwise noted  
(see Definition of typical, minimum and maximum values paragraph in [page 12](#)).

Parameter	Symbol	Unit	Min	Typ	Max	Conditions
DC supply voltage	$U_C$	V	4.5	5	5.5	Standard & SP2 versions
DC supply voltage			3.14	3.3	3.47	SP3 & SP4 versions
Output voltage range @ $I_{PM}$	$U_{out} - U_{ref}$	V	-2		2	$U_C = 5\text{ V}$
			-1.25		1.25	$U_C = 3.3\text{ V}$
Output internal resistance of $U_{out}$	$R_{out}$	$\Omega$		1	5	Up to 10 kHz
Primary resistance @ $T_A = 25^\circ\text{C}$	$R_P$	$\text{m}\Omega$		0.9		
Internal series resistance of reference voltage source	$R_{ref}$	$\Omega$	120	200	333	
Maximum output current source of $U_{out}$		mA	25			Up to 10 kHz
Maximum input current sink of $U_{out}$		mA	20			Up to 10 kHz
Output leakage current		$\mu\text{A}$		2	20	
Maximum output current source of $U_{ref}$		mA		0.5		
Maximum input current sink of $U_{ref}$		mA		0.5		
Load capacitance on $U_{out}$	$C_L$	nF	0	4.7	6	
Load capacitance on $U_{ref}$			0	47	100	
DC current consumption	$I_C$	mA		20	26	$U_C = 5\text{ V}$
				20	26	$U_C = 3.3\text{ V}$
Electrical offset voltage	$U_{OE}$	mV	-5		5	$U_{out} - U_{ref}$ @ $U_{ref} = 2.5\text{ V}$
Temperature coefficient of $U_{ref}$	$TCU_{ref}$	ppm/K	-170		170	$-40^\circ\text{C} \dots +125^\circ\text{C}$
Temperature coefficient of $U_{OE}$	$TCU_{OE}$	mV/K	-0.075		0.075	$-40^\circ\text{C} \dots +125^\circ\text{C}$
Delay time to 10 % of the final output value for $I_{PN}$ step	$t_{D10}$	$\mu\text{s}$			1.5	
Delay time to 90 % of the final output value for $I_{PN}$ step	$t_{D90}$	$\mu\text{s}$			2	
Frequency bandwidth -3 dB, $T_A = 25^\circ\text{C}$	$BW$	kHz		300		

## Electrical data GO 10-SME

## GO-SME series

At  $T_A = 25^\circ\text{C}$ ,  $U_C = +5\text{ V}$ ,  $R_L = 100\text{ k}\Omega$  unless otherwise noted. Output mode: referred to internal or external reference (see Definition of typical, minimum and maximum values paragraph in [page 12](#)).

Parameter	Symbol	Unit	Min	Typ	Max	Conditions
Primary nominal RMS current	$I_{PN}$	A		10		800 mV on $U_{out}$
Primary current, measuring range	$I_{PM}$	A	-25		25	Full scale: 2 V on $U_{out}$
Internal reference voltage @ $I_{PN} = 0$	$U_{I_{ref}}$	V	2.48	2.5	2.52	
Nominal sensitivity	$S_N$	mV/A		80		800 mV @ $I_{PN}$
Temperature coefficient of $S$	$TCS$	ppm/K	-150		150	-40 °C ... 125 °C
Electrical offset current referred to $I_{PN}$	$I_{OE}$	mA	-62.5		62.5	
Temperature coefficient of $I_{OE}$	$TCI_{OE}$	mA/K	-0.94		0.94	-40 °C ... 125 °C
Lifetime offset drift		mV		±2		
Noise voltage spectral density	$u_{no}$	$\frac{\mu\text{V}}{\sqrt{\text{Hz}}}$		14.5		100 Hz ... 100 kHz
Sensitivity error	$\varepsilon_S$	%	-1		1	
Lifetime sensitivity error		% $S$		±1	±2	
Linearity error 0 ... $I_{PN}$	$\varepsilon_L$	% of $I_{PN}$	-0.3		0.3	Referred to $I_{PN}$
Linearity error 0 ... $I_{PM}$	$\varepsilon_L$	% of $I_{PM}$	-0.6		0.6	Referred to $I_{PM}$
Sum of sensitivity and linearity @ $I_{PN}$ , @ $T_A = 25^\circ\text{C}$	$\varepsilon_{SL25}$	% of $I_{PM}$	-0.7		0.7	
Total error over temperature	$\varepsilon_{tot}$	% of $I_{PM}$	-1		1	

## Electrical data GO 20-SME

At  $T_A = 25^\circ\text{C}$ ,  $U_C = +5\text{ V}$ ,  $R_L = 100\text{ k}\Omega$  unless otherwise noted. Output mode: referred to internal or external reference. (see Definition of typical, minimum and maximum values paragraph in [page 12](#)).

Parameter	Symbol	Unit	Min	Typ	Max	Conditions
Primary nominal RMS current	$I_{PN}$	A		20		800 mV on $U_{out}$
Primary current, measuring range	$I_{PM}$	A	-50		50	Full scale: 2 V on $U_{out}$
Internal reference voltage @ $I_{PN} = 0$	$U_{I_{ref}}$	V	2.48	2.5	2.52	
Nominal sensitivity	$S_N$	mV/A		40		800 mV @ $I_{PN}$
Temperature coefficient of $S$	$TCS$	ppm/K	-150		150	-40 °C ... 125 °C
Electrical offset current referred to $I_{PN}$	$I_{OE}$	mA	-125		125	
Temperature coefficient of $I_{OE}$	$TCI_{OE}$	mA/K	-1.88		1.88	-40 °C ... 125 °C
Lifetime offset drift		mV		±2		
Noise voltage spectral density	$u_{no}$	$\frac{\mu\text{V}}{\sqrt{\text{Hz}}}$		7		100 Hz ... 100 kHz
Sensitivity error	$\varepsilon_S$	%	-1		1	
Lifetime sensitivity error		% $S$		±2		
Linearity error 0 ... $I_{PN}$	$\varepsilon_L$	% of $I_{PN}$	-0.3		0.3	Referred to $I_{PN}$
Linearity error 0 ... $I_{PM}$	$\varepsilon_L$	% of $I_{PM}$	-0.6		0.6	Referred to $I_{PM}$
Sum of sensitivity and linearity @ $I_{PN}$ , @ $T_A = 25^\circ\text{C}$	$\varepsilon_{SL25}$	% of $I_{PM}$	-0.7		0.7	
Total error over temperature	$\varepsilon_{tot}$	% of $I_{PM}$	-1		1	

## Electrical data GO 12-SME/SP2

## GO-SME series

At  $T_A = 25^\circ\text{C}$ ,  $U_C = +5\text{ V}$ ,  $R_L = 100\text{ k}\Omega$  unless otherwise noted. Output mode: ratiometric.  
(see Definition of typical, minimum and maximum values paragraph in [page 12](#)).

Parameter	Symbol	Unit	Min	Typ	Max	Conditions
Primary nominal RMS current	$I_{PN}$	A		12.12		800 mV on $U_{out}$
Primary current, measuring range	$I_{PM}$	A	-30.3		30.3	Full scale: 2 V on $U_{out}$
Internal reference voltage @ $I_{PN} = 0$	$U_{I_{ref}}$	V	2.48	2.5	2.52	
Nominal sensitivity	$S_N$	mV/A		66		800 mV @ $I_{PN}$
Temperature coefficient of $S$	$TCS$	ppm/K	-150		150	-40 °C ... 125 °C
Electrical offset current referred to $I_{PN}$	$I_{OE}$	mA	-75.7		75.7	
Temperature coefficient of $I_{OE}$	$TCI_{OE}$	mA/K	-1.14		1.14	-40 °C ... 125 °C
Lifetime offset drift		mV		±2		
Noise voltage spectral density	$u_{no}$	$\frac{\mu\text{V}}{\sqrt{\text{Hz}}}$		12.5		100 Hz ... 100 kHz
Sensitivity error	$\varepsilon_S$	%	-1		1	
Lifetime sensitivity error		% $S$		±1	±2	
Linearity error 0 ... $I_{PN}$	$\varepsilon_L$	% of $I_{PN}$	-0.3		0.3	Referred to $I_{PN}$
Linearity error 0 ... $I_{PM}$	$\varepsilon_L$	% of $I_{PM}$	-0.6		0.6	Referred to $I_{PM}$
Sum of sensitivity and linearity @ $I_{PN}$ , @ $T_A = 25^\circ\text{C}$	$\varepsilon_{SL25}$	% of $I_{PM}$	-0.7		0.7	
Total error over temperature	$\varepsilon_{tot}$	% of $I_{PM}$	-1		1	

## Electrical data GO 20-SME/SP2

At  $T_A = 25^\circ\text{C}$ ,  $U_C = +5\text{ V}$ ,  $R_L = 100\text{ k}\Omega$  unless otherwise noted  
(see Definition of typical, minimum and maximum values paragraph in [page 12](#)).

Parameter	Symbol	Unit	Min	Typ	Max	Conditions
Primary nominal RMS current	$I_{PN}$	A		20		
Primary current, measuring range	$I_{PM}$	A	-50		50	
Internal reference voltage @ $I_{PN} = 0$	$U_{I_{ref}}$	V	2.48	2.5	2.52	
Nominal sensitivity	$S_N$	mV/A		40		800 mV @ $I_{PN}$
Temperature coefficient of $S$	$TCS$	ppm/K	-150		150	-40 °C ... 125 °C
Electrical offset current referred to $I_{PN}$	$I_{OE}$	mA	-125		125	
Temperature coefficient of $I_{OE}$	$TCI_{OE}$	mA/K	-1.88		1.88	-40 °C ... 125 °C
Lifetime offset drift		mV		±2		
Noise voltage spectral density	$u_{no}$	$\frac{\mu\text{V}}{\sqrt{\text{Hz}}}$		7		100 Hz ... 100 kHz
Sensitivity error	$\varepsilon_S$	%	-1		1	
Lifetime sensitivity error		% $S$		±1	±2	
Linearity error 0 ... $I_{PN}$	$\varepsilon_L$	% of $I_{PN}$	-0.3		0.3	Referred to $I_{PN}$
Linearity error 0 ... $I_{PM}$	$\varepsilon_L$	% of $I_{PM}$	-0.6		0.6	Referred to $I_{PM}$
Sum of sensitivity and linearity @ $I_{PN}$ , @ $T_A = 25^\circ\text{C}$	$\varepsilon_{SL25}$	% of $I_{PM}$	-0.7		0.7	
Total error over temperature	$\varepsilon_{tot}$	% of $I_{PM}$	-1		1	

## Electrical data GO 10-SME/SP3

## GO-SME series

At  $T_A = 25^\circ\text{C}$ ,  $U_C = +3.3\text{ V}$ ,  $R_L = 100\text{ k}\Omega$  unless otherwise noted. Output mode: referred to internal or external reference. (see Definition of typical, minimum and maximum values paragraph in [page 12](#)).

Parameter	Symbol	Unit	Min	Typ	Max	Conditions
Primary nominal RMS current	$I_{PN}$	A		10		800 mV on $U_{out}$
Primary current, measuring range	$I_{PM}$	A	-25		25	Full scale: 2 V on $U_{out}$
Internal reference voltage @ $I_{PN} = 0$	$U_{I_{ref}}$	V	1.63	1.65	1.67	
Nominal sensitivity	$S_N$	mV/A		50		500 mV @ $I_{PN}$
Temperature coefficient of $S$	$TCS$	ppm/K	-150		150	-40 °C ... 125 °C
Electrical offset current referred to $I_{PN}$	$I_{OE}$	mA	-100		100	
Temperature coefficient of $I_{OE}$	$TCI_{OE}$	mA/K	-1.5		1.5	-40 °C ... 125 °C
Lifetime offset drift		mV		±2		
Noise voltage spectral density	$u_{no}$	$\frac{\mu\text{V}}{\sqrt{\text{Hz}}}$		8		100 Hz ... 100 kHz
Sensitivity error	$\varepsilon_S$	%	-1		1	
Lifetime sensitivity error		% $S$		±1	±2	
Linearity error 0 ... $I_{PN}$	$\varepsilon_L$	% of $I_{PN}$	-0.3		0.3	Referred to $I_{PN}$
Linearity error 0 ... $I_{PM}$	$\varepsilon_L$	% of $I_{PM}$	-0.6		0.6	Referred to $I_{PM}$
Sum of sensitivity and linearity @ $I_{PN}$ , @ $T_A = 25^\circ\text{C}$	$\varepsilon_{SL25}$	% of $I_{PM}$	-0.7		0.7	
Total error over temperature	$\varepsilon_{tot}$	% of $I_{PM}$	-1		1	

## Electrical data GO 20-SME/SP3

At  $T_A = 25^\circ\text{C}$ ,  $U_C = +3.3\text{ V}$ ,  $R_L = 100\text{ k}\Omega$  unless otherwise noted. Output mode: referred to internal or external reference. (see Definition of typical, minimum and maximum values paragraph in [page 12](#)).

Parameter	Symbol	Unit	Min	Typ	Max	Conditions
Primary nominal RMS current	$I_{PN}$	A		20		800 mV on $U_{out}$
Primary current, measuring range	$I_{PM}$	A	-50		50	Full scale: 2 V on $U_{out}$
Internal reference voltage @ $I_{PN} = 0$	$U_{I_{ref}}$	V	1.63	1.65	1.67	
Nominal sensitivity	$S_N$	mV/A		25		500 mV @ $I_{PN}$
Temperature coefficient of $S$	$TCS$	ppm/K	-150		150	-40 °C ... 125 °C
Electrical offset current referred to $I_{PN}$	$I_{OE}$	mA	-200		200	
Temperature coefficient of $I_{OE}$	$TCI_{OE}$	mA/K	-3		3	-40 °C ... 125 °C
Lifetime offset drift		mV		±2		
Noise voltage spectral density	$u_{no}$	$\frac{\mu\text{V}}{\sqrt{\text{Hz}}}$		4.5		100 Hz ... 100 kHz
Sensitivity error	$\varepsilon_S$	%	-1		1	
Lifetime sensitivity error		% $S$		±1	±2	
Linearity error 0 ... $I_{PN}$	$\varepsilon_L$	% of $I_{PN}$	-0.3		0.3	Referred to $I_{PN}$
Linearity error 0 ... $I_{PM}$	$\varepsilon_L$	% of $I_{PM}$	-0.6		0.6	Referred to $I_{PM}$
Sum of sensitivity and linearity @ $I_{PN}$ , @ $T_A = 25^\circ\text{C}$	$\varepsilon_{SL25}$	% of $I_{PM}$	-0.7		0.7	
Total error over temperature	$\varepsilon_{tot}$	% of $I_{PM}$	-1		1	

**Electrical data GO 8-SME/SP4**

At  $T_A = 25^\circ\text{C}$ ,  $U_C = +3.3\text{ V}$ ,  $R_L = 100\text{ k}\Omega$  unless otherwise noted. Output mode: ratiometric.  
(see Definition of typical, minimum and maximum values paragraph in [page 12](#)).

Parameter	Symbol	Unit	Min	Typ	Max	Conditions
Primary nominal RMS current	$I_{PN}$	A		8		800 mV on $U_{out}$
Primary current, measuring range	$I_{PM}$	A	-20		20	Full scale: 2 V on $U_{out}$
Internal reference voltage @ $I_{PN} = 0$	$U_{I_{ref}}$	V	1.63	1.65	1.67	
Nominal sensitivity	$S_N$	mV/A		62.5		500 mV @ $I_{PN}$
Temperature coefficient of $S$	$TCS$	ppm/K	-230		230	-40 °C ... 125 °C, including ratiometricity error
Electrical offset current referred to $I_{PN}$	$I_{OE}$	mA	-80		80	
Temperature coefficient of $I_{OE}$	$TCI_{OE}$	mA/K	-1.2		1.2	-40 °C ... 125 °C
Lifetime offset drift		mV		±2		
Noise voltage spectral density	$u_{no}$	$\frac{\mu\text{V}}{\sqrt{\text{Hz}}}$		8		100 Hz ... 100 kHz
Sensitivity error	$\varepsilon_S$	%	-1		1	
Ratiometricity error	$\varepsilon_r$	%		±0.5		
Ratiometricity offset error	$\varepsilon_{rO}$	mV	-10		10	$U_C = 3.3\text{ V} \pm 10\%$
Lifetime sensitivity error		% $S$		±1	±2	
Linearity error 0 ... $I_{PN}$	$\varepsilon_L$	% of $I_{PN}$	-0.3		0.3	Referred to $I_{PN}$
Linearity error 0 ... $I_{PM}$	$\varepsilon_L$	% of $I_{PM}$	-0.6		0.6	Referred to $I_{PM}$
Sum of sensitivity and linearity @ $I_{PN}$ , @ $T_A = 25^\circ\text{C}$	$\varepsilon_{SL25}$	% of $I_{PM}$	-0.7		0.7	
Total error over temperature	$\varepsilon_{tot}$	% of $I_{PM}$	-1.2	0.5	1.2	

**Electrical data GO 15-SME/SP4**

At  $T_A = 25^\circ\text{C}$ ,  $U_C = +3.3\text{ V}$ ,  $R_L = 100\text{ k}\Omega$  unless otherwise noted. Output mode: ratiometric.  
(see Definition of typical, minimum and maximum values paragraph in [page 12](#)).

Parameter	Symbol	Unit	Min	Typ	Max	Conditions
Primary nominal RMS current	$I_{PN}$	A		15		800 mV on $U_{out}$
Primary current, measuring range	$I_{PM}$	A	-37.5		37.5	Full scale: 2 V on $U_{out}$
Internal reference voltage @ $I_{PN} = 0$	$U_{I_{ref}}$	V	1.63	1.65	1.67	
Nominal sensitivity	$S_N$	mV/A		33.33		500 mV @ $I_{PN}$
Temperature coefficient of $S$	$TCS$	ppm/K	-230		230	-40 °C ... 125 °C, including ratiometricity error
Electrical offset current referred to $I_{PN}$	$I_{OE}$	mA	-125		125	
Temperature coefficient of $I_{OE}$	$TCI_{OE}$	mA/K	-1.88		1.88	-40 °C ... 125 °C
Lifetime offset drift		mV		±2		
Noise voltage spectral density	$u_{no}$	$\frac{\mu\text{V}}{\sqrt{\text{Hz}}}$		5		100 Hz ... 100 kHz
Sensitivity error	$\varepsilon_S$	%	-1		1	
Ratiometricity error	$\varepsilon_r$	%		±0.5		
Ratiometricity offset error	$\varepsilon_{rO}$	mV	-10		10	$U_C = 3.3\text{ V} \pm 10\%$
Lifetime sensitivity error		% $S$		±1	±2	
Linearity error 0 ... $I_{PN}$	$\varepsilon_L$	% of $I_{PN}$	-0.3		0.3	Referred to $I_{PN}$
Linearity error 0 ... $I_{PM}$	$\varepsilon_L$	% of $I_{PM}$	-0.6		0.6	Referred to $I_{PM}$
Sum of sensitivity and linearity @ $I_{PN}$ , @ $T_A = 25^\circ\text{C}$	$\varepsilon_{SL25}$	% of $I_{PM}$	-0.7		0.7	
Total error over temperature	$\varepsilon_{tot}$	% of $I_{PM}$	-1.2	0.5	1.2	

**Definition of typical, minimum and maximum values**

Minimum and maximum values for specified limiting and safety conditions have to be understood as such as well as values shown in "typical" graphs.

On the other hand, measured values are part of a statistical distribution that can be specified by an interval with upper and lower limits and a probability for measured values to lie within this interval.

Unless otherwise stated (e.g. "100 % tested"), the LEM definition for such intervals designated with "min" and "max" is that the probability for values of samples to lie in this interval is 99.73 %.

For a normal (Gaussian) distribution, this corresponds to an interval between -3 sigma and +3 sigma. If "typical" values are not obviously mean or average values, those values are defined to delimit intervals with a probability of 68.27 %, corresponding to an interval between -sigma and +sigma for a normal distribution.

Typical, maximal and minimal values are determined during the initial characterization of the product.

## Thermal characteristics

When designing a system containing a current transducer, self-heating due to the flow of the current should be considered.

When current passes through, the transducer's temperature will increase, and this may affect its performance.

This change of temperature will depend on the current profile, PCB layout, cooling techniques and copper thickness.

The following plots show an example of different thermal responses of the GO-SME transducer when used on an evaluation LEM board described on later paragraph.

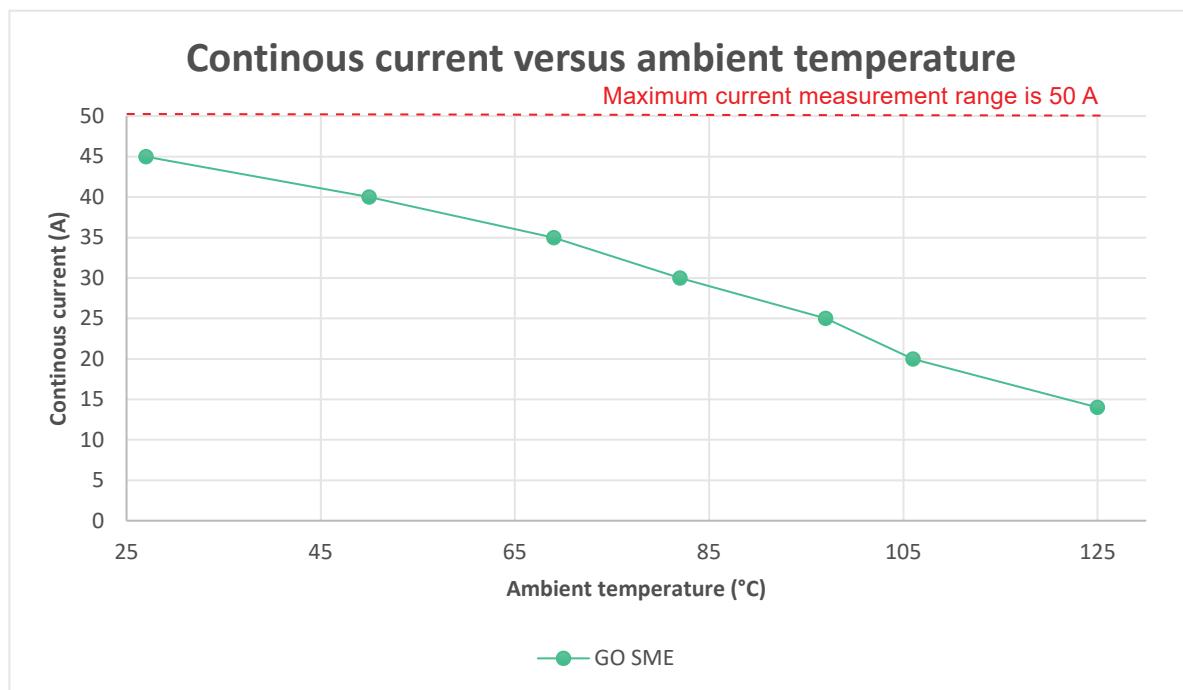


Figure 4: Continuous current vs temperature

The graph shows the mechanical capability of the GO-SME package.

The maximum current measurement range of the product is limited at 50 A.

The maximum temperature should be evaluated on the final system where the current transducer is integrated into the real application.

This temperature should never exceed the maximum junction temperature as shown on the previous paragraphs.

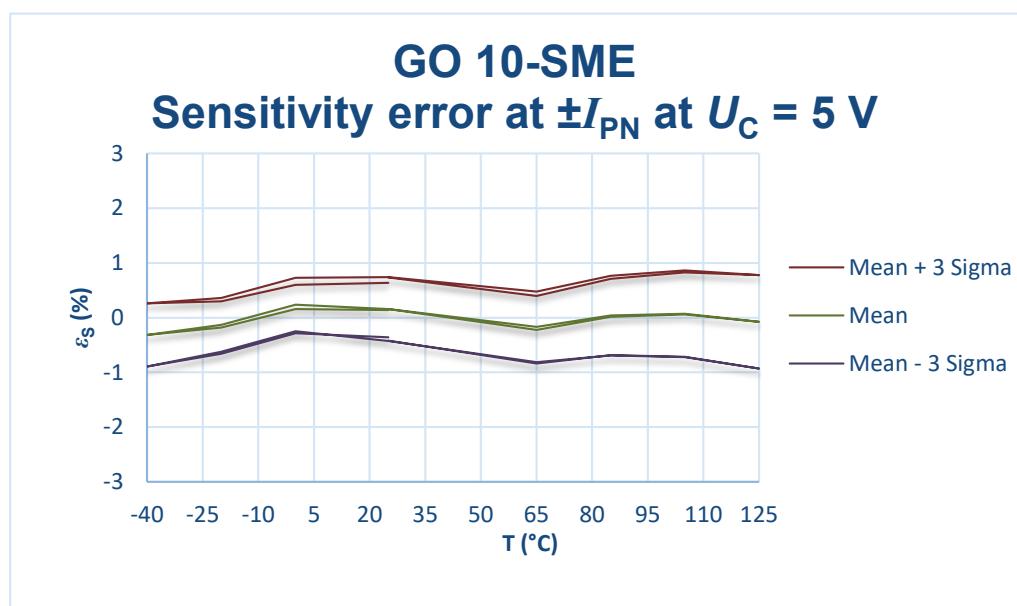
**Sensitivity error**


Figure 5: Sensitivity error (GO 10-SME)

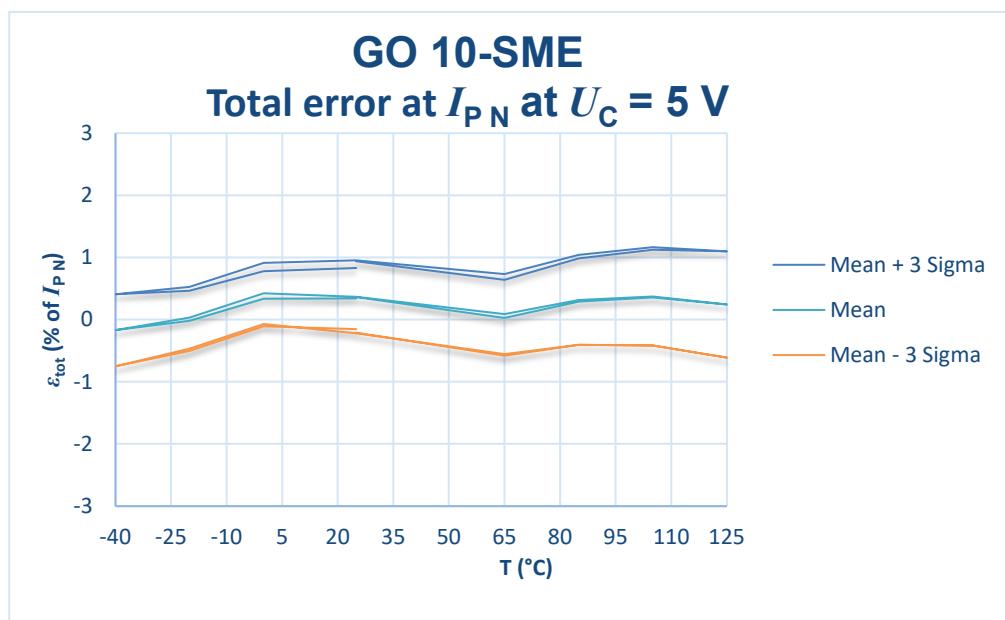
**Total error**


Figure 6: Total error over temperature


### Delay time

Typical results measured on GO 10-SME @  $I_{PN}$


Ambient temperature (°C)	Delay time @ 10 %	Limit	Delay time @ 90 %	Limit
25	1.46	1.50	1.36	2.00
120	1.19	1.50	1.36	2.00
-40	1.42	1.50	1.35	2.00

### Drifts over temperature (GO 10-SME)

#### Voltage offset drift over temperature

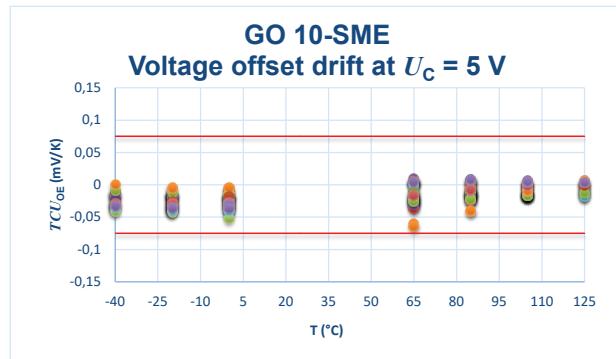

#### Sensitivity drift over temperature

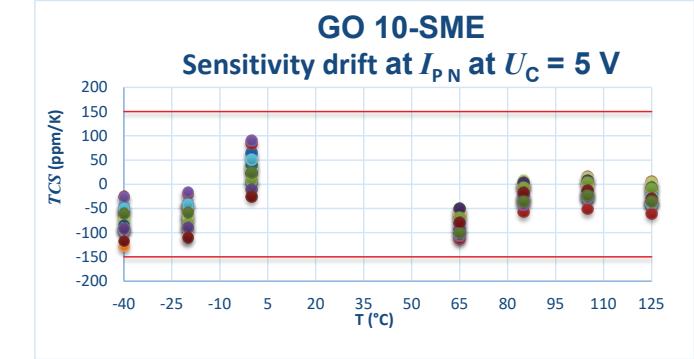

Figures 7, 8: Drifts over temperature

## Evaluation board PCB 2320

All the above results are based on a LEM evaluation board.  
 This evaluation board is available at our distributors or direct sales (please contact us).

### Description:

Evaluation board is based on 6 x 105  $\mu\text{m}$  (3oz) copper layers.  
 6 x 500 sq. mm copper stitched on primary side.  
 This layout improves thermal performances of the transducer.

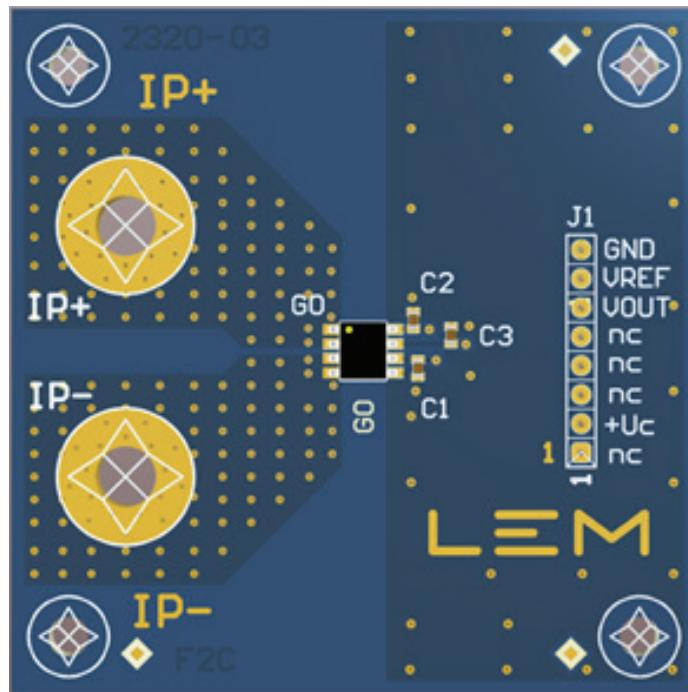


Figure 9: GO-SME Evaluation board

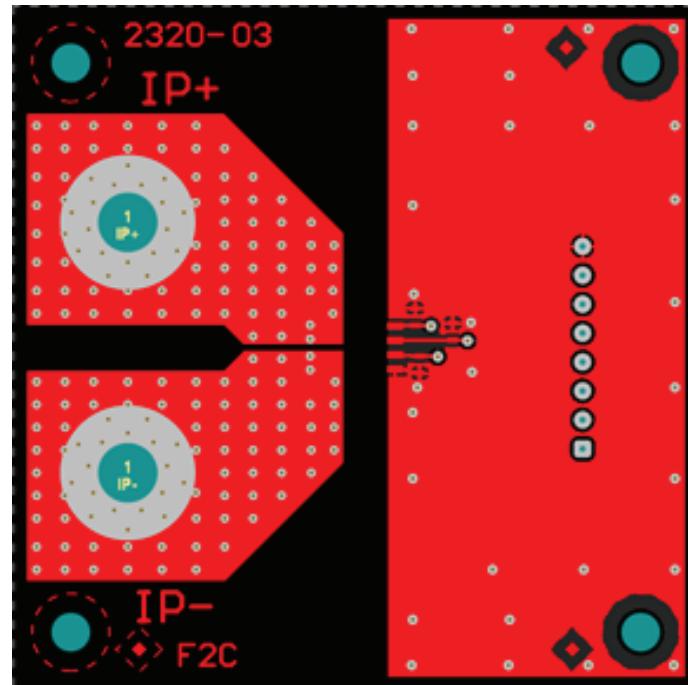


Figure 10: GO-SME Evaluation board layout

Contact LEM for more information about the evaluation board: <https://www.lem.com/en/go-series>

Page 16/21

## Terms and definitions

### Total error referred to primary

The total error  $\varepsilon_{\text{tot}}$  is the error at  $\pm I_{\text{PN}}$ , relative to the rated value  $I_{\text{PN}}$ . It includes all errors mentioned above

- the electrical offset  $I_{\text{OE}}$
- the sensitivity error  $\varepsilon_s$
- the linearity error  $\varepsilon_L$  (to  $I_{\text{PN}}$ ).

$$\varepsilon_{\text{tot}} = \left( \frac{U_{\text{out}} - U_{\text{out Th}}}{S_N \times I_{\text{PN}}} \right) \times \left( \frac{100}{I_{\text{PN}}} \right)$$

Figure 11: Total error equation  $\varepsilon_{\text{tot}}$

### Electrical offset referred to primary

Using the current cycle shown in figure 14, the electrical offset current  $I_{\text{OE}}$  is the residual output referred to primary when the input current is zero.

$$I_{\text{OE}} = \frac{I_{\text{P (3)}} + I_{\text{P (5)}}}{2}$$

$K_{\text{OL}}$ : Overload factor

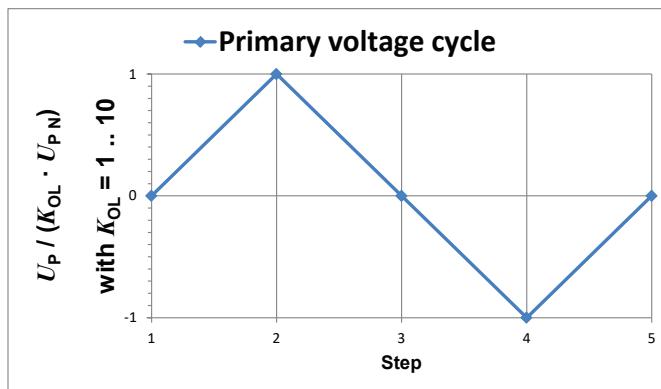


Figure 12: Current cycle used to measure electrical offset (transducer supplied)

### Fixed and ratiometric modes

Ideally,  $U_{\text{out}} - U_{\text{ref}} = 0 \text{ V}$  for  $I_{\text{P}} = 0 \text{ A}$

Fixed mode:  $U_{\text{out}}$  and  $U_{\text{ref}}$  are not scaled with the supply voltage.  $U_{\text{ref}}$  is trimmed during protection

Ratiometric mode:  $U_{\text{out}}$  and  $U_{\text{ref}}$  are scaled with the supply voltage.

### Sensitivity and linearity

To measure sensitivity and linearity, the primary current (DC) is cycled from 0 to  $I_{\text{P}}$ , then to  $-I_{\text{P}}$  and back to 0 (equally spaced  $I_{\text{P}}/10$  steps). The sensitivity  $S$  is defined as the slope of the linear regression line for a cycle between  $\pm I_{\text{PN}}$ .

The linearity error  $\varepsilon_L$  is the maximum positive or negative difference between the measured points and the linear regression line, expressed in % of  $I_{\text{PN}}$ .

### Delay times

The delay time  $t_{D,10}$  @ 10 % and the delay time  $t_{D,90}$  @ 90 % with respect to the primary are shown in the next figure.

Both slightly depend on the primary current  $di/dt$ .

They are measured at nominal current.

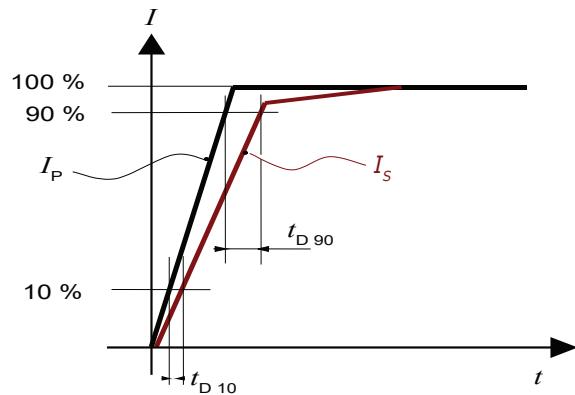
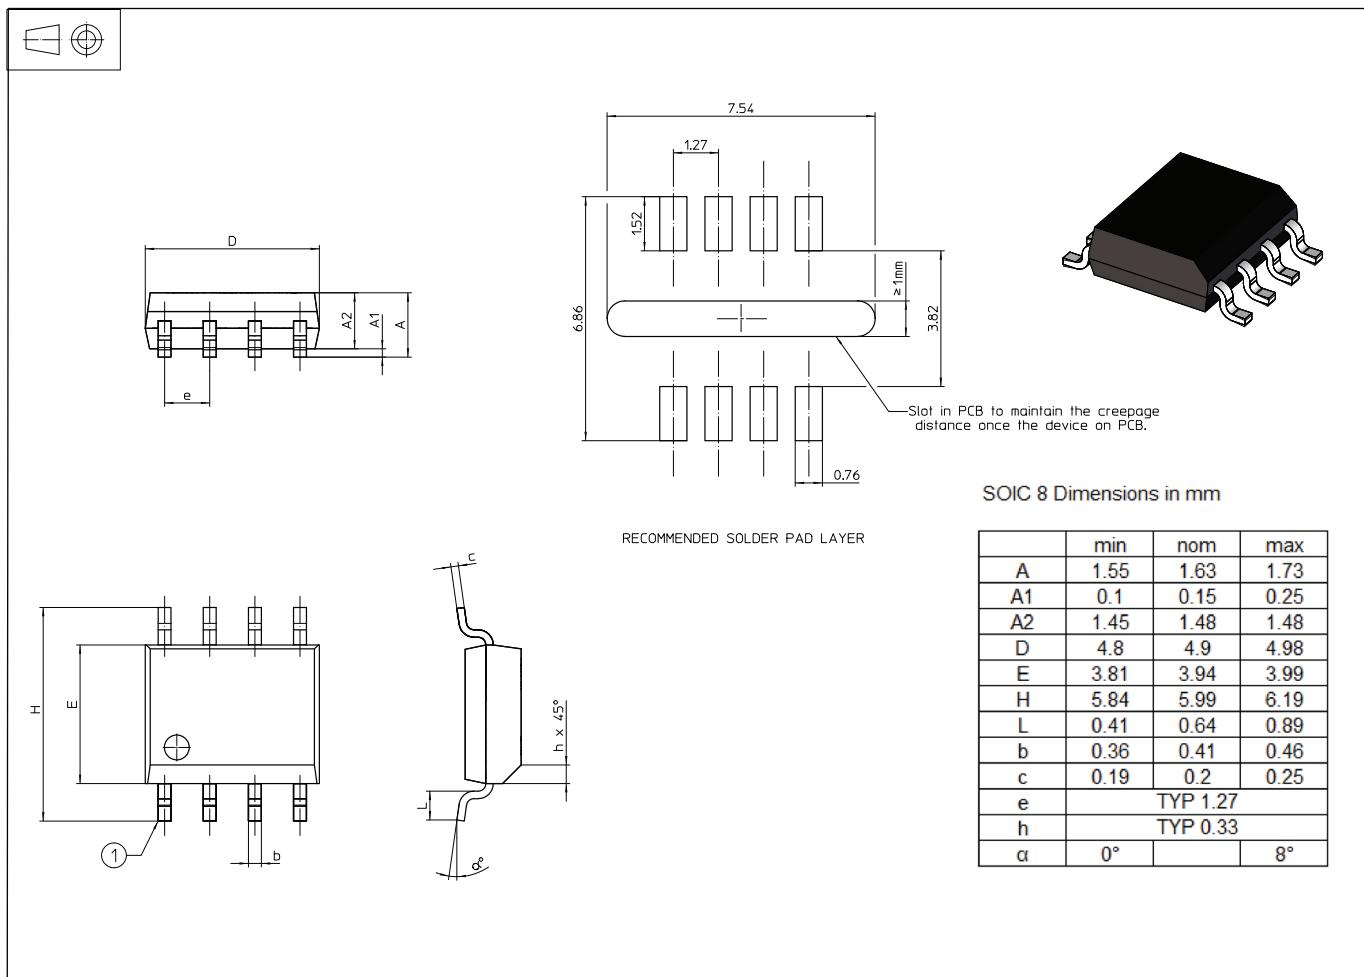
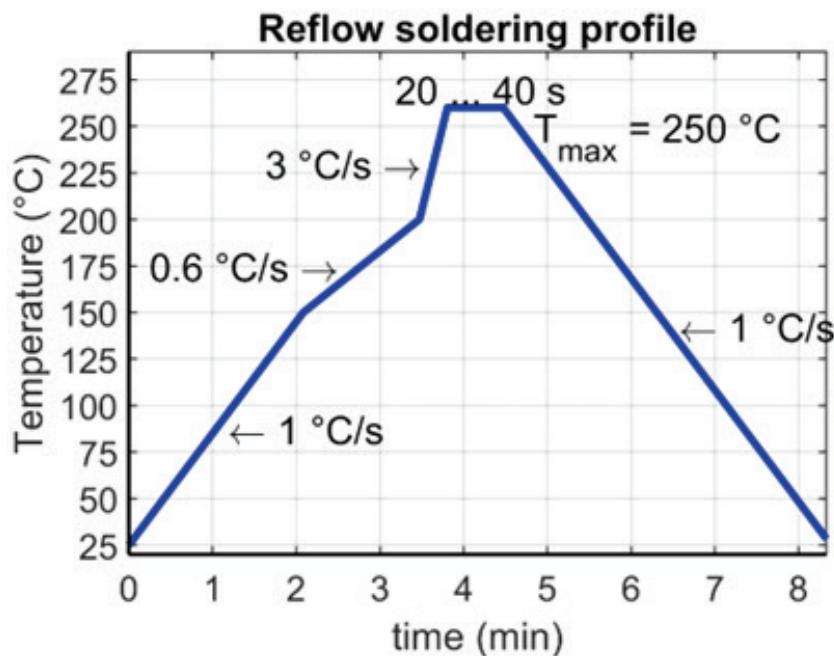


Figure 13:  $t_{D,10}$  (delay time @ 10 %) and  $t_{D,90}$  (delay time @ 90 %).

**PCB footprint & dimensions (in mm)**


Mechanical characteristics: General tolerance  $\pm 0.15$  mm

Remarks:  $U_{\text{out}} - U_{\text{ref}}$  is positive when  $I_{\text{P}}$  flows in the direction of arrow (pin 1-2 to pin 3-4).

**Soldering on PCB**

**Soldering remarks:**

- GO-SME is qualified MSL3 for storage and mounting purposes.
- Per JEDEC J-STD-020 for packages less than 2.5 mm thick per table 4.2 (Pb-Free process) of the specification.
- Best practice is to use 7 zones or greater conventional reflow system, limiting the time at reflow temperature as indicated in profile above.
- Rework not recommended.

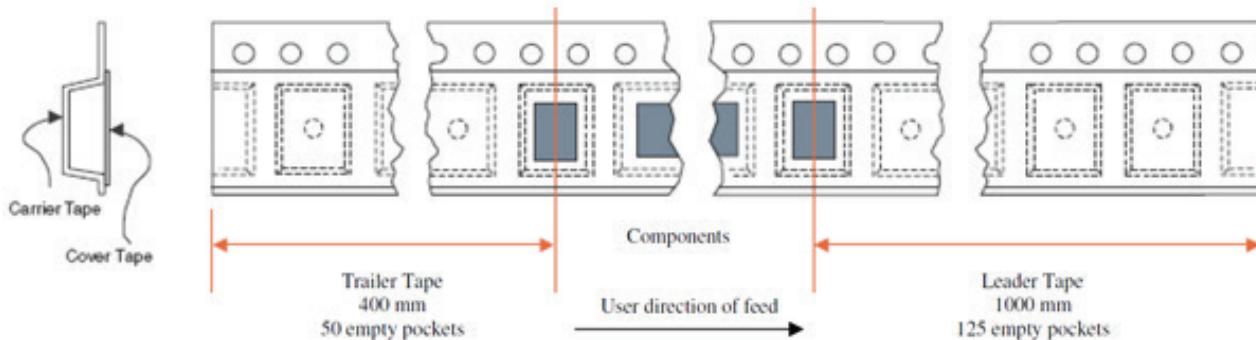
**Tape and reel dimensions (in mm)**
**Leader & Trailer:**


Figure 14: Leader and trailer


**Carrier Tape Data:**


Figure 14: Carrier tape


**Plastic Reel Data:**


Figure 15: Plastic reel

## Safety

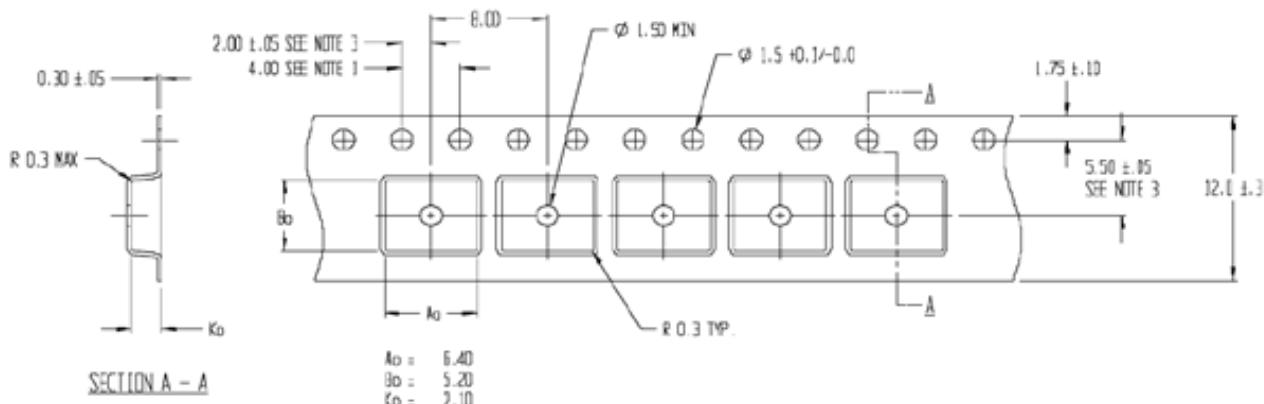

Caution

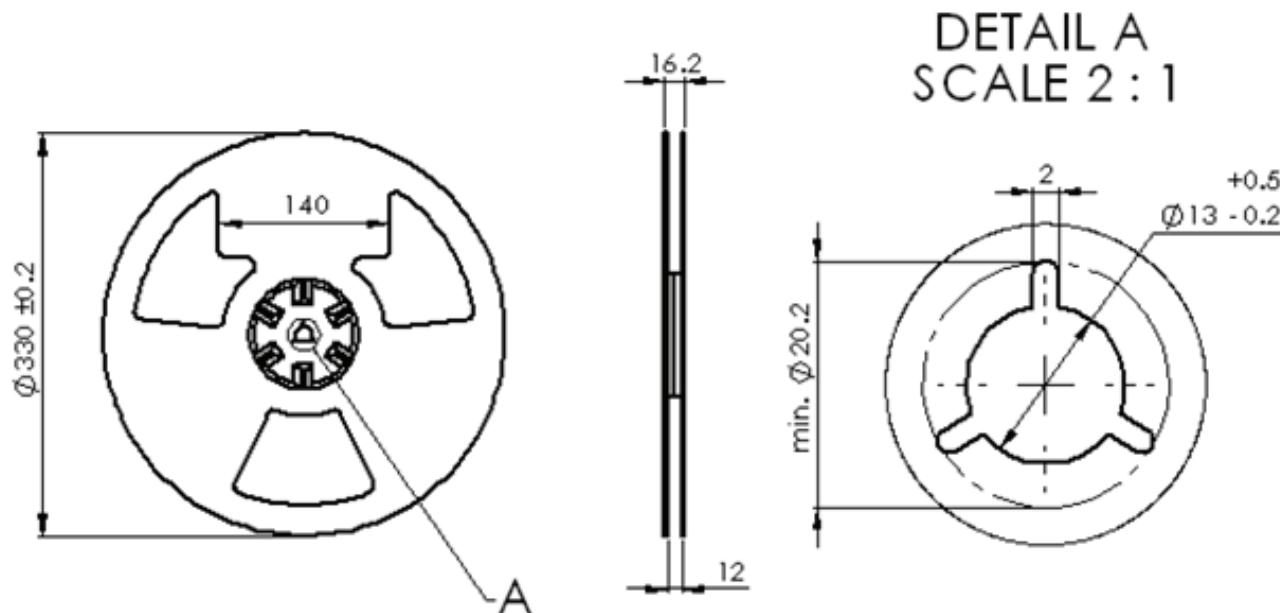This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions..



Caution, risk of electrical shock

This transducer must be used in limited-energy secondary circuits according to IEC 62368-1.

When operating the transducer, certain parts of the module can carry hazardous voltages and high currents (e.g. power supply, primary conductor).

Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose hazardous live parts must be inaccessible after installation.

A protective enclosure or additional shield could be used. Main supply must be able to be disconnected.

Therefore, LEM cannot be held liable for any potential hazards, damages, injuries or loss of life resulting from the use of this product.



ESD susceptibility

This product is susceptible to be damaged from an ESD event and the personnel and workspace should be grounded when handling it.



Underwriters Laboratory Inc. recognized component

## Version history

Date	Version	Comments
17 November 2021	0	New generic datasheet with SP products
22 June 2022	1	Modified definition paragraph + modified 3D picture (page 1); replaced ms by $\mu$ s (page 7) + modified LEM address + last sentence (all pages)
29 November 2022	2	Modified Nominal sensitivity is 50 instead of 62.5 (page 11)
2 May 2023	3	Modified "Main features & advantages" paragraph (page 1) + modified "Application circuit and pinout" connection + modified text in "Function" column on first table + added "Note" paragraph (page 2) + modified text in line under the standards products table (page 3) + modified "Note" sentence (page 4) + added red text and line on curve (page 13) + deleted magnetic current paragraph (page 17)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEM:

[GO 10-SME Demo Board](#) [GO 20-SME Demo Board](#) [GO 10-SME/SP3 Demo Board](#) [GO 20-SME/SP3](#) [GO 20-SME](#)  
[GO 20-SME/SP3 Demo Board](#) [GO 10-SME](#) [GO 10-SME/SP3](#) [GO 10-SME SET OF 50 PCS](#) [GO 20-SME/SP2](#) [GO 20-SME SET OF 50 PCS](#) [GO 20-SME/SP2 SET OF 50](#) [GO 20-SME/SP3 SET OF 50](#) [GO 10-SME/SP3 SET OF 50](#) [GO 20-SME KIT 5P](#) [GO 20-SME/SP2 KIT 5P](#) [GO 12-SME/SP2 SET OF 50](#) [GO 15-SME/SP4 SET OF 50](#) [GO 12-SME/SP2 KIT 5P](#) [GO 8-SME/SP4 SET OF 50](#) [GO 8-SME/SP4](#) [GO 15-SME/SP4 KIT 5P](#) [GO 12-SME/SP2](#) [GO 20-SME/SP3 KIT 5P](#) [GO 10-SME KIT 5P](#) [GO 15-SME/SP4](#) [GO 10-SME/SP3 KIT 5P](#)