




PJMA-series

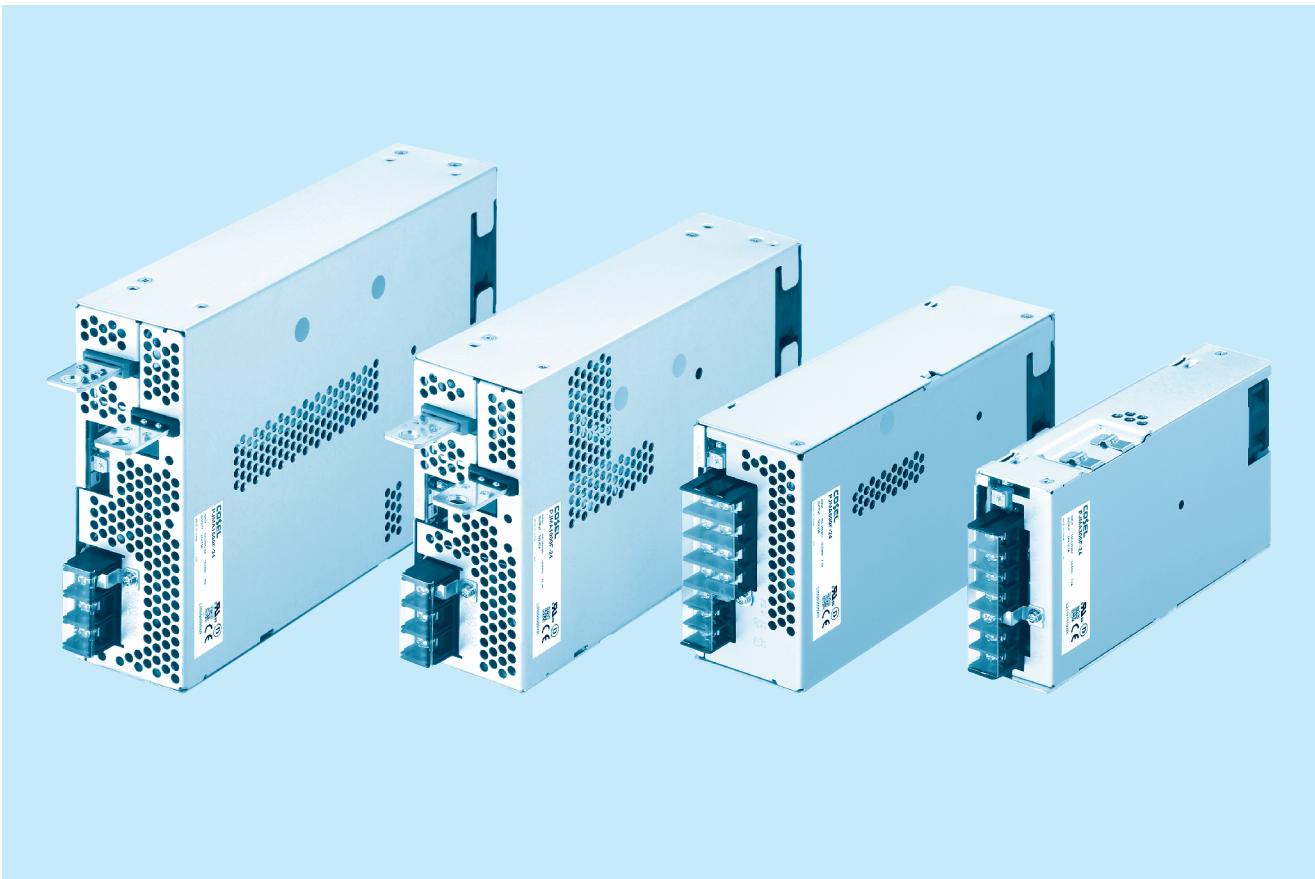

■ Feature

- 4kV isolation
- Economical design
- Suitable for BF application (Output-FG : 1MOPP, Input-Output : 2MOPP)
- Wide temperature range (-20°C to +70°C, Derating is required)
- Harmonic attenuator (Complies with IEC61000-3-2 class A)
- Universal input (AC85 - 264V, Derating is required)
- Low power consumption at no load

■ Safety agency approvals

ANSI/AAMI ES60601-1, EN60601-1 3rd

■ 5-year warranty (See Instruction Manual)

■ CE marking

Low Voltage Directive
RoHS Directive

■ EMI

Complies with FCC-B, CISPR32-B, EN55011-B, EN55032-B, VCCI-B
(PJMA1500F: Class A. In conducted noise, it can meet class B by additional EMI/EMC filter.)

■ EMS Compliance : EN61204-3, EN61000-6-2

IEC60601-1-2 (2014), IEC60601-1-2 (2015)

EN61000-4-2
EN61000-4-3
EN61000-4-4
EN61000-4-5
EN61000-4-6
EN61000-4-8
EN61000-4-11

PJMA300F



RoHS

2MOPP



Ordering information

 PJM A 300 F - □ - □

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

 Example recommended EMI/EMC filter
NAC-06-472

 High voltage pulse noise type : NAP series
Low leakage current type : NAM series

 * A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *6
 - C : with Coating
 - G : Low leakage current
 - V : External potentiometer for
output voltage adjustment
 - R : Remote on/off
(Required external power source)
 - F4: Low speed fan

See 5.1 in Instruction Manual.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

SPECIFICATIONS

	MODEL	PJMA300F-12	PJMA300F-24	PJMA300F-36	PJMA300F-48	
INPUT	VOLTAGE[V]	AC85 - 264 1 φ (Output derating is required at AC85V - 100V. Refer to "Derating" and instruction manual 1.1)				
	CURRENT[A]	ACIN 100V	3.9typ (Io=100%)			
		ACIN 115V	3.3typ (Io=100%)			
		ACIN 230V	1.7typ (Io=100%)			
	FREQUENCY[Hz]	50 / 60 (47 - 63)				
	EFFICIENCY[%]	ACIN 100V	79typ (Io=100%)	82typ (Io=100%)	83typ (Io=100%)	82typ (Io=100%)
		ACIN 115V	80typ (Io=100%)	83typ (Io=100%)	83typ (Io=100%)	83typ (Io=100%)
		ACIN 230V	82typ (Io=100%)	86typ (Io=100%)	87typ (Io=100%)	86typ (Io=100%)
	POWER FACTOR	ACIN 100V	0.99typ (Io=100%)			
		ACIN 115V	0.98typ (Io=100%)			
ACIN 230V		0.95typ (Io=100%)				
INRUSH CURRENT[A]	ACIN 100V	20typ (Io=100%) TA=25°C at cold start				
	ACIN 115V	20typ (Io=100%) TA=25°C at cold start				
	ACIN 230V	40typ (Io=100%) TA=25°C at cold start				
LEAKAGE CURRENT[mA]	0.3max (ACIN 240V, 60Hz, Io=100%)					
OUTPUT	VOLTAGE[V]	12	24	36	48	
	CURRENT[A]	ACIN 85-100V	Output derating is required at ACIN 100V or less (Refer to "Derating")			
		ACIN 100V-264V	25	12.5	8.4	6.3
	WATTAGE[W]	ACIN 85-100V	Output derating is required at ACIN 100V or less (Refer to "Derating")			
		ACIN 100V-264V	300	300	302.4	302.4
	LINE REGULATION[mV] *3	48max	96max	144max	192max	
	LOAD REGULATION[mV] *3	100max	150max	150max	300max	
	RIPPLE[mVp-p]	0 to +50°C	120max	120max	150max	150max
		*1 -10 to 0°C	160max	160max	160max	400max
	RIPPLE NOISE[mVp-p]	0 to +50°C	150max	150max	200max	200max
*1 -10 to 0°C		180max	180max	240max	500max	
TEMPERATURE REGULATION[mV]	0 to +50°C	120max	240max	360max	480max	
	-10 to +50°C	180max	290max	440max	600max	
DRIFT[mV] *2	48max	96max	144max	192max		
START-UP TIME[ms]	300typ (ACIN 100V, Io=100%)					
HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%)					
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	10.80 to 13.20	21.60 to 26.40	32.40 to 39.60	43.20 to 52.80		
OUTPUT VOLTAGE SETTING[V]	12.00 to 12.48	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92		
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically				
	OVERVOLTAGE PROTECTION[V]	13.80 to 16.80	27.60 to 33.60	41.40 to 50.40	55.20 to 67.20	
	OPERATING INDICATION	LED (Green)				
	REMOTE SENSING	Not provided				
	REMOTE ON/OFF	Optional (Required external power source. Option -R)				
ISOLATION	INPUT-OUTPUT • RC	*9 AC4,000V 1minute, Cutoff=20mA, 2MOPP DC500V 50MΩmin (At room temperature)				
	INPUT-FG	AC2,000V 1minute, Cutoff=20mA, 1MOPP DC500V 50MΩmin (At room temperature)				
	OUTPUT • RC-FG	*9 AC1,500V 1minute, Cutoff=20mA, 1MOPP DC500V 50MΩmin (At room temperature)				
	OUTPUT-RC	*9 AC500V 1minute, Cutoff=20mA, DC500V 50MΩmin (At room temperature)				
ENVIRONMENT	OPERATING TEMP,HUMID,AND ALTITUDE *4	-20 to +70°C (Refer to "Derating"), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max				
	STORAGE TEMP.,HUMID,AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max				
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60 minutes each along X, Y and Z axes				
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axes				
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	ANSI/AAMI ES60601-1, C-UL (CAN/CSA-C22.2 No.60601-1), EN60601-1 3rd.				
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B				
	HARMONIC ATTENUATOR *8	Complies with IEC61000-3-2 class A				

SPECIFICATIONS

OTHERS	CASE SIZE/WEIGHT	102 X 41 X 190mm [4.02 X 1.61 X 7.48 inches] (Excluding terminal block and screw) (W X H X D) / 1.0kg max
	COOLING METHOD	*7 Forced cooling (internal fan)
WARRANTY	WARRANTY	*5 5 years (subject to the operating conditions)

*1 This is the result of measurement of the testing board with capacitors of 22 μ F and 0.1 μ F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken R104. See 1.6 of Instruction Manual for more details.

*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.

*3 Consult us about dynamic load and input response.
 *4 Output power derating is required. Refer to "Derating".
 *5 See 4 in Instruction Manual for more details.
 *6 Consult us about safety agency approvals for the models with optional functions.
 *7 The fan speed slows down at no load.
 *8 Consult us about other classes.
 *9 The RC terminal is added to option -R models. The RC terminal is


isolated from input, output, and FG.
 * Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
 * Parallel operation is not possible with this mode.
 * Sound noise may be heard from the power supply when used for pulse load.

Features

- 4kV isolation
- Economical design
- Suitable for BF application (Output-FG : 1MOPP, Input-Output : 2MOPP)


- Wide temperature range (-20°C to +70°C, Refer to "Derating")
- Harmonic attenuator (Complies with IEC61000-3-2 class A)
- Universal input (AC85 - 264V, Refer to "Derating")
- Low power consumption at no load

Block diagram

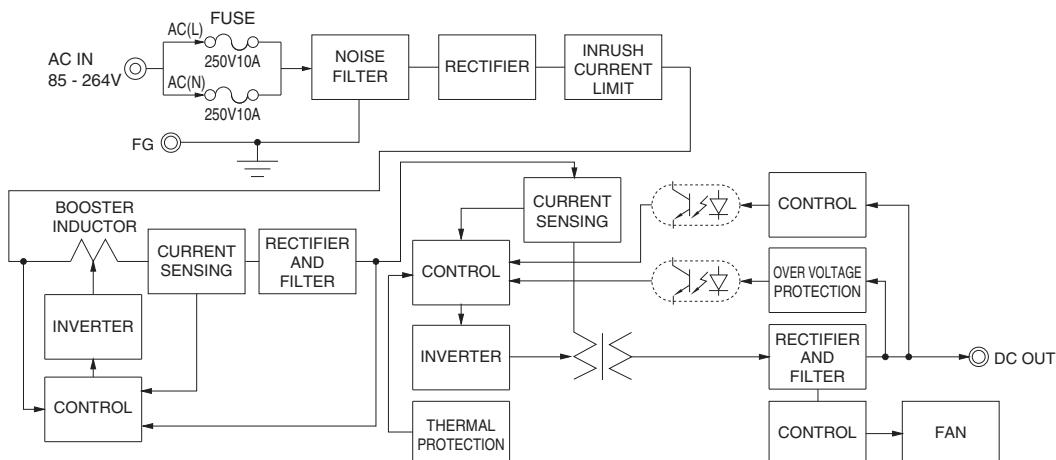

External view

The external size of -V option and -R option models is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

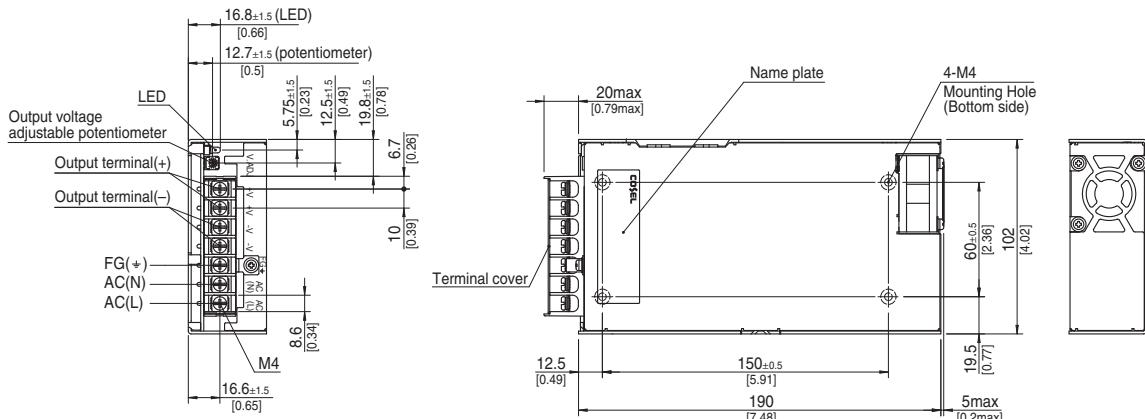

※ Tolerance : ± 1 [± 0.04]

※ Weight : 1.0kg max

※ PCB Material/thickness : FR-4 / 1.6mm [0.06inches]

※ Chassis material : Aluminum

※ Case material : Galvanizing steel

※ Dimensions in mm, []=inches

※ Mounting torque : 1.2N·m max

※ Screw tightening torque : 1.6N·m max

※ Connect the input FG to safety earth ground.

PJMA600F

Ordering information

RoHS

2MOPP



*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

SPECIFICATIONS

	MODEL	PJMA600F-12	PJMA600F-24	PJMA600F-36	PJMA600F-48
INPUT	VOLTAGE[V]	AC85 - 264 1φ (Output derating is required at AC85V - 100V. Refer to "Derating" and instruction manual 1.1)			
	CURRENT[A]	ACIN 100V ACIN 115V ACIN 230V	7.5typ (Io=100%) 6.5typ (Io=100%) 3.2typ (Io=100%)		
	FREQUENCY[Hz]	50 / 60 (47 - 63)			
	EFFICIENCY[%]	ACIN 100V ACIN 115V ACIN 230V	81typ (Io=100%) 82typ (Io=100%) 84typ (Io=100%)	84typ (Io=100%) 85typ (Io=100%) 88typ (Io=100%)	85typ (Io=100%) 85typ (Io=100%) 88typ (Io=100%)
	POWER FACTOR	ACIN 100V ACIN 115V ACIN 230V	0.99typ (Io=100%) 0.98typ (Io=100%) 0.95typ (Io=100%)		
	INRUSH CURRENT[A]	ACIN 100V ACIN 115V ACIN 230V	20/40typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 3sec to re-start) 20/40typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 3sec to re-start) 40/40typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 3sec to re-start)		
	LEAKAGE CURRENT[mA]	0.3max (ACIN 240V,60Hz,Io=100%)			
	VOLTAGE[V]	12	24	36	48
	CURRENT[A]	ACIN 85-100V ACIN 100V-264V	Output derating is required at ACIN 100V or less (Refer to "Derating") 50 25	16.7	12.5
	WATTAGE[W]	ACIN 85-100V ACIN 100V-264V	Output derating is required at ACIN 100V or less (Refer to "Derating") 600 600	601.2	600
OUTPUT	LINE REGULATION[mV]	*7 48max	96max	144max	192max
	LOAD REGULATION[mV]	*7 100max	150max	150max	300max
	RIPPLE[mVp-p]	0 to +50°C *1 -20 to 0°C	120max 160max	120max 160max	150max 400max
	RIPPLE NOISE[mVp-p]	0 to +50°C *1 -20 to 0°C	150max 180max	150max 180max	200max 500max
	TEMPERATURE REGULATION[mV]	0 to +50°C -20 to +50°C	120max 180max	240max 290max	360max 440max
	DRIFT[mV]	*2 48max	96max	144max	192max
	START-UP TIME[ms]	300typ (ACIN 100V, Io=100%)			
	HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%)			
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	10.80 to 13.20	21.60 to 26.40	32.40 to 39.60	43.20 to 52.80
	OUTPUT VOLTAGE SETTING[V]	12.00 to 12.48	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
	OVERVOLTAGE PROTECTION[V]	13.80 to 16.80	27.60 to 33.60	41.40 to 50.40	55.20 to 67.20
	OPERATING INDICATION	LED (Green)			
	REMOTE SENSING	Optional (Option -W1)			
	REMOTE ON/OFF	Optional (Required external power source. Option -R)			
ISOLATION	INPUT-OUTPUT • RC	*3 AC4,000V 1minute, Cutoff=20mA, 2MOPP	DC500V 50MΩ min (At room temperature)		
	INPUT-FG	AC2,000V 1minute, Cutoff=20mA, 1MOPP	DC500V 50MΩ min (At room temperature)		
	OUTPUT • RC-FG	*3 AC1,500V 1minute, Cutoff=20mA, 1MOPP	DC500V 50MΩ min (At room temperature)		
	OUTPUT-RC	*3 AC500V 1minute, Cutoff=20mA, DC500V 50MΩ min (At room temperature)			
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	*4 -20 to +70°C (Refer to "Derating"), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max			
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max			
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes			
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axes			
	SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS CONDUCTED NOISE HARMONIC ATTENUATOR	ANSI/AAMI ES60601-1, C-UL (CAN/CSA-C22.2 No. 60601-1), EN60601-1 3rd. Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B Complies with IEC61000-3-2 class A		

SPECIFICATIONS

OTHERS	CASE SIZE/WEIGHT	120 X 61 X 215mm [4.72 X 2.40 X 8.46 inches] (Excluding terminal block and screw) (W X H X D) / 2.0kg max
	COOLING METHOD	*8 Forced cooling (internal fan)
WARRANTY	WARRANTY	*5 5 years (subject to the operating conditions)

*1 This is the result of measurement of the testing board with capacitors of 22 μ F and 0.1 μ F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM104.
See 1.6 of Instruction Manual for more details.

*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.

*3 The RC terminal is added to option -R models. The RC terminal is isolated from input, output, and FG.

*4 Output power derating is required. Refer to "Derating".

*5 See 3 in Instruction Manual for more details.

*6 Consult us about safety agency approvals for the models with optional functions.

*7 Consult us about dynamic load and input response.

*8 The fan speed slows down at no load.

*9 Consult us about other classes.


* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.

* Sound noise may be heard from the power supply when used for pulse load.

Features


- 4kV isolation
- Economical design
- Suitable for BF application (Output-FG : 1MOPP, Input-Output : 2MOPP)
- Wide temperature range (-20°C to +70°C, Refer to "Derating")
- Harmonic attenuator (Complies with IEC61000-3-2 class A)
- Universal input (AC85 - 264V, Refer to "Derating")
- Low power consumption at no load

Block diagram

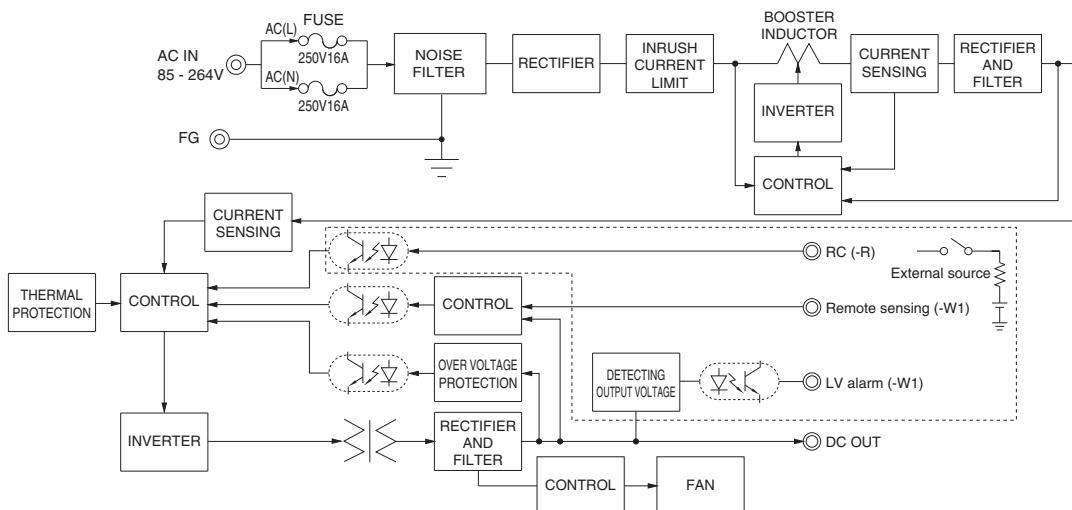

External view

The external size of -V option, -W1 option and -R option models is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

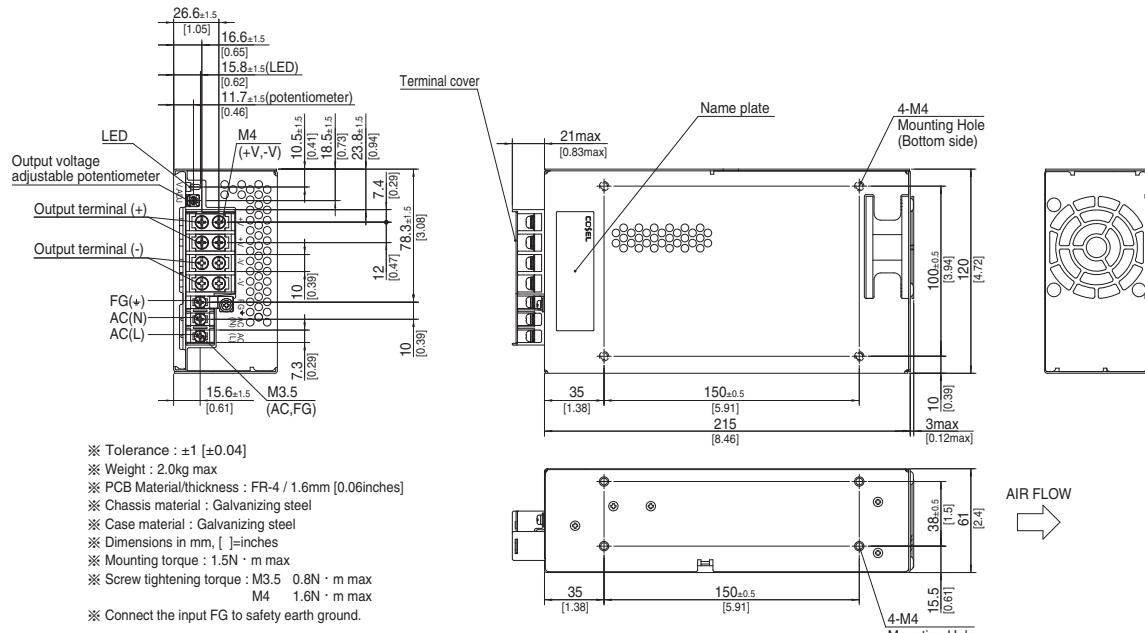

PJMA1000F



RoHS

2MOPP



Ordering information

 PJM A 1000 F - □ - □

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

 Example recommended EMI/EMC filter
NAC-20-472

 High voltage pulse noise type : NAP series
Low leakage current type : NAM series

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *8

- C : with Coating
- G : Low leakage current
- V : External potentiometer for output voltage adjustment
- W : Parallel operation, LV alarm and Remote sensing
- W1: LV alarm and Remote sensing
- R: Remote on/off
(Required external power source)
- F4: Low speed fan

See 5.1 in Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

SPECIFICATIONS

	PJMA1000F-12	PJMA1000F-24	PJMA1000F-36	PJMA1000F-48
INPUT				
VOLTAGE[V]	AC85 - 264 1φ (Output derating is required at AC85V - 115V. Refer to "Derating" and instruction manual 1.1)			
CURRENT[A]	ACIN 100V 12.5typ (Io=90%) ACIN 115V 11.0typ (Io=100%) ACIN 230V 5.5typ (Io=100%)			
FREQUENCY[Hz]	50 / 60 (47 - 63)			
EFFICIENCY[%]	ACIN 100V 81typ (Io=90%) ACIN 115V 82typ (Io=100%) ACIN 230V 85typ (Io=100%)	84typ (Io=90%) 85typ (Io=100%) 88typ (Io=100%)	84typ (Io=90%) 85typ (Io=100%) 88typ (Io=100%)	84typ (Io=90%) 85typ (Io=100%) 88typ (Io=100%)
POWER FACTOR	ACIN 100V 0.98typ (Io=90%) ACIN 115V 0.98typ (Io=100%) ACIN 230V 0.95typ (Io=100%)			
INRUSH CURRENT[A]	ACIN 100V 15/30typ (Io=90%) (Primary inrush current /Secondary inrush current) (More than 10sec to re-start) ACIN 115V 15/30typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 10sec to re-start) ACIN 230V 30/30typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 10sec to re-start)			
LEAKAGE CURRENT[mA]	0.3max (ACIN 240V, 60Hz, Io=100%)			
OUTPUT				
VOLTAGE[V]	12	24	36	48
CURRENT[A]	ACIN 85-115V Output derating is required at ACIN 115V or less (Refer to "Derating") ACIN 115V-264V 84	42	28	21
WATTAGE[W]	ACIN 85-115V Output derating is required at ACIN 115V or less (Refer to "Derating") ACIN 115V-264V 1008	1008	1008	1008
LINE REGULATION[mV]	*2 48max	96max	144max	192max
LOAD REGULATION[mV]	*2 100max	150max	150max	300max
RIPPLE[mVp-p]	0 to +50°C 180max -20 to 0°C 240max	120max 160max	150max 200max	200max 500max
RIPPLE NOISE[mVp-p]	0 to +50°C 210max *1 -20 to 0°C 270max	150max 180max	200max 240max	300max 600max
TEMPERATURE REGULATION[mV]	0 to +50°C 120max -20 to +50°C 180max	240max 290max	360max 440max	480max 600max
DRIFT[mV]	*3 48max	96max	144max	192max
START-UP TIME[ms]	800typ (ACIN 115V, Io=100%)			
HOLD-UP TIME[ms]	20typ (ACIN 115V, Io=100%)			
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	10.80 to 13.50	20.40 to 28.50	30.60 to 40.80	40.80 to 55.20
OUTPUT VOLTAGE SETTING[V]	12.00 to 12.48	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92
PROTECTION CIRCUIT AND OTHERS				
OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
OVERVOLTAGE PROTECTION[V]	14.40 to 17.40	28.80 to 34.80	43.20 to 52.20	57.00 to 67.20
OPERATING INDICATION	LED (Green)			
REMOTE SENSING	Optional (Option -W, -W1)			
REMOTE ON/OFF	Optional (Required external power source. Option -R)			
ISOLATION				
INPUT-OUTPUT	AC4,000V 1minute, Cutoff=20mA, 2MOPP DC500V 50MW min (At room temperature)			
INPUT-FG	AC2,000V 1minute, Cutoff=20mA, 1MOPP DC500V 50MW min (At room temperature)			
OUTPUT • RC-FG	*3 AC1,500V 1minute, Cutoff=20mA, 1MOPP DC500V 50MWmin (At room temperature)			
OUTPUT-RC	AC500V 1minute, Cutoff=20mA, DC500V 50MW min (At room temperature)			
ENVIRONMENT				
OPERATING TEMP., HUMID. AND ALTITUDE	*4 -20 to +70C (Refer to "Derating"), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max			
STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max			
VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes			
IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axes			
SAFETY AND NOISE REGULATIONS				
AGENCY APPROVALS	ANSI/AAMI ES60601-1, C-UL (CAN/CSA-C22.2 No.60601-1), EN60601-1 3rd.			
CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B			
HARMONIC ATTENUATOR	*5 Complies with IEC61000-3-2 class A			

SPECIFICATIONS

OTHERS	CASE SIZE/WEIGHT	150X61X240mm [5.91X2.40X9.45 inches] (Excluding terminal block and screw) (WXHxD) / 2.8kg max
	COOLING METHOD	*6 Forced cooling (internal fan)
WARRANTY	WARRANTY	*7 5 years (subject to the operating conditions)

*1 This is the result of measurement of the testing board with capacitors of 22 μ F and 0.1 μ F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM104.
See 1.6 of Instruction Manual for more details.

*2 Consult us about dynamic load and input response.

*3 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.

*4 Output power derating is required. Refer to "Derating".

*5 Consult us about other classes.

*6 The fan speed slows down or stops at no load.

*7 See 3 in Instruction Manual for more details.

*8 Consult us about safety agency approvals for the models with optional functions.

*9 Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.


*10 Parallel operation is not possible with this mode.

*11 Audible noise may be heard from the power supply when used for pulse load.

Features


- 4kV isolation
- Economical design
- Suitable for BF application (Output-FG : 1MOPP, Input-Output : 2MOPP)
- Wide temperature range (-20°C to +70°C, Refer to "Derating")
- Harmonic attenuator (Complies with IEC61000-3-2 class A)
- Universal input (AC85 - 264V, Refer to "Derating")
- Low power consumption at no load

Block diagram

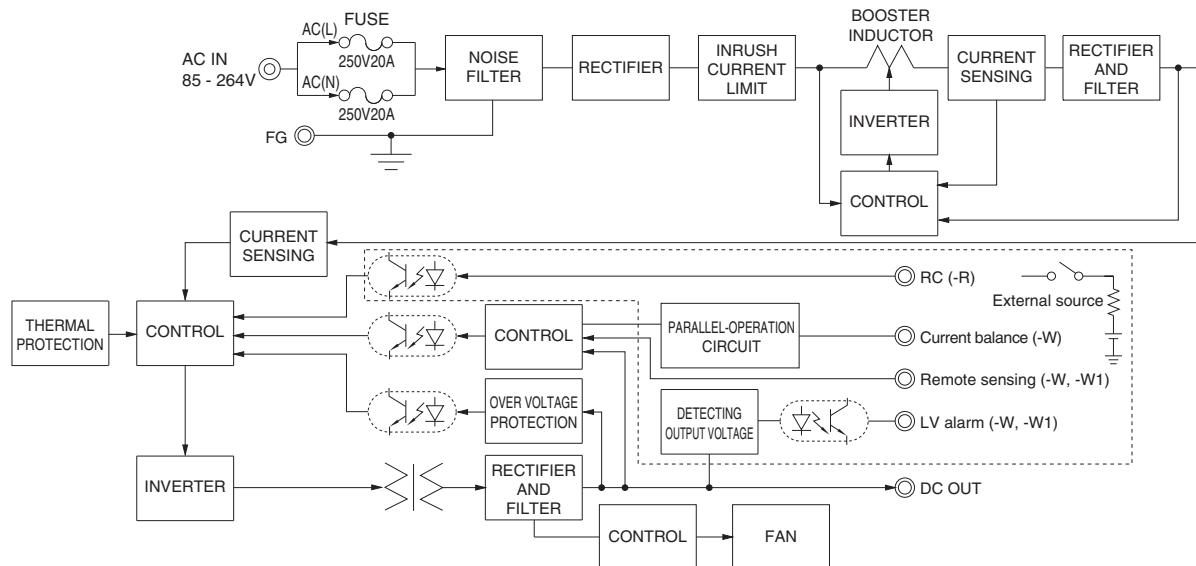

External view

The external size of -V option, -W option, -W1 option and -R option models is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

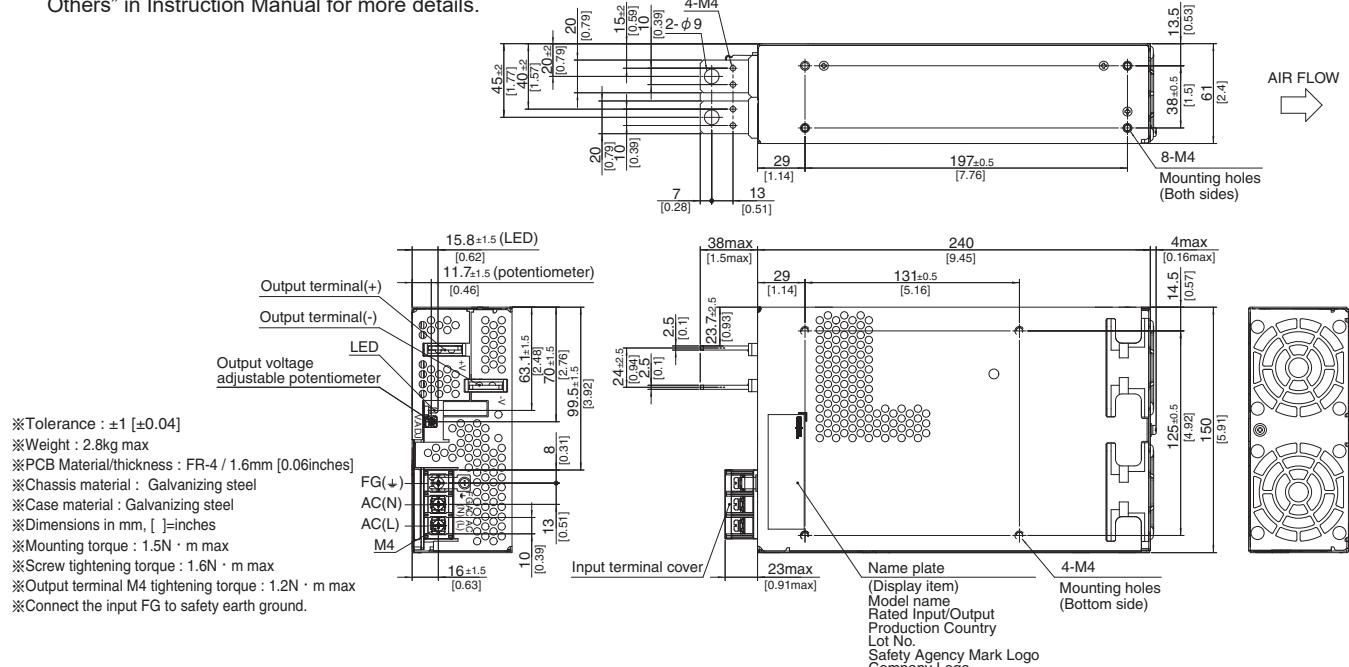

PJMA1500F



RoHS

2MOPP



Ordering information

 PJM A 1500 F - -

 ① ② ③ ④ ⑤ ⑥

 Example recommended EMI/EMC filter
NAC-20-472

 High voltage pulse noise type : NAP series
Low leakage current type : NAM series

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional*⁸
- C: with Coating
- G: Low leakage current
- V: External potentiometer for output voltage adjustment
- W: Parallel operation, LV alarm and Remote sensing (Except 48V)
- W1: LV alarm and Remote sensing
- R: Remote on/off (Required external power source)
- F4: Low speed fan

See 5.1 in Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

SPECIFICATIONS

	PJMA1500F-12	PJMA1500F-24	PJMA1500F-36	PJMA1500F-48
INPUT				
VOLTAGE[V]	AC85 - 264 1φ (Output derating is required at AC85V - 115V. Refer to "Derating" and instruction manual 1.1)			
CURRENT[A]	ACIN 100V 18typ (Io=90%) ACIN 115V 16typ (Io=100%) ACIN 230V 8typ (Io=100%)			
FREQUENCY[Hz]	50 / 60 (47 - 63)			
EFFICIENCY[%]	ACIN 100V 81typ (Io=90%) ACIN 115V 82typ (Io=100%) ACIN 230V 85typ (Io=100%)	84typ (Io=90%) 85typ (Io=100%) 88typ (Io=100%)	84typ (Io=90%) 85typ (Io=100%) 88typ (Io=100%)	84typ (Io=90%) 84typ (Io=100%) 87typ (Io=100%)
POWER FACTOR	ACIN 100V 0.98typ (Io=90%) ACIN 115V 0.98typ (Io=100%) ACIN 230V 0.95typ (Io=100%)			
INRUSH CURRENT[A]	ACIN 100V 15/30typ (Io=90%) (Primary inrush current /Secondary inrush current) (More than 10sec to re-start) ACIN 115V 15/30typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 10sec to re-start) ACIN 230V 30/30typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 10sec to re-start)			
LEAKAGE CURRENT[mA]	0.3max (ACIN 240V, 60Hz, Io=100%)			
OUTPUT				
VOLTAGE[V]	12	24	36	48
CURRENT[A]	ACIN 85-115V Output derating is required at ACIN 115V or less (Refer to "Derating") ACIN 115V-264V 125 64 42 32			
WATTAGE[W]	ACIN 85-115V Output derating is required at ACIN 115V or less (Refer to "Derating") ACIN 115V-264V 1500 1536 1512 1536			
LINE REGULATION[mV]	* ² 48max	96max	144max	192max
LOAD REGULATION[mV]	* ² 100max	150max	150max	300max
RIPPLE[mVp-p]	0 to +50°C 180max -20 to 0°C 240max	120max 160max	150max 200max	200max 500max
RIPPLE NOISE[mVp-p]	0 to +50°C 210max -20 to 0°C 270max	150max 270max	200max 240max	300max 600max
TEMPERATURE REGULATION[mV]	0 to +50°C 120max -20 to +50°C 180max	240max 290max	360max 440max	480max 600max
DRIFT[mV]	* ³ 48max	96max	144max	192max
START-UP TIME[ms]	800typ (ACIN 115V, Io=100%)			
HOLD-UP TIME[ms]	20typ (ACIN 115V, Io=100%)			
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	10.80 to 13.50	20.40 to 28.50	30.60 to 40.80	40.80 to 55.20
OUTPUT VOLTAGE SETTING[V]	12.00 to 12.48	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92
PROTECTION CIRCUIT AND OTHERS				
OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
OVERVOLTAGE PROTECTION[V]	14.40 to 17.40	28.80 to 34.80	43.20 to 52.20	57.00 to 67.20
OPERATING INDICATION	LED (Green)			
REMOTE SENSING	Optional (Option -W, -W1)			
REMOTE ON/OFF	Optional (Required external power source. Option -R)			
ISOLATION				
INPUT-OUTPUT	AC4,000V 1minute, Cutoff=20mA, 2MOPP DC500V 50MΩ min (At room temperature)			
INPUT-FG	AC2,000V 1minute, Cutoff=20mA, 1MOPP DC500V 50MΩ min (At room temperature)			
OUTPUT • RC-FG	* ³ AC1,500V 1minute, Cutoff=20mA, 1MOPP DC500V 50MΩ min (At room temperature)			
OUTPUT-RC	AC500V 1minute, Cutoff=20mA, DC500V 50MΩ min (At room temperature)			
ENVIRONMENT				
OPERATING TEMP., HUMID. AND ALTITUDE	* ⁴ -20 to +70°C (Refer to "Derating"), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max			
STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max			
VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes			
IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axes			
SAFETY AND NOISE REGULATIONS				
AGENCY APPROVALS	ANSI/AAMI ES60601-1, C-UL(CAN/CSA-C22.2 No. 60601-1), EN60601-1 3rd			
CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B			
HARMONIC ATTENUATOR	* ⁵ Complies with IEC61000-3-2 class A			

SPECIFICATIONS

OTHERS	CASE SIZE/WEIGHT	178 X 61 X 268mm [7.01 X 2.40 X 10.55 inches] (Excluding terminal block and screw) (W X H X D) / 3.5kg max
	COOLING METHOD	*6 Forced cooling (internal fan)
WARRANTY	WARRANTY	*7 5 years (subject to the operating conditions)

*1 This is the result of measurement of the testing board with capacitors of 22 μ F and 0.1 μ F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103. See 1.6 of Instruction Manual for more details.

*2 Consult us about dynamic load and input response.

*3 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.

*4 Output power derating is required. Refer to "Derating".

*5 Consult us about other classes.

*6 The fan speed slows down or stops at no load.

*7 See 3 in Instruction Manual for more details.

*8 Consult us about safety agency approvals for the models with optional functions.

*9 Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.


*10 Parallel operation is not possible with this mode.

*11 Audible noise may be heard from the power supply when used for pulse load.

Features


- 4kV isolation
- Economical design
- Suitable for BF application (Output-FG : 1MOPP, Input-Output : 2MOPP)
- Wide temperature range (-20°C to +70°C, Refer to "Derating")
- Harmonic attenuator (Complies with IEC61000-3-2 class A)
- Universal input (AC85 - 264V, Refer to "Derating")
- Low power consumption at no load

Block diagram

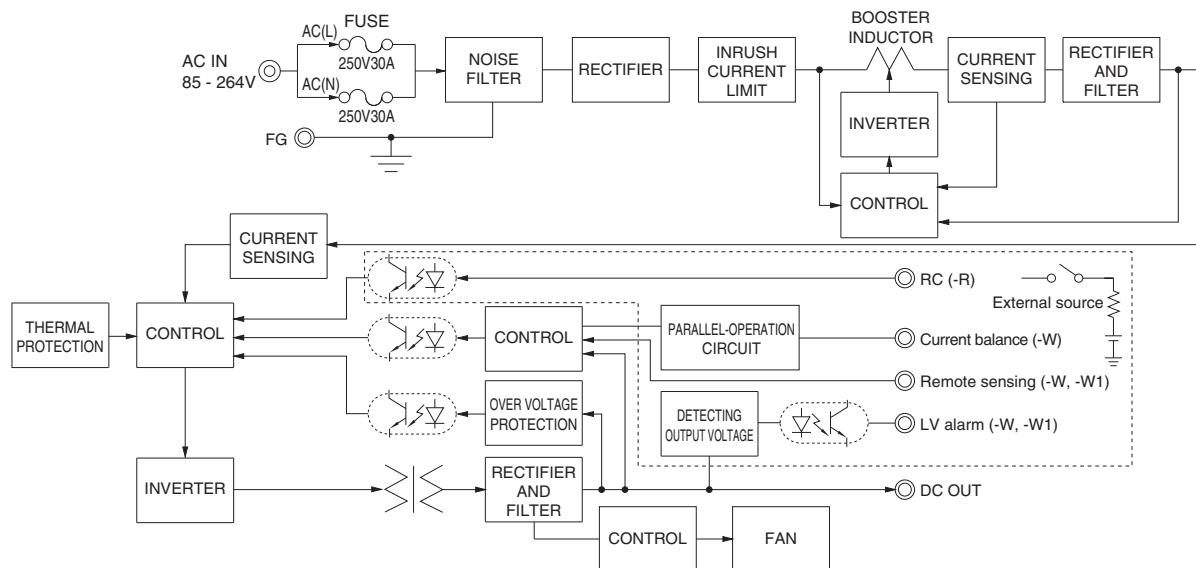

External view

The external size of -V option, -W option, -W1 option and -R option models is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

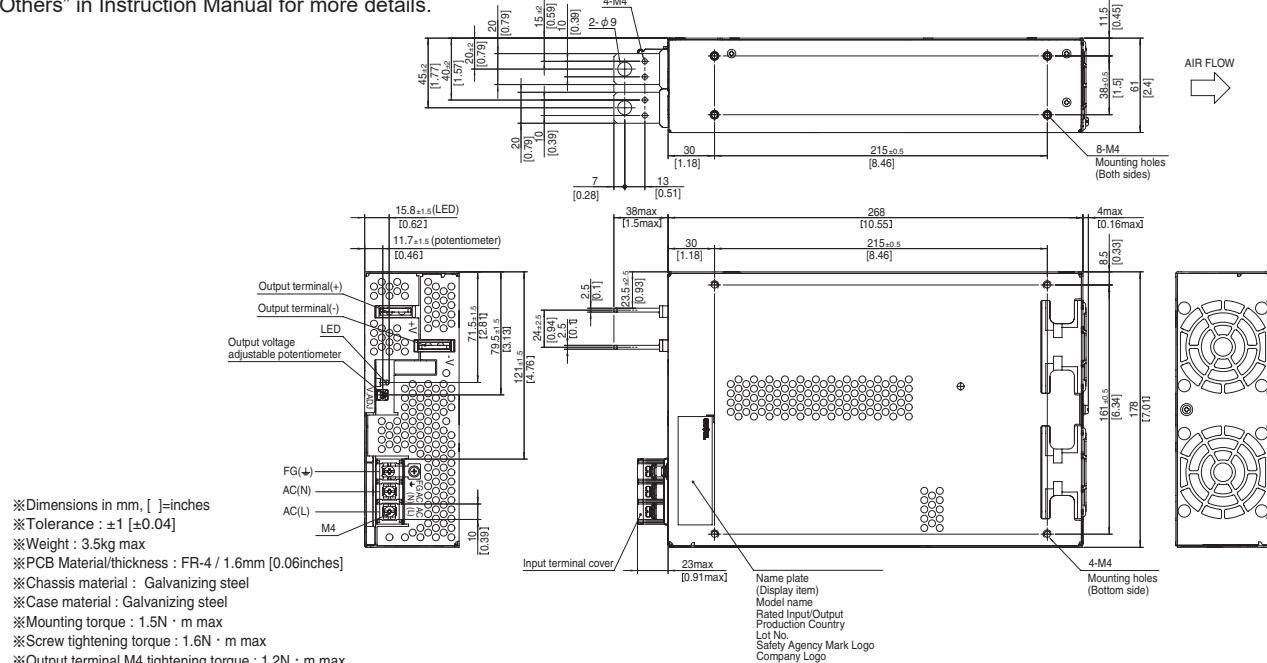

*Dimensions in mm, []=inches

*Tolerance : ± 1 [± 0.04]

*Weight : 3.5kg max

*PCB Material/Thickness : FR-4 / 1.6mm [0.06inches]

*Chassis material : Galvanizing steel

*Case material : Galvanizing steel


*Mounting torque : 1.5N · m max

*Screw tightening torque : 1.6N · m max


*Output terminal M4 tightening torque : 1.2N · m max

Assembling and Installation Method


- Do not insert a screw more than 6mm from the outside of a power supply to keep enough insulation distance between the screw and internal components.

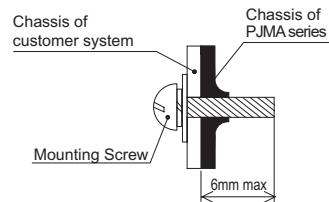


● PJMA300F

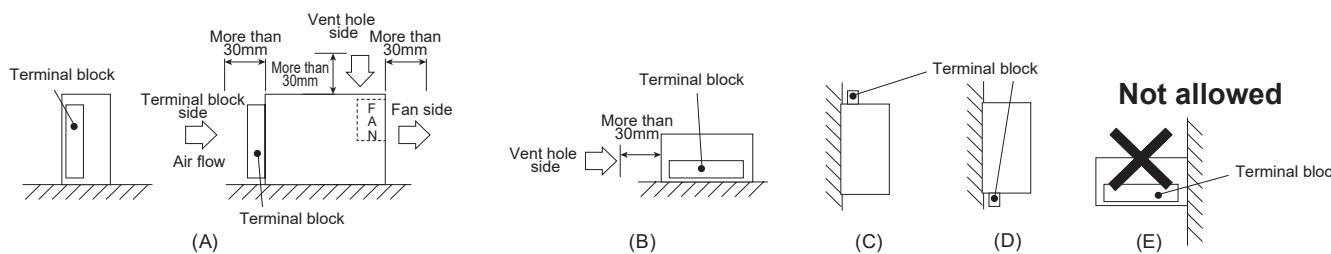

● PJMA600F


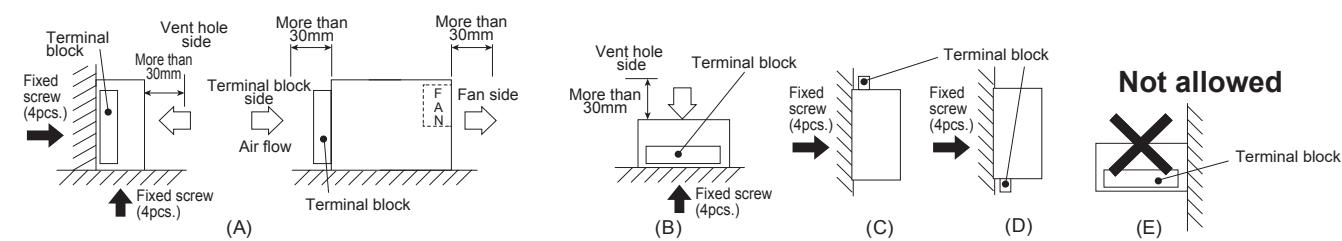


● PJMA1000F, PJMA1500F

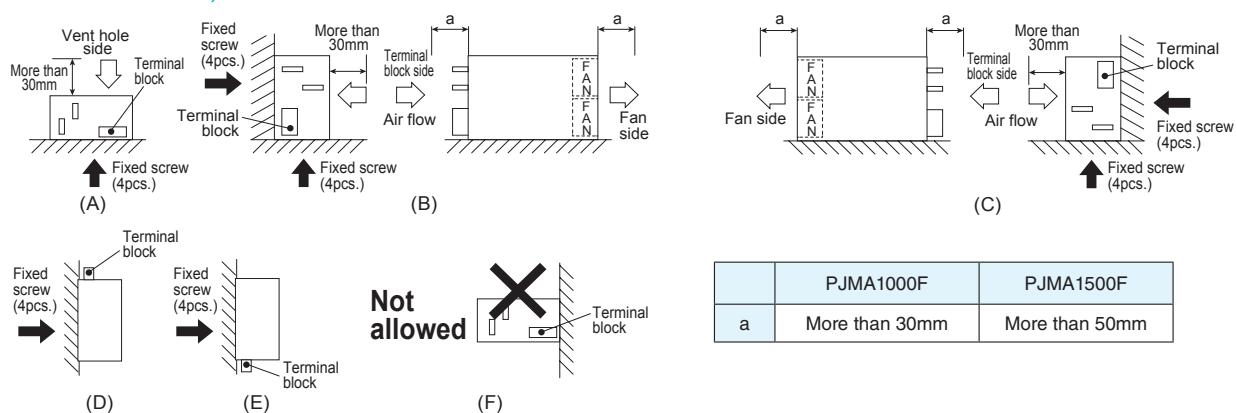

Assembling and Installation Method

- When mounting the power supply with screws, it is recommended that this be done as shown above. If other methods are used, be sure the weight of the power supply is taken into account.
- Avoid the not allowed installation method as it gives excessive stress to the mounting holes.
- Do not block air flow of the built-in fan (terminal block and ventilation hole).
- If the power supply is used in a dusty environment, use an airfilter. Make sure air flow is not blocked.
- If the built-in fan stops, thermal protection will work and the output will stop.
- The life expectancy ($R(t)=90\%$) of the built-in fan varies depending on the operating condition.

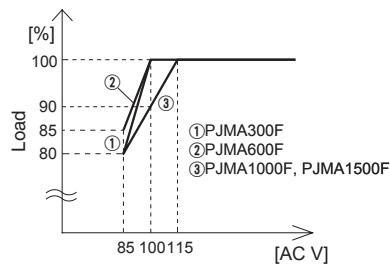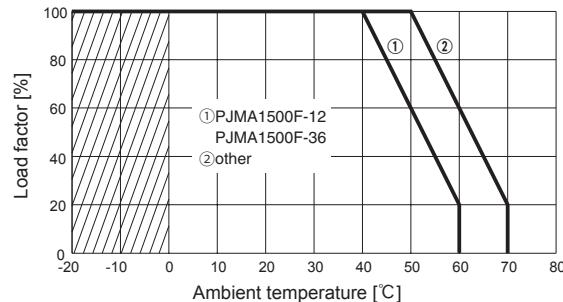Derating**● Input voltage Derating Curve****● Ambient temperature Derating Curve**

- In the hatched area, the specification of Ripple, Ripple Noise is different from other area.
- The ambient temperature is defined as the temperature of the air (at the terminal block side) that the built-in cooling fan blows into the power supply. Please pay attention to the heat generated by the input and output wires. Please consult us for more details.

Instruction Manual

- ◆ It is necessary to read the "Instruction Manual" and "Before using our product" before you use our product.

Instruction Manual <https://en.cosel.co.jp/product/powersupply/PJMA/>
 Before using our product <https://en.cosel.co.jp/technical/caution/index.html>

PJMA

NOTICE

**Basic Characteristics Data**

Model	Circuit method	Switching frequency [kHz]	Input current [A]	Rated input fuse	Inrush current protection circuit	PCB/Pattern			Series/Parallel operation availability	
						Material	Single sided	Double sided	Series operation	Parallel operation
PJMA300F	Active filler	60	3.9 *1	250V 10A	Thermistor	FR-4			Yes	Yes
	Forward converter	140								
PJMA600F	Active filler	60	7.5 *1	250V 16A	SCR	FR-4			Yes	Yes
	Forward converter	220								
PJMA1000F	Active filter	65	12.5 *2	250V 20A	TRIAC	FR-4			Yes	Yes
	Forward converter	210								
PJMA1500F	Active filter	65	18.0 *1	250V 30A	TRIAC	FR-4			Yes	Yes
	Forward converter	210								

*1 The input current shown is at ACIN 100V and 100% load.

*2 The input current shown is at ACIN 100V and 90% load.

*3 Parallel operation is possible with -W option. see "5.Option and Other" is Instruction Manual.

*4 Parallel operation is possible with -W option. (Except 48V) see "5.Option and Other" is Instruction Manual.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

[PJMA300F-12](#) [PJMA300F-24](#) [PJMA300F-36](#) [PJMA300F-48](#) [PJMA1000F-12-F4](#) [PJMA1000F-12-R](#) [PJMA1000F-12-V](#) [PJMA1000F-12-W](#) [PJMA1000F-12-W1](#) [PJMA1000F-24-C](#) [PJMA300F-36-V](#) [PJMA300F-48-C](#) [PJMA300F-48-F4](#) [PJMA300F-48-G](#) [PJMA300F-48-R](#) [PJMA300F-48-V](#) [PJMA300F-24-R](#) [PJMA300F-24-V](#) [PJMA300F-36-C](#) [PJMA300F-36-F4](#) [PJMA300F-36-G](#) [PJMA300F-36-R](#) [PJMA300F-12-G](#) [PJMA300F-12-R](#) [PJMA300F-12-V](#) [PJMA300F-24-C](#) [PJMA300F-24-F4](#) [PJMA300F-24-G](#) [PJMA600F-36-W1](#) [PJMA600F-48-R](#) [PJMA600F-48-V](#) [PJMA600F-48-W1](#) [PJMA300F-12-C](#) [PJMA300F-12-F4](#) [PJMA600F-24-V](#) [PJMA600F-24-W1](#) [PJMA600F-36-R](#) [PJMA1000F-12-G](#) [PJMA1000F-12-C](#) [PJMA600F-36-V](#) [PJMA1000F-48-W](#) [PJMA1000F-48-W1](#) [PJMA600F-12-R](#) [PJMA600F-12-V](#) [PJMA600F-12-W1](#) [PJMA600F-24-R](#) [PJMA1000F-36-W1](#) [PJMA1000F-48-C](#) [PJMA1000F-48-F4](#) [PJMA1000F-48-G](#) [PJMA1000F-48-R](#) [PJMA1000F-48-V](#) [PJMA1000F-36-C](#) [PJMA1000F-36-F4](#) [PJMA1000F-36-G](#) [PJMA1000F-36-R](#) [PJMA1000F-36-V](#) [PJMA1000F-36-W](#) [PJMA1000F-24-F4](#) [PJMA1000F-24-G](#) [PJMA1000F-24-R](#) [PJMA1000F-24-V](#) [PJMA1000F-24-W](#) [PJMA1000F-24-W1](#) [PJMA1500F-12](#) [PJMA1500F-24](#) [PJMA1500F-36](#) [PJMA1500F-48](#)