

Description

The smart power relay ESR10 Micro (Electronic Standard Relay) is a solid state relay which can replace electro-mechanical relays.

The ESR10 is a plus switching (high side switch) closing relay (NO) in an ISO Micro automotive relay enclosure.

It allows bipolar control by a positive voltage. This space-saving relay is available in three power classes:

- 10 A for max. 85° C / (12 and 24) Vdc
- 17 A for max. 105° C / (12 and 24) Vdc
- 30 A for max. 85° C / 12 Vdc

Applications

The ESR10 helps to switch loads whose current demand is too high to be connected directly to the controlgear. The switching function of the ESR10 is completely noiseless. This allows installation in the vehicle's interior.

The ESR10 Micro is suitable for all applications in DC 12 V or 24 V electrical systems where valves, motors, lamps etc. have to be switched:

- Road vehicles (passenger cars, bicycles, trucks, buses, working vehicles and emergency cars, special vehicles)
- Construction vehicles and agricultural vehicles
- Watercraft (ships, sailing boats, motor yachts etc.)

Benefits

- The low current consumption, particularly in the ON condition, helps to reduce gas consumption as well as CO₂ emissions.
- The solid state relay switches silently and features wear-free operation of all loads with an extremely long life span.

Order numbering code

Type No.								
ESR10	electronic standard relay							
Protection (characteristic curve)								
N not protected, only short circuit protection								
Type of enclosure								
C2 Micro enclosure with hexagonal latching lugs								
C3 Micro design without retaining clip								
Terminals (pins)								
A4 standard automotive, 4-pole (ISO)								
Load and control								
HB high-side-switch (HSS), bipolar control								
Sub type								
00 standard								
System voltage								
D1 DC 12 V								
D2 DC 24 V								
Current rating (at 25°C)								
10 A								
17 A								
30 A * (12 V only)								
ESR10	-	N	C2	A4				
			HB	- 00				
				- D1 - 10A				

Please be informed that we have minimum ordering quantities to be observed.



ESR10 Micro

Technical data (25 °C) – ESR10 Micro 10 A

Voltage supply LINE+

System voltage	U _B	DC 12 V / DC 24 V
Operating voltage		6...16 V / 10...32 V
Closed current ¹⁾	OFF	8 µA

Load circuit LOAD

Load output (HSS)		MOSFET, high side switching
Load types		resistive, inductive and capacitive
Protective function		short circuit proof, temperature disconnection (pulsing)
Current rating	I _N	10 A
Typical life		> 1,000,000 cycles
Voltage drop ¹⁾	U _{ON}	75 mV
Max. short circuit current		60 A (L/R = 3 ms)

Control input IN+

Control voltage	ON	12 V: ±6...16 V; 24 V: ±10...32 V
	OFF	12 V: ±0...2 V; 24 V: ±0...4 V
Control current ^{1) 2)}		10 mA (at 13.5 V respectively 27 V) (derating see chart)

Switching frequency max.

Rising edge < 5 ms

General data

Reverse polarity ³⁾	load	yes (reverse polarity conductive)
protection circuit, load circuit		
Cycle times ¹⁾	t _{ON} t _{OFF}	0.5 ms 0.5 ms
Temperature range		-40 °C...85 °C
Dimensions		ISO Standard Micro (with retaining lugs)
plugged in		26 x 15.5 x 26 mm
including contacts		26 x 15.5 x 37 mm
Mass ¹⁾		15 g

¹⁾ typically

²⁾ The upstream controlgear may misconstrue the situation as "wire break" due to the extremely low control current. In this case the trigger threshold should be adjusted.

³⁾ In the event of reverse polarity connection, the MOSFET will switch through automatically for self-protection.

Technical data (25 °C) – ESR10 Micro 17 A
Voltage supply LINE+

System voltage	U _B	DC 12 V / DC 24 V
Operating voltage		6...16 V / 10...32 V
Closed current ¹⁾	OFF	8 µA

Load circuit LOAD

Load output	MOSFET, high side switching (HSS)
Load types	resistive, inductive and capacitive
Protective function	short circuit proof, temperature disconnection (pulsing)
Current rating	I _N 17 A
Voltage drop ¹⁾	U _{ON} 75 mV
Max. short circuit current	100 A (L/R = 3 ms)

Control input IN+

Control voltage	ON	12 V: ±6...16 V; 24 V: ±10...32 V
	OFF	12 V: ±0...2 V; 24 V: ±0...4 V
Control current ^{1) 2)}		10 mA (at 13.5 V respectively 27 V) (derating see chart)
Switching frequency		max. see chart
Rising edge		< 5 ms

General data

Reverse polarity protection circuit, load circuit	load	yes (reverse polarity conductive) ³⁾
Cycle times ¹⁾	t _{ON} t _{OFF}	0.5 ms 0.5 ms
Temperature range		-40 °C...105 °C
Dimensions		ISO Standard Micro (with retaining lugs)
plugged in		26 x 15.5 x 26 mm
including contacts		26 x 15.5 x 37 mm
Mass ¹⁾		15 g

Approvals

Authority	Approval mark	Regulation
KBA	E1	ECE R 10

Conformity
RoHS ✓ REACH ✓
Qualifications

ESR10 Micro 10 A/12 V variant, VW		
VW80000:2013-06 (LV124)		
TL81000:2013-02		
ESR10 Micro 10 A/12 V variant, GM		
GMW 15267		
GMW 3097		
ESR10 Micro 10 A, 17 A, 30 A / 24 V		
Environmental tests to LV124		
(Specification and severity to VW80000: 2013-06)		
Electrical tests to ISO 16750-2		

Technical data (25 °C) – ESR10 Micro 30 A
Voltage supply LINE+

System voltage	U _B	DC 12 V
Operating voltage		6...16 V
Closed current ¹⁾	OFF	5 µA

Load circuit LOAD

Load output	MOSFET, high side switching (HSS)
Load types	resistive, inductive and capacitive
Protective function	short circuit proof, temperature disconnection (pulsing)
Current rating	I _N 30 A
Voltage drop ¹⁾	U _{ON} 50 mV
Max. short circuit current	100 A (L/R = 3 ms)

Control input IN+

Control voltage	ON	12 V: ±6...16 V
	OFF	12 V: ±0...2 V
Control current ^{1) 2)}		10 mA (at 13.5 V respectively 27 V) (derating see chart)
Switching frequency		max. see chart
Rising edge		< 5 ms

General data

Reverse polarity protection circuit, load circuit	load	yes (reverse polarity conductive) ³⁾
Cycle times ¹⁾	t _{ON} t _{OFF}	0.5 ms 3.5 ms
Temperature range		-40 °C...85 °C
Dimensions		ISO Standard Micro (with retaining lugs)
plugged in		26 x 15.5 x 26 mm
including contacts		26 x 15.5 x 37 mm
Mass ¹⁾		15 g

Important: The 30A version of the ESR10 Micro will only be available upon request and for high volume projects (> 5000 pcs). Small quantities cannot be ordered.


Tests

Chemical resistance	Tested with battery acid, interior cleaner, glass cleaner, acetone, spirit, cream, caffeine and sugar containing drink.
Vibration	ISO 60068-2-64:2008 test FH 3g
Shock	ISO 60068-2-27:2009 test EA 50g
Free fall	Drop height 1m onto concrete
Salt spray	DIN EN 60068-2-11:2000 Test KA
Degree of protection	ISO 20653 2nd Edition:2013/ IEC 60068-2-68:1997 IP5K3

Pin assignment


ESR10 Micro			
LINE +	3 (30)	U _B	
IN _a	1 (86/31)	control input	
IN _b	2 (31/86)	ground	
LOAD	5 (88a)	load output	

(¹) [^] = Automotive terminal designation



Dimensions

Pin assignment is in accordance with ISO 7588
 3 and 5 – blade terminals 6.3 x 0.8 [mm]
 1 and 2 – blade terminals 4.8 x 0.8 [mm]

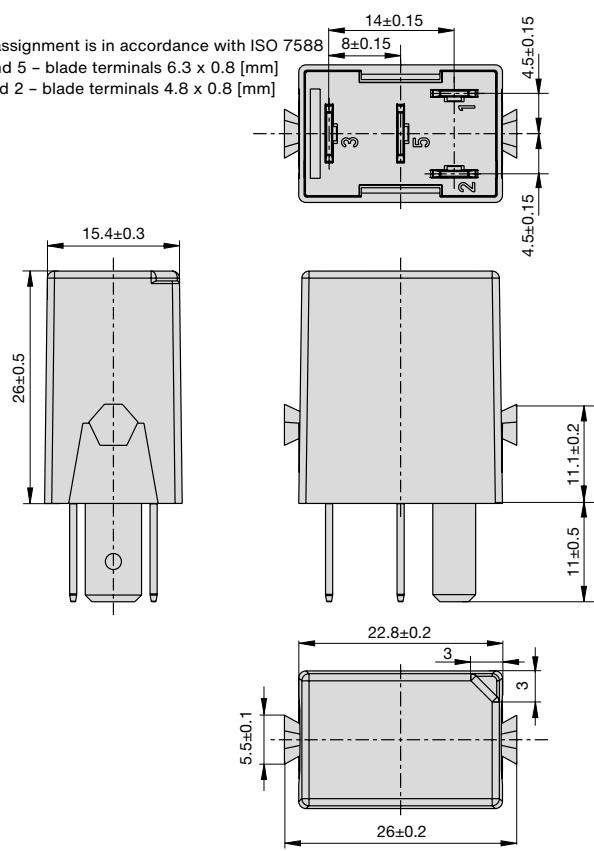


Schematic diagram


Alternative control of bipolar control inputs

Control inputs	IN a	IN b
alternative 1	U_B	GND
alternative 2	GND	U_B

alternative 1

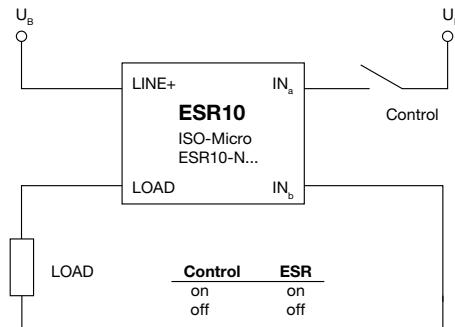


alternative 2

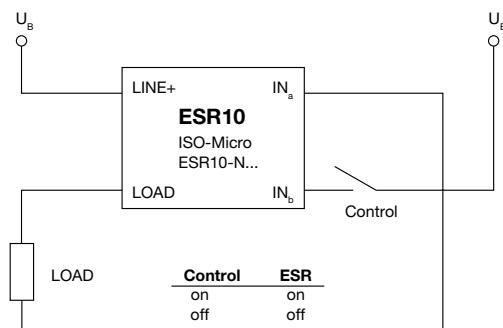

Dimensions: Design without retaining clip


Pin assignment is in accordance with ISO 7588
 3 and 5 – blade terminals 6.3 x 0.8 [mm]
 1 and 2 – blade terminals 4.8 x 0.8 [mm]

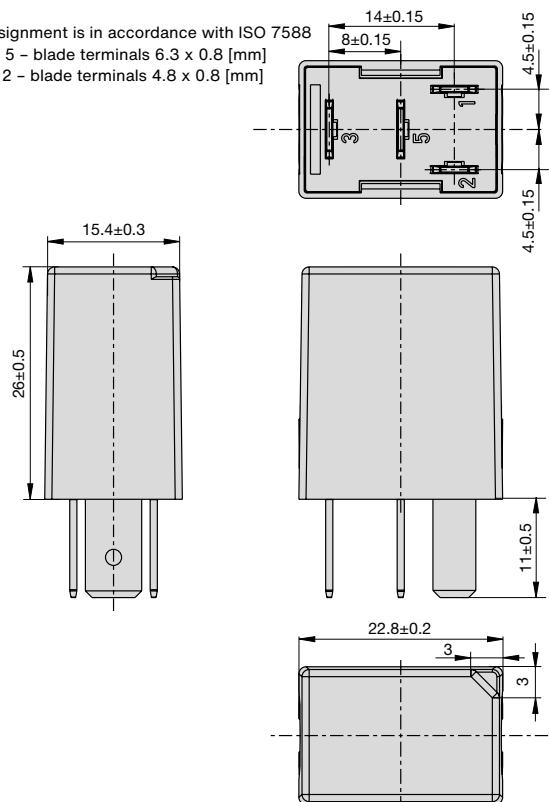


All dimensions without tolerances are for reference only. E-T-A reserves the right to change specifications at any time in the interest of improved design, performance and cost effectiveness, the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.

Derating


Load current for – 10 A variant

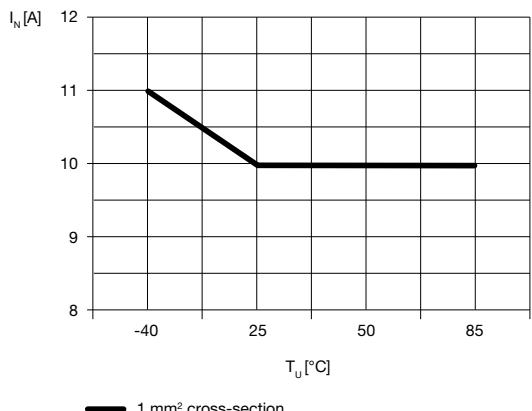


Load current for – 30 A variant

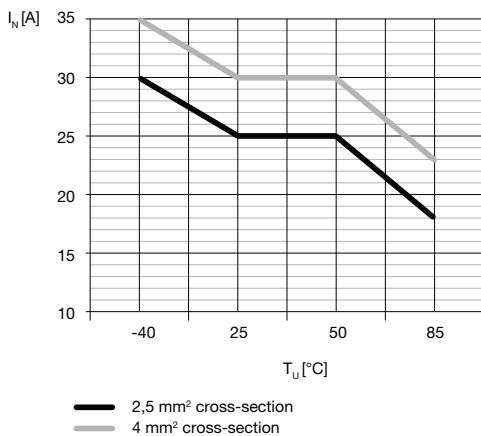


Load current for 17 A variant

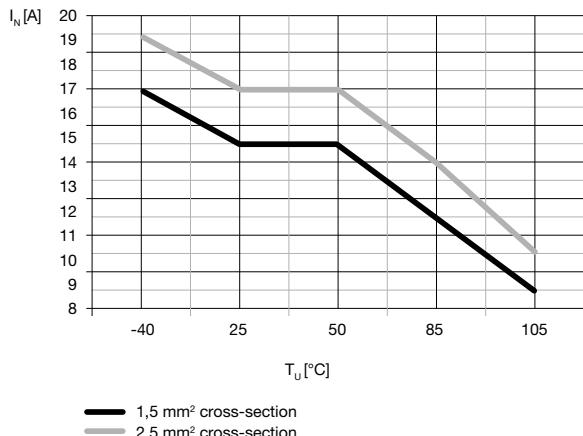






Control current for 12 V – 10 A / 17 A / 30 A variant

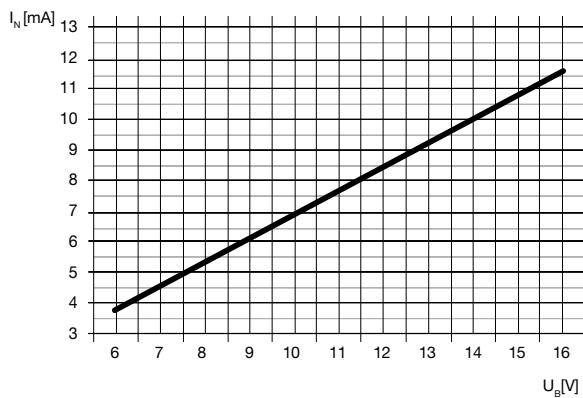

Control current for 24 V – 10 A / 17 A / 30 A variant





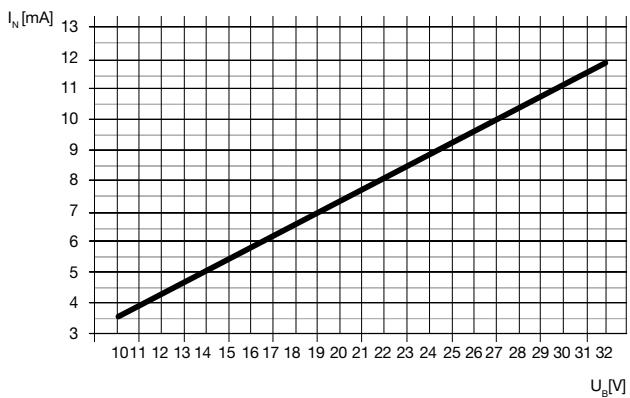


Frequency control 10 A

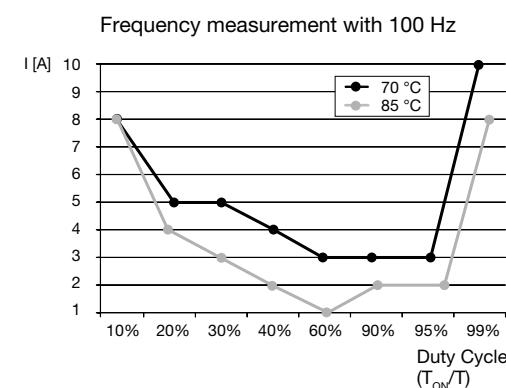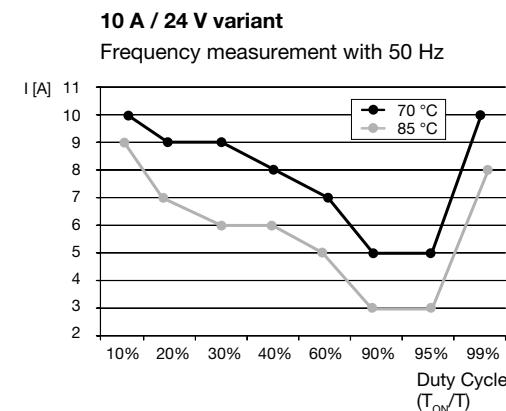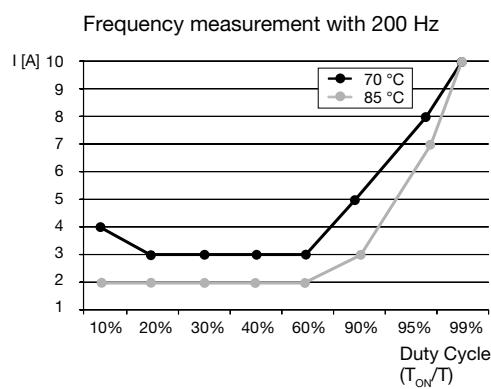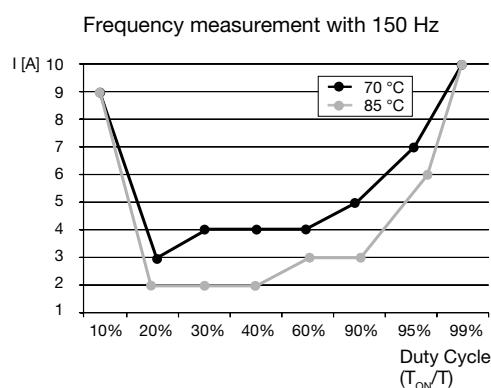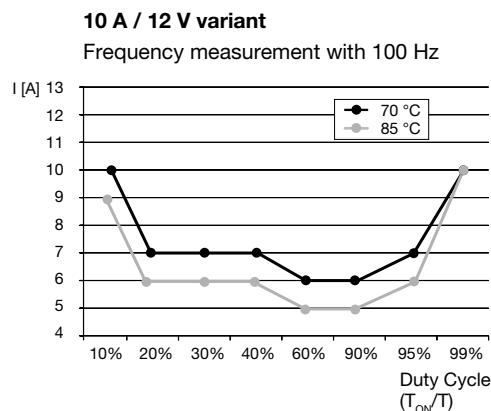

The max. load current depends on the load type. Please contact the manufacturer of the load if the limit values shown above are reached. E-T-A is able to test whether the relay works in the limit range.

Frequency control 17 A / 30 A

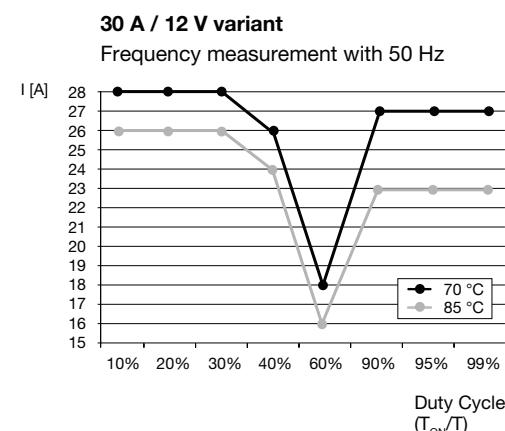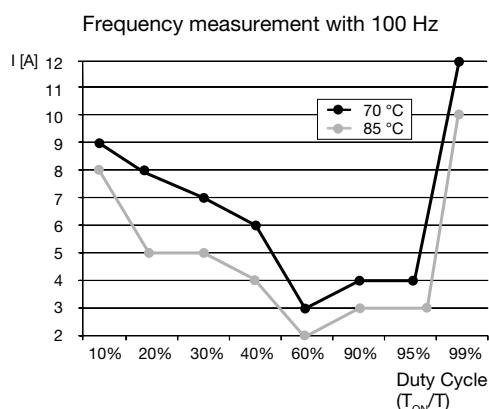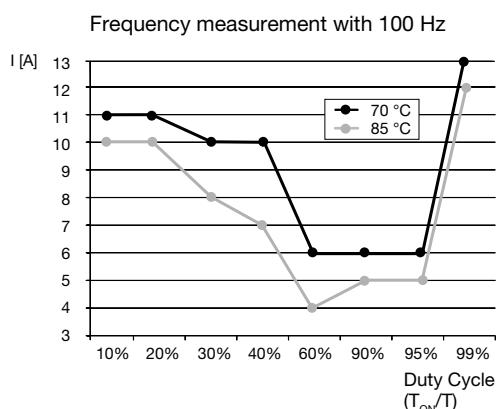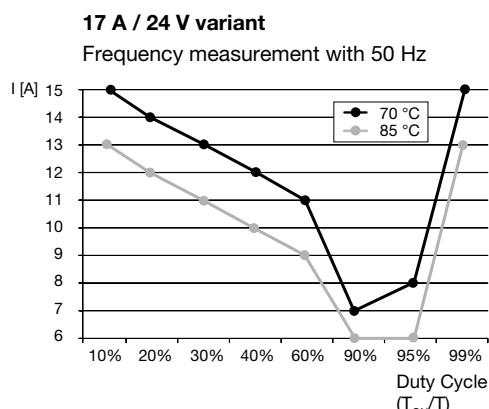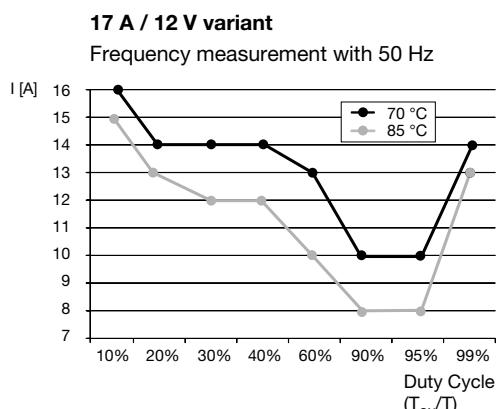

The max. load current depends on the load type. Please contact the manufacturer of the load if the limit values shown above are reached. E-T-A is able to test whether the relay works in the limit range.

