


Dual Channel Encoder

OPB822S, OPB822SD

OPB826S, OPB826SD



Features:

- Non-contact switching
- Single or double apertures for high resolution
- Choice of slot widths
- Choice of side-by-side or over/under dual channels
- Choice of electrical outputs

Description:

Each **OPB822** and **OPB826** slotted switch consists of two infrared emitting diodes and two NPN silicon phototransistors mounted on opposite sides of a 0.090" (2.29 mm) wide slot (**OPB822**) or a 0.100" (2.54 mm) wide slot (**OPB826**).

OPB822 uses a side-by-side mounting configuration, while **OPB826** uses an over/under mounting configuration.

OPB822S has 0.01" by 0.04" (0.25 mm x 1.02 mm) apertures in front of both phototransistors while the **OPB822SD** has the aperture in front of both phototransistors and both emitters. The **OPB826S** has 0.04" by 0.04" (1.02 mm x 1.02 mm) apertures in front of both phototransistors while the **OPB826SD** has the aperture in front of both phototransistors and both emitters.

Dual channels enable direction of travel sensing, with the low-cost plastic housing reduces possible interference from ambient light and provides protection from dust and dirt.

Phototransistor switching occurs when an opaque object passes through the device slot.

For information on encoder design, see Application Bulletin 203, along with 213 and 248.

Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

Applications:

- Encoders
- Non-contact object sensing
- Assembly line automation
- Machine automation
- Equipment security
- Machine safety

Part Number	LED Peak Wavelength	Sensor	Slot Width / Depth	Aperture Emitter/Sensor	Lead Length/Spacing
OPB822S	Dual 935 nm	Dual Transistor	0.09" / 0.30"	NA / 0.01"	0.35" / 0.30"
OPB822SD				0.01" / 0.01"	
OPB826S	Dual 890 nm	Dual Transistor	0.10" / 0.42"	NA / 0.04"	0.20" / 0.74"
OPB826SD				0.04" / 0.04"	



RoHS

CONTAINS POLYSULFONE

To avoid stress cracking, we suggest using ND Industries' **Vibra-Tite** for thread-locking. **Vibra-Tite** evaporates fast without causing structural failure in OPTEK's molded plastics.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Dual Channel Encoder


OPB822S, OPB822SD

OPB826S, OPB826SD




Packaging

OPB822

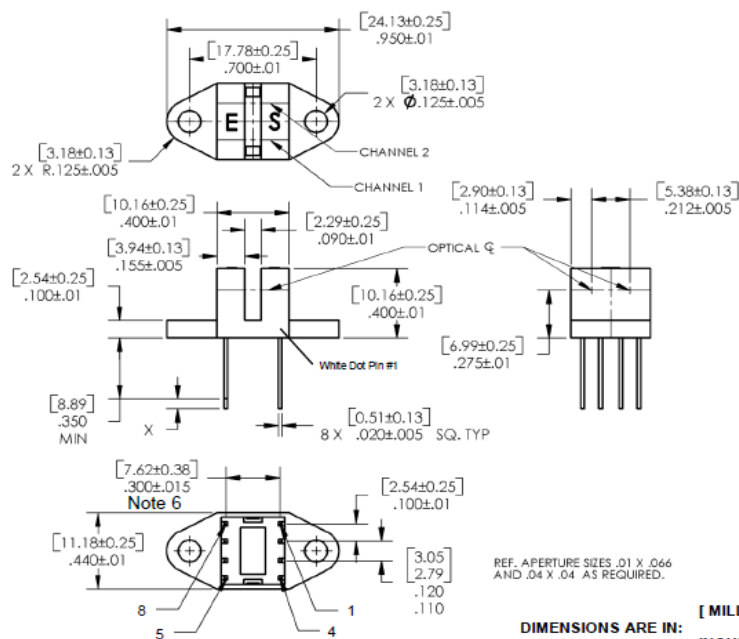


Bottom View

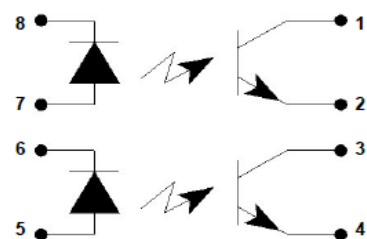


Pin #	Description	Pin #	Description
8	Cathode-1	1	Collector-1
7	Anode-1	2	Emitter-1
6	Cathode-2	3	Collector-2
5	Anode-2	4	Emitter-2

OPB826

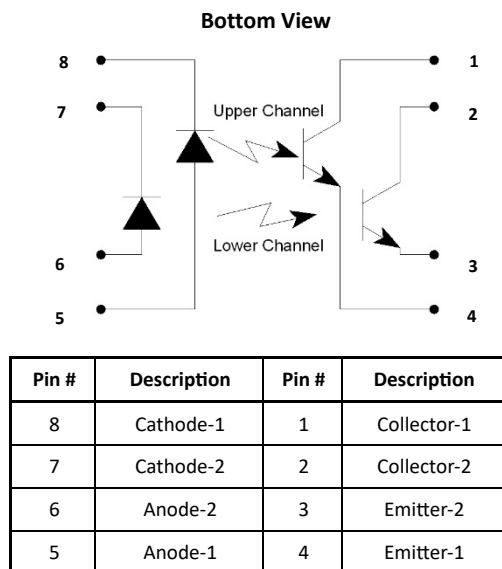

Bottom View

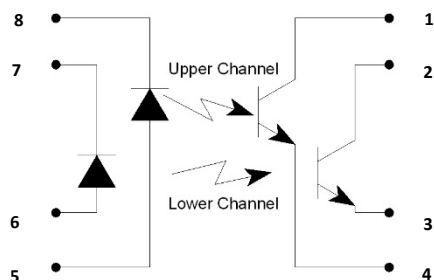

Pin #	Description	Pin #	Description
8	Cathode-1	1	Collector-1
7	Cathode-2	2	Collector-2
6	Anode-2	3	Emitter-2
5	Anode-1	4	Emitter-1

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Electrical Specifications


Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Storage & Operating Temperature Range	-40° C to +85° C
Lead Soldering Temperature [1/16 inch (1.6 mm) from the case for 5 sec. with soldering iron] ⁽¹⁾	260° C
Input Diode	
Forward DC Current OPB822S, OPB822SD OPB826S, OPB826SD	50 mA 40 mA
Peak Forward Current (1 μs pulse width, 300 pps)	1 A
Reverse DC Voltage	2 V
Power Dissipation ⁽²⁾	100 mW
Output Phototransistor	
Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Collector DC Current	30 mA
Power Dissipation ⁽²⁾	100 mW

Notes:


- (1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (2) Derate linearly 1.33 mW/° C above 25° C.
- (3) Methanol or isopropanol are recommended as cleaning agents. Plastic housing is soluble in chlorinated hydrocarbons and ketones. Spray and wipe; do not submerge.
- (4) All parameters tested using pulse techniques.
- (5) Feature controlled at body.

Encoder Sequence for OPB826

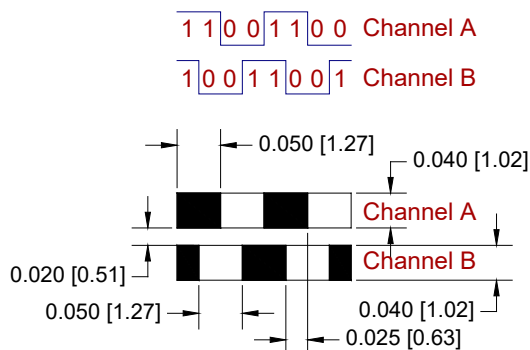

For information on encoder design, see Application Bulletin 203

Encoder Sequence for OPB822

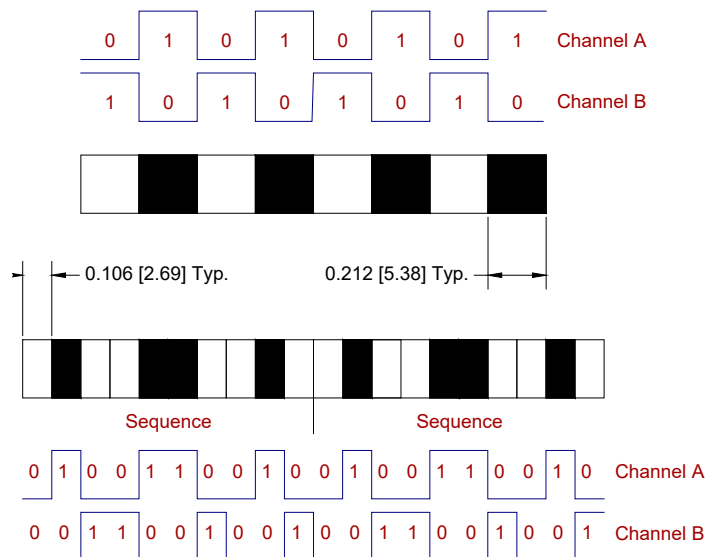

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Dual Channel Encoder

OPB822S, OPB822SD

OPB826S, OPB826SD



Electrical Specifications

Electrical Characteristics (OPB822, OPB826) ($T_A = 25^\circ \text{C}$ unless otherwise noted) ⁽¹⁾

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Input Diode						
V_F	Forward Voltage	1.0	-	1.7	V	$I_F = 20 \text{ mA}$
I_R	Reverse Current	-	-	100	μA	$V_R = 2 \text{ V}$
Output Phototransistor						
$V_{(BR)(CEO)}$	Collector-Emitter Breakdown Voltage	30	-	-	V	$I_C = 1 \text{ mA}$
$V_{(BR)(ECO)}$	Emitter-Collector Breakdown Voltage	5	-	-	V	$I_E = 100 \mu\text{A}$
I_{CEO}	Collector-Emitter Leakage Current	-	-	100	nA	$V_{CE} = 10 \text{ V}, I_F = 0, E_E = 0$
Coupled						
$I_{C(ON)}$	On-State Collector Current					
	OPB822S	250	-	-	μA	$V_{CE} = 5 \text{ V}, I_F = 20 \text{ mA}$
	OPB822SD	100	-	-	μA	$V_{CE} = 5 \text{ V}, I_F = 20 \text{ mA}$
	OPB826S	250	-	-	μA	$V_{CE} = 10 \text{ V}, I_F = 20 \text{ mA}$
	OPB826SD	100	-	-	μA	$V_{CE} = 10 \text{ V}, I_F = 20 \text{ mA}$
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage					
	OPB822S	-	-	0.4	V	$I_C = 125 \mu\text{A}, I_F = 20 \text{ mA}$
	OPB822SD	-	-	0.4	V	$I_C = 50 \mu\text{A}, I_F = 20 \text{ mA}$
	OPB826S	-	-	0.4	V	$I_C = 125 \mu\text{A}, I_F = 20 \text{ mA}$
	OPB826SD	-	-	0.4	V	$I_C = 50 \mu\text{A}, I_F = 20 \text{ mA}$
I_{CX1}	Crosstalk					
	OPB822D, OPB822SD	-	-	250	μA	$I_{F1} = 0 \text{ mA}, I_{F2} = 20 \text{ mA}, V_{CE} = 10 \text{ V}$
	OPB826S	-	-	20		
	OPB826SD	-	-	10		

Notes:

(1) All parameters tested using pulse techniques.


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Typical Performance


935nm LED Forward Voltage vs I_F vs Temp

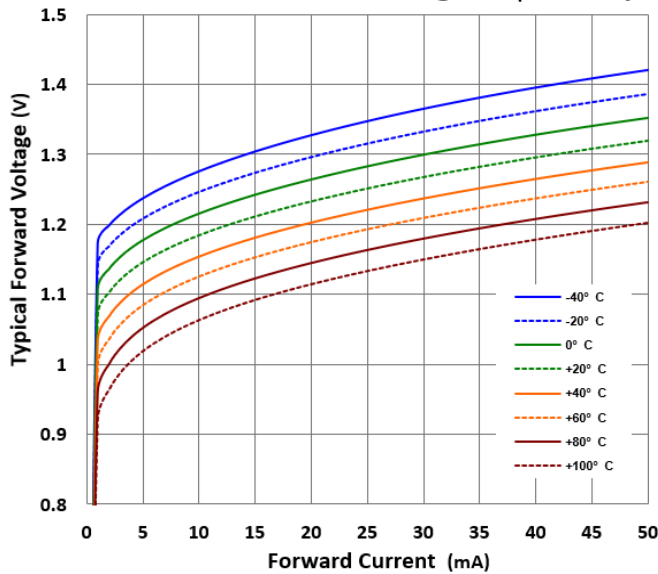


890nm LED Forward Voltage vs I_F vs Temp

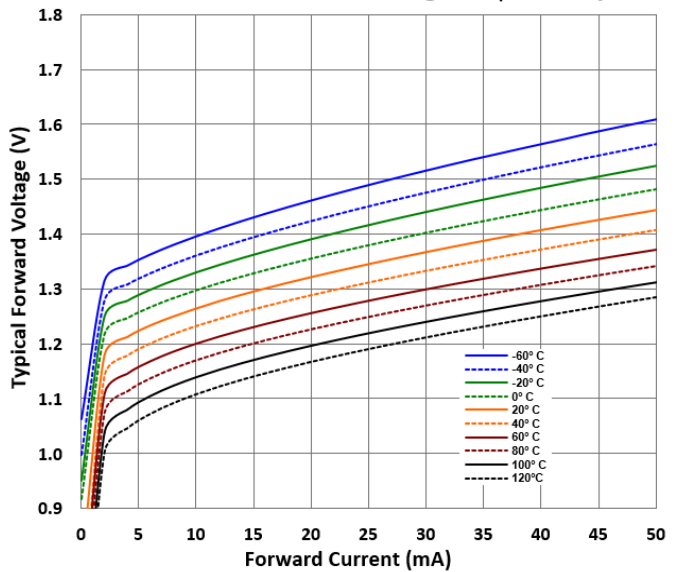

Rise and Fall time vs Load Resistance

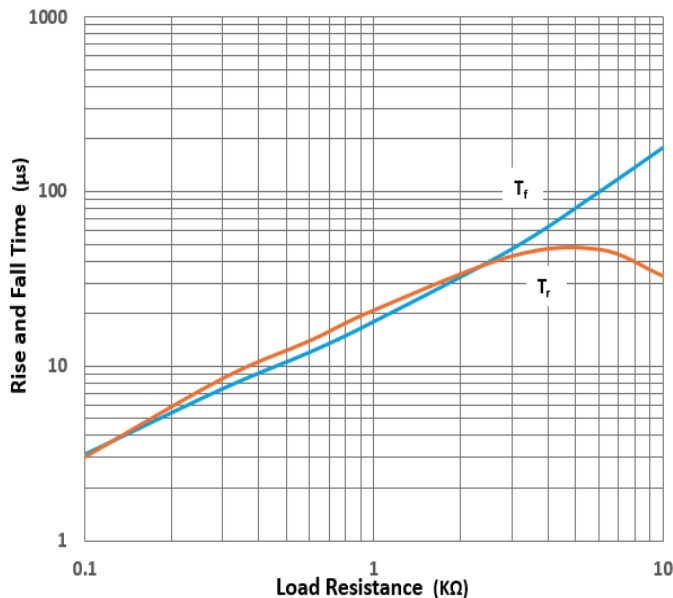

Collector Current vs Temperature

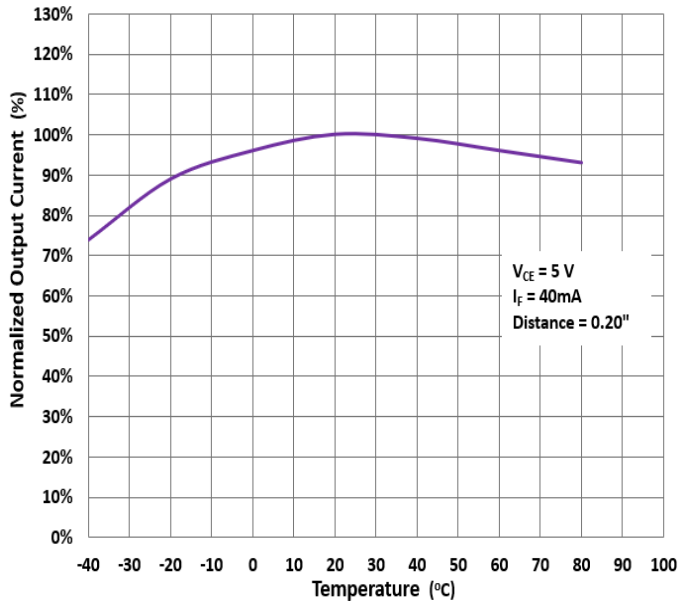

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com