



Quality Products. Service Excellence.

Tube Driver - Interstage *126 Series*

Features





ASK ABOUT
Custom
Transformers
& Chokes



Classic

✓ RoHS

- Designed for driver use ONLY in single ended tube output amplifiers. These units replace coupling capacitor circuits for improved sound.
- Closed style with minimum 8" long leads.
- All models use bifilar wound windings for exceptional coupling and bandwidth.
- Minimum frequency response 20 Hz. - 20 KHz (+/- 1db max. ref. 1 KHz.).
- The core is gapped to support the specified D.C. bias current.
- Maximum working voltage - 400 VDC
- Units are Hi-Pot tested at 1,000 VDC
- Core uses Hi grade silicon laminations (29M6).
- Units weight - 3 lbs. 2 oz.

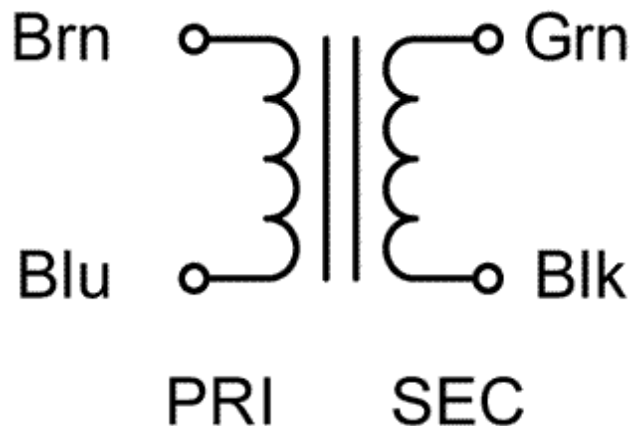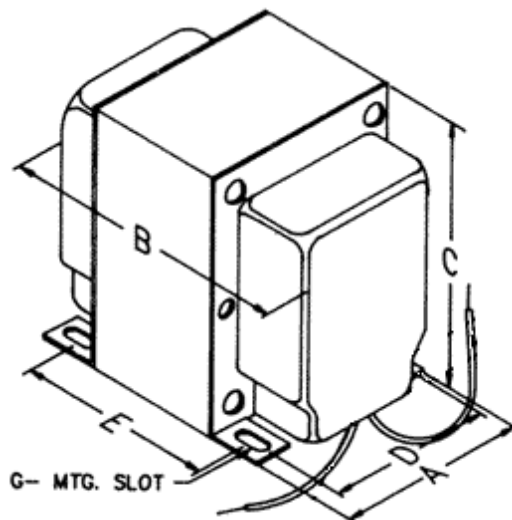

12/3/25, 7:23 AM

Tube Driver - Interstage (126 Series) - Hammond Mfg.

Part No.	Primary		Secondary		Inductance	Rated D.C. Bias Current	Dimensions					G Mtg Slot		
	Audio Watts	Impedance (Ohms)	D.C.	D.C.			A	B	C	D	E			
			Resistance	Resistance										
			(Ohms)	(Ohms)										
126A	4	5K	178	5K	178	59 Henrys	15 ma.	2.50	3.12	3.12	2.00	2.25	0.20	0.38
126B	4	5K	178	5K	178	44 Henries	30 ma.	2.50	3.12	3.12	2.00	2.25	0.20	0.38
126C	4	10K	375	10K	375	106 Henrys	15 ma.	2.50	3.12	3.12	2.00	2.25	0.20	0.38

Tags: audio transformer, interstage, tube driver, single ended, output

Data subject to change without notice

© 2025. Hammond Manufacturing Ltd. All rights reserved.