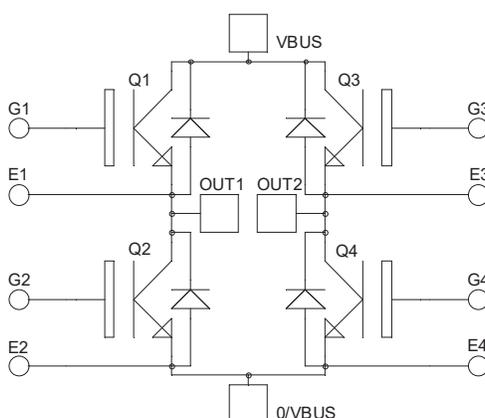


## Product Overview


The APTGX300H120G device is a full bridge 1200V, 300A Insulated-Gate Bipolar Transistor (IGBT) 7 power module.

The following figures show the electrical diagram and pinout location of the device.

**Figure 1.** Electrical Diagram



**Figure 2.** Pinout Location

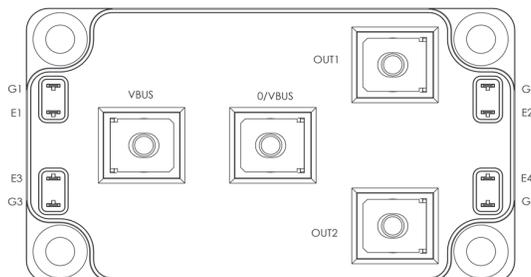

### Note:

- All ratings are at  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified.



These devices are sensitive to electrostatic discharge. Proper handling procedures must be followed.

## Features

The APTGX300H120G device has the following key features:

- IGBT 7
  - Low-voltage drop
  - Low-leakage current
- Very low-stray inductance
- Kelvin emitter for easy drive
- M5 power connectors
- Al<sub>2</sub>O<sub>3</sub> substrate and copper base plate

## Benefits

The APTGX300H120G device has the following benefits:

- High efficiency converter
- Direct mounting to heatsink (isolated package)
- Low junction-to-case thermal resistance
- Low profile
- RoHS compliant

## Potential Applications

The APTGX300H120G device has the following potential applications:

- Welding converters
- Switched-mode power supplies
- Uninterruptible power supplies
- Electric Vehicle (EV) motor and traction drive

## 1. Electrical Specifications

The following sections show the electrical specifications of the APTGX300H120G device.

### 1.1 IGBT Characteristics (Per IGBT)

The following table lists the absolute maximum ratings (per IGBT) of the APTGX300H120G device.

**Table 1-1.** Absolute Maximum Ratings

| Symbol    | Parameter   | Maximum Ratings                  | Unit |
|-----------|---|----------------------------------|------|
| $V_{CES}$ | Collector-emitter voltage                               | 1200                             | V    |
| $I_C$     | Continuous collector current                            | $T_C = 25\text{ }^\circ\text{C}$ | 415  |
|           |   | $T_C = 80\text{ }^\circ\text{C}$ | 300  |
| $I_{CM}$  | Pulsed collector current, $t_p$ limited by $T_{J(max)}$ | 600                              | A    |
| $V_{GE}$  | Gate-emitter voltage                                    | $\pm 20$                         | V    |
|           | Transient gate-emitter voltage                          | $\pm 25$                         |      |
| $P_D$     | Power dissipation                                       | $T_C = 25\text{ }^\circ\text{C}$ | 1020 |
|           |   |                                  | W    |

The following table lists the electrical characteristics (per IGBT) of the APTGX300H120G device.

**Table 1-2.** Electrical Characteristics

| Symbol        | Characteristic                       | Test Conditions                         | Min.                              | Typ. | Max. | Unit    |   |
|---------------|--------------------------------------|---|-----------------------------------|------|------|---------|---|
| $I_{CES}$     | Zero gate voltage collector current  | $V_{GE} = 0V$ ; $V_{CE} = 1200V$        | —                                 | —    | 24   | $\mu A$ |   |
| $V_{CE(sat)}$ | Collector-emitter saturation voltage | $V_{GE} = 15V$<br>$I_C = 300A$          | $T_J = 25\text{ }^\circ\text{C}$  | —    | 1.55 | 1.8     | V |
|               |                                      |   | $T_J = 125\text{ }^\circ\text{C}$ | —    | 1.7  | —       |   |
|               |                                      |   | $T_J = 175\text{ }^\circ\text{C}$ | —    | 1.77 | —       |   |
| $V_{GE(th)}$  | Gate threshold voltage               | $V_{GE} = V_{CE}$ ; $I_C = 7\text{ mA}$ | 5.15                              | 5.8  | 6.45 |         |   |
| $I_{GES}$     | Gate-emitter leakage current         | $V_{GE} = 20V$ ; $V_{CE} = 0V$          | —                                 | —    | 200  | nA      |   |

The following table lists the dynamic characteristics (per IGBT) of the APTGX300H120G device.

**Table 1-3.** Dynamic Characteristics

| Symbol       | Characteristic                      | Test Conditions   | Min.                        | Typ. | Max.  | Unit         |    |
|--------------|-------------------------------------|---|-----------------------------|------|-------|--------------|----|
| $C_{ies}$    | Input capacitance                   | $V_{GE} = 0V$<br>$V_{CE} = 25V$<br>$f = 100\text{ kHz}$   | —                           | 60   | —     | nF           |    |
| $C_{oes}$    | Output capacitance                  |   | —                           | 0.76 | —     |              |    |
| $C_{res}$    | Reverse transfer capacitance        |   | —                           | 0.22 | —     |              |    |
| $Q_G$        | Gate charge                         | $V_{GE} = \pm 15V$<br>$V_{CE} = 600V$<br>$I_C = 300A$   | —                           | 5    | —     | $\mu C$      |    |
| $T_{d(on)}$  | Turn-on delay time                  | $V_{GE} = \pm 15V$<br>$V_{BUS} = 600V$<br>$I_C = 300A$<br>$R_G = 1.8\Omega$   | $T_J = 25\text{ }^\circ C$  | —    | 195   | —            | ns |
|              |                                     |   | $T_J = 125\text{ }^\circ C$ | —    | 200   | —            |    |
|              |                                     |   | $T_J = 175\text{ }^\circ C$ | —    | 205   | —            |    |
| $T_r$        | Rise time                           |   | $T_J = 25\text{ }^\circ C$  | —    | 70    | —            |    |
|              |                                     |   | $T_J = 125\text{ }^\circ C$ | —    | 72    | —            |    |
|              |                                     |   | $T_J = 175\text{ }^\circ C$ | —    | 75    | —            |    |
| $T_{d(off)}$ | Turn-off delay time                 |   | $T_J = 25\text{ }^\circ C$  | —    | 422   | —            |    |
|              |                                     |   | $T_J = 125\text{ }^\circ C$ | —    | 500   | —            |    |
|              |                                     |   | $T_J = 175\text{ }^\circ C$ | —    | 530   | —            |    |
| $T_f$        | Fall time                           | $T_J = 25\text{ }^\circ C$  | —                           | 103  | —     |              |    |
|              |                                     | $T_J = 125\text{ }^\circ C$   | —                           | 198  | —     |              |    |
|              |                                     | $T_J = 175\text{ }^\circ C$   | —                           | 260  | —     |              |    |
| $E_{on}$     | Turn-on energy                      | $V_{GE} = \pm 15V$<br>$V_{BUS} = 600V$<br>$I_C = 300A$<br>$R_G = 1.8\Omega$<br>$di/dt = 3500\text{ A}/\mu s$<br>$dv/dt = 3900\text{ V}/\mu s$ | $T_J = 25\text{ }^\circ C$  | —    | 35.3  | —            | mj |
|              |                                     |   | $T_J = 125\text{ }^\circ C$ | —    | 37.7  | —            |    |
|              |                                     |   | $T_J = 175\text{ }^\circ C$ | —    | 44.8  | —            |    |
| $E_{off}$    | Turn-off energy                     |   | $T_J = 25\text{ }^\circ C$  | —    | 21.8  | —            |    |
|              |                                     |   | $T_J = 125\text{ }^\circ C$ | —    | 29.4  | —            |    |
|              |                                     |   | $T_J = 175\text{ }^\circ C$ | —    | 36.8  | —            |    |
| $R_{Gint}$   | Internal gate resistance            |   | —                           | 0.5  | —     | $\Omega$     |    |
| $I_{sc}$     | Short circuit data                  | $V_{GE} \leq 15V$<br>$V_{BUS} = 800V$<br>$t_p \leq 8\text{ } \mu s$   | $T_J = 150\text{ }^\circ C$ | —    | 1040  | —            | A  |
|              |                                     | $V_{GE} \leq 15V$<br>$V_{BUS} = 800V$<br>$t_p \leq 7\text{ } \mu s$   | $T_J = 175\text{ }^\circ C$ | —    | 980   | —            |    |
| $R_{thJC}$   | Junction-to-case thermal resistance |   | —                           | —    | 0.147 | $^\circ C/W$ |    |

## 1.2 Diode Characteristics (Per Diode)

The following table lists the diode characteristics (per diode) of the APTGX300H120G device.

**Table 1-4.** Diode Characteristics

| Symbol     | Characteristic  | Test Conditions  |                             | Min. | Typ. | Max.  | Unit         |
|------------|---|--|-----------------------------|------|------|-------|--------------|
| $V_{RRM}$  | Peak repetitive reverse voltage                           |  |                             | —    | —    | 1200  | V            |
| $I_{RM}$   | Reverse leakage current                                   | $V_R = 1200V$  |                             | —    | —    | 16    | $\mu A$      |
| $I_{FRM}$  | Repetitive forward current, $t_p$ limited by $T_{J(max)}$ |  |                             | —    | —    | 600   | A            |
| $I^2t$     | $I^2t$ value  | $t_p = 10\text{ ms}$<br>$V_R = 0V$   | $T_J = 125\text{ }^\circ C$ | —    | —    | 8390  | $A^2s$       |
|            |   |  | $T_J = 175\text{ }^\circ C$ | —    | —    | 5110  |              |
| $I_F$      | DC forward current  | $T_C = 45\text{ }^\circ C$   |                             |      |      |       |              |
| $V_F$      | Diode forward voltage                                     | $I_F = 300A$<br>$V_{GE} = 0V$  | $T_J = 25\text{ }^\circ C$  | —    | 1.75 | 2     | V            |
|            |   |  | $T_J = 125\text{ }^\circ C$ | —    | 1.6  | —     |              |
|            |   |  | $T_J = 175\text{ }^\circ C$ | —    | 1.52 | —     |              |
| $I_{RRM}$  | Reverse recovery current                                  | $V_{GE} = -15V$<br>$I_F = 300A$<br>$V_R = 600V$<br>$di/dt = 3500\text{ A}/\mu s$ | $T_J = 25\text{ }^\circ C$  | —    | 130  | —     | A            |
|            |   |  | $T_J = 125\text{ }^\circ C$ | —    | 184  | —     |              |
|            |   |  | $T_J = 175\text{ }^\circ C$ | —    | 214  | —     |              |
| $Q_{rr}$   | Reverse recovery charge                                   | $V_{GE} = -15V$<br>$I_F = 300A$<br>$V_R = 600V$<br>$di/dt = 3500\text{ A}/\mu s$ | $T_J = 25\text{ }^\circ C$  | —    | 20.6 | —     | $\mu C$      |
|            |   |  | $T_J = 125\text{ }^\circ C$ | —    | 43.4 | —     |              |
| $E_{rr}$   | Reverse recovery energy                                   | $V_{GE} = -15V$<br>$I_F = 300A$<br>$V_R = 600V$<br>$di/dt = 3500\text{ A}/\mu s$ | $T_J = 25\text{ }^\circ C$  | —    | 6.6  | —     | mJ           |
|            |   |  | $T_J = 125\text{ }^\circ C$ | —    | 14.6 | —     |              |
| $R_{thJC}$ | Junction-to-case thermal resistance                       |  |                             | —    | —    | 0.241 | $^\circ C/W$ |

### 1.3 Thermal and Package Characteristics

The following table lists the thermal and package characteristics of the APTGX300H120G device.

**Table 1-5.** Thermal and Package Characteristics

| Symbol             | Characteristic  | Min.                               | Typ. | Max. | Unit |     |     |
|--------------------|---|------------------------------------|------|------|------|-----|-----|
| V <sub>ISOL</sub>  | RMS isolation voltage, any terminal-to-case t = 1 min, 50/60 Hz | 4000                               | —    | —    | V    |     |     |
| L <sub>stray</sub> | Stray inductance per leg  | —                                  | 22   | —    | nH   |     |     |
| d <sub>creep</sub> | Creepage distance terminal-to-terminal                          | —                                  | 15.3 | —    | mm   |     |     |
|                    | Clearance distance terminal-to-heatsink                         | —                                  | 15.9 | —    |      |     |     |
| d <sub>clear</sub> | Clearance distance terminal-to-terminal                         | —                                  | 11.4 | —    |      |     |     |
|                    | Clearance distance terminal-to-heatsink                         | —                                  | 12.1 | —    |      |     |     |
| R <sub>CE</sub>    | Lead resistance terminal-to-chip                                | T <sub>C</sub> = 25 °C, per switch |      | —    | 0.65 | —   | mΩ  |
| T <sub>J</sub>     | Operating junction temperature range                            | -40                                | —    | 175  | °C   |     |     |
| T <sub>STG</sub>   | Storage temperature range                                       | -40                                | —    | 125  |      |     |     |
| T <sub>C</sub>     | Operating case temperature                                      | -40                                | —    | 125  |      |     |     |
| τ <sub>M</sub>     | Mounting torque   | To heatsink                        | M6   | 3    | —    | 5   | N.m |
|                    |   | For terminals                      | M5   | 2    | —    | 3.5 |     |
| Wt                 | Package weight  | —                                  | 282  | —    | g    |     |     |

## 1.4 Typical IGBT Performance Curve

The following figures show the IGBT performance curves of the APTGX300H120G device.

Figure 1-1. Maximum Thermal Impedance

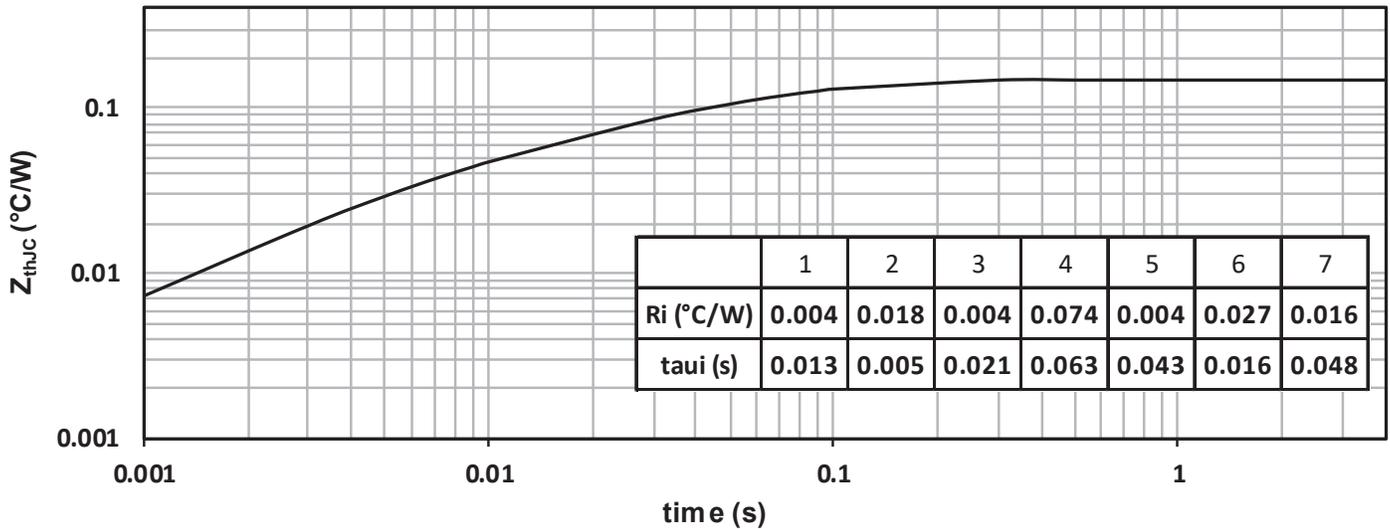


Figure 1-2. Output Characteristics,  $V_{GE} = 15V$

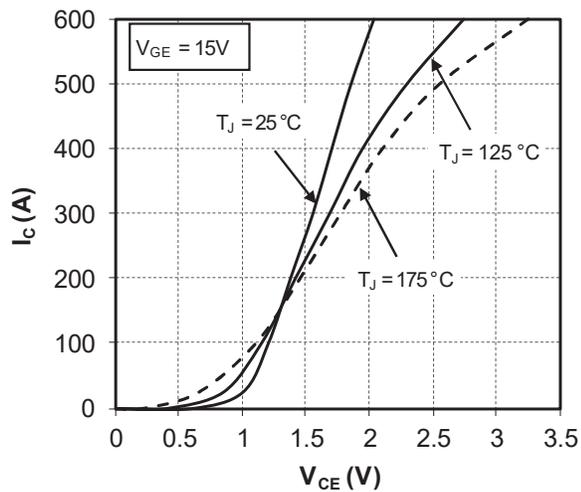


Figure 1-3. Output Characteristics,  $T_J = 175^\circ C$

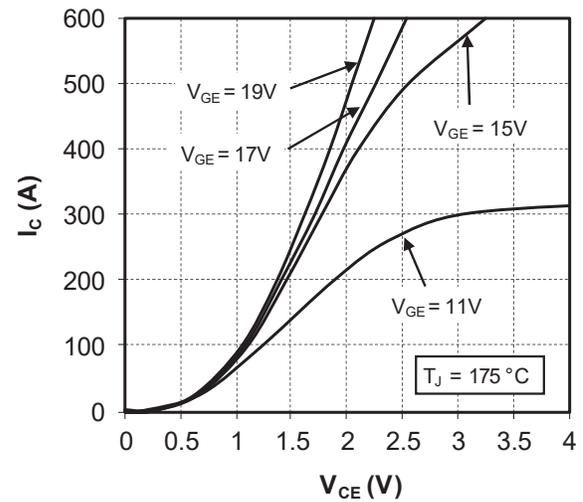


Figure 1-4. Switching Losses vs. Gate Resistance

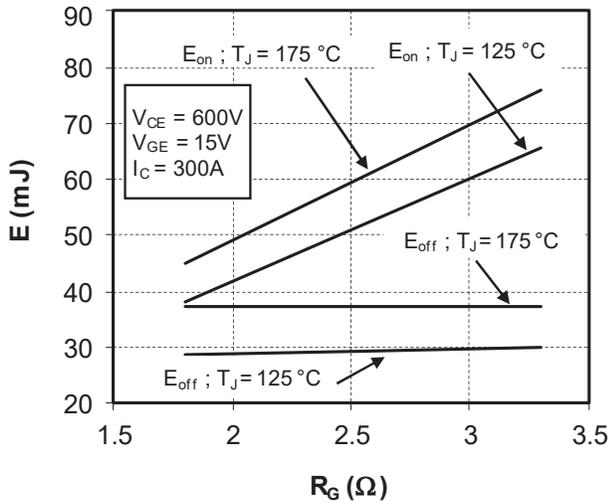


Figure 1-5. Switching Losses vs. Collector Current

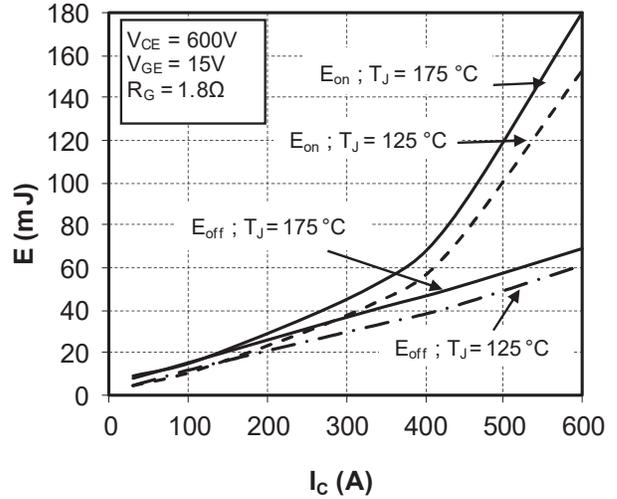


Figure 1-6. Operating Frequency vs. Collector Current

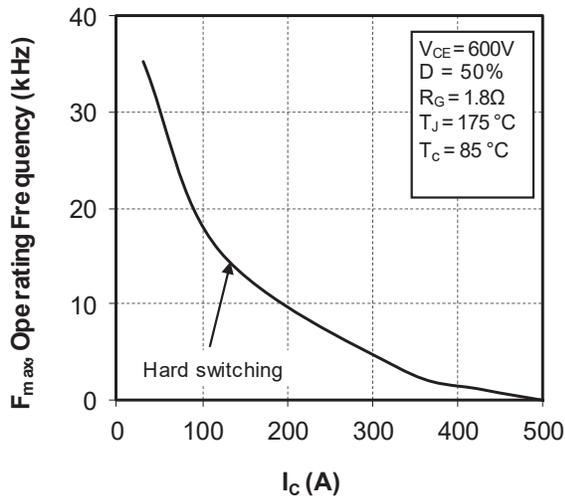


Figure 1-7. Gate Charge Characteristics

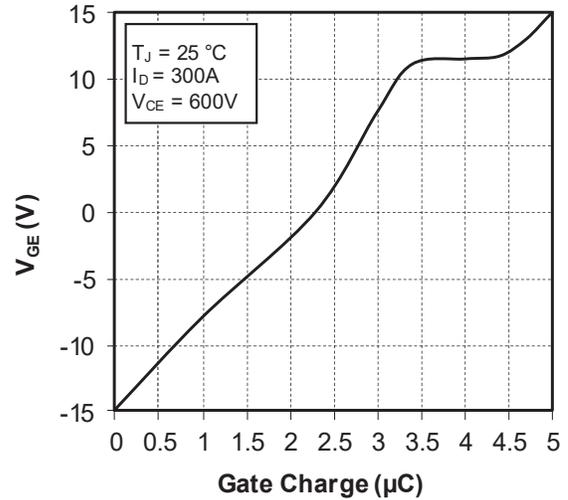


Figure 1-8. Transfer Characteristics

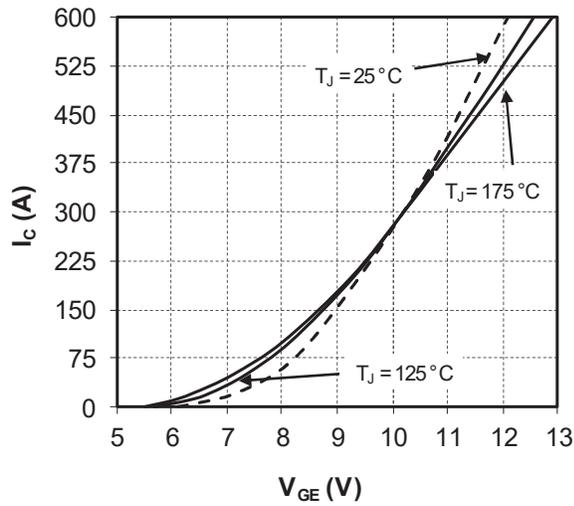


Figure 1-9. Capacity Characteristics


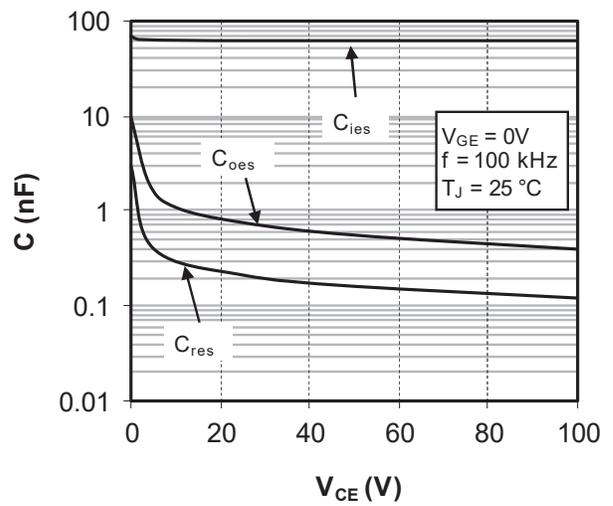


Figure 1-10. Reverse Bias Safe Operating Area

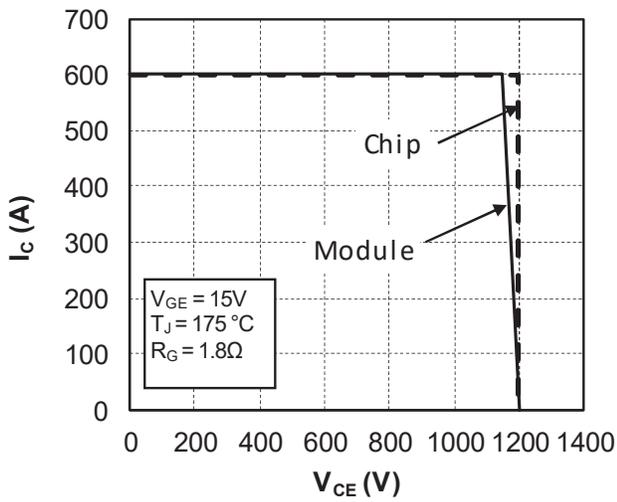

## 1.5 Typical Diode Performance Curve

The following figures show the diode performance curves of the APTGX300H120G device.

Figure 1-11. Maximum Thermal Impedance

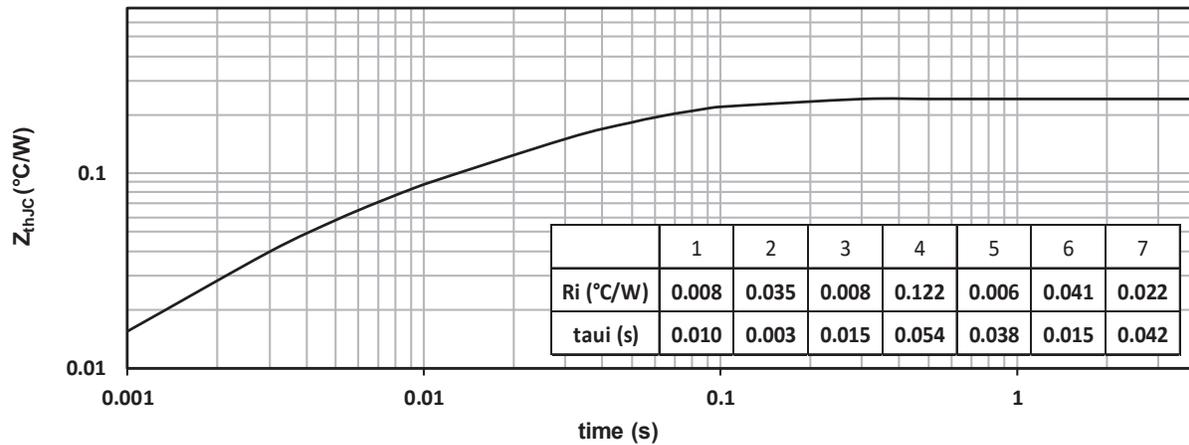


Figure 1-12. Forward Characteristics

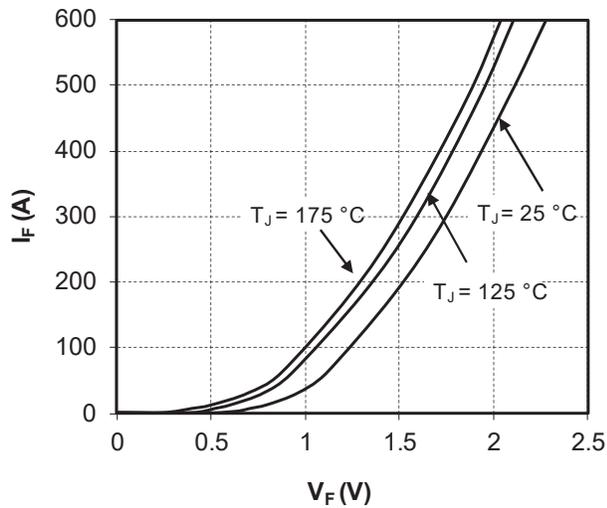


Figure 1-13. Switching Losses vs. Gate Resistance


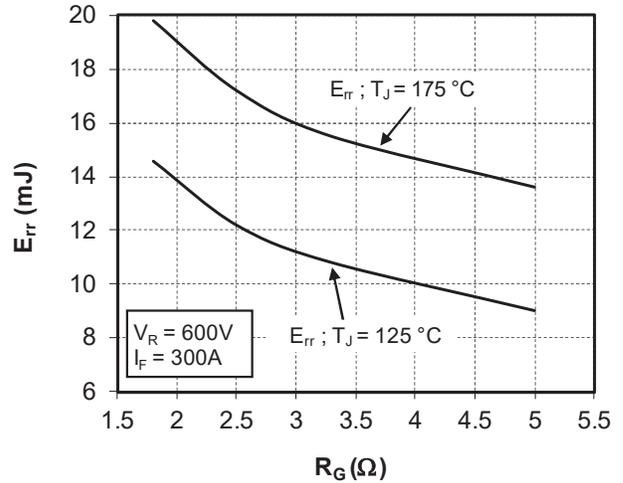


Figure 1-14. Switching Losses vs. Forward Current

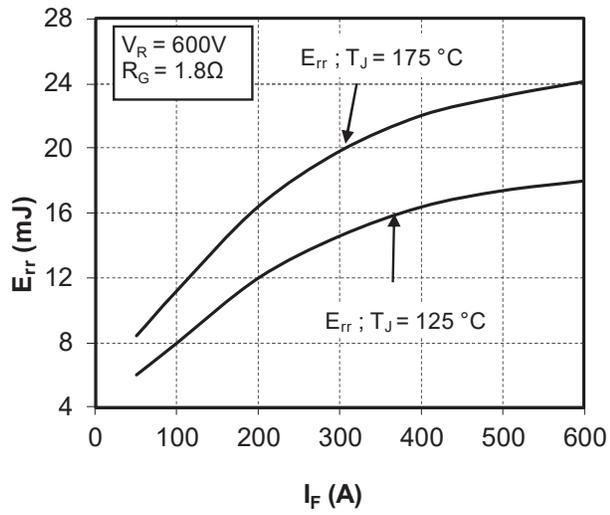


## 2. Package Specifications

The following section shows the package specification of the APTGX300H120G device.

### 2.1 Package Outline

The following figure shows the package outline drawing of the APTGX300H120G device. The dimensions in the following figure are in millimeters.

**Figure 2-1.** Package Outline Drawing

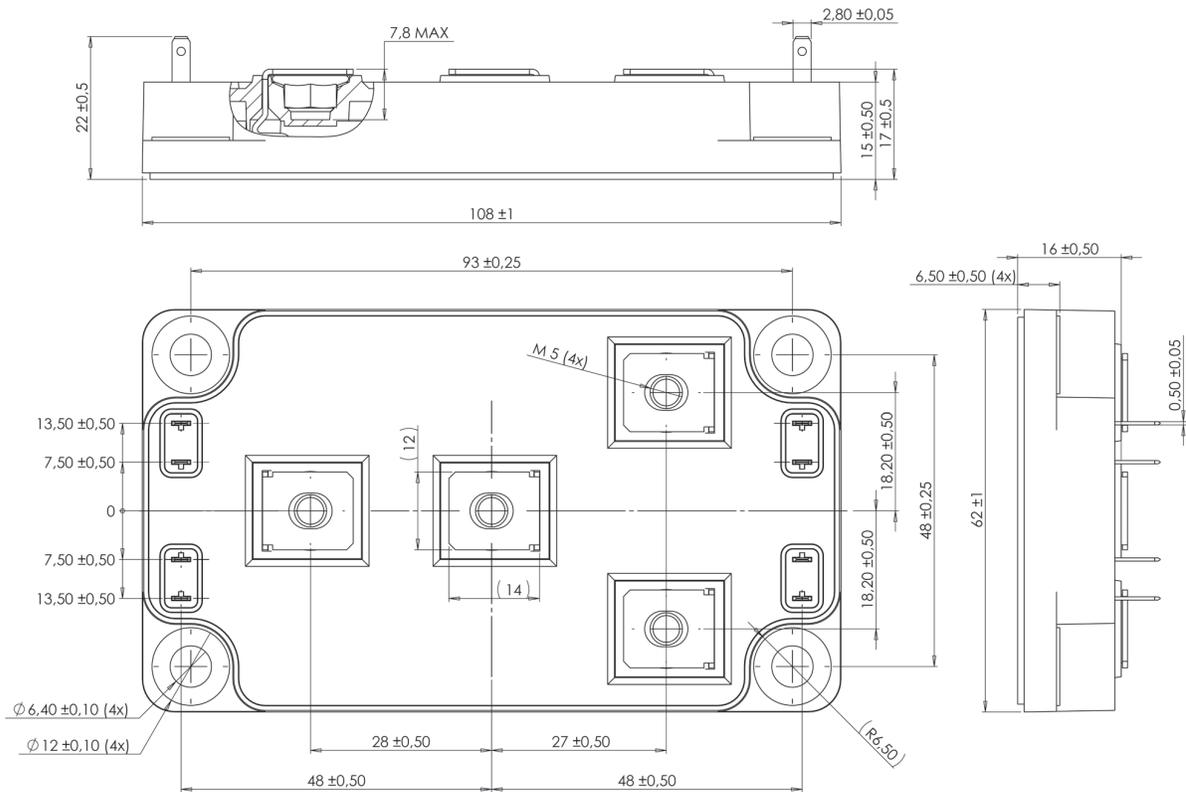

**Note:** For more information, see [APT0601-Mounting Instructions for SP6 Power Modules](#).

### 3. Revision History

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the most current publication.

| Revision | Date    | Description      |
|----------|---------|------------------|
| A        | 10/2024 | Initial revision |

## Microchip Information

### The Microchip Website

Microchip provides online support via our website at [www.microchip.com/](http://www.microchip.com/). This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user’s guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

### Product Change Notification Service

Microchip’s product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to [www.microchip.com/pcn](http://www.microchip.com/pcn) and follow the registration instructions.

### Customer Support

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: [www.microchip.com/support](http://www.microchip.com/support)

### Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

### Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure

that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at [www.microchip.com/en-us/support/design-help/client-support-services](http://www.microchip.com/en-us/support/design-help/client-support-services).

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

## Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, TimeCesium, TimeHub, TimePictra, TimeProvider, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, EyeOpen, GridTime, IdealBridge, IGaT, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, MarginLink, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mSiC, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, Power MOS IV, Power MOS 7, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, Turing, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2024, Microchip Technology Incorporated and its subsidiaries. All Rights Reserved.

ISBN: 978-1-6683-0349-8

## Quality Management System

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

# Worldwide Sales and Service

| AMERICAS  | ASIA/PACIFIC  | ASIA/PACIFIC   | EUROPE  |
|---|---|--|---|
| <p><b>Corporate Office</b><br/>2355 West Chandler Blvd.<br/>Chandler, AZ 85224-6199<br/>Tel: 480-792-7200<br/>Fax: 480-792-7277<br/>Technical Support:<br/><a href="http://www.microchip.com/support">www.microchip.com/support</a><br/>Web Address:<br/><a href="http://www.microchip.com">www.microchip.com</a></p> <p><b>Atlanta</b><br/>Duluth, GA<br/>Tel: 678-957-9614<br/>Fax: 678-957-1455</p> <p><b>Austin, TX</b><br/>Tel: 512-257-3370</p> <p><b>Boston</b><br/>Westborough, MA<br/>Tel: 774-760-0087<br/>Fax: 774-760-0088</p> <p><b>Chicago</b><br/>Itasca, IL<br/>Tel: 630-285-0071<br/>Fax: 630-285-0075</p> <p><b>Dallas</b><br/>Addison, TX<br/>Tel: 972-818-7423<br/>Fax: 972-818-2924</p> <p><b>Detroit</b><br/>Novi, MI<br/>Tel: 248-848-4000</p> <p><b>Houston, TX</b><br/>Tel: 281-894-5983</p> <p><b>Indianapolis</b><br/>Noblesville, IN<br/>Tel: 317-773-8323<br/>Fax: 317-773-5453<br/>Tel: 317-536-2380</p> <p><b>Los Angeles</b><br/>Mission Viejo, CA<br/>Tel: 949-462-9523<br/>Fax: 949-462-9608<br/>Tel: 951-273-7800</p> <p><b>Raleigh, NC</b><br/>Tel: 919-844-7510</p> <p><b>New York, NY</b><br/>Tel: 631-435-6000</p> <p><b>San Jose, CA</b><br/>Tel: 408-735-9110<br/>Tel: 408-436-4270</p> <p><b>Canada - Toronto</b><br/>Tel: 905-695-1980<br/>Fax: 905-695-2078</p> | <p><b>Australia - Sydney</b><br/>Tel: 61-2-9868-6733</p> <p><b>China - Beijing</b><br/>Tel: 86-10-8569-7000</p> <p><b>China - Chengdu</b><br/>Tel: 86-28-8665-5511</p> <p><b>China - Chongqing</b><br/>Tel: 86-23-8980-9588</p> <p><b>China - Dongguan</b><br/>Tel: 86-769-8702-9880</p> <p><b>China - Guangzhou</b><br/>Tel: 86-20-8755-8029</p> <p><b>China - Hangzhou</b><br/>Tel: 86-571-8792-8115</p> <p><b>China - Hong Kong SAR</b><br/>Tel: 852-2943-5100</p> <p><b>China - Nanjing</b><br/>Tel: 86-25-8473-2460</p> <p><b>China - Qingdao</b><br/>Tel: 86-532-8502-7355</p> <p><b>China - Shanghai</b><br/>Tel: 86-21-3326-8000</p> <p><b>China - Shenyang</b><br/>Tel: 86-24-2334-2829</p> <p><b>China - Shenzhen</b><br/>Tel: 86-755-8864-2200</p> <p><b>China - Suzhou</b><br/>Tel: 86-186-6233-1526</p> <p><b>China - Wuhan</b><br/>Tel: 86-27-5980-5300</p> <p><b>China - Xian</b><br/>Tel: 86-29-8833-7252</p> <p><b>China - Xiamen</b><br/>Tel: 86-592-2388138</p> <p><b>China - Zhuhai</b><br/>Tel: 86-756-3210040</p> | <p><b>India - Bangalore</b><br/>Tel: 91-80-3090-4444</p> <p><b>India - New Delhi</b><br/>Tel: 91-11-4160-8631</p> <p><b>India - Pune</b><br/>Tel: 91-20-4121-0141</p> <p><b>Japan - Osaka</b><br/>Tel: 81-6-6152-7160</p> <p><b>Japan - Tokyo</b><br/>Tel: 81-3-6880-3770</p> <p><b>Korea - Daegu</b><br/>Tel: 82-53-744-4301</p> <p><b>Korea - Seoul</b><br/>Tel: 82-2-554-7200</p> <p><b>Malaysia - Kuala Lumpur</b><br/>Tel: 60-3-7651-7906</p> <p><b>Malaysia - Penang</b><br/>Tel: 60-4-227-8870</p> <p><b>Philippines - Manila</b><br/>Tel: 63-2-634-9065</p> <p><b>Singapore</b><br/>Tel: 65-6334-8870</p> <p><b>Taiwan - Hsin Chu</b><br/>Tel: 886-3-577-8366</p> <p><b>Taiwan - Kaohsiung</b><br/>Tel: 886-7-213-7830</p> <p><b>Taiwan - Taipei</b><br/>Tel: 886-2-2508-8600</p> <p><b>Thailand - Bangkok</b><br/>Tel: 66-2-694-1351</p> <p><b>Vietnam - Ho Chi Minh</b><br/>Tel: 84-28-5448-2100</p> | <p><b>Austria - Wels</b><br/>Tel: 43-7242-2244-39<br/>Fax: 43-7242-2244-393</p> <p><b>Denmark - Copenhagen</b><br/>Tel: 45-4485-5910<br/>Fax: 45-4485-2829</p> <p><b>Finland - Espoo</b><br/>Tel: 358-9-4520-820</p> <p><b>France - Paris</b><br/>Tel: 33-1-69-53-63-20<br/>Fax: 33-1-69-30-90-79</p> <p><b>Germany - Garching</b><br/>Tel: 49-8931-9700</p> <p><b>Germany - Haan</b><br/>Tel: 49-2129-3766400</p> <p><b>Germany - Heilbronn</b><br/>Tel: 49-7131-72400</p> <p><b>Germany - Karlsruhe</b><br/>Tel: 49-721-625370</p> <p><b>Germany - Munich</b><br/>Tel: 49-89-627-144-0<br/>Fax: 49-89-627-144-44</p> <p><b>Germany - Rosenheim</b><br/>Tel: 49-8031-354-560</p> <p><b>Israel - Hod Hasharon</b><br/>Tel: 972-9-775-5100</p> <p><b>Italy - Milan</b><br/>Tel: 39-0331-742611<br/>Fax: 39-0331-466781</p> <p><b>Italy - Padova</b><br/>Tel: 39-049-7625286</p> <p><b>Netherlands - Drunen</b><br/>Tel: 31-416-690399<br/>Fax: 31-416-690340</p> <p><b>Norway - Trondheim</b><br/>Tel: 47-72884388</p> <p><b>Poland - Warsaw</b><br/>Tel: 48-22-3325737</p> <p><b>Romania - Bucharest</b><br/>Tel: 40-21-407-87-50</p> <p><b>Spain - Madrid</b><br/>Tel: 34-91-708-08-90<br/>Fax: 34-91-708-08-91</p> <p><b>Sweden - Gothenberg</b><br/>Tel: 46-31-704-60-40</p> <p><b>Sweden - Stockholm</b><br/>Tel: 46-8-5090-4654</p> <p><b>UK - Wokingham</b><br/>Tel: 44-118-921-5800<br/>Fax: 44-118-921-5820</p> |