


Order Number
63808-4300



Application Tooling Specification

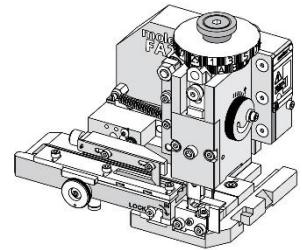

FEATURES


- Applicator designed to industry-standard mounting and 135.80mm (5.346") shut height.
- Quick setup time plus the crimp height, track and feed adjustments can be set without removing the applicator from the press.
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of 0.015mm (.0006") for conductor crimp height and 0.025mm (.001") for insulation height.
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other.
- Directly adapts to most automatic wire processing machines.
- This applicator was designed for use in a wire processor only.
- Fine adjustment of the bend is achieved using the bend adjust dial.

SCOPE

Products: CTX50 New Small Grip, 0.13mm² wire.

| Terminal Series No. | Terminal Order No. | Wire | | Insulation Diameter | | Strip Length (Ref) | |
|---------------------|--------------------|------------|---------------------|---------------------|-----------|--------------------|------|
| | | Wire Type | Size | mm | In. | mm | In. |
| | 560023-0444 | | | | | | |
| | 560023-0544 | | | | | | |
| | 560023-0744 | FLCUSN03RY | 0.13mm ² | 0.75-1.05 | .030-.041 | 3.60 | .142 |
| | 560023-0844 | | | | | | |

CAUTION: This applicator was designed for use in a wire processor only.

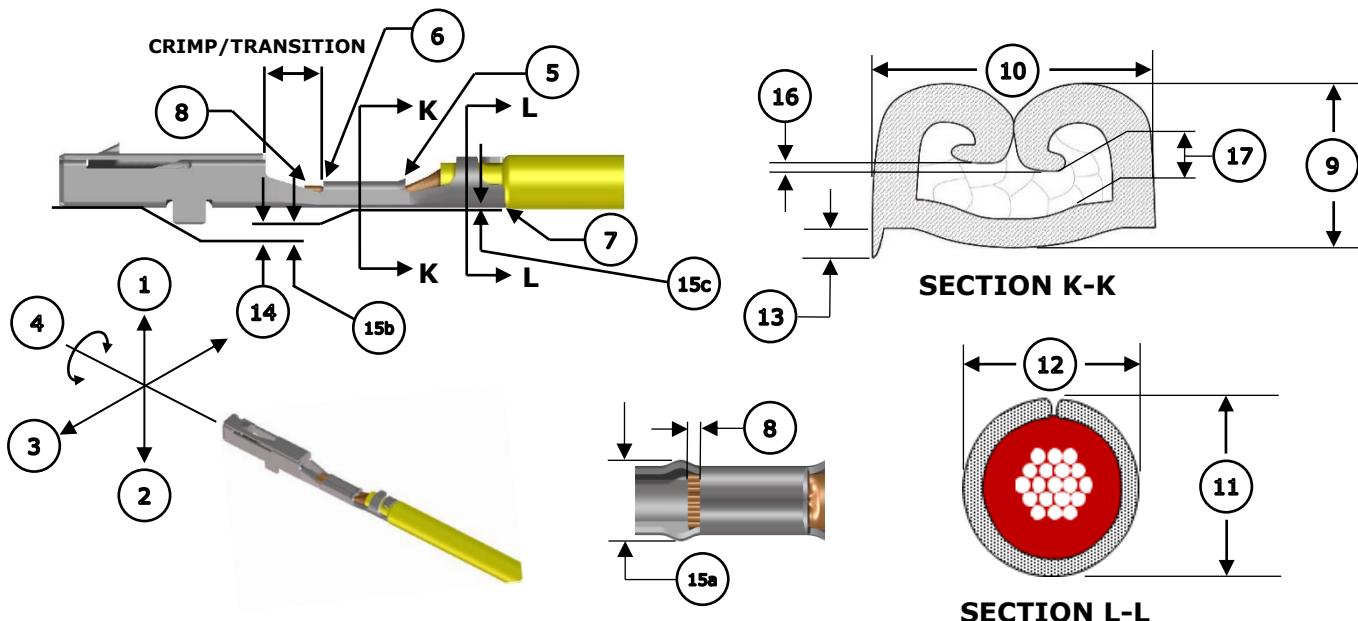DEFINITION OF TERMS**CRIMP SPECIFICATIONS**


The following crimp specifications are based on document AS-560023-001 Rev. M:

| Feature | Requirement | | | | | | | |
|----------------------------------|---|---------------------|--|---------------|---|--------------------------------------|--|--|
| 1. Bend Up | 1° Max | | | | | | | |
| 2. Bend Down | 1° Max | | | | | | | |
| 3. Twist | 2° Max | | | | | | | |
| 4. Roll | N/A | | | | | | | |
| 5. Bell Mouth Rear | 0-0.30mm (.000-.012") | | | | | | | |
| 6. Bell Mouth Front | 0.00-0.00mm (.000-.000") | | | | | | | |
| 7. Cut-Off Tab | 0.30mm (.012") Max | | | | | | | |
| 8. Conductor Brush | 0.55mm (.022") Max, not to extend above conductor crimp height. | | | | | | | |
| Conductor Crimp | Wire Type | Wire Size | 9. Crimp Height | | 10. Crimp Width | | | |
| | FLCUSN03RY | 0.13mm ² | 0.50-0.56mm | .020-.022 in. | 0.80-0.86mm | .031-.034 in. | | |
| Insulation Crimp | Wire Type | Wire Size | 11. Crimp Height | | 12. Crimp Width | | | |
| | FLCUSN03RY | 0.13mm ² | 1.15-1.25mm | .045-.049 in. | 1.05-1.15mm | .041-.045 in. | | |
| Pull Force | Wire Type | Wire Size | Minimum Force | | | | | |
| | FLCUSN03RY | 0.13mm ² | 50 N | 11.3 lb. | To be measured with no influence from the insulation crimp. | | | |
| 13. Conductor Anvil Flash | 0.10mm (.004") Max | | | | | | | |
| 14. Insulation Grip Step | -0.05-0.05mm (-.002-.002") | | | | | | | |
| Crimp Bulge | 15a. 1.07mm (.042") Max within crimp/transition area | | | | | | | |
| | 15b. 0.10mm (.004") | | | | | | | |
| | 15c. -0.05-0.15mm (-.002-.006") | | | | | | | |
| Misc. | Wire Type | Wire Size | Conductor Crimp Angle Horizontal Length | | Conductor Crimp Angle | | | |
| | FLCUSN03RY | 0.13mm ² | 1.00-2.00mm | .039-.079 in. | 5-10° | | | |
| | Wire Type | Wire Size | 16. Wing Dissymmetry | | | 17. Wing Tips to Crimp Bottom | | |
| | FLCUSN03RY | 0.13mm ² | 0.00-0.20mm | .000-.008 in. | No contact | | | |

NOTES

Applicator Notes

- This applicator is for automatic wire processor use only.
- This applicator does not include a cutting insert.
- Installing a cutting insert will cause jamming in this applicator.

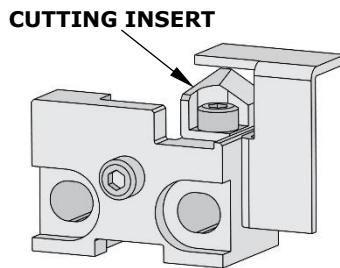

Specification Notes

- This applicator should only be run in a properly set up wire processor to consistently achieve the brush length.

General Notes

1. Molex recommends that an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by hand cycling the press and applicator before crimping under power. Check that all screws are tight.
3. Slugs, terminals, dirt and oil should be kept clear of the work area.
4. Wear safety glasses at all times.
5. For recommended maintenance, refer to the FA2 manual (TM-638080200).
6. Molex recommends crimping standard copper wire only.

Terminal Notes

- This terminal may have anvil impressions along the bottom of the insulation crimp and beyond the bottom of the conductor crimp into the transition area when successfully crimped.
- This is an expected condition. See Figure 1.

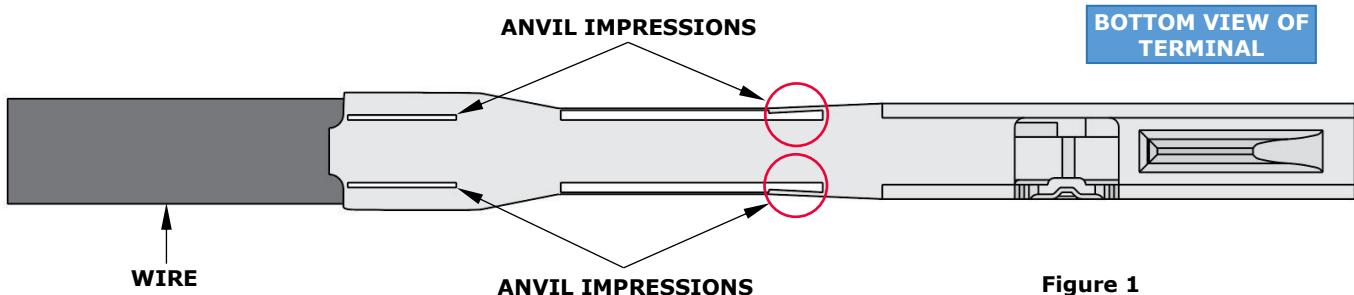


Figure 1

WARNINGS

CAUTION: This applicator must be installed in a press with a standard shut height of 135.80mm (5.346"). Tooling damage could result at a lower setting.


CAUTION: To prevent injury, never operate this applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

CAUTION: Molex tooling crimp specifications are valid only when used with Molex terminals and tooling manufactured by Molex and sold by Molex or authorized distributors ("Molex Tooling"). When using tooling other than Molex Tooling with Molex-specific connector systems listed in our ATS documents, the Molex Tooling qualification does not apply, and the responsibility for full qualification of the connector system is that of the customer. Molex accepts no liability for connector performance or tooling support where tooling other than Molex Tooling is used or where Molex Tooling is modified.

PARTS LIST

| Applicator 63808-4300 | | | | |
|----------------------------------|------------------|------------------------|----------------------------|-----------------|
| Item | Order No. | Engineering No. | Description | Quantity |
| Perishable Tooling | | | | |
| | 63808-4370 | 63808-4370 | Tool Kit (All "Y" Items) | Ref |
| 1 | 63454-0164 | 63454-0164 | Insulation Punch | 1 Y |
| 2 | 63457-0806 | 63457-0806 | Conductor Punch | 1 Y |
| 3 | 63455-0142 | 63455-0142 | Combination Anvil | 1 Y |
| 4 | 63443-0145 | 63443-0145 | Front Plunger | 1 Y |
| Non-Perishable Components | | | | |
| 5 | 63443-0118 | 63443-0118 | Front Plunger Retainer | 1 |
| 6 | 01124-1067 | 4996-4 | Cut-Off Plunger Spring | 1 |
| 7 | 63443-0117 | 63443-0117 | Front Scrap Chute | 1 |
| 8 | 63443-7510 | 63443-7510 | Anvil Mount | 1 |
| 9 | 63443-0090 | 63443-0090 | Wire Stop Assembly | 1 |
| 10 | 63443-2805 | 63443-2805 | Front Plunger Striker | 1 |
| 11 | 63443-2919 | 63443-2919 | Wire Hold Down Plunger | 1 |
| 12 | 63600-0021 | 63600-0021 | Wire Hold Down Spring | 1 |
| 13 | 63600-5776 | 63600-5776 | Nose Hold Down | 1 |
| 14 | 63600-5775 | 63600-5775 | Nose Hold Down Shank | 1 |
| 15 | 63443-4701 | 63443-4701 | Terminal Guide | 1 |
| 16 | 63443-7403 | 63443-7403 | Hold Down Block | 1 |
| 17 | 63808-0229 | 63808-0229 | Bend Adjust Dial | 1 |
| 18 | 63443-4406 | 63443-4406 | Feed Cam | 1 |
| Frame | | | | |
| 19 | 63808-0200 | 63808-0200 | Applicator Core | 1 |
| 20 | 63808-0191 | 63808-0191 | Track Assembly | 1 |
| 21 | 63808-0197 | 63808-0197 | Mechanical Feed Assembly | 1 |
| 22 | 63808-0249 | 63808-0249 | Feed Pawl | 1 |
| Hardware | | | | |
| 23 | — | — | M2.5 x 3 SHCS | 1* |
| 24 | — | — | M3 x 6 BHCS | 2* |
| 25 | — | — | M3 x 12 SHCS | 4* |
| 26 | — | — | M4 x 4 SSS | 1* |
| 27 | — | — | M4 x 6 SHCS | 1* |
| 28 | — | — | M4 x 8 SHCS | 2* |
| 29 | — | — | M4 x 45 SHCS | 2* |
| 30 | — | — | M5 x 12 SHCS | 1* |
| 31 | — | — | #10-32UNF x .25" BHCS | 1* |
| 32 | — | — | M3 Flat Washer Hard | 1* |
| 33 | — | — | M3 Inner Tooth Lock Washer | 1* |

*Fastener parts can be purchased through most industrial suppliers by using the description in the table above.

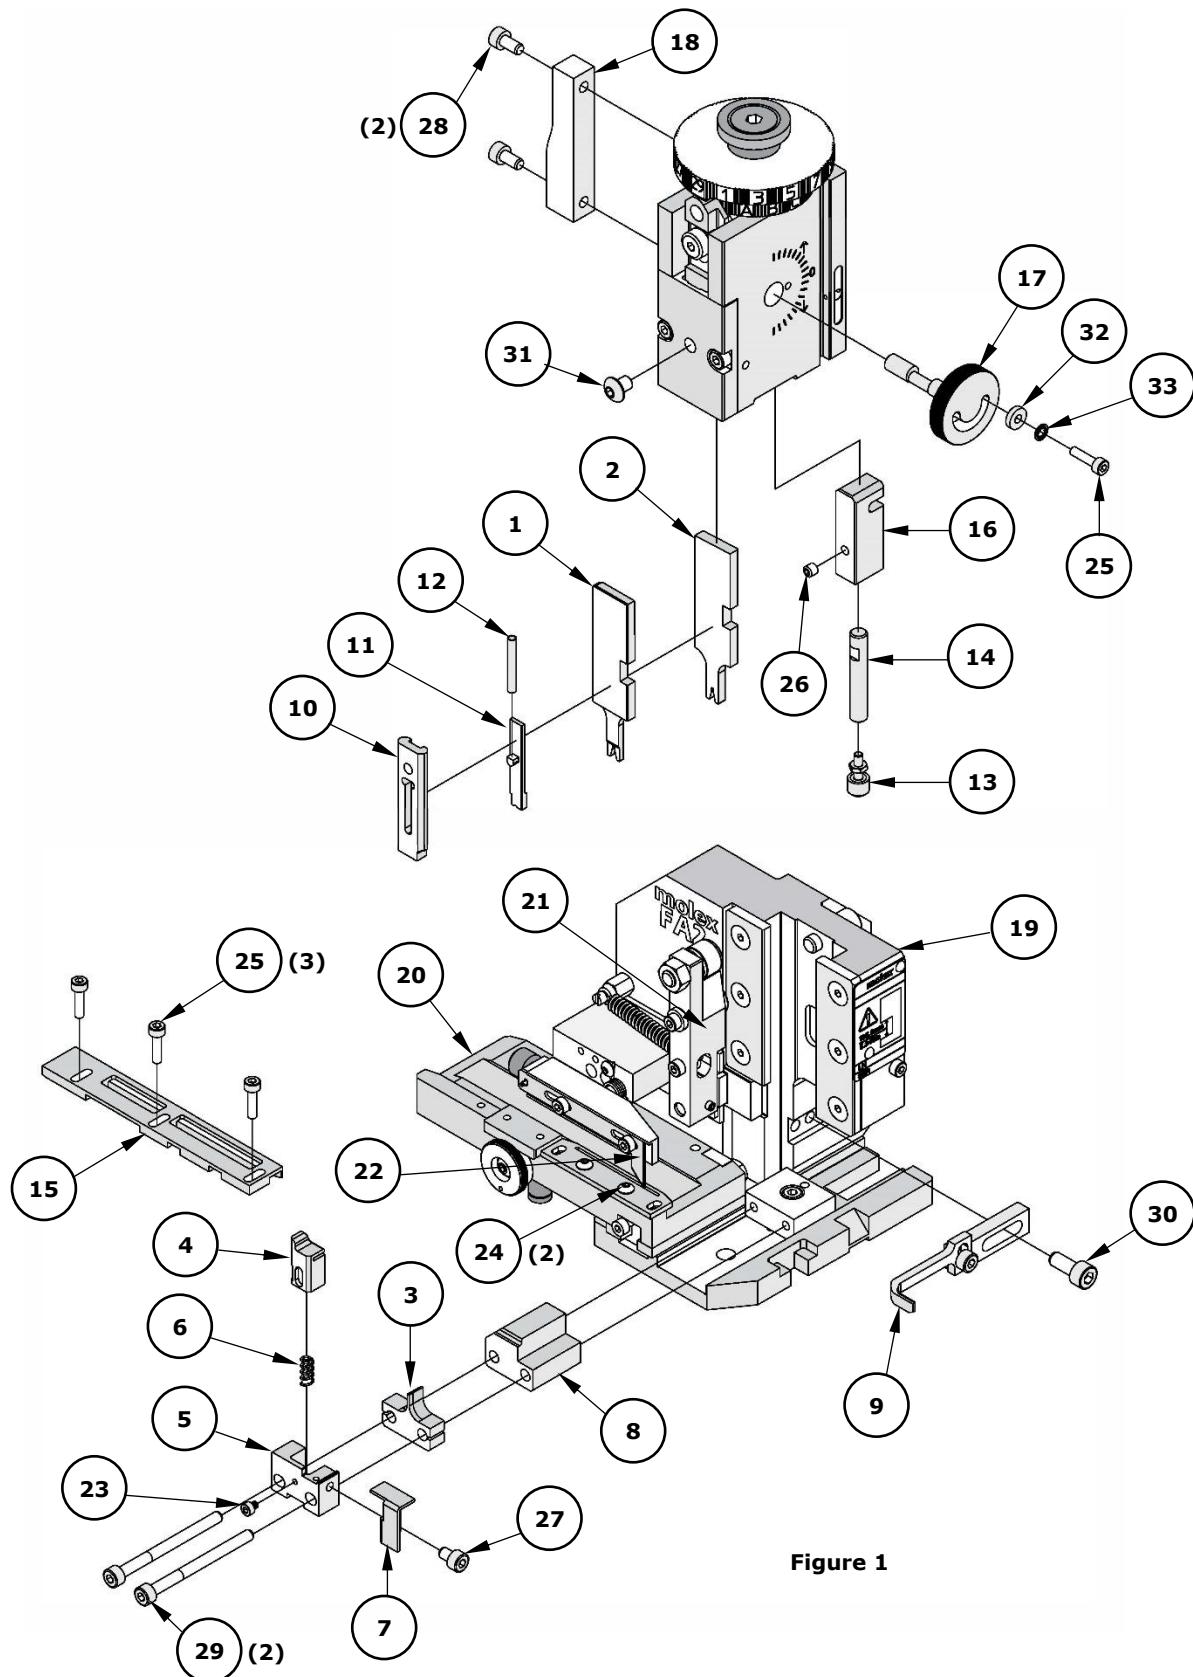ASSEMBLY DRAWING**Figure 1**

FACTORY SETTINGS**Feed Pawl Assembly**

The FA2 applicator number 63808-4300 ships with the following factory settings. See Figure 2:

- The feed pawl shaft and M3 screw that holds the feed pawl spring are in position 3.
- The pin is in position B.

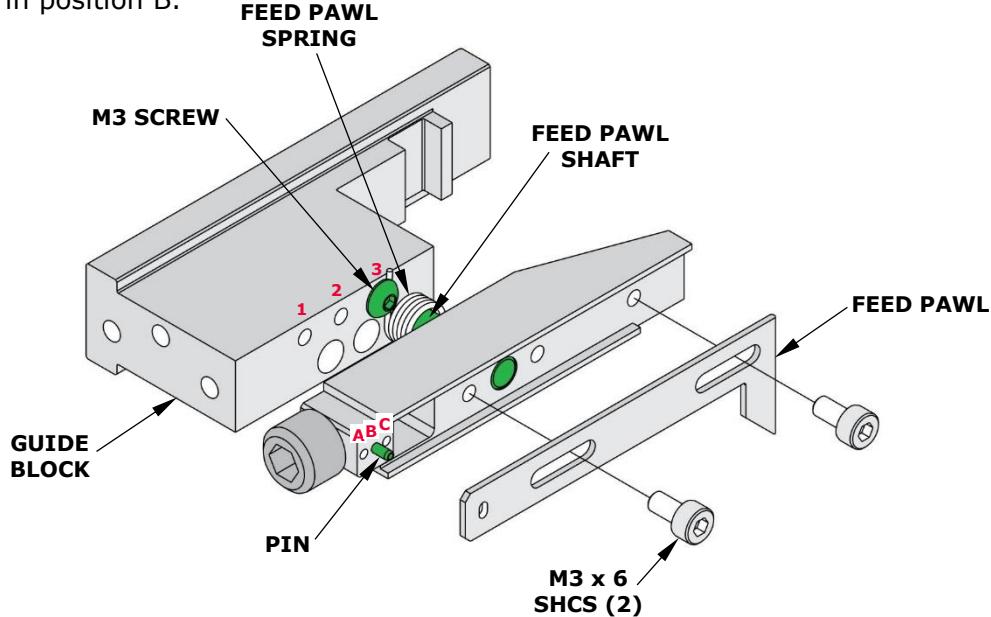


Figure 2

Note: Each applicator is configured and tested by Molex prior to shipping, and the above settings were used to produce the included sample crimps.

Third Dial/Ram Assembly

Indicates item number on the Parts List and Assembly Drawing

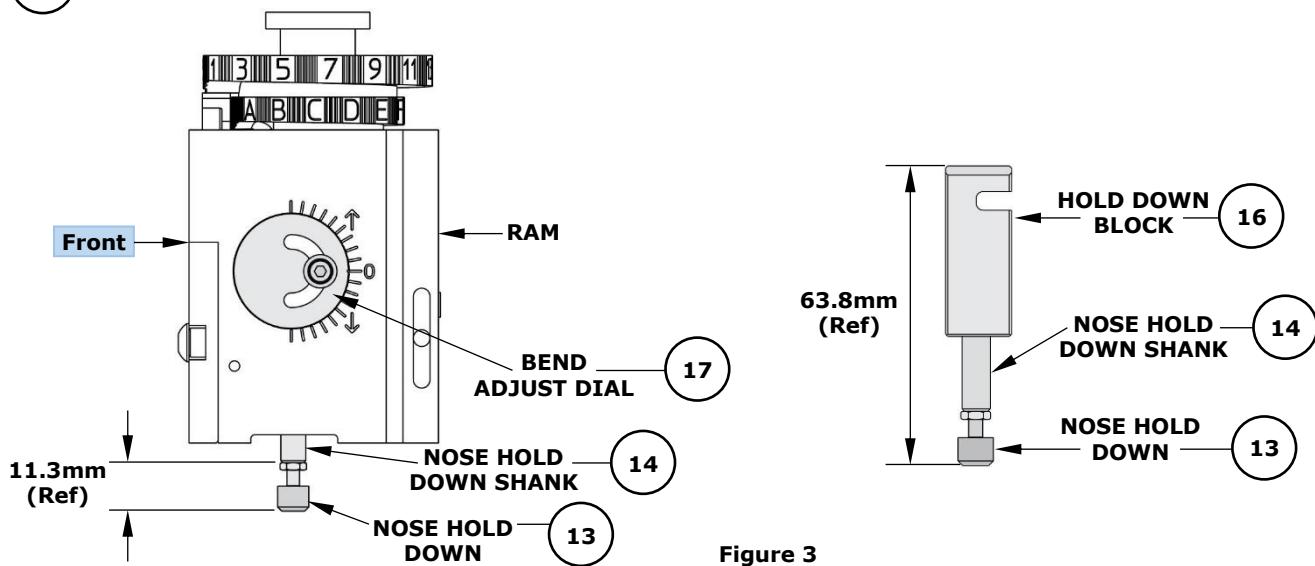


Figure 3

Note: The above dimensions were measured during setup and are included as a reference only. Additional adjustments may be required before crimping for production.

Mounting Datum Location

This applicator was assembled and tested by Molex with the mounting datum in the location shown in Figure 4. Do not remove the mounting datum.

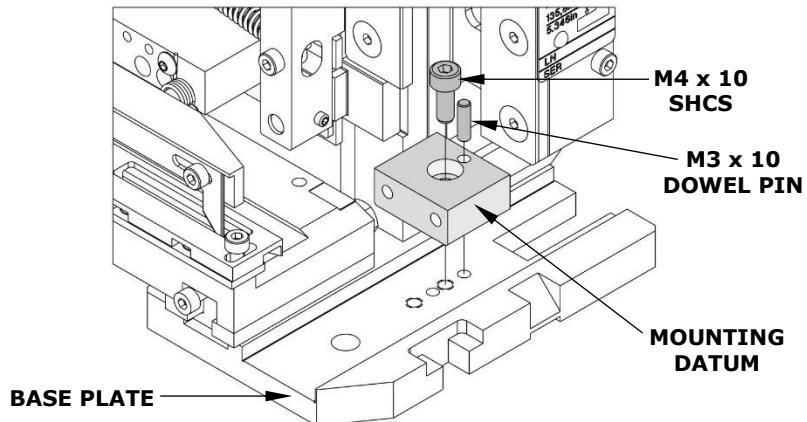


Figure 4

Application Tooling Support

E-Mail: toolingsupport@molex.com
Website: www.molex.com/applicationtooling

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.