

HAND
FLEX™

Coaxial Cable

FL086-12SMMCR+

Mini-Circuits

50Ω DC to 6000 MHz 12 Inches SMA Male to Right-Angle MCX Male

KEY FEATURES

- Low loss, 0.7 dB typ. at 6000 MHz
- Excellent return loss, 27 dB typ. at 6000 MHz
- Hand formable to almost any custom shape without special bending tools
- 6 mm bend radius for tight installations
- Insulated outer jacket standard



Generic photo used for illustration purposes only

APPLICATIONS

- Replacement for custom bent 0.086" semi-rigid cables
- Communication Receivers and Transmitters
- Radar, EW and ECM Defense Systems
- Environmental and Test Chambers

PRODUCT OVERVIEW

FL086-12SMMCR+ Hand-Flex™ coaxial cable is a semi-flexible cable ideal for interconnecting coaxial components and sub-assemblies in a wide range of systems, including communications, military and aerospace, environmental test chambers and more. The hand-formable cable provides a minimum bend radius of 6 mm to accommodate tight layouts without the need for bending tools, adapters or brackets. SMA-Male and Right-Angle MCX-Male connectors makes this cable ideal for assemblies with SMA or MCX connector types.

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		6000	MHz
Length			12		Inches
Insertion Loss	10 - 2000	-	0.30	0.60	dB
	2001 - 4000	-	0.53	0.97	
	4001 - 6000	-	0.66	0.97	
Return Loss	10 - 2000	17.7	36.1	-	dB
	2001 - 4000	17.7	25.6	-	
	4001 - 6000	17.7	27.4	-	

ABSOLUTE MAXIMUM RATINGS¹

Operating Temperature	-45°C to +85°C
Storage Temperature	-45°C to +85°C
Power Handling at +25°C, Sea Level	95 W at 1 GHz

1. Permanent damage may occur if any of these limits are exceeded.

 REV. B
 ECO-025779
 FL086-12SMMCR+
 MCL NY
 250616
Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 4



HAND
FLEX™




Coaxial Cable

FL086-12SMMC+

Mini-Circuits

50Ω DC to 6000 MHz 12 Inches SMA Male to Right-Angle MCX Male

TYPICAL PERFORMANCE GRAPHS

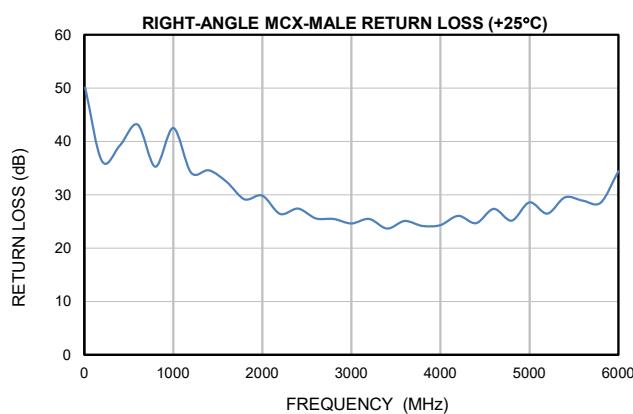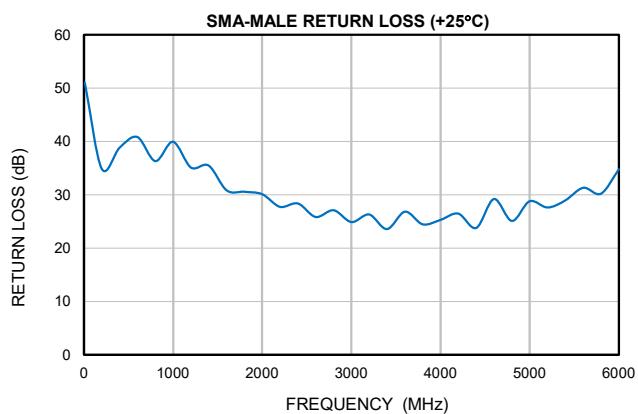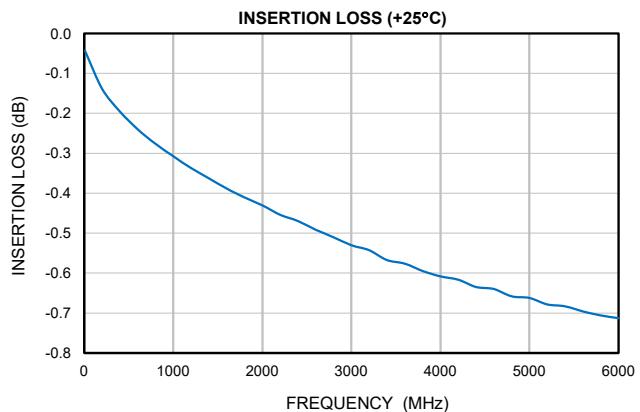

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 2 OF 4

HAND
FLEX™

Coaxial Cable



FL086-12SMMC+

Mini-Circuits

50Ω DC to 6000 MHz 12 Inches SMA Male to Right-Angle MCX Male

COAXIAL CONNECTIONS

Description	Connector 1	Connector 2
Connector Type	SMA-Male	MCX-Male
Orientation	Straight	Right-Angle

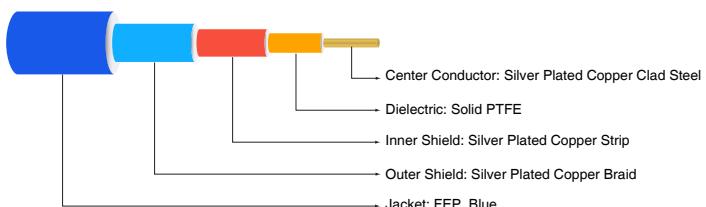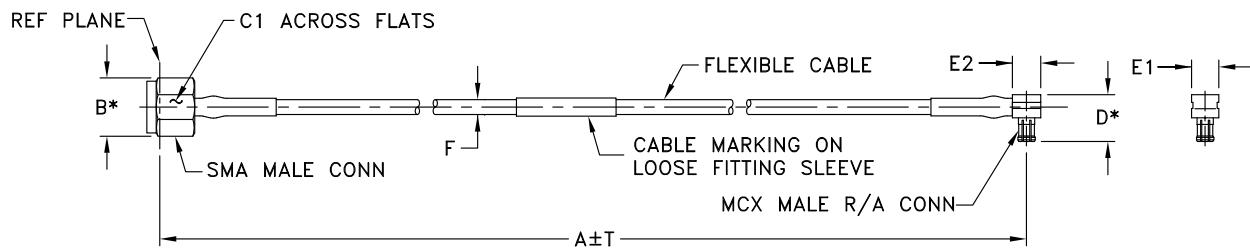CABLE CONSTRUCTION**CASE STYLE DRAWING****OUTLINE DIMENSIONS (Inch mm)**

A	B	C1	C2	D	E1	E2	T	wt
12.0 304.80	.36 9.14	.315 8.00	--	.338 8.6	.197 5.00	.22 5.6	0.10 2.54	grams 10.2

PRODUCT MARKING*: FL086-12SMMC+

*Marking may contain other features or characters for internal lot control.

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 3 OF 4



HAND
FLEX™

Coaxial Cable

FL086-12SMMC+

Mini-Circuits

50Ω DC to 6000 MHz 12 Inches SMA Male to Right-Angle MCX Male

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	SE3526-12
RoHS Status	Compliant
Environmental Ratings	ENV52T2

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

 **Mini-Circuits**