



LTCC SURFACE MOUNT

High Pass Filter

HFCG-3250+

Mini-Circuits

50Ω

3.65 to 16.5 GHz

THE BIG DEAL

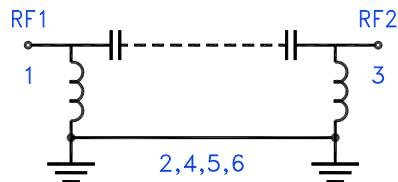
- Insertion Loss, Typ. 0.8 dB
- Stopband Rejection, Typ. 44 dB
- Passband Return Loss, Typ. 11 dB
- 0805 Surface Mount Footprint
- Power Handling: 3 W



Generic photo used for illustration purposes only

APPLICATIONS

- Test & Measurement Equipment
- SATCOM
- 5G MIMO and Back Haul Radio Systems
- Radar
- WiFi 6E

FUNCTIONAL DIAGRAM**PRODUCT OVERVIEW**

Mini-Circuits' HFCG-3250+ is a miniature low temperature co-fired ceramic (LTCC) high pass filter with a 3.65 to 16.5 GHz passband supporting a variety of applications. This model provides 0.8 dB typical insertion loss over a wide band due to its rugged monolithic construction. Housed in a tiny 0805 ceramic form factor with inspectable wrap-around terminations, the filter is ideal for dense signal chain PCB layouts where it complements MMIC size and performance. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well suited for environmental extremes of high humidity and temperature.

KEY FEATURES

Features	Advantages
Wide Passband, 12.85 GHz	This filter has a very wide passband, from 3.65 to 16.5 GHz.
LTCC Construction	The use of LTCC technology allows for repeatable performance in a rugged ceramic package, well suited for tough environments such as high humidity and temperature extremes. See Mini-Circuits Environmental Rating ENV126 for more information.
Small Size, 0805	0805 package allows for space to be saved in dense circuit board layouts, while also minimizing the effects of parasitics.
Rugged Power Handling, 3 W	Handles up to 3 Watts in a small 0805 package.



LTCC SURFACE MOUNT

High Pass Filter

HFCG-3250+

Mini-Circuits

50Ω

3.65 to 16.5 GHz

ELECTRICAL SPECIFICATIONS^{1,2,3} AT +25°C

Parameter		F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	F3-F4	3.65 - 4.3	—	1.6	—	dB
		F4-F5	4.3 - 5.5	—	0.8	1.5	
		F5-F6	5.5 - 14.1	—	0.7	1.3	
		F6-F7	14.1 - 16.5	—	2	—	
Stopband	Return Loss	F3-F6	3.65 - 14.1	—	11	—	dB
		F6-F7	14.1 - 16.5	—	13	—	
	Rejection	DC-F1	DC - 2	38	44	—	
Freq. Cut-Off ⁴	F1-F2	2 - 2.5	27	39	—	—	dB
	Fc	3.25	—	3	—	—	

1. Tested on Evaluation Board P/N TB-HFCG-3250+.

2. Bi-directional, RF1 and RF2 can be interchanged.

3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

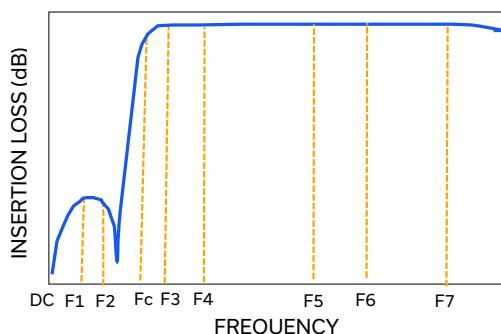
4. Typical variation ±5%.

ABSOLUTE MAXIMUM RATINGS⁵

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
Input Power ⁶	3 W @ +25°C

5. Permanent damage may occur if any of these limits are exceeded.

6. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.6 W at +125°C.

TYPICAL FREQUENCY RESPONSE AT +25°C**Mini-Circuits**

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 2 OF 5



LTCC SURFACE MOUNT

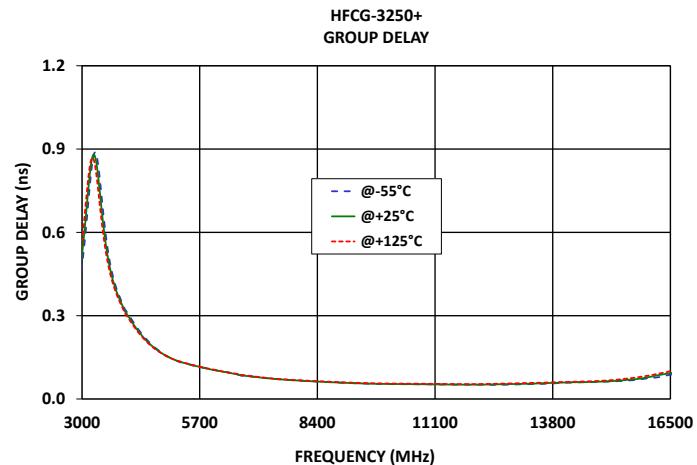
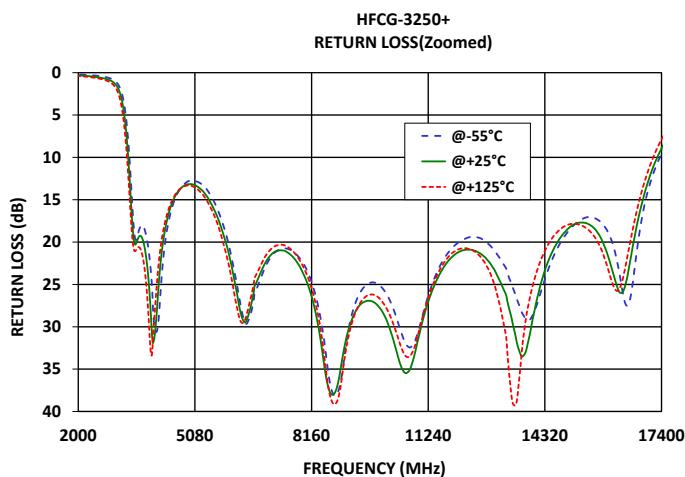
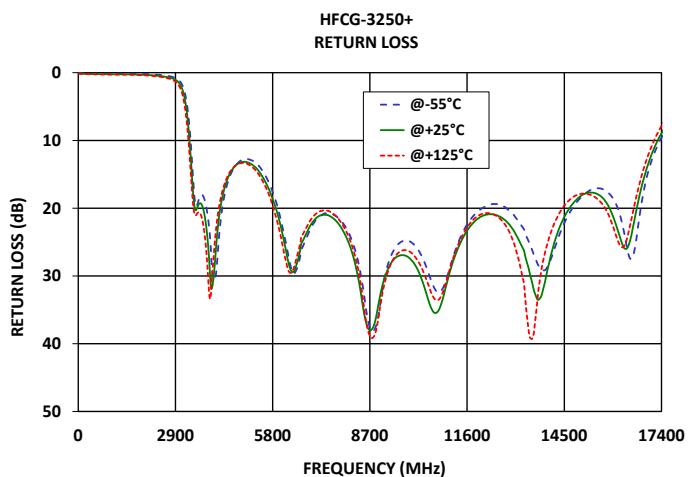
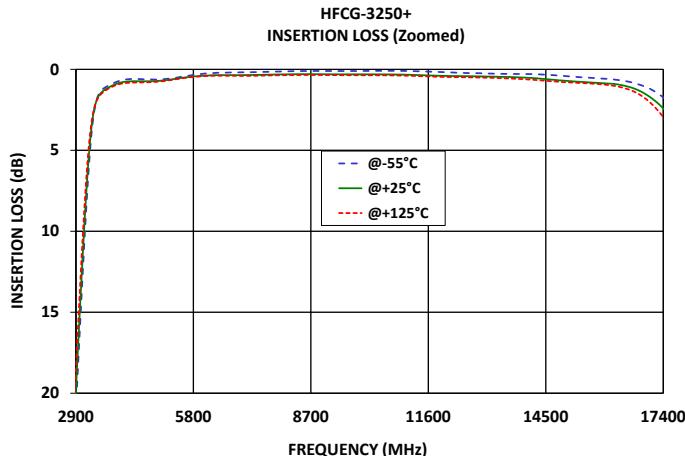
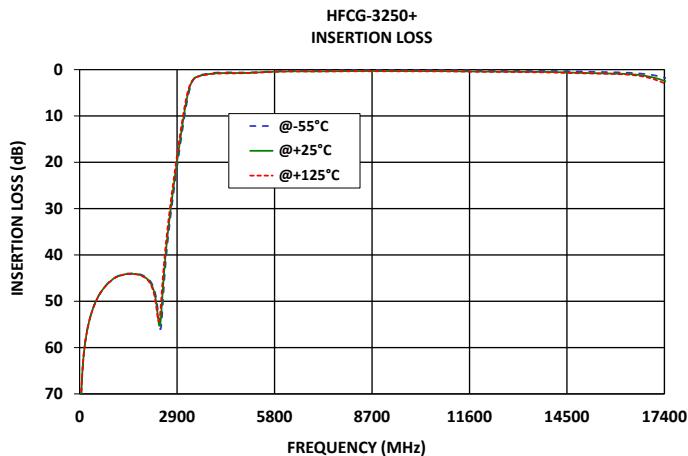
High Pass Filter

HFCG-3250+

50Ω

3.65 to 16.5 GHz

TYPICAL PERFORMANCE GRAPHS

**Mini-Circuits®**



LTCC SURFACE MOUNT

High Pass Filter

HFCG-3250+

50Ω

3.65 to 16.5 GHz

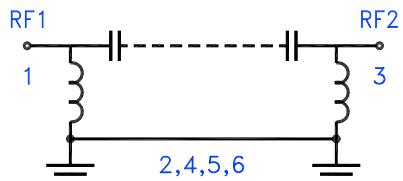
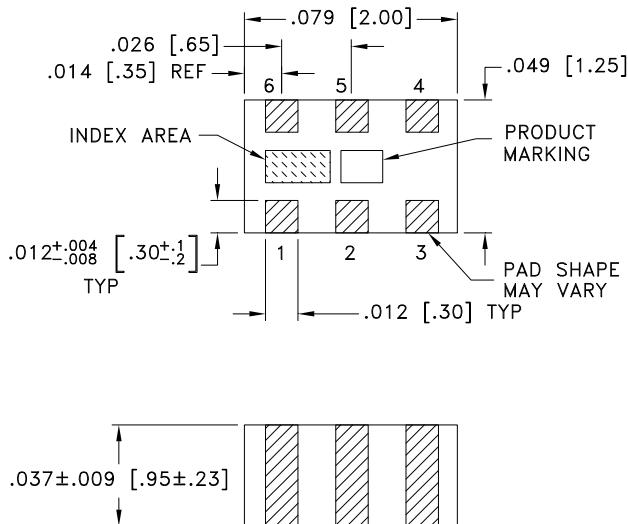
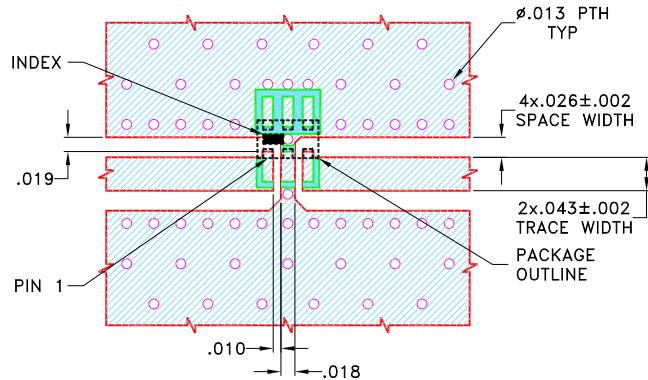
FUNCTIONAL DIAGRAM

Figure 1. HFCG-3250+ Functional Diagram

CASE STYLE DRAWING**PAD DESCRIPTION**

Function	Pad Number	Description
RF1 ²	1	Connects to RF Input Port
RF2 ²	3	Connects to RF Output Port
GROUND	2,4,5,6	Connects to Ground on PCB, (See drawing PL-633)

SUGGESTED PCB LAYOUT (PL-633)

NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS $.020 \pm .0015$. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

Figure 2. Suggested PCB Layout PL-633

Weight: .008 grams.

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .005$ **PRODUCT MARKING*: VY**

*Marking may contain other features or characters for internal lot control.



LTCC SURFACE MOUNT

High Pass Filter

HFCG-3250+

50Ω

3.65 to 16.5 GHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD.**CLICK HERE**

Performance Data and Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	GE0805C-9 Lead Finish: Tin over Nickel Plating.
RoHS Status	Compliant
Tape and Reel	F114
Suggested Layout for PCB Design	PL-633
Evaluation Board	TB-HFCG-3250+
	Gerber File
Environmental Rating	ENV126

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Mini-Circuits®www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 5 OF 5