

# Monitoring Relays

## 1-Phase True RMS AC/DC Over or Under Voltage Types DUB01, PUB01



DUB01

PUB01

- TRMS AC/DC over or under voltage monitoring relays
- Selection of measuring range by DIP-switches
- Measuring ranges from 0.1 to 500 V AC/DC
- Adjustable voltage on relative scale
- Adjustable hysteresis on relative scale
- Adjustable delay function (0.1 to 30 s)
- Programmable latching or inhibit at set level
- Output: 8 A SPDT relay N.D. or N.E. selectable
- For mounting on DIN-rail in accordance with DIN/EN/EC 60715 (DUB01) or plug-in module (PUB01)
- 22.5 mm Euronorm housing (DUB01) or 36 mm plug-in module (PUB01)
- LED indication for relay, alarm and power supply ON

### Product Description

DUB01 and PUB01 are precise TRMS AC/DC over or under voltage (selectable by DIP-switch) monitoring relays.

Owing to the built-in latch function, the ON-position of the relay output can be

maintained. Inhibit function can be used to avoid relay operation when not desired (maintenance, transitions).

The LED's indicate the state of the alarm and the output relay.

### Ordering Key

**DUB 01 C B23 10V**

Housing \_\_\_\_\_  
Function \_\_\_\_\_  
Type \_\_\_\_\_  
Item number \_\_\_\_\_  
Output \_\_\_\_\_  
Power supply \_\_\_\_\_  
Range \_\_\_\_\_

### Type Selection

Mounting	Output	Measuring range	Supply: 24 to 48 VAC/DC	Supply: 115/230 VAC
DIN-rail	SPDT	0.1 to 10 V AC/DC 2 to 500 V AC/DC	DUB 01 C D48 10V DUB 01 C D48 500V	DUB 01 C B23 10V DUB 01 C B23 500V
Plug-in	SPDT	0.1 to 10 V AC/DC 2 to 500 V AC/DC	PUB 01 C D48 10V PUB 01 C D48 500V	PUB 01 C B23 10V PUB 01 C B23 500V

### Input Specifications

Input (voltage level)	Terminals Y1, Y2 Terminals 5, 7	Contact input	
DUB01 PUB01		DUB01 PUB01 Disabled Enabled Latch disable	Terminals Z1, Y1 Terminals 8, 9 > 10 kΩ < 500 Ω > 500 ms
Measuring ranges	Int. resist.      Max. volt.		
Direct Selectable by DIP-switches			
<b>..10V:</b> 0.1 to 1 V AC/DC 0.2 to 2 V AC/DC 0.5 to 5 V AC/DC 1 to 10 V AC/DC Max. voltage for 1 s	>200 kΩ      100 V >200 kΩ      100 V >200 kΩ      100 V >200 kΩ      100 V 200 V		
<b>..500V:</b> 2 to 20 V AC/DC 5 to 50 V AC/DC 20 to 200 V AC/DC 50 to 500 V AC/DC Max. voltage for 1 s	>500 kΩ      350 V >500 kΩ      350 V >500 kΩ      600 V >500 kΩ      600 V 1000 V		
Note:	The input voltage cannot raise over 300 VAC/DC with respect to ground		

## Output Specifications

<b>Output</b>	SPDT relay 250 VAC
Rated insulation voltage	
<b>Contact ratings</b>	$\mu$
Resistive loads	AC 1 8 A @ 250 VAC
	DC 12 5 A @ 24 VDC
Small inductive loads	AC 15 2.5 A @ 250 VAC
	DC 13 2.5 A @ 24 VDC
<b>Mechanical life</b>	$\geq 30 \times 10^6$ operations
<b>Electrical life</b>	$\geq 50 \times 10^3$ operations (at 8 A, 250 V, $\cos \varphi = 1$ )
<b>Dielectric strength</b>	
Dielectric voltage	$\geq 2$ kVAC (rms)
Rated impulse withstand volt.	4 kV (1.2/50 $\mu$ s)

## General Specifications

<b>Power ON delay</b>	1 s $\pm$ 0.5 s or 6 s $\pm$ 0.5 s
<b>Reaction time</b>	(input signal variation from -20% to +20% or from +20% to -20% of set value) Alarm ON delay Alarm OFF delay
	< 100 ms < 100 ms
<b>Accuracy</b>	(15 min warm-up time) $\pm$ 1000 ppm/ $^{\circ}$ C $\pm$ 10% on set value $\pm$ 50 ms $\pm$ 0.5% on full-scale
<b>Indication for</b>	Power supply ON Alarm ON Output relay ON
	LED, green LED, red (flashing 2 Hz during delay time) LED, yellow
<b>Environment</b>	IP 20 2 -20 to 60 $^{\circ}$ C, R.H. < 95% -30 to 80 $^{\circ}$ C, R.H. < 95%
<b>Housing</b>	
Dimensions	DUB01 22.5 x 80 x 99.5 mm PUB01 36 x 80 x 94 mm
Material	Polyamide (Nylon) or Phenylene ether + Polystyrene
<b>Weight</b>	Approx. 150 g
<b>Screw terminals</b>	
Tightening torque	Max. 0.5 Nm acc. to IEC 60947
<b>Product standard</b>	EN 60255-6
<b>Approvals</b>	UL, CSA, CCC (GB/T14048.5) only DUB
<b>CE Marking</b>	L.V. Directive 2006/95/EC EMC Directive 2004/108/EC
EMC	According to EN 60255-26
Immunity	According to EN 61000-6-2
Emissions	According to EN 60255-26 According to EN 61000-6-3

## Supply Specifications

<b>Power supply</b>	Overvoltage cat. III (IEC 60664, IEC 60038)
Rated operational voltage through terminals:	
A1, A2 or A3, A2 (DUB01) 2, 10 or 11, 10 (PUB01)	
D48:	24 to 48 VAC/DC $\pm$ 15% 45 to 65 Hz, insulated
B23:	115/230 VAC $\pm$ 15% 45 to 65 Hz, insulated
<b>Dielectric voltage</b>	
Supply to input	<b>DC supply</b> 2 kV
Supply to output	<b>AC supply</b> 4 kV
Input to output	4 kV
<b>Rated operational power</b>	
AC	4 VA
DC	3 W

## Mode of Operation

DUB01 and PUB01 monitor both AC and DC over or under voltage.

### Example 1

(no connection between terminals Z1, Y1 or 8, 9 - latch function disabled)

The relay operates when the measured value exceeds (or drops below) the set level for more than the set delay time.

It releases when the voltage

drops below (or exceeds) the set level (see hysteresis setting), or when power supply is interrupted.

### Example 2

(connection between terminals Z1, Y1 or 8, 9 - latch function enabled)

The relay operates and latches in operating position when the measured value exceeds (or drops below) the set level for more than

the set delay time. Provided that the voltage has dropped below (or has exceeded) the set point (see hysteresis setting) the relay releases when the interconnection between terminals Z1, Y1 or 8, 9 is interrupted, or power supply is interrupted as well.

The red LED flashes until the delay time has expired or the measured value has dropped below the set point (see hysteresis setting).

### Note


When the inhibit contact is opened, if the input signal is already in alarm position, the delay time needs to elapse before relay activation.

## Function/Range/Level and Time Delay Setting

Adjust the input range setting the DIP switches 1 and 2 as shown below.

Select the desired function setting the DIP switches 3 to 6 as shown below.

To access the DIP switches open the grey plastic cover as shown below.

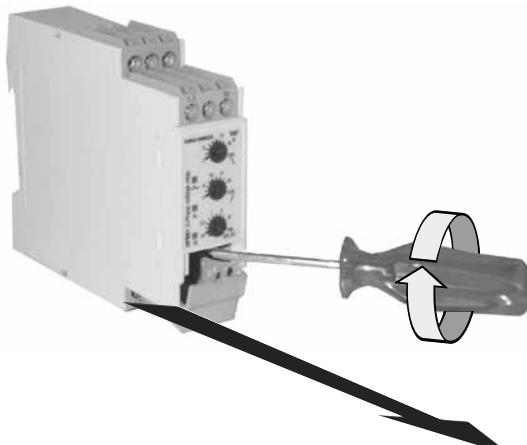

### Selection of level and time delay:

#### Upper knob:

Setting of hysteresis on relative scale: 0 to 30% on set value.

#### Centre knob:

Voltage level setting on relative scale: 10 to 110% on full scale.

#### Lower knob:

Setting of delay on alarm time on absolute scale (0.1 to 30 s).

Measuring range		
Model	500 V	10 V
ON OFF	20 V	1 V
OFF OFF	50 V	2 V
ON ON	200 V	5 V
OFF ON	500 V	10 V

Relay working mode		
ON:	Normally De-Energized	OFF: Normally Energized

Power ON delay		
ON:	6 s ± 0.5 s	OFF: 1 s ± 0.5 s


Contact input		
ON:	Latch function enable	OFF: Inhibit function enable


Monitoring function		
ON:	Over voltage	OFF: Under voltage

## Operation Diagrams


### Over voltage - N.D. relay

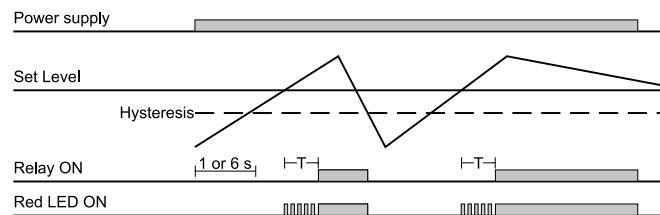


### Under voltage - Latch function - N.D. relay

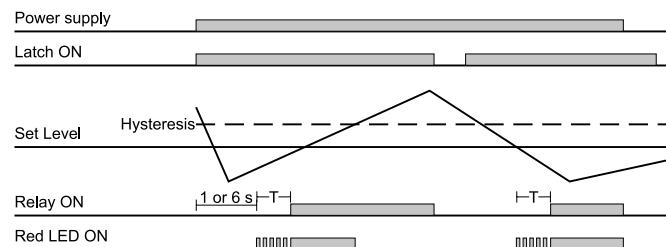

### Under voltage - N.D. relay

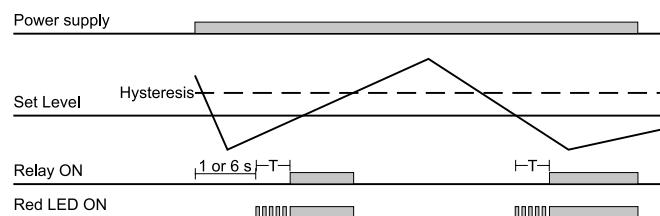


### Over voltage - Inhibit function - N.D. relay

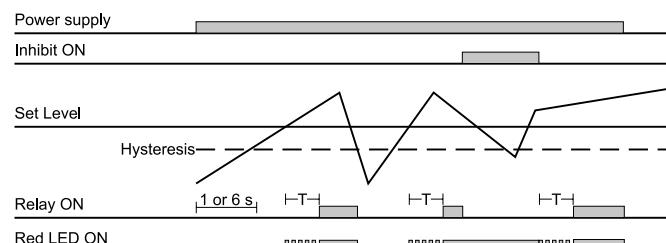


## Wiring Diagrams


Example 1

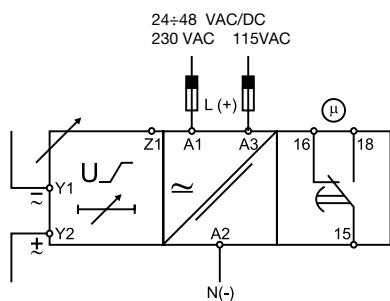


Example 2

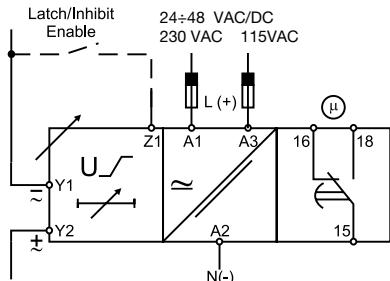

DUB01

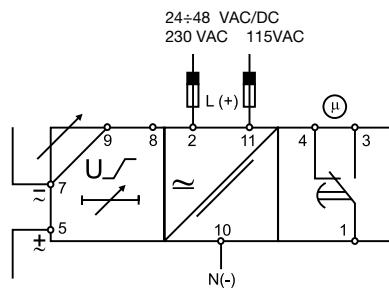24÷48 VAC/DC  
230 VAC 115VAC


Example 2

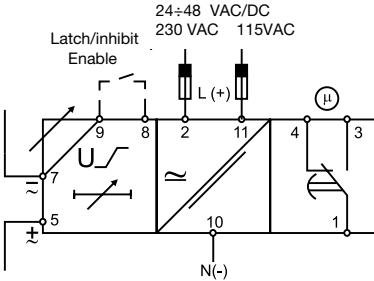

PUB01

## Dimensions

DIN-rail

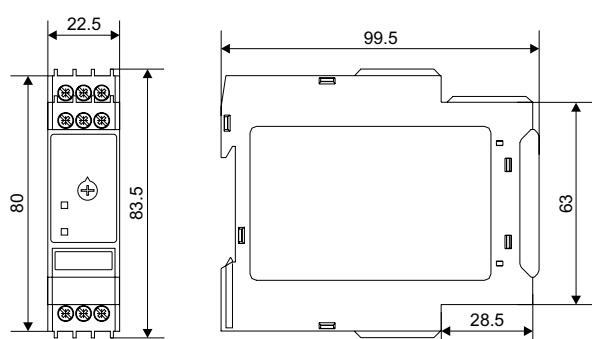

Plug-in

