

# SACC-DSI-M12FSS-4CON-M16/1,0PE - Device connector rear mounting



1178143

<https://www.phoenixcontact.com/us/products/1178143>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, Power, 4-position, Socket, straight, M12, S-coding, on free cable end, Individual wires, cable length: 1 m, 1.31 mm<sup>2</sup>, UL/cUL stranded hook-up wire, potted, this item is expected to be lead-free from Q2 2026 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

## Your advantages

- For compact devices: transmit high power in a confined space
- Protection against mismatching thanks to S-coding
- Preassembled with litz wires for immediate use
- Customer-specific assemblies and litz wire lengths available
- Sealed on the litz wire side for optimum leak-tightness
- For high transmission safety: shield connection to the housing with optional EMC nut

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1178143       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | AB24          |
| Product key                          | ABQCHG        |
| GTIN                                 | 4063151212919 |
| Weight per piece (including packing) | 88.1 g        |
| Weight per piece (excluding packing) | 76.333 g      |
| Customs tariff number                | 85444290      |
| Country of origin                    | DE            |

# SACC-DSI-M12FSS-4CON-M16/1,0PE - Device

## connector rear mounting



1178143

<https://www.phoenixcontact.com/us/products/1178143>

## Technical data

### Notes

|                    |                                                                                                                                                                                                                                                                                                                                                    |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes on operation | The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration. |
| Order information: | Lock nut is included in the scope of delivery                                                                                                                                                                                                                                                                                                      |
| General            | Contact connection method: Crimp connection                                                                                                                                                                                                                                                                                                        |

### Safety note

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety note | <p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none"><li>• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li><li>• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li><li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li><li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li><li>• Assembled products may not be manipulated or improperly opened.</li><li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li><li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li><li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li><li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li><li>• Observe the corresponding technical data. You will find information:<ul style="list-style-type: none"><li>o On the product</li><li>o On the packing label</li><li>o In the supplied documentation</li><li>o Online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> under the product</li></ul></li><li>• Only use tools recommended by Phoenix Contact</li><li>• Use a protective cap to protect connectors that are not in use.</li></ul> |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

# SACC-DSI-M12FSS-4CON-M16/1,0PE - Device

## connector rear mounting



1178143

<https://www.phoenixcontact.com/us/products/1178143>

The suitable accessories are available online in the accessory section of the product at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)

- Ensure that the protective or functional ground has been properly connected.

- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector

- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

### Mounting

|                   |                                          |
|-------------------|------------------------------------------|
| Mounting type     | Rear mounting (M16 x 1.5, with flat nut) |
| Tightening torque | 3 Nm ... 4 Nm (M12 connector)            |

### Product properties

|                       |                                   |
|-----------------------|-----------------------------------|
| Product type          | Circular connectors (device side) |
| Application           | Power                             |
| Sensor type           | Power                             |
| Number of positions   | 4                                 |
| Connection profile    | 3+PE                              |
| No. of cable outlets  | 1                                 |
| No. of power contacts | 3                                 |
| Shielded              | no                                |
| Coding                | S                                 |
| Thread type           | M12                               |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Material specifications

|                                        |                           |
|----------------------------------------|---------------------------|
| Material Molding compound              | PUR (potted)              |
| Flammability rating according to UL 94 | V0                        |
| Seal material                          | FKM                       |
| Contact material                       | CuZn                      |
| Contact surface material               | Au                        |
| Contact carrier material               | PA                        |
| Material for screw connection          | CuZn alloy, nickel-plated |
| Conductor material                     | Bare Cu litz wires        |

### Electrical properties

|                                            |         |
|--------------------------------------------|---------|
| Rated voltage in acc. with IEC 61076-2-101 | 630 V   |
| Rated surge voltage                        | 6 kV    |
| Rated surge voltage                        | 6 kV AC |

# SACC-DSI-M12FSS-4CON-M16/1,0PE - Device connector rear mounting



1178143

<https://www.phoenixcontact.com/us/products/1178143>

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 630 V                      |
| Nominal current $I_N$ | 12 A                       |
| Test voltage          | 6 kV                       |

## Connection data

### Conductor connection

|                         |                               |
|-------------------------|-------------------------------|
| Connection method       | Individual wires              |
| Contact connection type | Socket                        |
| Conductor cross-section | 1.31 mm <sup>2</sup>          |
| Tightening torque       | 3 Nm ... 4 Nm (M12 connector) |

## Mechanical properties

### Mechanical data

|                             |       |
|-----------------------------|-------|
| Insertion/withdrawal cycles | > 100 |
|-----------------------------|-------|

## Connector

### Connection 1

|                   |          |
|-------------------|----------|
| Head design       | Socket   |
| Head cable outlet | straight |
| Head thread type  | M12      |
| Coding            | S        |

### Connection 2

|             |                |
|-------------|----------------|
| Head design | free cable end |
|-------------|----------------|

## Cable/line

|                                 |                                                  |
|---------------------------------|--------------------------------------------------|
| Cable length                    | 1 m                                              |
| Cable type                      | UL/cUL stranded hook-up wire                     |
| Signal type/category            | Power                                            |
| Wire diameter incl. insulation  | 2.2 mm                                           |
| Single wire, color              | black 1, black 2, black 3, green/yellow          |
| Cable cross section             | 1.31 mm <sup>2</sup>                             |
| Conductor material              | Bare Cu litz wires                               |
| AWG signal line                 | 16                                               |
| Material wire insulation        | mPPE                                             |
| Halogen-free                    | yes                                              |
| Flame resistance                | in acc. to UL 1581 VW1                           |
| Ambient temperature (operation) | -40 °C ... 105 °C (cable, fixed installation)    |
|                                 | -20 °C ... 105 °C (Cable, flexible installation) |

## Environmental and real-life conditions

# SACC-DSI-M12FSS-4CON-M16/1,0PE - Device connector rear mounting



1178143

<https://www.phoenixcontact.com/us/products/1178143>

## Ambient conditions

|                                                                   |                                                  |
|-------------------------------------------------------------------|--------------------------------------------------|
| Degree of protection                                              | IP65                                             |
|                                                                   | IP67                                             |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 85 °C (Plug / socket)                 |
| Ambient temperature (operation) (Cable, flexible installation)    | -20 °C ... 105 °C (Cable, flexible installation) |
| Ambient temperature (operation) (Cable, fixed installation)       | -40 °C ... 105 °C (cable, fixed installation)    |
| UL Type Rating                                                    | Type 4 (indoor use only)                         |

## Standards and regulations

|                          |                              |
|--------------------------|------------------------------|
| Flame resistance         | in acc. to UL 1581 VW1       |
| Standard designation     | M12 circular connector       |
| Standards/specifications | according to IEC 61076-2-111 |


# SACC-DSI-M12FSS-4CON-M16/1,0PE - Device connector rear mounting

1178143

<https://www.phoenixcontact.com/us/products/1178143>


## Drawings

Schematic diagram

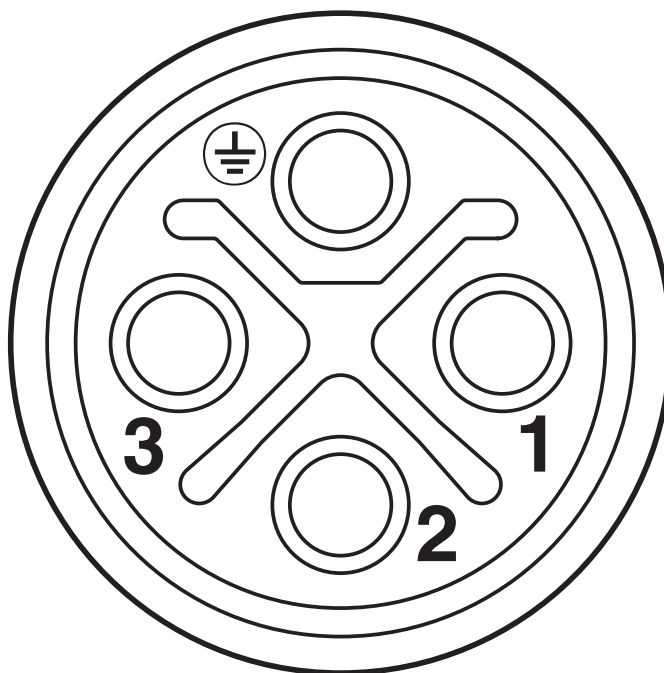

Pin assignment of M12 socket, 4-pos., S-coded, socket side view

Circuit diagram

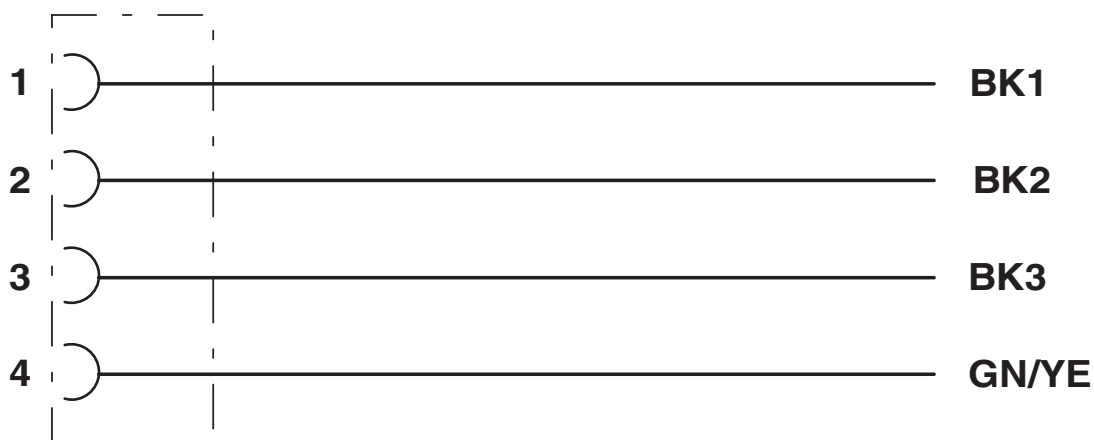

Contact assignment of the M12 socket

# SACC-DSI-M12FSS-4CON-M16/1,0PE - Device connector rear mounting



1178143

<https://www.phoenixcontact.com/us/products/1178143>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1178143>

|                                                                                                                                          |                       |                       |                   |                             |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>cUL Recognized</b><br>Approval ID: E468743-20190917 |                       |                       |                   |                             |
|                                                                                                                                          | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| keine                                                                                                                                    |                       |                       |                   |                             |
|                                                                                                                                          | 600 V                 | 12 A                  | 16                | -                           |

|                                                                                                                                         |                       |                       |                   |                             |
|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>UL Recognized</b><br>Approval ID: E468743-20190917 |                       |                       |                   |                             |
|                                                                                                                                         | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| keine                                                                                                                                   |                       |                       |                   |                             |
|                                                                                                                                         | 600 V                 | 12 A                  | 16                | -                           |

# SACC-DSI-M12FSS-4CON-M16/1,0PE - Device connector rear mounting



1178143

<https://www.phoenixcontact.com/us/products/1178143>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27440103 |
| ECLASS-15.0 | 27440103 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC003570 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# SACC-DSI-M12FSS-4CON-M16/1,0PE - Device connector rear mounting



1178143

<https://www.phoenixcontact.com/us/products/1178143>

## Environmental product compliance

### EU RoHS

|                                         |      |
|-----------------------------------------|------|
| Fulfills EU RoHS substance requirements | Yes  |
| Exemption                               | 6(c) |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: n/a)                       |
| SCIP                                | 193d1021-82d4-4c96-8e39-e500913fc70f |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)