

**100-04215-C**

Calix® 100-04215 Compatible TAA 10GBase-CWDM XFP Transceiver (SMF, 1590nm, 80km, LC, DOM, -40 to 85C)

**Features:**

- INF-8077i Compliance
- Duplex LC Connector
- Single-mode Fiber
- Industrial Temperature -40 to 85 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free

**Applications:**

- 10x Gigabit Ethernet over CWDM
- 8x/10x Fibre Channel
- Access, Metro and Enterprise
- Mobile Fronthaul CPRI/OBSAI

**Product Description**

This Calix® 100-04215 compatible XFP transceiver provides 10GBase-CWDM throughput up to 80km over single-mode fiber (SMF) using a wavelength of 1590nm via an LC connector. It is capable of withstanding rugged environments and can operate at temperatures between -40 and 85C. The listed reach has been determined using a link budget calculation and tested in a standard environment. Actual link distances achieved will be dependent upon the deployed environment. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Calix®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products.")



## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.7.
- ESD to the Duplex LC Receptacle: compatible with IEC 61000-4-2
- Immunity compatible with IEC 61000-4-3.
- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B.
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2.
- RoHS compliant with 2002/95/EC 4.1&4.2 2005/747/EC.

## CWDM Available Wavelengths

Wavelengths	Min.	Typ.	Max.
<b>1270</b>	1264.5	1271	1277.5
<b>1290</b>	1284.5	1291	1297.5
<b>1310</b>	1304.5	1311	1317.5
<b>1330</b>	1324.5	1331	1337.5
<b>1350</b>	1344.5	1351	1357.5
<b>1370</b>	1364.5	1371	1377.5
<b>1390</b>	1384.5	1391	1397.5
<b>1410</b>	1404.5	1411	1417.5
<b>1430</b>	1424.5	1431	1437.5
<b>1450</b>	1444.5	1451	1457.5
<b>1470</b>	1464.5	1471	1477.5
<b>1490</b>	1484.5	1491	1497.5
<b>1510</b>	1504.5	1511	1517.5
<b>1530</b>	1524.5	1531	1537.5
<b>1550</b>	1544.5	1551	1557.5
<b>1570</b>	1564.5	1571	1577.5
<b>1590</b>	1584.5	1591	1597.5
<b>1610</b>	1604.5	1611	1617.5

### Absolute Maximum Ratings

Parameter	Symbol	Min.		Max.	Unit
<b>Maximum Supply Voltage</b>	Vcc3	-0.5		4.0	V
	Vcc5	-0.5		6.0	
<b>Storage Temperature</b>	TS	-40		85	°C
<b>Operating Humidity</b>	RH	5		85	%
<b>Case Operating Temperature</b>	Tc	-40		85	°C
<b>50/125µm MMF (OM3)</b>	Lmax			70	km

### Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
<b>Power Supply Voltage</b>	Vcc3	3.13	3.30	3.47	V	
	Vcc5	4.75	5.0	5.25		
<b>Power Supply Current</b>	Icc3			750	mA	
	Icc5			500		
<b>Transmitter</b>						
<b>Differential data input swing</b>	Vin,pp	120	600	850	mV	
<b>Input differential impedance</b>	Zin	90	100	110	Ω	
<b>Receiver</b>						
<b>Differential data output swing</b>	Vout, pp	300	600	850	mV	
<b>Output differential impedance</b>	Zin	90	100	110	Ω	
<b>Transceiver</b>						
<b>Ref-clk input swing</b>	Ref,pp	400		2400	mV	
<b>TX Disable-High</b>		2.0		Vcc+0.3	V	
<b>TX Disable-Low</b>		Vee-0.3		0.8	V	
<b>LOS-High</b>		2.0		Vcc+0.3	V	
<b>LOS-Low</b>		Vee-0.3		0.8	V	
<b>MOD_DESEL-High</b>		2.0		Vcc+0.3	V	
<b>MOD_DESEL-Low</b>		Vee-0.3		0.8	V	
<b>MOD_INT-High</b>		2.0		Vcc+0.3	V	
<b>MOD_INT-Low</b>		Vee-0.3		0.8	V	
<b>MOD_NR-High</b>		2.0		Vcc+0.3	V	
<b>MOD_NR-Low</b>		Vee-0.3		0.8	V	
<b>P_DOWN/RST-High</b>		2.0		Vcc+0.3	V	
<b>P_DOWN/RST-Low</b>		Vee-0.3		0.8	V	

**Notes:**

1. Maximum total power value is specified across the full temperature and voltage range and the inrush current is included.

**Optical Characteristics**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
<b>Transmitter</b>						
<b>Operating Data Rate</b>		9.95		11.3		
<b>Output Opt. Power</b>	PO	0		4	dBm	
<b>Center Wavelength Spacing</b>			100		GHZ	
<b>Optical Wavelength</b>	$\lambda$	$\lambda-6.5$	$\lambda$	$\lambda+6.5$	nm	
<b>Side Mode Suppression Ratio</b>	SMSR	30			dB	
<b>Optical Extinction Ratio</b>	ER	9			dB	
<b>Generation Jitter 1(20KHZ-80MHZ)</b>				0.3	UIp-p	1
<b>Generation Jitter 2(4MHZ-80MHZ)</b>				0.1	UIp-p	1
<b>Dispersion penalty (@1450ps/nm, non-FEC rate)</b>				2	dB	3
<b>Dispersion penalty (@1300ps/nm, FEC rate)</b>				3	dB	3
<b>Optical Eye Mask 1</b>			ITU-T G.691			1
<b>Optical Eye Mask 2</b>			IEEE802.3ae			2
<b>Receiver</b>						
<b>Overload</b>		-8			dBm	
<b>Optical Center Wavelength</b>	$\lambda_C$	1270		1600	nm	
<b>LOS De-Assert</b>	LOSD			-26	dBm	
<b>LOS Assert</b>	LOSA	-34			dBm	
<b>LOS Hysteresis</b>		0.5		5	dB	
<b>Receiver Sensitivity @non-FEC rate</b>	Pmin1			-23	dBm	3
<b>Receiver Sensitivity @ FEC rate</b>	Pmin2			-27	dBm	3

**Notes:**

1. Measured at 9.9532GBs, PRBS<sup>31-1</sup>, NRZ.
2. Measured at 10.3125Gbs, Non-framed PRBS2<sup>31-1</sup>, NRZ.
3. Non-FEC rate refers 9.9/10.3/10.5 Gbs, and FEC rate refers 10.7/11.1/11.3 Gbs, BER of 1E-12 for non-FEC rate, and 1E-4 for FEC rate.

## Pin Descriptions


Pin	Symbol	Name/Descriptions	Ref.
1	GND	Module Ground	
2	Vee5	(not required)	
3	MOD_DESEL	Module De-select; When Held low allows the module to respond to 2-wire serial interface. LVTTL-I	
4	/INTERRUPT	Interrupt; Indicates presence of an important condition which can be read via the 2-wire serial interface. LVTTL-O	2
5	TX_DIS	Transmitter Disable. Logic1 indicates laser output disabled, LVTTL-I	
6	VCC5	+5V Power Supply (Not required)	
7	GND	Module Ground	1
8	VCC3	+3.3V Power Supply	
9	VCC3	+3.3V Power Supply	
10	SCL	2-Wire Serial Interface Clock. LVTTL-I	2
11	SDA	2-Wire Serial Interface Data Line. LVTTL-I/O	2
12	MOD_Abs	Indicates Module is not present. Grounded in the Module. LVTTL-O	2
13	MOD_NR	Module Not Ready; Indicating Module Operational Fault. Open-collector. LVTTL-O	2
14	RX_LOS	Loss of Signal indication. Logic 1 indicates loss of Signal. Open-collector. LVTTL-O	2
15	GND	Module Ground	1
16	GND	Module Ground	1
17	RD-	Receiver Inverted Data Output. CML-O	
18	RD+	Receiver Non-Inverted Data Output. CML-O	
19	GND	Module Ground	1
20	VCC2	+1.8V Power Supply (Not required).	3
21	P_DOWN/RST	Power down; When high, requires the module to limit power consumption to 1.5W or below. 2-Wire serial interface must be functional in the low power mode. LVTTL-I	
		Reset; The falling edge initiates a complete reset of the module including the 2wire serial interface, equivalent to a power cycle. LVTTL-I	
22	VCC2	+1.8V Power Supply (Not required)	3
23	GND	Module Ground	1
24	REFCLK+	Reference Clock (Not required)	

25	REFCLK-	Reference Clock (Not required)	
26	GND	Module Ground	1
27	GND	Module Ground	1
28	TD-	Transmitter Inverted Data Input. CML-I	
29	TD+	Transmitter Non-Inverted Data Input. CML-I	

30	GND	Module Ground	1
----	-----	---------------	---


**Notes:**

1. Module ground pins GND are isolated from the module case and chassis ground within the module.
2. Open collector; should be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.6V on the host board.
3. The pins are open within module.

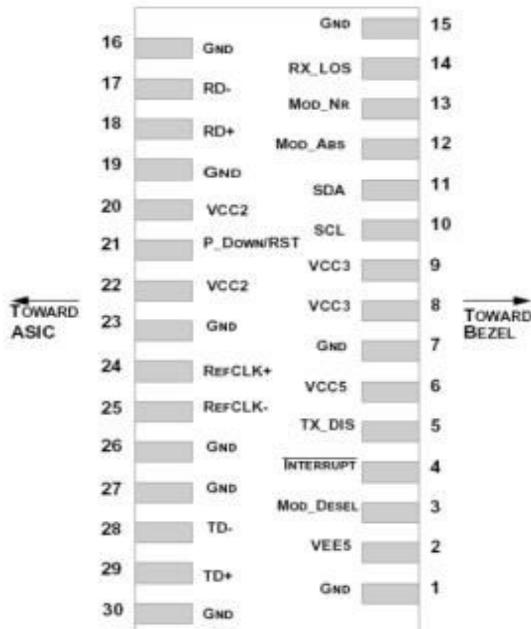


Pin-out of connector Block on Host board

## Recommend Circuit Schematic

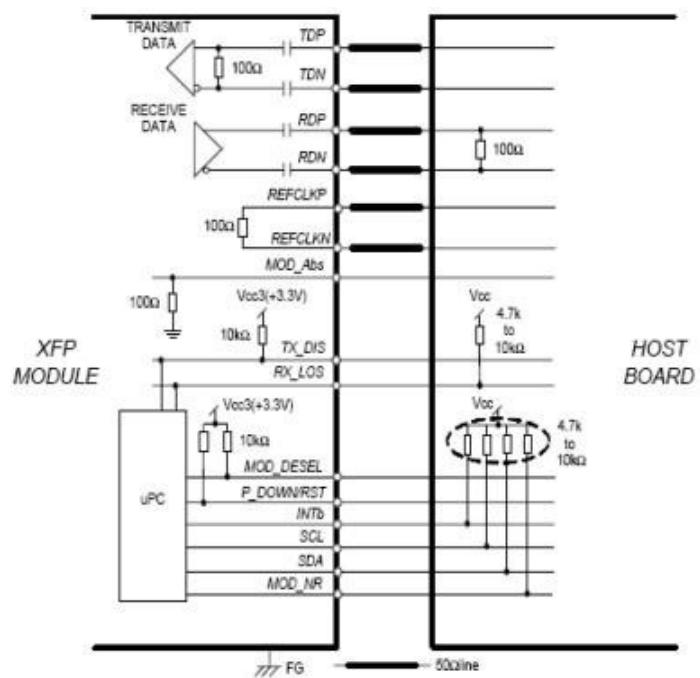

## Mechanical Specifications

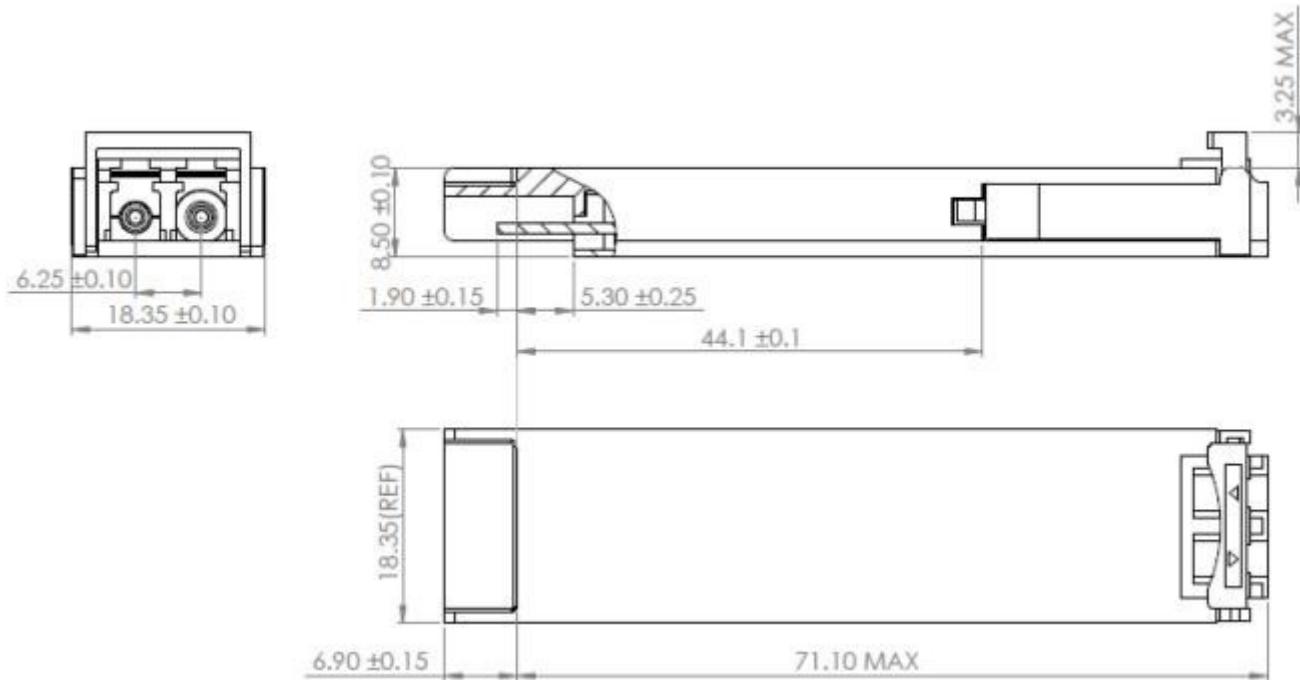


## Management Interface

XFP 2-wire serial interface is specified in the Chapter 4 of the XFP MSA specification. The XFP 2-wire serial interface is used for serial ID, digital diagnostics, and certain control functions. The 2-wire serial interface is mandatory for all XFP modules. The 2-wire serial interface address of the XFP module is 1010000X(A0h). In order to access to multiple modules on the same 2-wire serial bus, the XFP has a MOD\_DESEL(module deselect pin). This pin (which is pull high or deselected in the module) must be held low by the host to select of interest and allow communication over 2-wire serial interface. The module must not respond to or accept 2-wire serial bus instructions unless it is selected.

## XFP Management Interface

XFP Management interface is specified in the Chapter 5 of the XFP MSA specification. The Figure 1 shows the structure of the memory map. The normal 256 Byte address space is divided into lower and upper blocks of 128 Bytes. The lower block of 128 Byte is always directly available and is used for the diagnostics and control functions that must be accessed repeatedly. Multiple blocks of memories are available in the upper 128 Bytes of the address space. These are individually addressed through a table select Byte which the user enters into a location in the lower address space. The upper address space tables are used for less frequently accessed functions and control space for future standards definition.

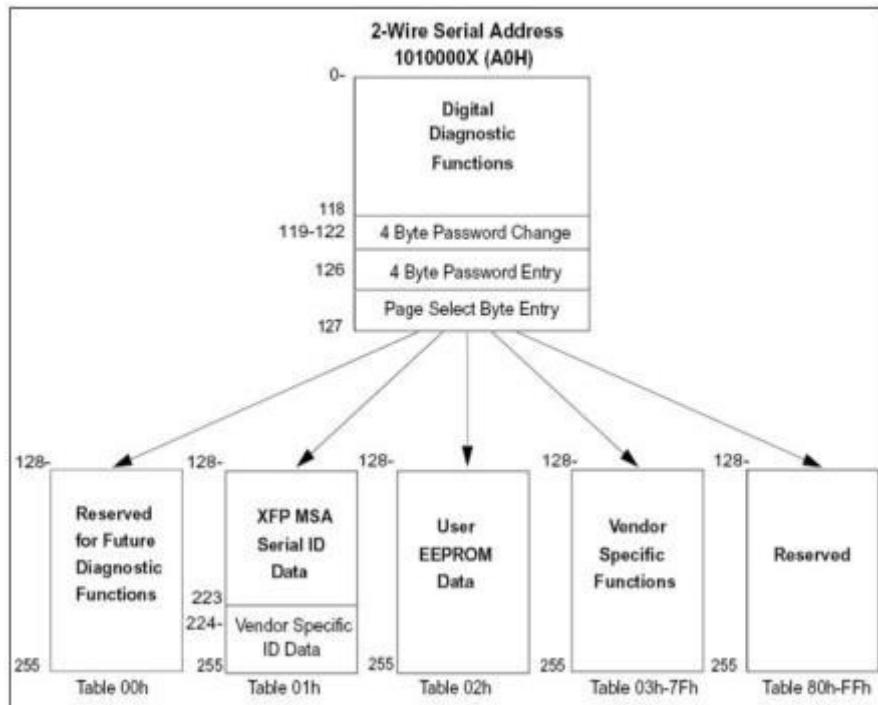

## About ProLabs

Our extensive experience comes as standard. For over 20 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with more than 100 optical switching and transport platforms.

## A Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 1.6T while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

## The Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure compatible products, and immediate answers to your questions. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



## Contact Information

### ProLabs US

Email: [sales@prolabs.com](mailto:sales@prolabs.com)  
Telephone: 952-852-0252

### ProLabs UK

Email: [salessupport@prolabs.com](mailto:salessupport@prolabs.com)  
Telephone: +44 1285 719 600