ITEM	QTY.	PART NO.	DESCRIPTION
1	2	SPH-001T-P0.5L	PAD HOUSING CONTACT
2	108.5mm	22AWG, UL1061	BLACK

APPLICABLE HOUSINGS	
NO. OF CIRCUITS	HOUSING PART NO.
10	PADP-10V-1-S
12	PADP-12V-1-S
14	PADP-14V-1-S
16	PADP-16V-1-S
20	PADP-20V-1-S
22	PADP-22V-1-S
24	PADP-24V-1-S
40	PADP-40V-1-S

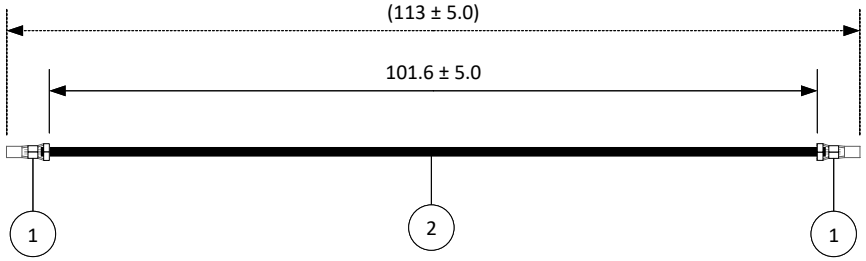

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

REV.	DESCRIPTION	DATE	BY
1	Revised wire style from UL1007 to UL1061	3/7/2023	SP

SCALE: 1: 1	Electrical Specifications
DIMENSIONS: All dimensions are in MM with a tolerance of ± 5.0 unless otherwise specified.	Current: 3.0A AC/DC
	Voltage: 250V AC/DC
	DESCRIPTION: 2.0mm Pitch PAD Series Standard Lead - 4" Inside Length – Double End
DRAWN BY: STEVEN PILKINGTON	PART NO.: APADPAD22K102
CHECKED BY: JUSTIN BAKER	DRAWING NO.: GAM-568
	DATE: 3/7/2023