



Features:

- -55°C to 125°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 0.1pF to 0.1uF
- RoHS compliant, REACH compliant, lead free and halogen free



Construction



- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

Electrical Specifications

| Type/Code | Dielectric Code | Standard Tolerance | | Capacitance Range | |
|-----------|-----------------|--------------------|-------------|-------------------|----------------|
| | | Code | Description | 50V | 100V |
| CML0402 | C0G | C | ± 0.25pF | 0.1pF - 8.2pF | - |
| | | F | ± 1% | 10pF - 1000pF | - |
| | | J | ± 5% | 10pF - 1000pF | - |
| CML0603 | C0G | C | ± 0.25pF | 0.5pF - 8.2pF | 0.5pF - 8.2pF |
| | | F | ± 1% | 10pF - 0.01uF | 10pF - 0.01uF |
| | | J | ± 5% | 10pF - 0.01uF | 10pF - 0.01uF |
| CML0805 | C0G | C | ± 0.25pF | 0.5pF - 8.2pF | 0.5pF - 8.2pF |
| | | F | ± 1% | 10pF - 0.022uF | 10pF - 0.022uF |
| | | J | ± 5% | 10pF - 0.022uF | 10pF - 0.022uF |
| CML1206 | C0G | C | ± 0.25pF | 1.2pF - 8.2pF | 1.2pF - 8.2pF |
| | | F | ± 1% | 10pF - 0.1uF | 10pF - 0.022uF |
| | | J | ± 5% | 10pF - 0.1uF | 10pF - 0.022uF |
| CML1210 | C0G | F | ± 1% | 10pF - 0.047uF | 10pF - 0.047uF |
| | | J | ± 5% | 10pF - 0.047uF | 10pF - 0.047uF |
| CML1812 | C0G | F | ± 1% | 10pF - 0.1uF | 10pF - 0.1uF |
| | | J | ± 5% | 10pF - 0.1uF | 10pF - 0.1uF |

How to Order

C M L 0 4 0 2 C 0 G 1 0 0 J T 5 0 V

| Product Series | | Size | Dielectric | Capacitance Range | | Tolerance (*) | | Packaging | | | Max Working Voltage | |
|----------------|--------------------|--|------------|-----------------------|----------|---------------|------|-------------|------|----------------------------------|-----------------------------------|-------------|
| Code | Description | Code | Code | 0.1pF to 0.10uF (E12) | EIA Code | Capacitance | Code | Description | Code | Description | Size and Quantity | |
| CML | Multilayer Ceramic | 0402 0603 0805 1206 1210 1812 | C0G | | 0R1 | 0.1pF | C | ± 0.25pF | T | 7" Paper Reel 7" Plastic Tape | Refer to Packaging Specifications | 50V 100V |
| | | | | | 100 | 10pF | F | ± 1% | | | | |
| | | | | | 101 | 100pF | G | ± 2% | | | | |
| | | | | | 102 | 1000pF | J | ± 5% | | | | |
| | | | | | 103 | 0.01uF | | | | | | |
| | | | | | 104 | 0.1uF | | | | | | |

(*) Other tolerances may be available. Contact Stackpole.


| Capacitance and Voltage Available | | | | | | | | | | | | |
|-----------------------------------|-----------|----------|---------------|--|---------------|--|---------------|--|---------------|--|---------------|--|
| Dielectric | | C0G | | | | | | | | | | |
| EIA Code | Size VDCW | 0402 50V | 0603 50V 100V | | 0805 50V 100V | | 1206 50V 100V | | 1210 50V 100V | | 1812 50V 100V | |
| 0R1 | 0.1 pF | | | | | | | | | | | |
| 0R2 | 0.2 pF | | | | | | | | | | | |
| 0R3 | 0.3 pF | | | | | | | | | | | |
| 0R4 | 0.4 pF | | | | | | | | | | | |
| 0R5 | 0.5 pF | | | | | | | | | | | |
| 0R6 | 0.6 pF | | | | | | | | | | | |
| 0R7 | 0.7 pF | | | | | | | | | | | |
| 0R8 | 0.8 pF | | | | | | | | | | | |
| 0R9 | 0.9 pF | | | | | | | | | | | |
| 1R0 | 1 pF | | | | | | | | | | | |
| 1R2 | 1.2 pF | | | | | | | | | | | |
| 1R5 | 1.5 pF | | | | | | | | | | | |
| 1R8 | 1.8 pF | | | | | | | | | | | |
| 2R0 | 2 pF | | | | | | | | | | | |
| 2R2 | 2.2 pF | | | | | | | | | | | |
| 2R7 | 2.7 pF | | | | | | | | | | | |
| 3R0 | 3 pF | | | | | | | | | | | |
| 3R3 | 3.3 pF | | | | | | | | | | | |
| 3R9 | 3.9 pF | | | | | | | | | | | |
| 4R7 | 4.7 pF | | | | | | | | | | | |
| 5R0 | 5 pF | | | | | | | | | | | |
| 5R6 | 5.6 pF | | | | | | | | | | | |
| 6R8 | 6.8 pF | | | | | | | | | | | |
| 8R2 | 8.2 pF | | | | | | | | | | | |
| 100 | 10 pF | | | | | | | | | | | |
| 120 | 12 pF | | | | | | | | | | | |
| 150 | 15 pF | | | | | | | | | | | |
| 180 | 18 pF | | | | | | | | | | | |
| 220 | 22 pF | | | | | | | | | | | |
| 270 | 27 pF | | | | | | | | | | | |
| 330 | 33 pF | | | | | | | | | | | |
| 390 | 39 pF | | | | | | | | | | | |
| 470 | 47 pF | | | | | | | | | | | |
| 560 | 56 pF | | | | | | | | | | | |
| 680 | 68 pF | | | | | | | | | | | |
| 820 | 82 pF | | | | | | | | | | | |
| 101 | 100 pF | | | | | | | | | | | |
| 121 | 120 pF | | | | | | | | | | | |
| 151 | 150 pF | | | | | | | | | | | |
| 181 | 180 pF | | | | | | | | | | | |
| 221 | 220 pF | | | | | | | | | | | |
| 271 | 270 pF | | | | | | | | | | | |
| 331 | 330 pF | | | | | | | | | | | |
| 391 | 390 pF | | | | | | | | | | | |
| 471 | 470 pF | | | | | | | | | | | |
| 561 | 560 pF | | | | | | | | | | | |
| 681 | 680 pF | | | | | | | | | | | |
| 821 | 820 pF | | | | | | | | | | | |
| 102 | 1000 pF | | | | | | | | | | | |

Capacitance and Voltage Available (cont.)

| Dielectric | | C0G | | | | | | | | | | |
|------------|-----------|----------|---------------|--|---------------|--|---------------|--|---------------|--|---------------|--|
| EIA Code | Size VDCW | 0402 50V | 0603 50V 100V | | 0805 50V 100V | | 1206 50V 100V | | 1210 50V 100V | | 1812 50V 100V | |
| 122 | 1200 pF | | | | | | | | | | | |
| 152 | 1500 pF | | | | | | | | | | | |
| 182 | 1800 pF | | | | | | | | | | | |
| 222 | 2200 pF | | | | | | | | | | | |
| 272 | 2700 pF | | | | | | | | | | | |
| 332 | 3300 pF | | | | | | | | | | | |
| 392 | 3900 pF | | | | | | | | | | | |
| 472 | 4700 pF | | | | | | | | | | | |
| 562 | 5600 pF | | | | | | | | | | | |
| 682 | 6800 pF | | | | | | | | | | | |
| 822 | 8200 pF | | | | | | | | | | | |
| 103 | 0.01 uF | | | | | | | | | | | |
| 123 | 0.012 uF | | | | | | | | | | | |
| 153 | 0.015 uF | | | | | | | | | | | |
| 183 | 0.018 uF | | | | | | | | | | | |
| 223 | 0.022 uF | | | | | | | | | | | |
| 273 | 0.027 uF | | | | | | | | | | | |
| 333 | 0.033 uF | | | | | | | | | | | |
| 473 | 0.047 uF | | | | | | | | | | | |
| 563 | 0.056 uF | | | | | | | | | | | |
| 683 | 0.068 uF | | | | | | | | | | | |
| 823 | 0.082 uF | | | | | | | | | | | |
| 104 | 0.1 uF | | | | | | | | | | | |

= Available

Mechanical Specifications and Packaging Specifications

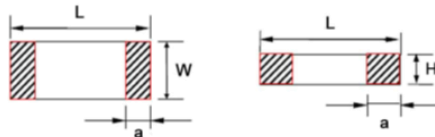


| Type/Code | Voltage | Capacitance Value | L | W | H | a | Unit | Packaging (7" Reel) Qty. | |
|------------|--------------|-------------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|--------------------------|--------------|
| | | | | | | | | Paper Tape | Plastic Tape |
| CML0402C0G | 50V | 0.1pF - 1000pF | 0.039 ± 0.008 1.00 ± 0.20 | 0.020 ± 0.008 0.50 ± 0.20 | 0.020 ± 0.002 0.50 ± 0.05 | 0.010 ± 0.004 0.25 ± 0.10 | inches mm | 10000 | - |
| CML0603C0G | 50V and 100V | 0.5pF - 0.01uF | 0.063 ± 0.008 1.60 ± 0.20 | 0.031 ± 0.008 0.80 ± 0.20 | 0.031 ± 0.008 0.80 ± 0.20 | 0.016 ± 0.008 0.40 ± 0.20 | inches mm | 4000 | - |
| CML0805C0G | 50V and 100V | 0.5pF - 2200pF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.028 ± 0.008 0.70 ± 0.20 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | 4000 | - |
| | | 2700pF - 0.022uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.049 ± 0.006 1.25 ± 0.15 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 3000 |

Mechanical Specifications and Packaging Specifications (cont.)


| Type/Code | Voltage | Capacitance Value | L | W | H | a | Unit | Packaging (7" Reel) Qty. | |
|------------|--------------|---------------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|--------------------------|--------------|
| | | | | | | | | Paper Tape | Plastic Tape |
| CML1206C0G | 50V and 100V | 1.2pF - 6800pF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.035 ± 0.008 0.90 ± 0.20 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | 4000 | - |
| | | 8200pF and 0.01uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.049 ± 0.004 1.25 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 3000 |
| | | 0.012uF - 0.022uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| | 50V | 0.027uF - 0.1uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| CML1210C0G | 50V and 100V | 10pF - 0.01uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.037 ± 0.004 0.95 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 3000 |
| | | 0.012uF and 0.015uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.049 ± 0.004 1.25 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 3000 |
| | | 0.018uF - 0.047uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.079 ± 0.008 2.00 ± 0.20 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 |
| CML1812C0G | 50V and 100V | 10pF - 0.033uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.049 ± 0.004 1.25 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 |
| | | 0.039uF - 0.1uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.016 3.20 ± 0.40 | 0.098 ± 0.012 2.50 ± 0.30 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 500 |

Environmental Characteristics

| Test | Test Specification | | Test Condition | | |
|---|---|--|---|---------------------|-------------------|
| Capacitance | Should be within the specified tolerance. | | C0G: (Class I) Cap ≤ 1000pF 1.0 ± 0.2 Vrms, 1 MHz ± 10% Cap > 1000pF 1.0 ± 0.2 Vrms, 1 KHz ± 10% | | |
| Dissipation Factor (DF) | C0G (Class I) | DF | Capacitance | Measuring Frequency | Measuring Voltage |
| | | ≤ 0.56% | Cr < 5pF | 1 MHz ± 10% | 1 ± 0.2 Vrms |
| | | 1.5 [(150 / Cr) + 7] x 10 ⁻⁴ | 5pF ≤ Cr < 50pF | | |
| | | ≤ 0.15% | 50pF ≤ Cr ≤ 1000pF | | |
| ≤ 0.15% | > 1000pF | 1 KHz ± 10% | | | |
| Insulation Resistance | C0G (Class I) | C ≤ 10 nF, Ri ≥ 50000 MΩ C > 10 nF, Ri*CR ≥ 500 S | Measuring Voltage: Rated Voltage (Max 500V) Duration: 60 ± 5 seconds Test Humidity: ≤ 75% Test Temperature: 25°C ± 5°C Test Current: ≤ 50 mA | | |
| Dielectric Withstanding Voltage | No breakdown or damage. | | Measuring voltage: Class I: 300% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max. | | |
| Solderability | At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage. | | Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds | | |
| | | | Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds | | |
| | | | Solder Temperature: 245°C ± 5°C (Lead-free) Duration: 2 ± 0.5 seconds | | |
| Resistance to Soldering Heat | Item | C0G | Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5°C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature. | | |
| | Δ C/C | ≤ ± 0.5% or ± 0.5pF whichever is larger | | | |
| | DF | Same to initial value | | | |
| | IR | Same to initial value | | | |
| Appearance: No visible damage. At least 95% of the terminal electrode is covered by new solder. | | | | | |

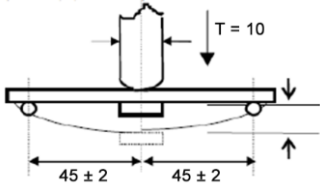
| Environmental Characteristics (cont.) | | | | | | | | | | | | | | | | | |
|--|---|---|----------------------------------|-------------|-------------|---|----------------------------------|--------|---|--------------------|-------|---|----------------------------------|--------|---|----------------------|-------|
| Test | Test Specification | Test Condition | | | | | | | | | | | | | | | |
| Resistance to Flexure of Substrate (Bending Strength) | Appearance: No visible damage. $\Delta C/C: \leq \pm 10\%$ | <p>Test Board: Al₂O₃ or PCB Warp: 1 mm Speed: 0.5 mm/second The measurement should be made with the board in the bending position.</p>  <p>Unit: mm</p> | | | | | | | | | | | | | | | |
| Termination Adhesion | No visible damage | <p>Applied Force: 5 N Duration: 10 ± 1 seconds</p> | | | | | | | | | | | | | | | |
| Temperature Cycle | C0G: $\Delta C/C: \leq \pm 2.5\%$ or $\pm 1pF$, whichever is larger | <p>Preheating Conditions: up-category Temperature: 1 hour Recovery Time: 24 ± 1 hours Initial Measurement Cycling times: 5 times, 1 cycle, 4 steps:</p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Low-category temp. C0G: -55°C</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Normal temp. (+20)</td> <td>2 - 3</td> </tr> <tr> <td>3</td> <td>Up-category temp. C0G: +125°C</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Normal temp. (+20°C)</td> <td>2 - 3</td> </tr> </tbody> </table> | Step | Temp. (°C) | Time (min.) | 1 | Low-category temp. C0G: -55°C | 30 ± 3 | 2 | Normal temp. (+20) | 2 - 3 | 3 | Up-category temp. C0G: +125°C | 30 ± 3 | 4 | Normal temp. (+20°C) | 2 - 3 |
| | | Step | Temp. (°C) | Time (min.) | | | | | | | | | | | | | |
| | | 1 | Low-category temp. C0G: -55°C | 30 ± 3 | | | | | | | | | | | | | |
| | | 2 | Normal temp. (+20) | 2 - 3 | | | | | | | | | | | | | |
| | | 3 | Up-category temp. C0G: +125°C | 30 ± 3 | | | | | | | | | | | | | |
| 4 | Normal temp. (+20°C) | 2 - 3 | | | | | | | | | | | | | | | |
| Recovery time after test: 24 ± 2 hours | | | | | | | | | | | | | | | | | |
| Temperature: 40°C ± 2°C Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 24 hours (Class I) | | | | | | | | | | | | | | | | | |
| Low-voltage (< 100V) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: 125°C (C0G) Charge/Discharge Current: 50 mA max. Recovery Conditions: Room temperature Recovery Time: 24 hours (Class I) | | | | | | | | | | | | | | | | | |
| Applied voltage: 100V ≤ rated voltage < 500V: 2 multiple 500V ≤ rated voltage ≤ 1000V: 1.5 multiple > 1000V rated voltage: 1.2 multiple Duration: 1000 hours Charge/Discharge Current: 50 mA max. Temperature: 125°C (C0G) Recovery Conditions: Room temperature Recovery Time: 24 hours (Class I) | | | | | | | | | | | | | | | | | |
| Moisture Resistance | <p>C0G: $\Delta C/C: \leq \pm 5\%$ or $\pm 1pF$, whichever is larger DF: Not more than twice of initial value. IR: C0G: $R_i \geq 2500 M \Omega$ or $R_i \cdot CR \geq 25 S$ whichever is smaller Appearance: No visible damage</p> | | | | | | | | | | | | | | | | |
| Life Test | <p>C0G: $\Delta C/C: \leq \pm 3\%$ or $\pm 1pF$, whichever is larger DF: Not more than twice of initial value. IR: C0G: $R_i \geq 4000 M \Omega$ or $R_i \cdot CR \geq 40 S$ whichever is smaller Appearance: No visible damage</p> | | | | | | | | | | | | | | | | |
| Middle and High Voltage Life Test | <p>C0G: $\Delta C/C: \leq \pm 2\%$ or $\pm 1pF$, whichever is larger DF: Not more than twice of initial value. IR: C0G: $R_i \geq 4000 M \Omega$ or $R_i \cdot CR \geq 40 S$ whichever is smaller Appearance: No visible damage</p> | | | | | | | | | | | | | | | | |

Reel Specifications

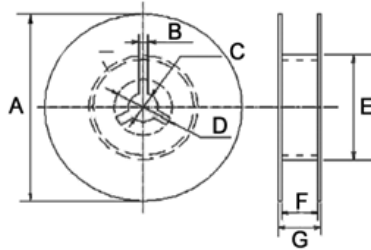


| Type/Code | A | B | C | D | E | F | G | Unit |
|------------------------------------|--------------------------------|---------------|-------------------------------|-------------------------------|--------------------------------|-------------------------------|------------------------|--------------|
| CML_C0G (all sizes except 1812) | 7.008 ± 0.079 178.00 ± 2.00 | 0.118 3.00 | 0.512 ± 0.020 13.00 ± 0.50 | 0.827 ± 0.031 21.00 ± 0.80 | 1.969 or more 50.00 or more | 0.394 ± 0.059 10.00 ± 1.50 | 0.472 max 12.00 max | inches mm |
| CML_C0G (1812 size) | 7.008 ± 0.079 178.00 ± 2.00 | 0.118 3.00 | 0.512 ± 0.020 13.00 ± 0.50 | 0.827 ± 0.031 21.00 ± 0.80 | 1.969 or more 50.00 or more | 0.488 ± 0.079 12.40 ± 2.00 | not defined | inches mm |

Packaging Specifications - Paper Tape

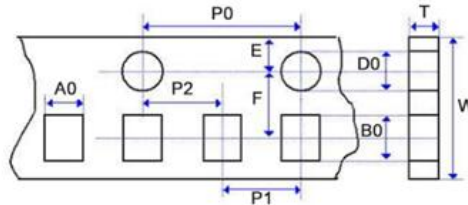


| Type/Code | A ₀ | B ₀ | T | W | P ₀ | Unit |
|------------|------------------------------|------------------------------|-------------------------------|------------------------------|------------------------------|--------------|
| CML0402C0G | 0.028 ± 0.008 0.70 ± 0.20 | 0.047 ± 0.008 1.20 ± 0.20 | 0.031 below 0.80 below | 0.315 ± 0.004 8.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| CML0603C0G | 0.043 ± 0.012 1.10 ± 0.30 | 0.071 ± 0.012 1.80 ± 0.30 | 0.047 max 1.20 max | 0.315 ± 0.004 8.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| CML0805C0G | 0.059 ± 0.008 1.50 ± 0.20 | 0.091 ± 0.008 2.30 ± 0.20 | 0.045 max 1.15 max | 0.315 ± 0.006 8.00 ± 0.15 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| CML1206C0G | 0.075 ± 0.020 1.90 ± 0.50 | 0.138 ± 0.020 3.50 ± 0.50 | 0.047 max 1.20 max | 0.315 ± 0.008 8.00 ± 0.20 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| Type/Code | P ₁ | P ₂ | D ₀ | E | F | Unit |
| CML0402C0G | 0.079 ± 0.002 2.00 ± 0.05 | 0.079 ± 0.002 2.00 ± 0.05 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.002 1.75 ± 0.05 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |
| CML0603C0G | 0.157 ± 0.002 4.00 ± 0.05 | 0.079 ± 0.004 2.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.002 1.75 ± 0.05 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |
| CML0805C0G | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.002 1.75 ± 0.05 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |
| CML1206C0G | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.004 1.75 ± 0.10 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |

Packaging Specifications - Plastic Tape

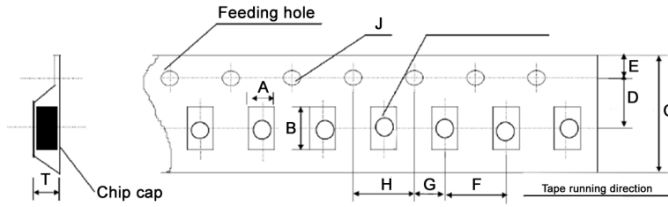

| Type/Code | A | B | C | D | E | Unit |
|---------------------------|------------------------------|------------------------------|-------------------------------|-------------------------------|------------------------------|--------------|
| CML0805C0G | 0.061 ± 0.010 1.55 ± 0.25 | 0.094 ± 0.012 2.40 ± 0.30 | 0.315 ± 0.008 8.00 ± 0.20 | 0.138 ± 0.002 3.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| CML1206C0G (≤ 0.01uF) | 0.077 ± 0.008 1.95 ± 0.20 | 0.142 ± 0.008 3.60 ± 0.20 | 0.315 ± 0.008 8.00 ± 0.20 | 0.138 ± 0.002 3.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| CML1206C0G (≥ 0.012uF) | 0.079 ± 0.012 2.00 ± 0.30 | 0.146 ± 0.012 3.70 ± 0.30 | 0.315 ± 0.008 8.00 ± 0.20 | 0.138 ± 0.002 3.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| CML1210C0G | 0.106 ± 0.004 2.70 ± 0.10 | 0.135 ± 0.004 3.42 ± 0.10 | 0.315 ± 0.004 8.00 ± 0.10 | 0.138 ± 0.002 3.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| CML1812C0G | 0.144 ± 0.004 3.66 ± 0.10 | 0.195 ± 0.004 4.95 ± 0.10 | 0.472 ± 0.004 12.00 ± 0.10 | 0.217 ± 0.002 5.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| Type/Code | F | G | H | J | T | Unit |
| CML0805C0G | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.079 max 2.00 max | inches mm |
| CML1206C0G (≤ 0.01uF) | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.079 max 2.00 max | inches mm |
| CML1206C0G (≥ 0.012uF) | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.098 max 2.50 max | inches mm |
| CML1210C0G | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.002 2.00 ± 0.05 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.126 max 3.20 max | inches mm |
| CML1812C0G | 0.315 ± 0.004 8.00 ± 0.10 | 0.079 ± 0.002 2.00 ± 0.05 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.157 max 4.00 max | inches mm |


Recommended Solder Pad for Wave Soldering

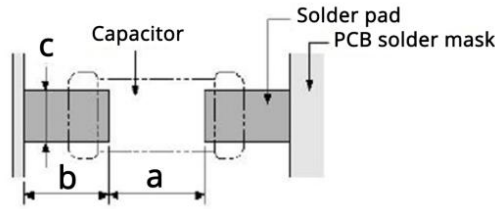

| Type | 0603 | 0805 | 1206 | 1210 | Unit |
|------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| Length (L) | 0.063 1.60 | 0.079 2.00 | 0.126 3.20 | 0.126 3.20 | inches mm |
| Width (W) | 0.031 0.80 | 0.049 1.25 | 0.063 1.60 | 0.098 2.50 | inches mm |
| a | 0.031 ~ 0.039 0.80 ~ 1.00 | 0.039 ~ 0.055 1.00 ~ 1.40 | 0.071 ~ 0.098 1.80 ~ 2.50 | 0.071 ~ 0.098 1.80 ~ 2.50 | inches mm |
| b | 0.020 ~ 0.031 0.50 ~ 0.80 | 0.031 ~ 0.059 0.80 ~ 1.50 | 0.031 ~ 0.067 0.80 ~ 1.70 | 0.031 ~ 0.067 0.80 ~ 1.70 | inches mm |
| c | 0.024 ~ 0.031 0.60 ~ 0.80 | 0.035 ~ 0.047 0.90 ~ 1.20 | 0.047 ~ 0.063 1.20 ~ 1.60 | 0.071 ~ 0.098 1.80 ~ 2.50 | inches mm |

NOTE: Solder pad information is for reference only.

Recommended Solder Pad for Reflow Soldering

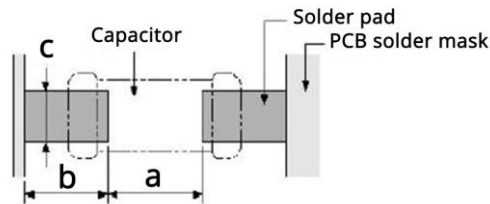

| Type | 0402 | 0603 | 0805 | 1206 | 1210 | 1812 | Unit |
|------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| Length (L) | 0.043 1.10 | 0.063 1.60 | 0.079 2.00 | 0.126 3.20 | 0.126 3.20 | 0.177 4.50 | inches mm |
| Width (W) | 0.020 0.50 | 0.031 0.80 | 0.049 1.25 | 0.063 1.60 | 0.098 2.50 | 0.126 3.20 | inches mm |
| a | 0.018 ~ 0.022 0.45 ~ 0.55 | 0.024 ~ 0.031 0.60 ~ 0.80 | 0.031 ~ 0.047 0.80 ~ 1.20 | 0.071 ~ 0.098 1.80 ~ 2.50 | 0.071 ~ 0.098 1.80 ~ 2.50 | 0.098 ~ 0.138 2.50 ~ 3.50 | inches mm |
| b | 0.016 ~ 0.020 0.40 ~ 0.50 | 0.024 ~ 0.031 0.60 ~ 0.80 | 0.024 ~ 0.047 0.60 ~ 1.20 | 0.024 ~ 0.059 0.60 ~ 1.50 | 0.024 ~ 0.059 0.60 ~ 1.50 | 0.039 ~ 0.071 1.00 ~ 1.80 | inches mm |
| c | 0.018 ~ 0.022 0.45 ~ 0.55 | 0.024 ~ 0.031 0.60 ~ 0.80 | 0.035 ~ 0.063 0.90 ~ 1.60 | 0.047 ~ 0.079 1.20 ~ 2.00 | 0.071 ~ 0.126 1.80 ~ 3.20 | 0.091 ~ 0.138 2.30 ~ 3.50 | inches mm |

NOTE: Solder pad information is for reference only.

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

| RoHS Compliance Status | | | | |
|-------------------------|-----------------------------------|----------------------------|--------------------------------|-----------------------------------|
| Standard Product Series | Description | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition |
| CML | Multilayer Ceramic Chip Capacitor | SMD | YES | 100% Matte Sn over Ni |

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”


We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy


It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

Features:

- -55°C to 85°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 0.047 uF to 100 uF
- RoHS compliant, REACH compliant, lead free and halogen free



Construction



- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

Electrical Specifications

| Type / Code | Dielectric Code | Standard Tolerance | | Capacitance Range | | | |
|-------------|-----------------|--------------------|-------------|-------------------|-----|-----|-----|
| | | Code | Description | 10V | 16V | 25V | 50V |
| CML0402 | X5R | K | ± 10% | 120 pF - 0.039 uF | | | |
| | | | | 0.047 uF - 0.1 uF | | - | |
| | | | | 0.12 uF - 0.47 uF | | - | |
| CML0603 | X5R | K | ± 10% | 0.47 uF - 1 uF | | | |
| | | | | 1.2 uF - 2.2 uF | | - | |
| CML0805 | X5R | K | ± 10% | 150 pF - 0.39 uF | | | |
| | | | | 0.47 uF - 2.2 uF | | - | |
| CML1206 | X5R | K | ± 10% | 150 pF - 4.7 uF | | | |
| | | | | 10 uF | - | | |
| CML1210 | X5R | K | ± 10% | 4.7 uF - 22 uF | | | |
| | | | | 33 uF - 47 uF | | - | |
| | | | | 68 uF - 100 uF | | - | |
| CML1812 | X5R | K | ± 10% | 4.7 uF - 6.8 uF | | | |
| | | | | 10 uF | | - | |
| | | | | 15 uF - 22 uF | | - | |
| | | | | 33 uF - 47 uF | | - | |

Note: J = ± 5% tolerance may be available

How to Order


C M L 0 4 0 2 X 5 R 1 0 4 K T 5 0 V

| Product Series | | Size | Dielectric | Capacitance Range | | Tolerance (*) | | Packaging | | | Max Working Voltage |
|----------------|--------------------|------|------------|-------------------|-------------|---------------|-------------|-----------|-----------------|-----------------------------------|---------------------|
| Code | Description | Code | Code | EIA Code | Capacitance | Code | Description | Code | Description | Quantity | |
| CML | Multilayer Ceramic | 0402 | X5R | 473 | 0.047 uF | J | ± 5% | T | 7" Paper Reel | Refer to Packaging Specifications | 10V |
| | | 0603 | | 104 | 0.1 uF | K | ± 10% | | 7" Plastic Tape | | 16V |
| | | 0805 | | 105 | 1 uF | | | | | | 25V |
| | | 1206 | | 106 | 10 uF | | | | | | 50V |
| | | 1210 | | 107 | 100 uF | | | | | | |
| | | 1812 | | | | | | | | | |

(*) Other tolerances may be available. Contact Stackpole.

| Capacitance and Voltage Available | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------------|----------|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|------|-----|-----|-----|------|-----|-----|------|-----|-----|--|--|
| Dielectric | | X5R | | | | | | | | | | | | | | | | | | | | | | |
| EIA | Size | 0402 | | | | 0603 | | | | 0805 | | | 1206 | | | | 1210 | | | 1812 | | | | |
| Code | VDCW | 10V | 16V | 25V | 50V | 10V | 16V | 25V | 50V | 10V | 16V | 25V | 10V | 16V | 25V | 50V | 10V | 16V | 25V | 10V | 16V | 25V | | |
| 473 | 0.047 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 563 | 0.056 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 683 | 0.068 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 823 | 0.082 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 104 | 0.1 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 154 | 0.15 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 224 | 0.22 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 334 | 0.33 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 474 | 0.47 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 684 | 0.68 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 105 | 1 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 155 | 1.5 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 225 | 2.2 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 335 | 3.3 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 475 | 4.7 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 685 | 6.8 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 106 | 10 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 156 | 15 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 226 | 22 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 336 | 33 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 476 | 47 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 686 | 68 uF | | | | | | | | | | | | | | | | | | | | | | | |
| 107 | 100 uF | | | | | | | | | | | | | | | | | | | | | | | |

Mechanical Specifications and Packaging Specifications

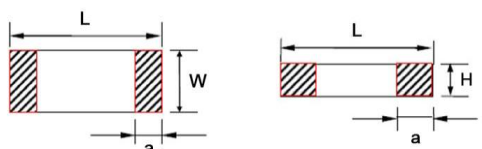


| Type / Code | Voltage | Capacitance Range | L | W | H | a | Unit | Packaging (7" Reel) Qty. | |
|----------------|-----------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|--------------------------|--------------|
| | | | | | | | | Paper Tape | Plastic Tape |
| CML0402X5R | 10V - 50V | 0.1 uF - 4.7 uF | 0.039 ± 0.008 1.00 ± 0.20 | 0.020 ± 0.008 0.50 ± 0.20 | 0.020 ± 0.002 0.50 ± 0.05 | 0.010 ± 0.004 0.25 ± 0.10 | inches mm | 10000 | - |
| CML0603X5R | 10V - 50V | 0.47 uF - 10 uF | 0.063 ± 0.008 1.60 ± 0.20 | 0.031 ± 0.008 0.80 ± 0.20 | 0.031 ± 0.004 0.80 ± 0.10 | 0.012 ± 0.004 0.30 ± 0.10 | inches mm | 4000 | - |
| CML0805X5R | 10V - 16V | 1 uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.039 ± 0.004 1.00 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 3000 |
| | | 1.5 uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.047 ± 0.004 1.20 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 3000 |
| | | 2.2 uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.031 ± 0.004 0.80 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | 4000 | - |
| | | 3.3 uF - 22 uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.047 ± 0.004 1.20 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 2000 |
| | 25V | 1 uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.039 ± 0.004 1.00 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 3000 |
| | | 1.5 uF - 2.2 uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.047 ± 0.004 1.20 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 3000 |
| 3.3 uF - 10 uF | | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.047 ± 0.004 1.20 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 2000 | |

Mechanical Specifications and Packaging Specifications (cont.)


| Type / Code | Voltage | Capacitance Range | L | W | H | a | Unit | Packaging (7" Reel) Qty. | |
|----------------|-----------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|--------------------------|--------------|
| | | | | | | | | Paper Tape | Plastic Tape |
| CML1206X5R | 10V | 2.2 uF - 3.3 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.047 ± 0.004 1.20 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 3000 |
| | | 4.7 uF - 22 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.063 ± 0.004 1.60 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| | | 47 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.071 ± 0.004 1.80 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| | 16V - 25V | 2.2 uF - 3.3 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.047 ± 0.004 1.20 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 3000 |
| | | 4.7 uF - 22 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.063 ± 0.004 1.60 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| | 50V | 2.2 uF - 3.3 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.047 ± 0.004 1.20 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 3000 |
| 4.7 uF - 10 uF | | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.063 ± 0.004 1.60 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 | |
| CML1210X5R | 10V | 4.7 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.047 ± 0.004 1.20 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| | | 6.8 uF - 10 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.071 ± 0.004 1.80 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| | | 15 uF - 100 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.098 ± 0.010 2.50 ± 0.25 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 500 |
| | 16V | 4.7 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.047 ± 0.004 1.20 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| | | 6.8 uF - 10 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.071 ± 0.004 1.80 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| | | 15 uF - 47 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.098 ± 0.010 2.50 ± 0.25 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 500 |
| | 25V | 4.7 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.047 ± 0.004 1.20 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| | | 6.8 uF - 10 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.071 ± 0.004 1.80 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 2000 |
| | | 15 uF - 22 uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.098 ± 0.010 2.50 ± 0.25 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 500 |
| CML1812X5R | 10V - 25V | 4.7 uF - 47 uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.071 ± 0.004 1.80 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | - | 1000 |

Environmental Characteristics

| Test | Test Specification | | | | Test Condition | |
|---------------------------------|---|---|-----------------|--|--|--|
| Capacitance | Should be within the specified tolerance. | | | | X5R: (Class II) Cap ≤ 10 uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10 uF 0.5 ± 0.1 Vrms, 120 Hz ± 10% | |
| Dissipation Factor (DF) | X5R (Class II) | X5R (≥ 0402) | ≥ 50V ≤ 2.5% | 25V ≤ 3.5% (C < 0.47 uF) ≤ 10.0% (C ≥ 0.47 uF) | 16V ≤ 5% (C < 0.15 uF) ≤ 10.0% (C ≥ 0.15 uF) | 10V Cap ≤ 10 uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10 uF 0.5 ± 0.1 Vrms, 120 Hz ± 10% |
| Insulation Resistance | X5R (Class II) | C ≤ 25 nF, Ri ≥ 10,000 MΩ C > 25 nF, Ri*CR > 100 S | | | Measuring Voltage: Rated Voltage (Max 500V) Duration: 60 ± 5 seconds Test Humidity: ≤ 75% Test Temperature: 25°C ± 5°C Test Current: ≤ 50 mA | |
| Dielectric Withstanding Voltage | No breakdown or damage. | | | | Measuring voltage: Class II: 250% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max. | |


| Environmental Characteristics (cont.) | | | | | | | | | | | | | | | | | |
|---|---|--|----------------------------------|-------------|-------------|---|----------------------------------|--------|---|----------------------|-------|---|---------------------------------|--------|---|----------------------|-------|
| Test | Test Specification | Test Condition | | | | | | | | | | | | | | | |
| Solderability | At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage. | Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds Solder Temperature: 245°C ± 5°C (Lead-free) Duration: 2 ± 0.5 seconds | | | | | | | | | | | | | | | |
| Resistance to Soldering Heat | Item | X5R | | | | | | | | | | | | | | | |
| | Δ C/C | -5 ~ + 10% | | | | | | | | | | | | | | | |
| | DF | Same to initial value | | | | | | | | | | | | | | | |
| | IR | Same to initial value | | | | | | | | | | | | | | | |
| Appearance: No visible damage. At least 95% of the terminal electrode is covered by new solder. | | Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5 °C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature. | | | | | | | | | | | | | | | |
| Resistance to Flexure of Substrate (Bending Strength) | Appearance: No visible damage. Δ C/C: ≤ ± 10% | Test Board: Al2O3 or PCB Warp: 1 mm Speed: 0.5 mm / second The measurement should be made with the board in the bending position. Unit: mm  | | | | | | | | | | | | | | | |
| Termination Adhesion | No visible damage | Applied Force: 5 N Duration: 10 ± 1 seconds | | | | | | | | | | | | | | | |
| Temperature Cycle | X5R: Δ C/C: ≤ ± 10% | Preheating Conditions: up-category temperature 1 hour Recovery Time: 24 ± 1 hours Initial Measurement Cycling times: 5 times, 1 cycle, 4 steps: | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Step</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Low-category temp. X5R: -55°C</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Normal temp. (+20°C)</td> <td>2 - 3</td> </tr> <tr> <td>3</td> <td>Up-category temp. X5R: +85°C</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Normal temp. (+20°C)</td> <td>2 - 3</td> </tr> </tbody> </table> | Step | Temp. (°C) | Time (min.) | 1 | Low-category temp. X5R: -55°C | 30 ± 3 | 2 | Normal temp. (+20°C) | 2 - 3 | 3 | Up-category temp. X5R: +85°C | 30 ± 3 | 4 | Normal temp. (+20°C) | 2 - 3 |
| | | Step | Temp. (°C) | Time (min.) | | | | | | | | | | | | | |
| | | 1 | Low-category temp. X5R: -55°C | 30 ± 3 | | | | | | | | | | | | | |
| | | 2 | Normal temp. (+20°C) | 2 - 3 | | | | | | | | | | | | | |
| 3 | Up-category temp. X5R: +85°C | 30 ± 3 | | | | | | | | | | | | | | | |
| 4 | Normal temp. (+20°C) | 2 - 3 | | | | | | | | | | | | | | | |
| Recovery time after test: 24 ± 2 hours | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| Moisture Resistance | X5R: Δ C/C: ≤ ± 10% DF: Not more than twice of initial value. IR: X5R: Ri ≥ 1000 MΩ or Ri*CR ≥ 25 S whichever is smaller Appearance: No visible damage | Temperature: 40°C ± 2°C Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II) | | | | | | | | | | | | | | | |
| Life Test | X5R: Δ C/C: ≤ ± 20% DF: Not more than twice of initial value. IR: X5R: Ri ≥ 2000 MΩ or Ri*CR ≥ 50 S whichever is smaller Appearance: No visible damage | Low-voltage (< 100V) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: 85°C (X5R) Charge/Discharge Current: 50 mA max. Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II) | | | | | | | | | | | | | | | |

Reel Specifications




| Type/Code | A | B | C | D | E | F | G | Unit |
|------------------------|--------------------------------|---------------|-------------------------------|-------------------------------|--------------------------------|-------------------------------|------------------------|--------------|
| CML_X5R (all sizes) | 7.008 ± 0.079 178.00 ± 2.00 | 0.118 3.00 | 0.512 ± 0.020 13.00 ± 0.50 | 0.827 ± 0.031 21.00 ± 0.80 | 1.969 or more 50.00 or more | 0.394 ± 0.059 10.00 ± 1.50 | 0.472 max 12.00 max | inches mm |

Paper Tape Specifications

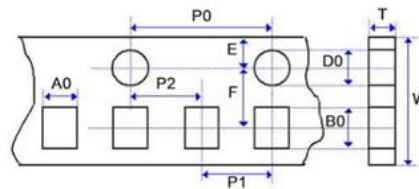

| Type/Code | A0 | B0 | T | W | P0 | Unit |
|------------|------------------------------|------------------------------|-------------------------------|------------------------------|------------------------------|--------------|
| CML0402X5R | 0.026 ± 0.004 0.65 ± 0.10 | 0.045 ± 0.004 1.15 ± 0.10 | 0.031 below 0.80 below | 0.315 ± 0.004 8.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| CML0603X5R | 0.043 ± 0.004 1.10 ± 0.10 | 0.075 ± 0.004 1.90 ± 0.10 | 0.043 max 1.10 max | 0.315 ± 0.004 8.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| CML0805X5R | 0.057 ± 0.006 1.45 ± 0.15 | 0.091 ± 0.006 2.30 ± 0.15 | 0.043 max 1.10 max | 0.315 ± 0.006 8.00 ± 0.15 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| CML1206X5R | 0.071 ± 0.008 1.80 ± 0.20 | 0.134 ± 0.008 3.40 ± 0.20 | 0.043 max 1.10 max | 0.315 ± 0.008 8.00 ± 0.20 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| Type/Code | P1 | P2 | D0 | E | F | Unit |
| CML0402X5R | 0.079 ± 0.002 2.00 ± 0.05 | 0.079 ± 0.002 2.00 ± 0.05 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.002 1.75 ± 0.05 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |
| CML0603X5R | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.002 4.00 ± 0.05 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.002 1.75 ± 0.05 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |
| CML0805X5R | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.002 1.75 ± 0.05 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |
| CML1206X5R | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.004 1.75 ± 0.10 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |


Plastic Tape Specifications

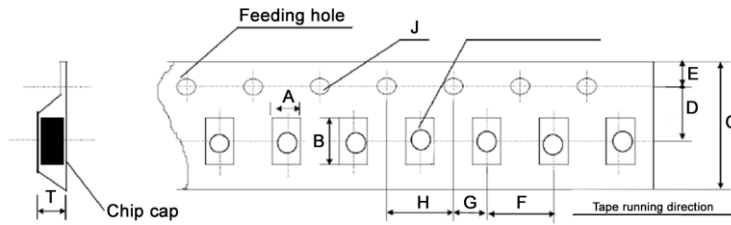

| Type/Code | A | B | C | D | E | Unit |
|------------|------------------------------|------------------------------|-------------------------------|-------------------------------|------------------------------|--------------|
| CML0805X5R | 0.061 ± 0.008 1.55 ± 0.20 | 0.093 ± 0.008 2.35 ± 0.20 | 0.315 ± 0.008 8.00 ± 0.20 | 0.138 ± 0.002 3.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| CML1206X5R | 0.077 ± 0.008 1.95 ± 0.20 | 0.142 ± 0.008 3.60 ± 0.20 | 0.315 ± 0.008 8.00 ± 0.20 | 0.138 ± 0.002 3.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| CML1210X5R | 0.106 ± 0.004 2.70 ± 0.10 | 0.135 ± 0.004 3.42 ± 0.10 | 0.315 ± 0.004 8.00 ± 0.10 | 0.138 ± 0.002 3.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| CML1812X5R | 0.144 ± 0.004 3.66 ± 0.10 | 0.195 ± 0.004 4.95 ± 0.10 | 0.472 ± 0.004 12.00 ± 0.10 | 0.217 ± 0.002 5.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| Type/Code | F | G | H | J | T | Unit |
| CML0805X5R | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.059 max 1.50 max | inches mm |
| CML1206X5R | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.073 max 1.85 max | inches mm |
| CML1210X5R | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.002 2.00 ± 0.05 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.126 max 3.20 max | inches mm |
| CML1812X5R | 0.315 ± 0.004 8.00 ± 0.10 | 0.079 ± 0.002 2.00 ± 0.05 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.157 max 4.00 max | inches mm |


Recommended Solder Pad for Wave Soldering

| Type | 0603 | 0805 | 1206 | 1210 | Unit |
|------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| Length (L) | 0.063 1.60 | 0.079 2.00 | 0.126 3.20 | 0.126 3.20 | inches mm |
| Width (W) | 0.031 0.80 | 0.049 1.25 | 0.063 1.60 | 0.098 2.50 | inches mm |
| a | 0.031 ~ 0.039 0.80 ~ 1.00 | 0.039 ~ 0.055 1.00 ~ 1.40 | 0.071 ~ 0.098 1.80 ~ 2.50 | 0.071 ~ 0.098 1.80 ~ 2.50 | inches mm |
| b | 0.020 ~ 0.031 0.50 ~ 0.80 | 0.031 ~ 0.059 0.80 ~ 1.50 | 0.031 ~ 0.067 0.80 ~ 1.70 | 0.031 ~ 0.067 0.80 ~ 1.70 | inches mm |
| c | 0.024 ~ 0.031 0.60 ~ 0.80 | 0.035 ~ 0.047 0.90 ~ 1.20 | 0.047 ~ 0.063 1.20 ~ 1.60 | 0.071 ~ 0.098 1.80 ~ 2.50 | inches mm |

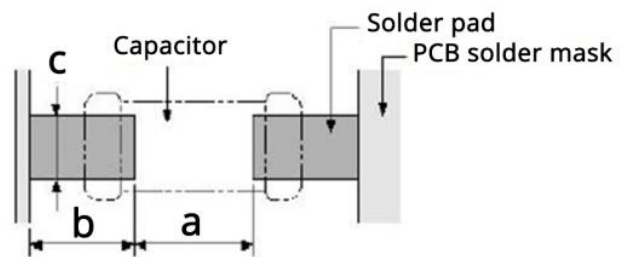

NOTE: Solder pad information is for reference only.

Recommended Solder Pad for Reflow Soldering

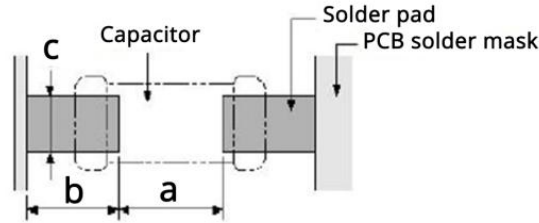

| Type | 0402 | 0603 | 0805 | 1206 | 1210 | 1812 | Unit |
|------------|---------------|---------------|---------------|---------------|---------------|---------------|--------|
| Length (L) | 0.043 | 0.063 | 0.079 | 0.126 | 0.126 | 0.177 | inches |
| | 1.10 | 1.60 | 2.00 | 3.20 | 3.20 | 4.50 | mm |
| Width (W) | 0.020 | 0.031 | 0.049 | 0.063 | 0.098 | 0.126 | inches |
| | 0.50 | 0.80 | 1.25 | 1.60 | 2.50 | 3.20 | mm |
| a | 0.018 ~ 0.022 | 0.024 ~ 0.031 | 0.031 ~ 0.047 | 0.071 ~ 0.098 | 0.071 ~ 0.098 | 0.098 ~ 0.138 | inches |
| | 0.45 ~ 0.55 | 0.60 ~ 0.80 | 0.80 ~ 1.20 | 1.80 ~ 2.50 | 1.80 ~ 2.50 | 2.50 ~ 3.50 | mm |
| b | 0.016 ~ 0.020 | 0.024 ~ 0.031 | 0.024 ~ 0.047 | 0.024 ~ 0.059 | 0.024 ~ 0.059 | 0.039 ~ 0.071 | inches |
| | 0.40 ~ 0.50 | 0.60 ~ 0.80 | 0.60 ~ 1.20 | 0.60 ~ 1.50 | 0.60 ~ 1.50 | 1.00 ~ 1.80 | mm |
| c | 0.018 ~ 0.022 | 0.024 ~ 0.031 | 0.035 ~ 0.063 | 0.047 ~ 0.079 | 0.071 ~ 0.126 | 0.091 ~ 0.138 | inches |
| | 0.45 ~ 0.55 | 0.60 ~ 0.80 | 0.90 ~ 1.60 | 1.20 ~ 2.00 | 1.80 ~ 3.20 | 2.30 ~ 3.50 | mm |

NOTE: Solder pad information is for reference only.

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

| RoHS Compliance Status | | | | |
|-------------------------|-----------------------------------|----------------------------|--------------------------------|-----------------------------------|
| Standard Product Series | Description | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition |
| CML | Multilayer Ceramic Chip Capacitor | SMD | YES | 100% Matte Sn over Ni |

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”


We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy


It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

Features:

- -55°C to 125°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 100 pF to 47uF
- RoHS compliant, REACH compliant, lead free and halogen free



Construction



- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

Electrical Specifications

| Type/Code | Dielectric Code | Standard Tolerance | | Capacitance Range | | | | | |
|-----------|-----------------|--------------------|-------------|-------------------|-----------------|----------------|----------------|------|---|
| | | Code | Description | 10V | 16V | 25V | 50V | 100V | |
| CML0201 | X7R | K | ± 10% | 1000pF - 0.022uF | 100pF - 0.022uF | 100pF - 0.01uF | 100pF - 1000pF | - | |
| CML0402 | X7R | K | ± 10% | 100pF - 0.47uF | - | | | - | |
| | | | | 100pF - 0.22uF | | | - | | - |
| | | | | 100pF - 0.1uF | | | - | | - |
| | | | | 100pF - 4700pF | | | - | | - |
| CML0603 | X7R | K | ± 10% | 100pF - 2.2uF | - | | | - | |
| | | | | 100pF - 1.0uF | | | - | | - |
| | | | | 100pF - 0.1uF | | | - | | - |
| CML0805 | X7R | K | ± 10% | 100pF - 10uF | - | | | - | |
| | | | | 100pF - 4.7uF | | | - | | - |
| | | | | 100pF - 2.2uF | | | - | | - |
| | | | | 100pF - 0.47uF | | | - | | - |
| CML1206 | X7R | K | ± 10% | 150pF - 22uF | - | | | - | |
| | | | | 150pF - 10uF | | | - | | - |
| | | | | 150pF - 4.7uF | | | - | | - |
| | | | | 150pF - 2.2uF | | | - | | - |
| CML1210 | X7R | K | ± 10% | 1000pF - 47uF | - | | | - | |
| | | | | 1000pF - 22uF | | | - | | - |
| | | | | 1000pF - 10uF | | | - | | - |
| | | | | 1000pF - 4.7uF | | | - | | - |
| CML1812 | X7R | K | ± 10% | 1000pF - 1.0uF | 1000pF - 10uF | | 1000pF - 2.2uF | | |

Note: J = 5% tolerance may be available

How to Order

C M L 0 4 0 2 X 7 R 1 0 3 K T 5 0 V

| Product Series | | Size | Dielectric | Capacitance Range | | Tolerance (*) | | Packaging | | | | Max Working Voltage |
|----------------|--------------------|------|------------|-----------------------|-------------|---------------|-------------|-----------|-----------------|-----------------------------------|----------|---------------------|
| Code | Description | Code | Code | 0.1pF to 0.10uF (E12) | | Code | Description | Code | Description | Size | Quantity | Voltage |
| CML | Multilayer Ceramic | 0201 | X7R | EIA Code | Capacitance | J | ± 5% | T | 7" Paper Reel | Refer to Packaging Specifications | | 10V |
| | | 0402 | | 101 | 100pF | K | ± 10% | | 7" Plastic Tape | 16V | | |
| | | 0603 | | 102 | 1000pF | | | 25V | | | | |
| | | 0805 | | 103 | 0.01uF | | | 50V | | | | |
| | | 1206 | | 104 | 0.1uF | | | 100V | | | | |
| | | 1210 | | 105 | 1uF | | | | | | | |
| | | 1812 | | 106 | 10uF | | | | | | | |


(*) Other tolerances may be available. Contact Stackpole.

Capacitance and Voltage Available

| Dielectric | | X7R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|-----------|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|------|-----|-----|------|-----|------|-----|------|-----|-----|------|------|-----|-----|-----|------|-----|-----|-----|-----|------|--|--|--|--|
| EIA Code | Size VDCW | 0201 | | | | 0402 | | | | 0603 | | | | 0805 | | | | 1206 | | | | 1210 | | | | 1812 | | | | | | | | | | | | | |
| | | 10V | 16V | 25V | 50V | 10V | 16V | 25V | 50V | 100V | 10V | 16V | 25V | 50V | 100V | 10V | 16V | 25V | 50V | 100V | 10V | 16V | 25V | 50V | 100V | 10V | 16V | 25V | 50V | 100V | 10V | 16V | 25V | 50V | 100V | | | | |
| 101 | 100 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 121 | 120 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 151 | 150 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 181 | 180 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 201 | 200 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 221 | 220 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 271 | 270 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 331 | 330 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 391 | 390 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 471 | 470 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 561 | 560 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 681 | 680 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 821 | 820 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 102 | 1000 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 122 | 1200 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 152 | 1500 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 182 | 1800 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 222 | 2200 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 272 | 2700 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 332 | 3300 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 392 | 3900 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 472 | 4700 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 562 | 5600 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 682 | 6800 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 822 | 8200 pF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 103 | 0.01 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 123 | 0.012 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 153 | 0.015 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 183 | 0.018 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 223 | 0.022 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 273 | 0.027 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 333 | 0.033 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 393 | 0.039 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 473 | 0.047 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 563 | 0.056 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 683 | 0.068 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 823 | 0.082 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 104 | 0.1 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 124 | 0.12 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 154 | 0.15 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 184 | 0.18 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 224 | 0.22 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 274 | 0.27 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 334 | 0.33 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 394 | 0.39 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 474 | 0.47 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 564 | 0.56 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 684 | 0.68 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 824 | 0.82 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 105 | 1 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 155 | 1.5 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 225 | 2.2 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 335 | 3.3 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 475 | 4.7 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 685 | 6.8 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 106 | 10 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 226 | 22 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 476 | 47 uF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

■ = Available


Mechanical Specifications and Packaging Specifications

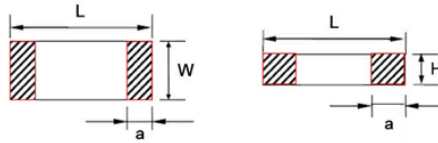

| Type/Code | Voltage | Capacitance Range | L | W | H | a | Unit | Packaging (7" Reel) Qty. | | |
|----------------|-------------|--------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------------------|--------------|------|
| | | | | | | | | Paper Tape | Plastic Tape | |
| CML0201X7R | 10V - 50V | 100pF - 0.22uF | 0.024 ± 0.001 0.60 ± 0.03 | 0.012 ± 0.001 0.30 ± 0.03 | 0.008 ± 0.001 0.20 ± 0.03 | 0.006 ± 0.002 0.15 ± 0.05 | inches mm | 15000 | - | |
| CML0402X7R | 10V - 100V | 100pF - 0.47uF | 0.039 ± 0.008 1.00 ± 0.20 | 0.020 ± 0.008 0.50 ± 0.20 | 0.020 ± 0.008 0.50 ± 0.20 | 0.010 ± 0.004 0.25 ± 0.10 | inches mm | 10000 | - | |
| CML0603X7R | 10V - 100V | 150pF - 2.2uF | 0.063 ± 0.008 1.60 ± 0.20 | 0.031 ± 0.008 0.80 ± 0.20 | 0.031 ± 0.008 0.80 ± 0.20 | 0.016 ± 0.008 0.40 ± 0.20 | inches mm | 4000 | - | |
| CML0805X7R | 10V and 16V | 100pF - 0.12uF | 0.079 ± 0.006 2.00 ± 0.15 | 0.049 ± 0.004 1.25 ± 0.10 | 0.031 ± 0.004 0.80 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | 4000 | - | |
| | | 0.15uF - 10uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 3000 | |
| | 25V | 100pF - 0.12uF | 0.079 ± 0.006 2.00 ± 0.15 | 0.049 ± 0.004 1.25 ± 0.10 | 0.031 ± 0.004 0.80 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | 4000 | - | |
| | | 0.15uF - 4.7uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 3000 | |
| | 50V | 100pF - 0.12uF | 0.079 ± 0.006 2.00 ± 0.15 | 0.049 ± 0.004 1.25 ± 0.10 | 0.031 ± 0.004 0.80 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | 4000 | - | |
| | | 0.15uF - 2.2uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 3000 | |
| | 100V | 100pF - 0.022uF | 0.079 ± 0.006 2.00 ± 0.15 | 0.049 ± 0.004 1.25 ± 0.10 | 0.031 ± 0.004 0.80 ± 0.10 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | 4000 | - | |
| | | 0.027uF - 0.47uF | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.049 ± 0.008 1.25 ± 0.20 | 0.020 ± 0.008 0.50 ± 0.20 | inches mm | - | 3000 | |
| | CML1206X7R | 10V and 16V | 150pF - 0.12uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.031 ± 0.004 0.80 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | 4000 | - |
| | | | 0.15uF - 0.39uF | 0.126 ± 0.006 3.20 ± 0.15 | 0.063 ± 0.006 1.60 ± 0.15 | 0.037 ± 0.004 0.95 ± 0.10 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 3000 |
| 0.47uF - 2.2uF | | | 0.126 ± 0.006 3.20 ± 0.15 | 0.063 ± 0.006 1.60 ± 0.15 | 0.045 ± 0.006 1.15 ± 0.15 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 3000 | |
| 3.3uF - 22uF | | | 0.130 ± 0.012 3.30 ± 0.30 | 0.067 ± 0.008 1.70 ± 0.20 | 0.067 ± 0.008 1.70 ± 0.20 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 3000 | |
| 25V | | 150pF - 0.12uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.031 ± 0.004 0.80 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | 4000 | - | |
| | | 0.15uF - 0.39uF | 0.126 ± 0.006 3.20 ± 0.15 | 0.063 ± 0.006 1.60 ± 0.15 | 0.037 ± 0.004 0.95 ± 0.10 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 3000 | |
| | | 0.47uF - 2.2uF | 0.126 ± 0.006 3.20 ± 0.15 | 0.063 ± 0.006 1.60 ± 0.15 | 0.045 ± 0.006 1.15 ± 0.15 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 3000 | |
| | | 3.3uF - 22uF | 0.130 ± 0.012 3.30 ± 0.30 | 0.067 ± 0.008 1.70 ± 0.20 | 0.067 ± 0.008 1.70 ± 0.20 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 3000 | |
| 50V | | 150pF - 0.12uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.031 ± 0.004 0.80 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | 4000 | - | |
| | | 0.15uF - 0.22uF | 0.126 ± 0.006 3.20 ± 0.15 | 0.063 ± 0.006 1.60 ± 0.15 | 0.037 ± 0.004 0.95 ± 0.10 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 3000 | |
| | | 0.27uF - 0.33uF | 0.126 ± 0.006 3.20 ± 0.15 | 0.063 ± 0.006 1.60 ± 0.15 | 0.049 ± 0.004 1.25 ± 0.10 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 3000 | |
| | | 0.39uF - 4.7uF | 0.130 ± 0.012 3.30 ± 0.30 | 0.067 ± 0.008 1.70 ± 0.20 | 0.067 ± 0.008 1.70 ± 0.20 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 2000 | |
| 100V | | 150pF - 0.068uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.012 1.60 ± 0.30 | 0.031 ± 0.004 0.80 ± 0.10 | 0.024 ± 0.012 0.60 ± 0.30 | inches mm | 4000 | - | |
| | | 0.082uF and 0.12uF | 0.126 ± 0.006 3.20 ± 0.15 | 0.063 ± 0.006 1.60 ± 0.15 | 0.049 ± 0.004 1.25 ± 0.10 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 3000 | |
| | | 0.1uF | 0.126 ± 0.006 3.20 ± 0.15 | 0.063 ± 0.006 1.60 ± 0.15 | 0.037 ± 0.004 0.95 ± 0.10 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 3000 | |
| | | 0.15uF - 3.3uF | 0.130 ± 0.012 3.30 ± 0.30 | 0.067 ± 0.008 1.70 ± 0.20 | 0.067 ± 0.012 1.70 ± 0.30 | 0.024 ± 0.008 0.60 ± 0.20 | inches mm | - | 2000 | |

Mechanical Specifications and Packaging Specifications (cont.)


| Type/Code | Voltage | Capacitance Range | L | W | H | a | Unit | Packaging (7" Reel) Qty. | | |
|--------------|-------------|----------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------------------|--------------|------|
| | | | | | | | | Paper Tape | Plastic Tape | |
| CML1210X7R | 10V | 1000pF - 0.47uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.037 ± 0.004 0.95 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 3000 | |
| | | 0.56uF - 1.0uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.049 ± 0.004 1.25 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 3000 | |
| | | 4.7uF and 10uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.079 ± 0.004 2.00 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | | 22uF and 47uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.098 ± 0.004 2.50 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | 16V and 25V | 1000pF - 0.47uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.037 ± 0.004 0.95 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 3000 | |
| | | 0.56uF to 1.0uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.049 ± 0.004 1.25 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 3000 | |
| | | 1.5uF to 3.3uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.071 ± 0.008 1.80 ± 0.20 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 2000 | |
| | | 4.7uF and 10uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.079 ± 0.004 2.00 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | | 22uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.098 ± 0.004 2.50 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | 50V | 1000pF - 0.27uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.037 ± 0.004 0.95 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 3000 | |
| | | 0.33uF - 1.0uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.049 ± 0.004 1.25 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 3000 | |
| | | 1.5uF - 10uF | 0.126 ± 0.016 3.20 ± 0.40 | 0.098 ± 0.012 2.50 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | 100V | 1000pF - 0.12uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.037 ± 0.004 0.95 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 3000 | |
| | | 0.15uF - 0.22uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.049 ± 0.004 1.25 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 3000 | |
| | | 0.27uF and 0.33uF | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.008 2.50 ± 0.20 | 0.071 ± 0.008 1.80 ± 0.20 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 2000 | |
| | | 0.39uF - 0.56uF 1.5uF - 4.7uF | 0.126 ± 0.016 3.20 ± 0.40 | 0.098 ± 0.012 2.50 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | | 0.68uF - 1.0uF | 0.126 ± 0.016 3.20 ± 0.40 | 0.098 ± 0.012 2.50 ± 0.30 | 0.083 ± 0.012 2.10 ± 0.30 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | CML1812X7R | 10V and 16V | 1000pF to 1.0uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.049 ± 0.004 1.25 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 |
| | | 25V | 1000pF to 1.5uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.049 ± 0.004 1.25 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 |
| | | | 2.2uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.063 ± 0.008 1.60 ± 0.20 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 |
| 3.3uF | | | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.079 ± 0.008 2.00 ± 0.20 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| 4.7uF - 10uF | | | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.016 3.20 ± 0.40 | 0.098 ± 0.008 2.50 ± 0.20 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 500 | |
| 50V | | 1000pF - 0.56uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.049 ± 0.004 1.25 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | | 0.68uF - 1.5uF 3.3uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.079 ± 0.008 2.00 ± 0.20 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | | 2.2uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 500 | |
| | | 4.7uF - 10uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.098 ± 0.012 2.50 ± 0.30 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 500 | |
| 100V | | 1000pF - 0.39uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.049 ± 0.004 1.25 ± 0.10 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | | 0.47uF - 1.5uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.012 3.20 ± 0.30 | 0.079 ± 0.008 2.00 ± 0.20 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 1000 | |
| | | 2.2uF | 0.177 ± 0.016 4.50 ± 0.40 | 0.126 ± 0.016 3.20 ± 0.40 | 0.098 ± 0.012 2.50 ± 0.30 | 0.030 ± 0.010 0.75 ± 0.25 | inches mm | - | 500 | |

| Environmental Characteristics | | | |
|---|---|--|---|
| Test | Test Specification | | Test Condition |
| Capacitance | Should be within the specified tolerance. | | X7R: (Class II) Cap ≤ 10uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10uF 0.5 ± 0.1 Vrms, 120 Hz ± 10% |
| Dissipation Factor (DF) | 100V - 2.5% | (except for 0603 ≥ 0.068uF, 0805 ≥ 0.1uF, 1206 ≥ 0.47uF, 1210 ≥ 2.2uF, 1812 ≥ 4.7uF are all 10%) | Cap ≤ 10uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10uF 0.5 ± 0.1 Vrms, 120 Hz ± 10% |
| | 50V - 2.5% | (except for 0201, 0402 ≥ 0.012uF, 0603 ≥ 0.1uF, 0805 ≥ 0.18uF, 1206 ≥ 2.2uF, 1210 ≥ 10uF, 1812 ≥ 4.7uF are all 10%) | |
| | 25V - 3.5% | (except for 0201 ≥ 0.01uF, 0402 ≥ 0.056uF, 0603 ≥ 0.33uF, 0805 ≥ 1uF, 1206 ≥ 4.7uF, 1210 ≥ 22uF are all 10%) | |
| | 16V - 3.5% | (except for 0201 ≥ 0.01uF, 0402 ≥ 0.033uF, 0603 ≥ 0.15uF, 0805 ≥ 0.68uF, 1206 ≥ 2.2uF, 1210 ≥ 22uF are all 10%) | |
| | 10V - 5% | (except for 0201 ≥ 0.012uF, 0402 ≥ 0.15uF, 0603 ≥ 0.33uF, 0805 ≥ 2.2uF, 1206 ≥ 2.2uF, 1210 ≥ 22uF are all 10%, and 0201 ≥ 0.1uF, and 0402 ≥ 1uF are all 15%) | |
| Insulation Resistance | X7R (Class II) | C ≤ 25nF, Ri ≥ 10000M Ω C > 25nF, Ri*CR > 100S | Measuring Voltage: Rated Voltage (Max 500V) Duration: 60 ± 5 seconds Test Humidity: ≤ 75% Test Temperature: 25°C ± 5°C Test Current: ≤ 50 mA |
| Dielectric Withstanding Voltage | No breakdown or damage. | | Measuring voltage: Class II: 250% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max. |
| Solderability | At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage. | | Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds |
| | | | Solder Temperature: 245°C ± 5°C (Lead-free) Duration: 2 ± 0.5 seconds |
| | | | Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5°C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature. |
| Resistance to Soldering Heat | Item | X7R | Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5°C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature. |
| | Δ C/C | -5 ~ + 10% | |
| | DF | Same to initial value | |
| | IR | Same to initial value | |
| Appearance: No visible damage. At least 95% of the terminal electrode is covered by new solder. | | | |
| Resistance to Flexure of Substrate (Bending Strength) | Appearance: No visible damage. Δ C/C: ≤ ± 10% | | Test Board: Al2O3 or PCB Warp: 1 mm Speed: 0.5 mm / second The measurement should be made with the board in the bending position. Unit: mm  |

Environmental Characteristics (cont.)


| Test | Test Specification | Test Condition | | | | | | | | | | | | | | | |
|--|---|---|----------------------------------|-------------|-------------|---|----------------------------------|--------|---|----------------------|-------|---|----------------------------------|--------|---|----------------------|-------|
| Termination Adhesion | No visible damage | Applied Force: 5 N Duration: 10 ± 1 seconds | | | | | | | | | | | | | | | |
| Temperature Cycle | X7R: Δ C/C: ≤ ± 10% | Preheating Conditions: up-category temperature 1 hour Recovery Time: 24 ± 1 hours Initial Measurement Cycling times: 5 times, 1 cycle, 4 steps: | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Step</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Low-category temp. X7R: -55°C</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Normal temp. (+20°C)</td> <td>2 - 3</td> </tr> <tr> <td>3</td> <td>Up-category temp. X7R: +125°C</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Normal temp. (+20°C)</td> <td>2 - 3</td> </tr> </tbody> </table> | Step | Temp. (°C) | Time (min.) | 1 | Low-category temp. X7R: -55°C | 30 ± 3 | 2 | Normal temp. (+20°C) | 2 - 3 | 3 | Up-category temp. X7R: +125°C | 30 ± 3 | 4 | Normal temp. (+20°C) | 2 - 3 |
| | | Step | Temp. (°C) | Time (min.) | | | | | | | | | | | | | |
| | | 1 | Low-category temp. X7R: -55°C | 30 ± 3 | | | | | | | | | | | | | |
| | | 2 | Normal temp. (+20°C) | 2 - 3 | | | | | | | | | | | | | |
| 3 | Up-category temp. X7R: +125°C | 30 ± 3 | | | | | | | | | | | | | | | |
| 4 | Normal temp. (+20°C) | 2 - 3 | | | | | | | | | | | | | | | |
| Recovery time after test: 24 ± 2 hours | | | | | | | | | | | | | | | | | |
| Moisture Resistance | X7R: Δ C/C: ≤ 12.5% DF: Not more than twice of initial value. IR: X7R: Ri ≥ 1000M Ω or Ri*CR ≥ 25S whichever is smaller Appearance: No visible damage | Temperature: 40°C ± 2°C Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II) | | | | | | | | | | | | | | | |
| Life Test | X7R: Δ C/C: ≤ ± 25% DF: Not more than twice of initial value. IR: X7R: Ri ≥ 2000M Ω or Ri*CR ≥ 50 S whichever is smaller Appearance: No visible damage | Low-voltage (< 100V) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: 125°C (X7R) Charge/Discharge Current: 50 mA max. Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II) | | | | | | | | | | | | | | | |
| Middle and High Voltage Life Test | X7R: Δ C/C: ≤ ± 20% DF: Not more than twice of initial value. IR: X7R Ri ≥ 2000M Ω or Ri*CR ≥ 50 S whichever is smaller Appearance: No visible damage | Applied voltage: 100V ≤ rated voltage < 500V: 2 multiple 500V ≤ rated voltage ≤ 1000V: 1.5 multiple > 1000V rated voltage: 1.2 multiple Duration: 1000 hours Charge/Discharge Current: 50 mA max. Temperature: 125°C (X7R) Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II) | | | | | | | | | | | | | | | |

Reel Specifications




| Type/Code | A | B | C | D | E | F | G | Unit |
|------------------------|--------------------------------|---------------|-------------------------------|-------------------------------|--------------------------------|-------------------------------|------------------------|--------------|
| CML_X7R (all sizes) | 7.008 ± 0.079 178.00 ± 2.00 | 0.118 3.00 | 0.512 ± 0.020 13.00 ± 0.50 | 0.827 ± 0.031 21.00 ± 0.80 | 1.969 or more 50.00 or more | 0.394 ± 0.059 10.00 ± 1.50 | 0.472 max 12.00 max | inches mm |

Packaging Specifications - Paper Tape

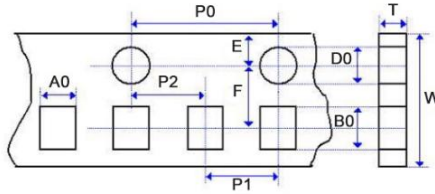

| Type/Code | A0 | B0 | T | W | P0 | Unit |
|------------|------------------------------|------------------------------|-------------------------------|------------------------------|------------------------------|--------------|
| CML0402X7R | 0.026 ± 0.004 0.65 ± 0.10 | 0.045 ± 0.004 1.15 ± 0.10 | 0.031 below 0.80 below | 0.315 ± 0.004 8.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| CML0603X7R | 0.043 ± 0.004 1.10 ± 0.10 | 0.075 ± 0.004 1.90 ± 0.10 | 0.043 max 1.10 max | 0.315 ± 0.004 8.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| CML0805X7R | 0.057 ± 0.006 1.45 ± 0.15 | 0.091 ± 0.006 2.30 ± 0.15 | 0.043 max 1.10 max | 0.315 ± 0.006 8.00 ± 0.15 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| CML1206X7R | 0.071 ± 0.008 1.80 ± 0.20 | 0.134 ± 0.008 3.40 ± 0.20 | 0.043 max 1.10 max | 0.315 ± 0.008 8.00 ± 0.20 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| Type/Code | P1 | P2 | D0 | E | F | Unit |
| CML0402X7R | 0.079 ± 0.002 2.00 ± 0.05 | 0.079 ± 0.002 2.00 ± 0.05 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.002 1.75 ± 0.05 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |
| CML0603X7R | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.002 4.00 ± 0.05 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.002 1.75 ± 0.05 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |
| CML0805X7R | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.002 1.75 ± 0.05 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |
| CML1206X7R | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.069 ± 0.004 1.75 ± 0.10 | 0.138 ± 0.002 3.50 ± 0.05 | inches mm |


Packaging Specifications - Plastic Tape

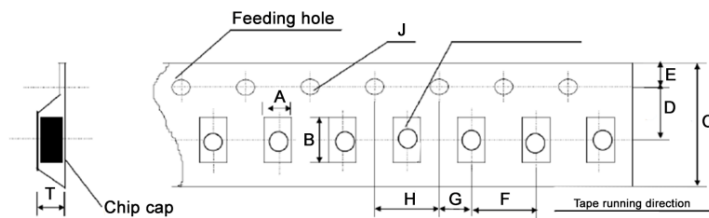

| Type/Code | A | B | C | D | E | Unit |
|------------|------------------------------|------------------------------|-------------------------------|-------------------------------|------------------------------|--------------|
| CML0805X7R | 0.061 ± 0.008 1.55 ± 0.20 | 0.093 ± 0.008 2.35 ± 0.20 | 0.315 ± 0.008 8.00 ± 0.20 | 0.138 ± 0.002 3.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| CML1206X7R | 0.077 ± 0.008 1.95 ± 0.20 | 0.142 ± 0.008 3.60 ± 0.20 | 0.315 ± 0.008 8.00 ± 0.20 | 0.138 ± 0.002 3.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| CML1210X7R | 0.106 ± 0.004 2.70 ± 0.10 | 0.135 ± 0.004 3.42 ± 0.10 | 0.315 ± 0.004 8.00 ± 0.10 | 0.138 ± 0.002 3.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| CML1812X7R | 0.144 ± 0.004 3.66 ± 0.10 | 0.195 ± 0.004 4.95 ± 0.10 | 0.472 ± 0.004 12.00 ± 0.10 | 0.217 ± 0.002 5.50 ± 0.05 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| Type/Code | F | G | H | J | T | Unit |
| CML0805X7R | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.059 max 1.50 max | inches mm |
| CML1206X7R | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.073 max 1.85 max | inches mm |
| CML1210X7R | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.002 2.00 ± 0.05 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.126 max 3.20 max | inches mm |
| CML1812X7R | 0.315 ± 0.004 8.00 ± 0.10 | 0.079 ± 0.002 2.00 ± 0.05 | 0.157 ± 0.004 4.00 ± 0.10 | 0.059-0/+0.004 1.5-0/+0.10 | 0.157 max 4.00 max | inches mm |


Recommended Solder Pad for Wave Soldering

| Type | 0603 | 0805 | 1206 | 1210 | Unit |
|------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| Length (L) | 0.063 1.60 | 0.079 2.00 | 0.126 3.20 | 0.126 3.20 | inches mm |
| Width (W) | 0.031 0.80 | 0.049 1.25 | 0.063 1.60 | 0.098 2.50 | inches mm |
| a | 0.031 ~ 0.039 0.80 ~ 1.00 | 0.039 ~ 0.055 1.00 ~ 1.40 | 0.071 ~ 0.098 1.80 ~ 2.50 | 0.071 ~ 0.098 1.80 ~ 2.50 | inches mm |
| b | 0.020 ~ 0.031 0.50 ~ 0.80 | 0.031 ~ 0.059 0.80 ~ 1.50 | 0.031 ~ 0.067 0.80 ~ 1.70 | 0.031 ~ 0.067 0.80 ~ 1.70 | inches mm |
| c | 0.024 ~ 0.031 0.60 ~ 0.80 | 0.035 ~ 0.047 0.90 ~ 1.20 | 0.047 ~ 0.063 1.20 ~ 1.60 | 0.071 ~ 0.098 1.80 ~ 2.50 | inches mm |

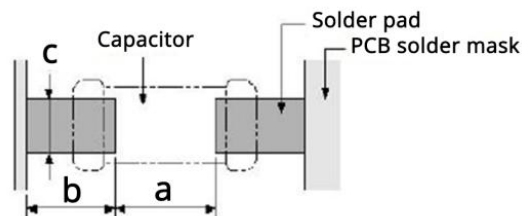

NOTE: Solder pad information is for reference only.

Recommended Solder Pad for Reflow Soldering

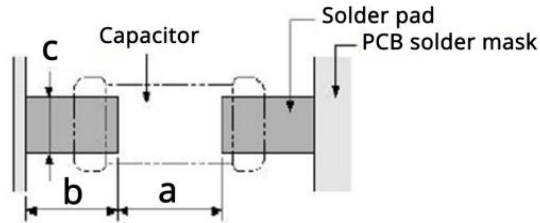

| Type | 0402 | 0603 | 0805 | 1206 | 1210 | 1812 | Unit |
|------------|---------------|---------------|---------------|---------------|---------------|---------------|--------|
| Length (L) | 0.043 | 0.063 | 0.079 | 0.126 | 0.126 | 0.177 | inches |
| | 1.10 | 1.60 | 2.00 | 3.20 | 3.20 | 4.50 | mm |
| Width (W) | 0.020 | 0.031 | 0.049 | 0.063 | 0.098 | 0.126 | inches |
| | 0.50 | 0.80 | 1.25 | 1.60 | 2.50 | 3.20 | mm |
| a | 0.018 ~ 0.022 | 0.024 ~ 0.031 | 0.031 ~ 0.047 | 0.071 ~ 0.098 | 0.071 ~ 0.098 | 0.098 ~ 0.138 | inches |
| | 0.45 ~ 0.55 | 0.60 ~ 0.80 | 0.80 ~ 1.20 | 1.80 ~ 2.50 | 1.80 ~ 2.50 | 2.50 ~ 3.50 | mm |
| b | 0.016 ~ 0.020 | 0.024 ~ 0.031 | 0.024 ~ 0.047 | 0.024 ~ 0.059 | 0.024 ~ 0.059 | 0.039 ~ 0.071 | inches |
| | 0.40 ~ 0.50 | 0.60 ~ 0.80 | 0.60 ~ 1.20 | 0.60 ~ 1.50 | 0.60 ~ 1.50 | 1.00 ~ 1.80 | mm |
| c | 0.018 ~ 0.022 | 0.024 ~ 0.031 | 0.035 ~ 0.063 | 0.047 ~ 0.079 | 0.071 ~ 0.126 | 0.091 ~ 0.138 | inches |
| | 0.45 ~ 0.55 | 0.60 ~ 0.80 | 0.90 ~ 1.60 | 1.20 ~ 2.00 | 1.80 ~ 3.20 | 2.30 ~ 3.50 | mm |

NOTE: Solder pad information is for reference only.

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

| RoHS Compliance Status | | | | |
|-------------------------|-----------------------------------|----------------------------|--------------------------------|-----------------------------------|
| Standard Product Series | Description | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition |
| CML | Multilayer Ceramic Chip Capacitor | SMD | YES | 100% Matte Sn over Ni |

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.